

NASA TECHNICAL MEMORANDUM

NASA TM X-64952

DATA FOR NASA'S AVE IV EXPERIMENT: 25-MB SOUNDING DATA AND SYNOPTIC CHARTS

By Nancy F. Fucik and Robert E. Turner
Space Sciences Laboratory

August 1975



NASA

*George C. Marshall Space Flight Center
Marshall Space Flight Center, Alabama*

(NASA-TM-X-64952) DATA FOR NASA'S AVE 4
EXPERIMENT: 25-mb SOUNDING DATA AND
SYNOPTIC CHARTS (NASA) 61 p HC \$11.50

N75-30699

CSCI 04A

Unclass

G3/46 34232

TECHNICAL REPORT STANDARD TITLE PAGE			
1. REPORT NO. NASA TM X-64952	2. GOVERNMENT ACCESSION NO.	3. RECIPIENT'S CATALOG NO.	
4. TITLE AND SUBTITLE Data for NASA's AVE IV Experiment: 25-MB Sounding Data and Synoptic Charts		5. REPORT DATE August 1975	6. PERFORMING ORGANIZATION CODE
		8. PERFORMING ORGANIZATION REPORT #	
7. AUTHOR(S) Nancy F. Fucik* and Robert E. Turner		10. WORK UNIT NO.	
9. PERFORMING ORGANIZATION NAME AND ADDRESS George C. Marshall Space Flight Center Marshall Space Flight Center, Alabama 35812		11. CONTRACT OR GRANT NO.	
		13. TYPE OF REPORT & PERIOD COVERED Technical Memorandum	
12. SPONSORING AGENCY NAME AND ADDRESS National Aeronautics and Space Administration Washington, D.C. 20546		14. SPONSORING AGENCY CODE	
15. SUPPLEMENTARY NOTES This report is based on work performed under Contract NAS8-26751 and is published to make available a unique set of atmospheric data records for research use by the scientific community. The project was conducted under the operational direction of Robert E. Turner and Charles K. Hill of the Marshall Space Flight Center.			
16. ABSTRACT This report describes the AVE IV Experiment and presents tabulated rawinsonde data at 25-mb intervals from the surface to 25 mb for the 42 stations participating in the experiment. Soundings were taken between 0000 GMT, April 24 and 1200 GMT, April 25, 1975. Brief discussions are given on the methods of data processing and accuracy. Synoptic charts prepared from the data are presented, as well as an example of contact data.			
* Texas A&M University, College Station, Texas.			
17. KEY WORDS Meteorology Atmospheric Variability Soundings Synoptic Mesoscale		18. DISTRIBUTION STATEMENT UNCLASSIFIED - UNLIMITED <i>Robert E. Turner</i>	
19. SECURITY CLASSIF. (of this report) UNCLASSIFIED	20. SECURITY CLASSIF. (of this page) UNCLASSIFIED	21. NO. OF PAGES 457	22. PRICE NTIS

TABLE OF CONTENTS

	Page
LIST OF FIGURES	iii
LIST OF TABLES	iv
I. Introduction	1
II. The AVE IV Experiment	2
III. Discussion of Basic Data	5
A. Collection	5
B. Methods of Processing	5
IV. Discussion of Sounding Data	6
A. Accuracy Estimates	6
B. Tabulated Data	7
V. Synoptic Charts	14
ACKNOWLEDGEMENTS	14
REFERENCES	14
Sounding Data	
0000 GMT, 24 April 1975	53
0600 GMT, 24 April 1975	95
1200 GMT, 24 April 1975	139
1500 GMT, 24 April 1975	183
1800 GMT, 24 April 1975	225
2100 GMT, 24 April 1975	269
0000 GMT, 25 April 1975	311
0600 GMT, 25 April 1975	355
1200 GMT, 25 April 1975	397
APPENDIX	439

LIST OF FIGURES

<u>Figure</u>	<u>Title</u>	<u>Page</u>
1	Rawinsonde stations participating in the AVE IV experiment	3
2	Example of contact data from the AVE IV experiment . .	8
3	Synoptic charts for 0000 GMT, 24 April 1975	16
4	Synoptic charts for 0600 GMT, 24 April 1975	20
5	Synoptic charts for 1200 GMT, 24 April 1975	24
6	Synoptic charts for 1500 GMT, 24 April 1975	28
7	Synoptic charts for 1800 GMT, 24 April 1975	32
8	Synoptic charts for 2100 GMT, 24 April 1975	36
9	Synoptic charts for 0000 GMT, 25 April 1975	40
10	Synoptic charts for 0600 GMT, 25 April 1975	44
11	Synoptic charts for 1200 GMT, 25 April 1975	48

LIST OF TABLES

<u>Table</u>	<u>Title</u>	<u>Page</u>
1	Atmospheric Variability Experiments	1
2	Rawinsonde Stations Participating in the AVE IV Experiment	4
3	Unusual or Erroneous Soundings	6
4	Explanation of Column Headings of Tabulated Sounding Data for the AVE IV Experiment	12
5	List of Missing Soundings	13

DATA FOR NASA'S AVE IV EXPERIMENT:
25-MB SOUNDING DATA AND SYNOPTIC CHARTS

by

Nancy F. Fucik¹
Texas A&M University
College Station, Texas

and

Robert E. Turner²
NASA Marshall Space Flight Center
Huntsville, Alabama

I. Introduction

As of this date, four NASA Atmospheric Variability Experiments have been conducted. Dates the soundings were taken and the number of participating stations are listed in Table 1.

Table 1

Atmospheric Variability Experiments		
AVE	Date	Number of Participating Stations
I	19-22 February 1964	30
IIP	11-12 May 1974	54
III	6- 7 February 1975	41
IV	24-25 April 1975	42

Data for the first NASA Atmospheric Variability Experiment were presented by Scoggins and Smith (1973 a and b), and a compilation of studies from AVE I has been presented by Scoggins et al. (1973). The reduction

¹Technical Assistant, Center for Applied Geosciences
²Aerospace Engineer, Aerospace Environment Division

procedures and accuracy of the data from the second NASA Atmospheric Variability (Pilot) Experiment (AVE IIP) have been described by Fuelberg (1974), while the data were presented by Scoggins and Turner (1974) and by Fuelberg and Turner (1975). Data for AVE III have been presented by Fuelberg and Turner (1975). Studies using AVE IIP and AVE III data, including satellite and radar data, are underway. Results from AVE I, AVE IIP, and AVE III have demonstrated conclusively that systems with a time scale of less than 12 hours are important features of the atmosphere and should be studied in greater detail with additional AVE-type experiments.

To provide these additional data, the fourth Atmospheric Variability Experiment (AVE IV) was conducted on April 24-25, 1975. This report presents rawinsonde data and synoptic charts for AVE IV. Selected data from other sources such as satellite, radar, and surface stations are available but are not presented in this report.

II. The AVE IV Experiment

Forty-two rawinsonde stations participated in the AVE IV experiment. These stations are shown in Fig. 1 and listed in Table 2. Soundings were taken at nine time periods--April 24 at 0000 GMT, 0600 GMT, 1200 GMT, 1500 GMT, 1800 GMT, and 2100 GMT, and on April 25 at 0000 GMT, 0600 GMT, and 1200 GMT. The objectives of the AVE IV are to evaluate the accuracy and representativeness of quantitative satellite data, to investigate the temporal and spatial variability of atmospheric parameters and systems of a scale smaller than that normally detected from data available at intervals of 12 hours, and to investigate the structure and dynamics of the atmosphere associated with severe weather. To achieve these goals it was desirable

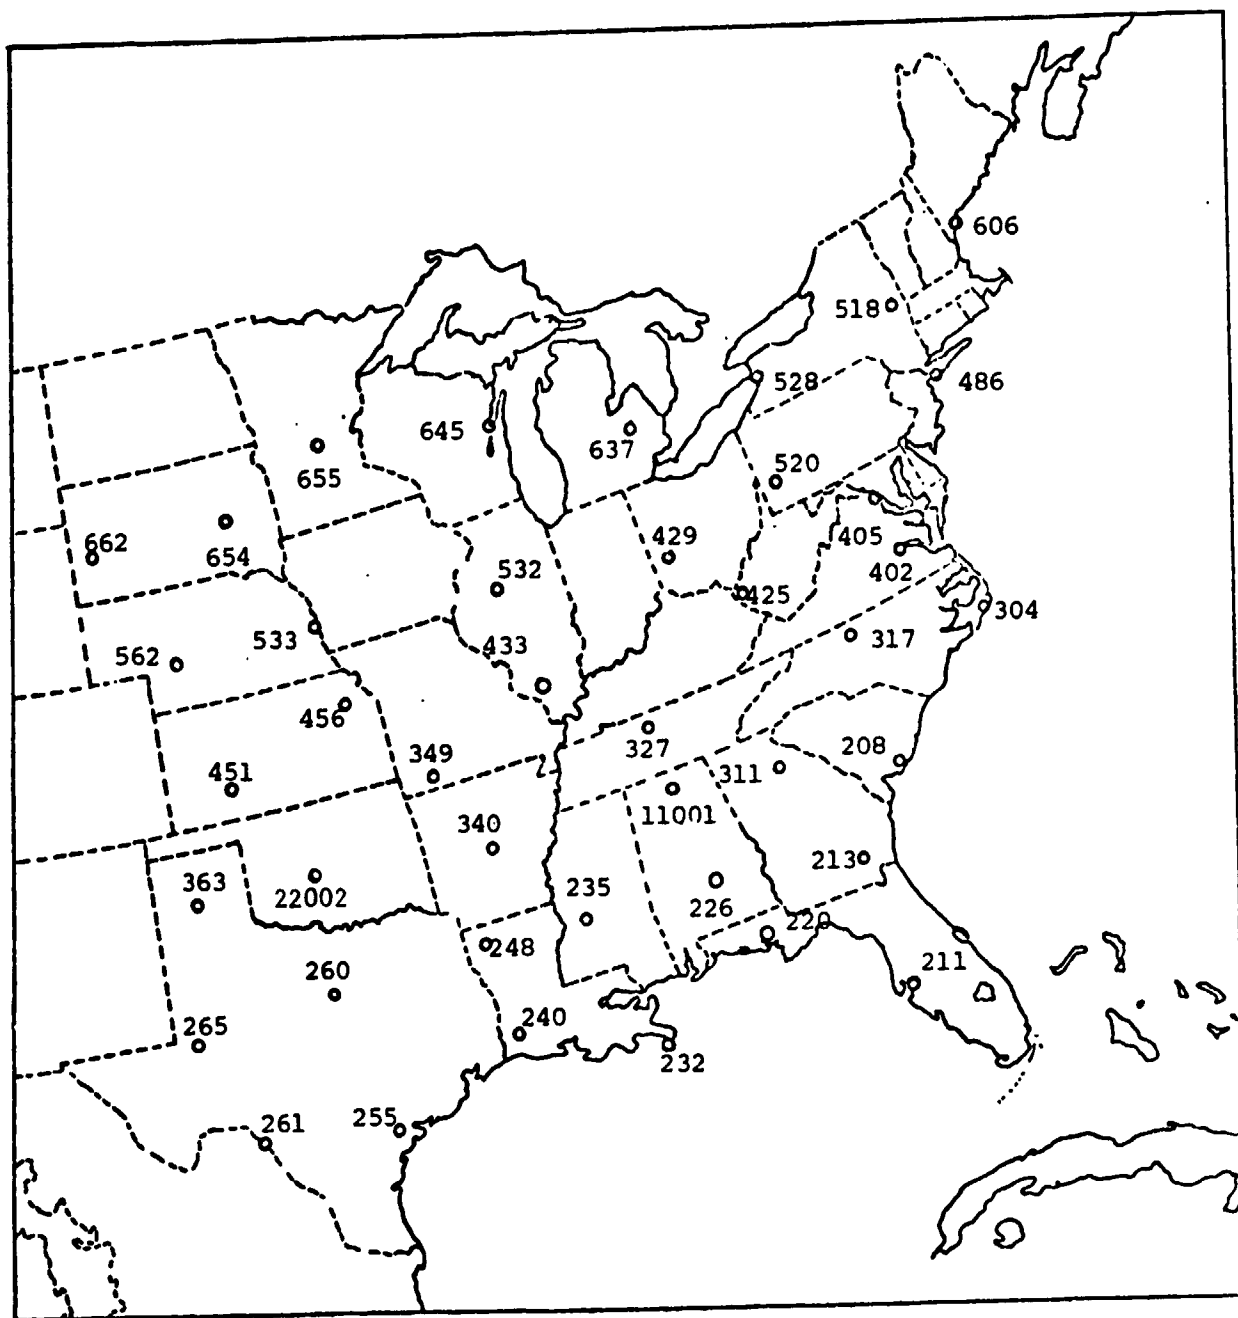


Fig. 1. Rawinsonde stations participating in the AVE IV experiment.

Table 2

 Rawinsonde Stations Participating in AVE IV Experiment

<u>Station Number</u>	<u>Location</u>
208 (CHS)	Charleston, South Carolina
211 (TPA)	Tampa, Florida
213 (AYS)	Waycross, Georgia
220 (VPS)	Apalachicola, Florida
226 (CEN)	Centerville, Alabama
232 (BVE)	Boothville, Louisiana
235 (JAN)	Jackson, Mississippi
240 (LCH)	Lake Charles, Louisiana
248 (SHV)	Shreveport, Louisiana
255 (VCT)	Victoria, Texas
260 (SEP)	Stephenville, Texas
261 (DRT)	Del Rio, Texas
265 (MAF)	Midland, Texas
304 (HAT)	Hatteras, North Carolina
311 (AHN)	Athens, Georgia
317 (GSO)	Greensboro, North Carolina
327 (BNA)	Nashville, Tennessee
340 (LIT)	Little Rock, Arkansas
349 (UMN)	Monette, Missouri
363 (AMA)	Amarillo, Texas
402 (WAL)	Wallops Island, Virginia
405 (IAD)	Sterling, Virginia (Dulles Airport)
425 (HTS)	Huntington, West Virginia
429 (DAY)	Dayton, Ohio
433 (SLO)	Salem, Illinois
451 (DDC)	Dodge City, Kansas
456 (TOP)	Topeka, Kansas
486 (JFK)	Fort Totten, New York (Kennedy Airport)
518 (ALB)	Albany, New York
520 (PIT)	Pittsburg, Pennsylvania
528 (BUF)	Buffalo, New York
532 (PIA)	Peoria, Illinois
553 (OMA)	Omaha, Nebraska
562 (LBF)	North Platte, Nebraska
606 (PWM)	Portland, Maine
637 (FNT)	Flint, Michigan
645 (GRB)	Green Bay, Wisconsin
654 (HUR)	Huron, South Dakota
655 (STC)	St. Cloud, Minnesota
662 (RAP)	Rapid City, South Dakota
11001 (MFS)	Marshall Space Flight Center, Alabama
22002 (FSI)	Fort Sill, Oklahoma

to conduct AVE IV during a period when large horizontal temperature gradients existed, convective activity was present, a jet stream was present, a variety of cloud conditions existed, and rapid changes in weather patterns were expected to occur.

III. Discussion of Basic Data

A. Collection. Original information from which sounding data was computed was sent to the Aerospace Environment Division, NASA Marshall Space Flight Center (MSFC), Alabama. Texas A&M University personnel extracted ordinate and angle data at each pressure contact and key-punched these and baseline data into cards. All sounding computations were made on an IBM 360/65 computer at Texas A&M University.

B. Methods of Processing. The procedure used to compute soundings is the same as that used on the AVE III data and is described by Fuelberg (1974) and Fuelberg and Turner (1975). All keypunched data were checked for errors by calculating centered differences on the input data. Processed soundings were further checked by calculating centered differences of wind direction and speed and by calculating the lapse rates of temperature and dew point. All questionable data were checked with the original strip chart information, and any data found to be erroneous were corrected. All unusual or erroneous soundings are listed in Table 3.

The final data sets of the AVE IV experiment consist of data computed at each pressure contact and at 25-mb intervals. Thermodynamic quantities were computed at each pressure contact, while wind data were computed from 30-sec intervals by means of centered finite differences and subsequently smoothed and interpolated to each pressure contact. These detailed profiles were then interpolated to give the 25-mb data presented in this report.

Table 3

<u>Unusual or Erroneous Soundings</u>		
<u>Station</u>	<u>Date/GMT</u>	<u>Error</u>
349 Monette, Missouri	24/1200 25/0000	Sondes released during rainstorm.
429 Dayton, Ohio	24/0600	Sonde released during thunderstorm.
235 Jackson, Mississippi	24/2100	Height and temperature fields seem to be high. No known reason.
402 Wallops Island, Virginia	All time periods	Angle data were not available for Stations 402 and 486 to compute winds using AVE procedure. Winds computed by the National Weather Service are given in the Appendix.
486 Fort Totten, New York	All time periods	

IV. Discussion of Sounding Data

A. Accuracy Estimates. Estimates of the RMS errors in the thermodynamic quantities of the AVE IV data are the same as those given by Scoggins and Smith (1973) for AVE I, Fuelberg (1974) for AVE I12, and Fuelberg and Turner (1975) for AVE III. These estimates are:

<u>Parameter</u>	<u>Approximate RMS Error</u>
Temperature	1°C
Pressure	1.3 mb from surface to 400 mb; 1.1 mb between 400 and 100 mb; 0.7 mb between 100 and 10 mb.
Humidity	10 percent
Pressure Altitude	10 gpm at 500 mb; 20 gpm at 300 mb; 50 gpm at 50 mb.

The RMS errors for wind speed and direction are difficult to describe since they are a function of tracking geometry and other factors. RMS errors in the AVE IV wind data are the same as those given by Fuelberg (1974) for the AVE IIP data. Maximum RMS errors for winds computed at 30-sec intervals (based on the worst geometric tracking configuration) are: at 700 mb about 2.5 mps at an elevation angle of 10° and about 0.5 mps at an elevation angle of 40° ; at 500 mb, 4.5 mps and 0.8 mps for the same elevation angles; and at 300 mb, 7.8 mps and 1.0 mps, respectively. After assuming typical values of scalar wind speed at the various levels, maximum RMS errors in wind direction were determined. The maximum RMS errors at 700 mb range from about 9.5° at an elevation angle of 10° to about 1.3° at an elevation angle of 40° . At 500 mb the errors are 13.4° and 1.8° at the same elevation angles, while at 300 mb the maximum errors are 18.0° and 2.5° , respectively. The accuracy of the wind data at pressure contacts and at 25-mb intervals is greater than that stated for the 30-sec winds because of the additional smoothing and interpolation performed. In addition, errors cited for the 30-sec winds were maxima for the stated conditions.

B. Tabulated Data. An example of AVE IV contact data is given in Fig. 2. An explanation of the column headings is given in Table 4, and a list of missing soundings is given in Table 5. In Fig. 2, the first line of data for the time of 0.0 minutes is surface data. A series of nines is used to indicate missing data. The three numbers in the upper right-hand side of each page are the number of pressure contacts computed, the minimum pressure obtained (mb), and an angle identifier with the value 0 for 30-sec angle input and 1 for 1-min angle input. The contact data are available in paper form or on magnetic tape from the George C. Marshall

STATION NO. 208
CHARLESTON, SC

23 APRIL 1975
2315 GMT

TIME MIN	CATCY	HEICHT C/M	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCHP M/SEC	PCT Y DG K	E POT Y DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.3	13.0	1024.0	21.1	12.8	190.0	5.2	0.9	5.1	293.5	317.4	9.1	59.0	0.0	0.
0.2	5.0	85.5	1015.0	21.0	12.8	182.5	6.6	0.3	6.6	294.2	318.5	9.2	59.5	0.3	4.
0.6	6.0	218.3	1000.0	20.2	12.4	182.0	6.7	0.3	6.6	294.5	318.6	9.1	61.0	0.3	4.
1.0	7.0	222.4	988.0	19.1	12.1	184.7	6.9	0.6	6.3	294.3	318.3	9.0	64.0	0.4	3.
1.4	8.0	436.2	975.0	18.2	12.0	182.4	7.8	0.3	7.8	294.7	318.7	9.1	66.9	0.6	4.
1.6	5.0	573.4	964.0	17.0	11.7	180.9	8.1	0.1	8.1	294.4	318.2	9.0	70.9	0.7	4.
1.9	10.0	631.3	953.0	16.0	11.7	178.2	8.4	-0.3	8.4	294.4	318.5	9.1	75.9	0.9	3.
2.4	11.0	757.1	939.0	15.0	12.0	175.1	7.7	-0.1	7.7	294.6	319.6	9.5	82.6	1.1	2.
2.7	12.0	866.1	927.0	14.0	12.3	182.0	8.0	0.3	8.0	294.7	320.4	9.7	89.3	1.3	1.
3.1	13.0	976.1	915.0	13.0	12.0	186.7	9.0	1.0	9.0	294.8	320.4	9.7	93.7	1.4	2.
3.4	14.0	1077.9	904.0	12.1	11.6	190.3	10.0	1.8	9.8	294.8	320.1	9.6	97.3	1.6	2.
3.7	15.0	1190.1	892.0	11.3	10.8	192.6	10.3	2.3	10.1	295.1	319.4	9.2	98.5	1.8	3.
4.2	16.0	1323.4	878.0	10.7	10.1	195.3	10.4	2.7	10.0	295.8	319.5	8.9	98.0	2.1	5.
4.5	17.0	1427.6	867.0	9.5	9.0	192.4	10.4	2.9	10.0	295.5	317.7	8.3	96.7	2.3	6.
4.9	18.0	1533.6	856.0	8.6	8.1	197.5	9.8	3.0	9.4	295.6	316.8	8.0	97.0	2.5	7.
5.1	19.0	1640.7	845.0	8.0	5.7	197.8	9.7	3.0	9.2	295.9	316.4	6.4	85.3	2.7	8.
5.5	20.0	1739.1	835.0	8.9	4.6	197.9	9.7	3.0	9.2	297.8	315.3	6.4	74.3	2.9	8.
5.9	21.0	1879.4	821.0	6.9	-12.9	183.3	9.8	3.1	9.3	298.7	303.8	1.7	19.9	3.1	9.
6.3	22.0	1990.6	811.0	8.0	-10.5	210.2	9.8	3.4	9.1	298.8	305.0	2.1	25.6	3.4	10.
6.6	23.0	2094.0	800.0	7.3	-12.3	231.8	9.5	3.5	8.8	299.2	304.7	1.9	23.2	3.5	10.
6.9	24.0	2186.4	790.0	6.6	-10.9	232.7	9.1	3.6	8.3	299.5	305.7	2.1	27.3	3.7	11.
7.3	25.0	2300.7	780.0	5.6	-8.9	232.7	8.2	3.7	7.3	299.6	306.8	2.5	34.3	3.9	12.
7.7	26.0	2418.0	767.0	5.0	-6.6	212.8	7.2	3.9	6.1	300.2	308.1	2.6	36.6	4.1	12.
8.1	27.0	2545.1	757.0	5.0	-9.5	221.0	6.4	4.2	4.8	301.6	308.8	2.4	33.9	4.2	13.
8.4	28.0	2684.5	746.0	4.9	-10.5	225.0	6.0	4.5	3.9	302.5	305.8	1.1	15.1	4.3	14.
8.7	29.0	2763.2	737.0	4.0	-19.6	237.2	5.8	4.9	3.2	302.6	306.0	1.1	16.0	4.4	15.
9.1	30.0	2874.2	727.0	3.9	-19.6	247.1	5.8	5.4	2.3	303.0	307.0	1.1	16.0	4.5	16.
9.4	31.0	2952.7	716.0	2.8	-19.5	252.2	5.9	5.6	1.8	303.8	307.2	1.1	14.8	4.6	17.
9.8	32.0	3055.9	707.0	1.9	-16.5	255.2	6.0	5.8	1.3	303.5	308.4	1.5	24.1	4.6	19.
10.2	33.0	3203.1	696.0	1.4	-15.8	255.9	6.2	6.1	1.3	304.4	309.3	1.6	26.4	4.7	20.
10.5	34.0	3310.1	688.0	0.7	-15.7	257.6	6.4	6.2	1.6	305.4	310.0	1.6	28.0	4.8	21.
10.8	35.0	3424.8	679.0	0.4	-18.9	257.6	6.6	6.4	1.4	305.7	309.6	1.3	21.7	4.9	23.
11.2	36.0	3567.7	667.0	0.2	-23.5	222.1	6.8	6.6	0.9	307.0	309.0	0.9	14.8	5.0	24.
11.6	37.0	3684.6	657.0	-0.1	-24.9	229.3	6.6	6.6	0.9	308.0	310.5	0.8	13.3	5.0	26.
12.0	38.0	3768.8	646.0	-0.9	-29.5	278.4	6.4	6.4	-0.9	308.3	310.0	0.5	9.2	5.1	28.
12.3	39.0	3910.3	639.0	-1.2	-32.0	266.4	6.4	6.1	-1.8	309.1	310.5	0.4	7.4	5.1	29.
12.7	40.0	4023.3	630.0	-1.4	-32.0	255.2	6.7	6.1	-2.5	310.2	311.6	0.4	7.5	5.2	30.
13.2	41.0	4163.4	619.0	-2.0	-32.4	259.6	7.5	6.6	-3.7	311.1	312.4	0.4	7.5	5.1	33.
13.6	42.0	4266.7	611.0	-2.3	-32.6	259.0	8.3	7.3	-4.0	311.9	313.2	0.4	7.6	5.1	35.
13.9	43.0	4357.5	601.0	-2.8	-31.7	258.2	8.8	7.7	-4.2	312.8	314.3	0.4	8.5	5.2	36.
14.3	44.0	4503.6	593.0	-3.2	-32.0	300.2	9.4	8.1	-4.7	313.5	314.9	0.4	8.6	5.2	39.
14.7	45.0	4624.5	584.0	-3.5	-32.2	304.2	10.0	8.3	-5.6	314.5	316.0	0.4	8.6	5.3	41.
15.0	46.0	4732.3	576.0	-4.3	-32.7	307.9	10.5	8.3	-6.3	314.8	316.3	0.4	8.7	5.3	43.
15.4	47.0	4857.2	567.0	-4.8	-32.0	311.0	11.2	8.5	-7.4	315.7	317.3	0.5	9.7	5.3	46.
15.7	48.0	4968.8	559.0	-5.5	-25.5	311.4	11.5	8.6	-7.6	316.1	318.0	0.9	18.9	5.3	48.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

Fig. 2. Example of contact data from the AVE IV experiment.

STATION NO. 208
CHARLESTON, SC

23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT T DG K	MX RTO GM/KC	RM PCY	RANGE KM	AZ DG
16.1	49.0	5081.7	551.0	-6.3	-26.9	310.4	11.7	8.9	-7.6	310.9	319.1	0.8	17.6	5.3	52.
16.4	50.0	5210.4	542.0	-6.9	-23.5	309.1	11.6	9.0	-7.3	317.4	320.8	1.1	25.1	5.4	54.
16.9	51.0	5340.9	533.0	-7.6	-22.5	308.7	11.4	8.9	-7.1	318.0	321.9	1.2	29.1	5.5	57.
17.2	52.0	5456.4	525.0	-8.6	-22.1	309.5	11.4	8.8	-7.2	318.2	322.2	1.2	32.6	5.6	59.
17.6	53.0	5577.2	517.0	-9.6	-19.2	311.0	11.5	8.7	-7.6	318.4	323.6	1.6	45.4	5.7	62.
18.0	54.0	5712.7	508.0	-10.7	-17.5	312.1	11.9	8.9	-8.0	318.8	324.9	1.9	56.9	5.8	64.
18.4	55.0	5834.6	500.0	-11.6	-19.3	311.0	12.2	9.2	-8.0	318.8	324.2	1.7	53.4	5.9	67.
18.8	56.0	5973.5	491.0	-12.6	-21.2	307.7	12.4	9.8	-7.6	319.4	324.1	1.4	48.4	6.0	70.
19.2	57.0	6083.0	484.0	-13.3	-21.5	303.0	12.6	10.6	-6.9	319.9	324.5	1.4	50.0	6.2	72.
19.6	58.0	6209.8	476.0	-14.0	-22.5	297.6	13.0	11.5	-6.0	320.5	324.8	1.3	48.5	6.4	74.
19.9	59.0	6322.2	469.0	-14.9	-22.5	294.0	13.3	12.2	-5.4	320.8	325.2	1.3	52.0	6.6	75.
20.4	60.0	6468.6	460.0	-15.8	-22.2	290.2	13.9	13.0	-4.8	321.4	326.0	1.4	58.0	6.9	77.
20.8	61.0	6584.2	453.0	-16.1	-21.5	285.5	14.4	13.6	-4.0	322.5	327.5	1.5	63.2	7.2	79.
21.2	62.0	6684.6	447.0	-16.7	-23.7	290.2	15.1	14.1	-5.2	323.0	327.2	1.3	54.4	7.5	80.
21.7	63.0	6820.1	439.0	-17.5	-24.9	292.1	16.0	14.8	-6.0	323.6	327.5	1.1	52.3	7.9	82.
22.0	64.0	6940.3	432.0	-18.6	-25.5	293.2	16.6	15.2	-6.9	323.7	327.4	1.1	56.6	8.2	83.
22.4	65.0	7061.9	425.0	-19.8	-26.6	294.4	17.0	15.6	-7.0	323.7	327.2	1.0	58.6	9.0	86.
22.9	66.0	7202.8	417.0	-20.6	-27.2	296.4	17.4	15.6	-7.5	324.4	327.9	1.0	60.5	9.4	88.
23.4	67.0	7327.8	410.0	-21.7	-29.2	296.9	17.2	15.3	-7.8	324.6	327.5	0.8	56.0	9.7	88.
23.7	68.0	7454.4	403.0	-22.9	-29.3	297.1	16.4	14.6	-7.5	325.0	327.9	0.8	60.0	10.2	90.
24.2	69.0	7582.7	396.0	-23.8	-30.8	296.2	15.8	14.2	-6.9	325.6	328.2	0.7	55.9	10.5	91.
24.6	70.0	7712.8	389.0	-24.6	-32.8	293.8	15.5	14.2	-6.3	326.2	328.4	0.6	51.4	11.0	92.
25.2	71.0	7882.9	380.0	-25.8	-36.1	293.7	15.8	14.5	-6.4	327.1	328.7	0.5	42.5	11.7	93.
25.8	72.0	8017.5	373.0	-26.5	-36.4	295.2	16.3	14.8	-7.0	327.2	328.9	0.5	48.2	12.1	94.
26.0	73.0	8154.1	366.0	-27.6	-36.3	297.1	17.1	15.2	-7.8	327.2	328.9	0.5	59.4	12.5	95.
26.5	74.0	8272.7	360.0	-28.8	-35.3	297.6	17.7	15.7	-8.2	327.4	329.3	0.5	67.1	13.0	96.
26.9	75.0	8412.9	353.0	-30.0	-35.3	297.3	18.4	16.3	-8.4	327.4	329.7	0.4	58.0	13.4	97.
27.4	76.0	8534.7	347.0	-31.2	-35.3	297.3	18.4	16.3	-8.1	328.6	330.1	0.3	49.5	13.9	97.
27.8	77.0	8678.9	340.0	-32.1	-37.6	296.5	19.1	17.2	-8.2	328.8	330.7	0.3	57.3	14.8	98.
28.2	78.0	8804.5	334.0	-32.8	-40.8	294.8	19.3	17.5	-8.1	328.6	330.1	0.3	49.5	14.3	98.
28.6	79.0	8931.8	328.0	-34.0	-40.4	294.7	19.4	17.6	-8.1	329.4	330.6	0.3	65.9	15.8	99.
29.0	80.0	9060.9	322.0	-34.9	-40.4	294.7	19.4	17.6	-8.6	330.1	331.5	0.4	65.1	15.4	99.
29.6	81.0	9214.0	315.0	-35.9	-40.0	295.6	19.8	17.9	-8.6	330.1	331.3	0.3	63.8	16.4	100.
29.9	82.0	9347.3	309.0	-37.2	-41.2	296.0	20.0	18.0	-9.0	330.6	331.7	0.3	62.8	16.8	101.
30.4	83.0	9482.6	303.0	-38.2	-42.4	296.4	20.2	18.1	-9.0	330.6	331.4	0.3	62.8	17.3	101.
30.8	84.0	9596.8	298.0	-39.4	-43.7	296.8	20.3	18.1	-9.1	330.4	331.4	0.3	62.8	18.0	102.
31.2	85.0	9735.7	292.0	-40.6	99.9	297.1	20.3	18.1	-9.3	330.7	331.6	0.3	62.8	18.0	102.
31.8	86.0	9900.7	285.0	-41.6	99.9	296.9	21.0	18.7	-9.5	331.6	331.6	0.3	62.8	18.0	102.
32.3	87.0	10020.4	280.0	-43.0	99.9	296.0	22.1	19.9	-9.7	331.3	331.3	0.3	62.8	18.0	102.
32.7	88.0	10166.1	274.0	-44.0	99.9	295.3	23.1	20.9	-9.8	331.9	331.9	0.3	62.8	18.0	102.
33.2	89.0	10285.3	269.0	-45.4	99.9	295.1	23.6	21.4	-10.0	331.6	331.6	0.3	62.8	18.0	102.
33.6	90.0	10414.2	264.0	-46.5	99.9	295.9	23.4	21.1	-10.2	331.7	331.7	0.3	62.8	18.0	102.
34.1	91.0	10540.8	259.0	-47.8	99.9	297.8	23.2	20.5	-10.8	331.6	331.6	0.3	62.8	18.0	102.
34.6	92.0	10695.0	253.0	-49.2	99.9	299.2	24.1	21.0	-11.8	331.8	331.8	0.3	62.8	18.0	102.
35.1	93.0	10825.5	248.0	-50.5	99.9	300.0	26.1	22.6	-13.0	331.7	331.7	0.3	62.8	18.0	102.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

Fig. 2. (Continued)

STATION NO. 208
CHARLESTON, SC

23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GCM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
35.6	94.0	10558.0	243.0	-21.8	99.9	300.9	27.8	23.8	-14.2	331.8	999.9	99.9	999.9	23.2	105.
35.9	95.0	11092.4	238.0	-53.0	99.9	301.5	28.0	23.9	-14.7	331.9	999.9	99.9	999.9	23.8	106.
36.5	96.0	11256.5	232.0	-54.6	99.9	302.7	27.0	22.8	-14.6	331.9	999.9	99.9	999.9	24.7	106.
37.0	97.0	11395.5	227.0	-55.9	99.9	303.4	26.0	21.7	-14.3	332.0	999.9	99.9	999.9	25.5	107.
37.6	98.0	11508.3	223.0	-57.2	99.9	304.5	26.1	21.5	-14.8	331.6	999.9	99.9	999.9	26.4	107.
38.0	99.0	11651.3	218.0	-58.4	99.9	305.1	26.7	21.8	-15.3	332.0	999.9	99.9	999.9	27.0	108.
38.4	100.0	11756.7	213.0	-60.0	99.9	305.9	27.2	22.0	-15.9	331.7	999.9	99.9	999.9	27.6	108.
38.9	101.0	11844.6	208.0	-61.3	99.9	307.8	27.6	21.9	-16.9	332.0	999.9	99.9	999.9	28.4	109.
39.3	102.0	12095.3	203.0	-62.2	99.9	309.7	27.9	21.5	-17.8	332.5	999.9	99.9	999.9	29.0	109.
39.8	103.0	12215.1	199.0	-62.8	99.9	311.0	29.0	21.8	-19.0	333.9	999.9	99.9	999.9	29.8	110.
40.3	104.0	12343.1	195.0	-62.9	99.9	310.7	31.0	23.5	-20.2	335.5	999.9	99.9	999.9	30.6	110.
40.9	105.0	12502.7	190.0	-63.9	99.9	310.0	33.6	25.7	-21.5	336.5	999.9	99.9	999.9	31.7	111.
41.6	106.0	12633.0	186.0	-64.3	99.9	305.4	34.6	26.8	-22.0	337.9	999.9	99.9	999.9	33.1	112.
42.1	107.0	12775.9	182.0	-64.7	99.9	308.1	34.1	26.8	-21.1	339.4	999.9	99.9	999.9	34.1	112.
42.7	108.0	12901.7	178.0	-64.5	99.9	304.7	32.6	26.8	-18.5	341.9	999.9	99.9	999.9	35.3	113.
43.3	109.0	13041.0	174.0	-63.1	99.9	300.9	32.2	27.7	-16.5	346.3	999.9	99.9	999.9	36.4	113.
43.9	110.0	13134.4	170.0	-62.4	99.9	298.8	33.4	29.3	-16.1	349.9	999.9	99.9	999.9	37.5	113.
44.7	111.0	13268.9	165.0	-62.0	99.9	298.9	33.8	29.6	-16.4	353.5	999.9	99.9	999.9	39.2	114.
45.2	112.0	13520.5	161.0	-62.2	99.9	301.3	34.1	29.1	-17.7	355.7	999.9	99.9	999.9	40.2	114.
45.3	113.0	13676.1	157.0	-62.0	99.9	305.8	34.9	28.3	-20.4	356.6	999.9	99.9	999.9	41.6	114.
46.5	114.0	13755.7	154.0	-60.9	99.9	307.1	34.8	27.8	-21.0	362.4	999.9	99.9	999.9	42.9	115.
47.1	115.0	13955.4	150.0	-60.5	99.9	305.1	33.9	27.7	-19.5	365.8	999.9	99.9	999.9	44.0	115.
48.0	116.0	14127.4	146.0	-61.5	99.9	303.9	33.3	27.6	-18.6	367.0	999.9	99.9	999.9	45.8	115.
48.7	117.0	14300.5	142.0	-59.3	99.9	306.8	33.1	27.3	-20.4	373.7	999.9	99.9	999.9	47.3	115.
49.4	118.0	14434.2	139.0	-55.5	99.9	307.7	34.2	27.1	-20.9	375.7	999.9	99.9	999.9	48.5	116.
50.1	119.0	14616.8	135.0	-55.8	99.9	307.2	33.3	26.5	-20.1	378.2	999.9	99.9	999.9	50.2	116.
50.7	120.0	14757.0	132.0	-60.5	99.9	308.3	31.2	24.5	-19.3	379.4	999.9	99.9	999.9	51.2	116.
51.5	121.0	14948.6	128.0	-60.5	99.9	309.5	27.5	21.2	-17.5	382.8	999.9	99.9	999.9	52.6	117.
52.1	122.0	15053.9	125.0	-61.8	99.9	310.5	23.7	18.0	-15.4	383.1	999.9	99.9	999.9	53.5	117.
52.7	123.0	15245.8	122.0	-63.1	99.9	311.6	20.0	14.9	-13.3	383.6	999.9	99.9	999.9	54.3	117.
53.4	124.0	15358.5	119.0	-64.5	99.9	307.4	19.9	15.8	-12.1	383.6	999.9	99.9	999.9	54.9	117.
54.2	125.0	15606.8	115.0	-65.7	99.9	300.8	21.0	18.0	-10.7	385.2	999.9	99.9	999.9	56.1	118.
55.1	126.0	15765.9	112.0	-67.3	99.9	296.3	19.1	17.1	-8.5	385.0	999.9	99.9	999.9	57.0	118.
55.8	127.0	15930.1	109.0	-68.4	99.9	295.7	20.6	18.5	-8.9	386.0	999.9	99.9	999.9	57.9	117.
56.6	128.0	16097.2	106.0	-69.2	99.9	293.9	22.9	20.9	-9.3	387.5	999.9	99.9	999.9	58.9	117.
57.3	129.0	16258.3	103.0	-70.1	99.9	291.1	23.8	22.2	-8.4	389.0	999.9	99.9	999.9	59.9	117.
58.0	130.0	16443.6	100.0	-71.3	99.9	292.2	25.1	23.3	-5.5	390.1	999.9	99.9	999.9	60.9	117.
58.9	131.0	16684.3	96.0	-72.4	99.9	292.6	25.8	23.7	-12.4	392.3	999.9	99.9	999.9	62.2	117.
59.8	132.0	16871.3	93.0	-71.7	99.9	303.8	28.5	23.7	-15.9	397.3	999.9	99.9	999.9	63.9	117.
60.6	133.0	17065.3	90.0	-70.6	99.9	303.9	23.8	19.8	-13.3	403.4	999.9	99.9	999.9	65.0	117.
61.4	134.0	17265.6	87.0	-72.2	99.9	307.9	19.1	15.1	-11.7	404.0	999.9	99.9	999.9	66.1	118.
62.2	135.0	17402.9	85.0	-71.3	99.9	307.9	19.6	15.0	-12.7	408.6	999.9	99.9	999.9	66.9	118.
63.3	136.0	17685.2	81.0	-65.5	99.9	323.0	17.9	10.7	-14.3	418.0	999.9	99.9	999.9	68.2	118.
64.3	137.0	17914.5	78.0	-69.2	99.9	339.6	15.0	5.2	-14.0	423.0	999.9	99.9	999.9	69.0	118.
65.5	138.0	18144.2	75.0	-70.1	99.9	8.2	6.0	-1.1	-7.9	425.9	999.9	99.9	999.9	69.4	119.

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
• BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 14
OF POOR QUALITY

Fig. 2. (Continued)

STATION NO. 208
CHARLESTON, SC

23 APRIL 1975
2315 GMT

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
66.6	139.0	18391.5	72.0	-65.2	99.9	313.6	11.1	8.0	-7.6	432.8	999.9	99.9	999.9	69.9	119.
67.7	140.0	18646.9	69.0	-67.3	99.9	313.6	9.1	6.5	-6.4	442.2	999.9	99.9	999.9	70.6	119.
68.9	141.0	18915.6	66.0	-66.3	99.9	329.1	12.1	6.2	-10.4	450.1	999.9	99.9	999.9	71.3	120.
70.2	142.0	19197.5	63.0	-66.3	99.9	357.0	7.4	0.4	-7.3	456.2	999.9	99.9	999.9	71.9	120.
71.6	143.0	19493.9	60.0	-65.3	99.9	338.2	7.9	1.3	-2.6	464.8	999.9	99.9	999.9	72.0	120.
73.0	144.0	19807.0	57.0	-64.3	99.9	328.0	5.6	3.3	-4.5	473.9	999.9	99.9	999.9	72.1	120.
74.5	145.0	20139.3	54.0	-62.4	99.9	321	6.0	-0.2	-6.0	485.7	999.9	99.9	999.9	72.6	121.
76.0	146.0	20491.5	51.0	-63.1	99.9	179.9	3.0	-0.0	3.0	491.9	999.9	99.9	999.9	72.6	121.
77.5	147.0	20864.8	48.0	-62.8	99.9	300.7	10.4	9.0	-5.3	501.4	999.9	99.9	999.9	72.9	121.
79.2	148.0	21263.9	45.0	-61.3	99.9	256.6	3.9	3.5	-1.7	514.4	999.9	99.9	999.9	74.1	121.
80.9	149.0	21546.8	43.0	-60.2	99.9	324.9	4.6	2.6	-3.7	523.8	999.9	99.9	999.9	74.4	121.
82.8	150.0	22000.9	40.0	-57.4	99.9	323.9	12.0	7.1	-9.7	541.7	999.9	99.9	999.9	75.4	121.
84.6	151.0	22494.9	37.0	-56.2	99.9	328.9	6.1	4.6	-6.6	556.9	999.9	99.9	999.9	76.0	121.
86.6	152.0	23033.8	34.0	-54.9	99.9	279.7	0.7	0.7	-0.1	574.0	999.9	99.9	999.9	76.8	122.
88.6	153.0	23624.7	31.0	-54.6	99.9	248.0	3.8	3.5	1.4	590.3	999.9	99.9	999.9	77.2	121.
90.8	154.0	24051.5	29.0	-54.8	99.9	320.9	2.3	1.5	-1.8	601.2	999.9	99.9	999.9	77.3	121.
93.2	155.0	24750.8	26.0	-54.4	99.9	310.7	9.2	6.3	-6.7	621.2	999.9	99.9	999.9	78.1	121.
95.8	156.0	25540.3	23.0	-52.1	99.9	327.7	9.3	5.0	-7.9	650.3	999.9	99.9	999.9	79.3	122.
98.8	157.0	26449.7	20.0	-49.9	99.9	321.9	0.7	0.4	-0.5	683.4	999.9	99.9	999.9	80.1	122.
102.1	158.0	27137.5	18.0	-50.7	99.9	999.9	99.9	99.9	99.9	701.9	999.9	99.9	999.9	999.9	999.

Fig. 2. (Continued)

ORIGINAL PAGE IS
OF POOR QUALITY

Table 4

Explanation of Column Headings of Tabulated Sounding Data
for the AVE IV Experiment

TIME (MIN)	Time after balloon release.
CNTCT	Contact number.
HEIGHT (GPM)	Height of corresponding pressure surface in geopotential meters.
PRES (MB)	Pressure in millibars.
TEMP (DG C)	Ambient temperature in degrees Celsius. NOTE: An asterisk indicates that time from release and/or temperature were linearly interpolated.
DEW PT (DG C)	Dew point temperature in degrees Celsius.
DIR (DG)	Wind direction measured clockwise from true north and is the direction from which the wind is blowing.
SPEED (M/SEC)	Scalar wind speed in meters per second. NOTE: An asterisk indicates that wind quantities are based on an elevation angle that is between 10° and 6°. A double asterisk indicates that the elevation angle is less than 6°.
U COMP (M/SEC)	The E-W wind component, positive toward the east and negative toward the west.
V COMP (M/SEC)	The N-S wind component, positive toward the north and negative toward the south.
POT T (DG K)	Potential temperature in degrees Kelvin.
E POT T (DG K)	Equivalent potential temperature in degrees Kelvin.
MX RTO (GM/KG)	Mixing ratio in grams per kilogram.
RH (PCT)	Relative humidity in percent.
RANGE (KM)	Distance balloon is from release point along a radius vector.
AZ (DG)	Direction toward balloon measured clockwise from true north.

Space Flight Center, Aerospace Environment Division, Space Sciences Laboratory, Marshall Space Flight Center, Alabama 35812.

The contact data interpolated for 25-mb intervals are presented following Section V. The column headings are identical to those used for the contact data and are described in Table 4. The soundings are arranged by time and appear in ascending order by station number for each time. The first line of data indicates the surface report which is followed by data from 1000 to 25 mb. In cases where the surface pressure is less than the given 25-mb pressure value, missing data (nines) are indicated for each quantity. This is also done when the sounding terminates before the 25-mb level is reached.

Table 5

List of Missing Soundings

<u>Station</u>	<u>Date/GMT</u>	<u>Reason for Omission</u>
562 North Platte, Nebraska	25/0600	Sounding not taken.
486 Fort Totten, New York	25/0600	Pen out of ink, no visible trace.
11001 Marshall Space Flight Center, Alabama	24/0000	Sounding not taken.
402 Wallops Island, Virginia	24/0000 24/0600 24/1200 25/0000 25/1200	Wind data only missing. Thermodynamic data were computed normally.
20002 Fort Sill, Oklahoma	24/0000 24/1500 24/2100 25/0600 25/1200	Soundings not taken.

V. Synoptic Charts

Synoptic charts for the surface-, 850-, 700-, 500-, 400-, 300-, and 200-mb levels for each observation time are presented in Figs. 3-11. The surface maps were prepared by the National Weather Service. The charts are intended to depict the overall synoptic situation during the observational period and should be reanalyzed when accuracy is a key factor.

Acknowledgements

The tasks of processing the AVE IV data and preparing this report required the efforts of approximately 15 people. The work is often tedious and yet must be performed with great care and speed. The authors are grateful to every person who worked diligently behind the scenes to accomplish this important task.

REFERENCES

- Fuelberg, H. E., 1974: Reduction and Error Analysis of the AVE II Pilot Experiment Data. NASA Contractor Report CR-120496. Marshall Space Flight Center, Alabama, 140 pp.
- Fuelberg, H. E. and R. E. Turner, 1975: Pressure Contact Data for NASA's Atmospheric Variability Experiment (AVE II). NASA Technical Note TN D-7914. National Aeronautics and Space Administration, Washington, D. C., 24 pp.
- Fuelberg, H. E. and R. E. Turner, 1975: Data for NASA's AVE III Experiment: 25-mb Sounding Data and Synoptic Charts. NASA Technical Memorandum TM X-64938. Marshall Space Flight Center, Alabama, 465 pp.
- Scoggins, J. R., H. E. Fuelberg, R. D. Carlson, R. W. Phelps, and D. G. Bellue, 1973: A Compilation of Studies from the Atmospheric Variability Experiment (AVE). NASA Contract Report CR-2304. National Aeronautics and Space Administration, Washington, D.C., 235 pp.
- Scoggins, J. R. and O. E. Smith, 1973: Data for the First NASA Atmospheric Variability Experiment (AVE I), Part I: Data Tabulation. NASA Technical Memorandum TM X-2938. Marshall Space Flight Center, Alabama, 681 pp.
- _____, 1973: Data for the First NASA Atmospheric Variability Experiment (AVE I), Part II: Graphical Presentation of Data. NASA Technical Memorandum TM X-2948. Marshall Space Flight Center, Alabama, 260 pp.

Scoggins, J. R. and R. E. Turner, 1974: Data for NASA's AVE II Pilot Experiment, Part I: 25-mb Sounding Data and Synoptic Charts. NASA Technical Memorandum TM X-64877. Marshall Space Flight Center, Alabama, 534 pp.

SCOTT V. 10/11/75

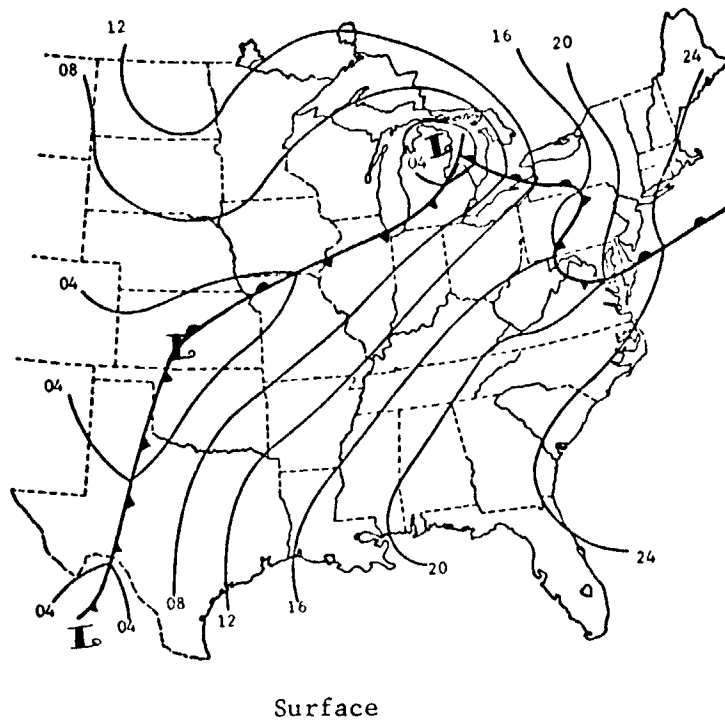


Fig. 3. Synoptic charts for 0000 GMT, 24 April 1975.




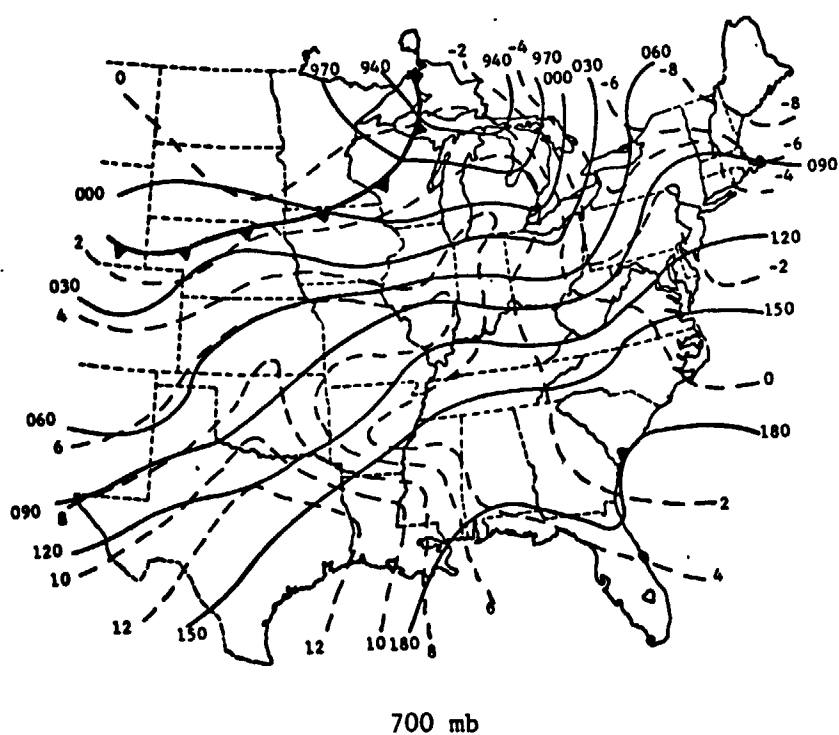


Fig. 3. (Continued)

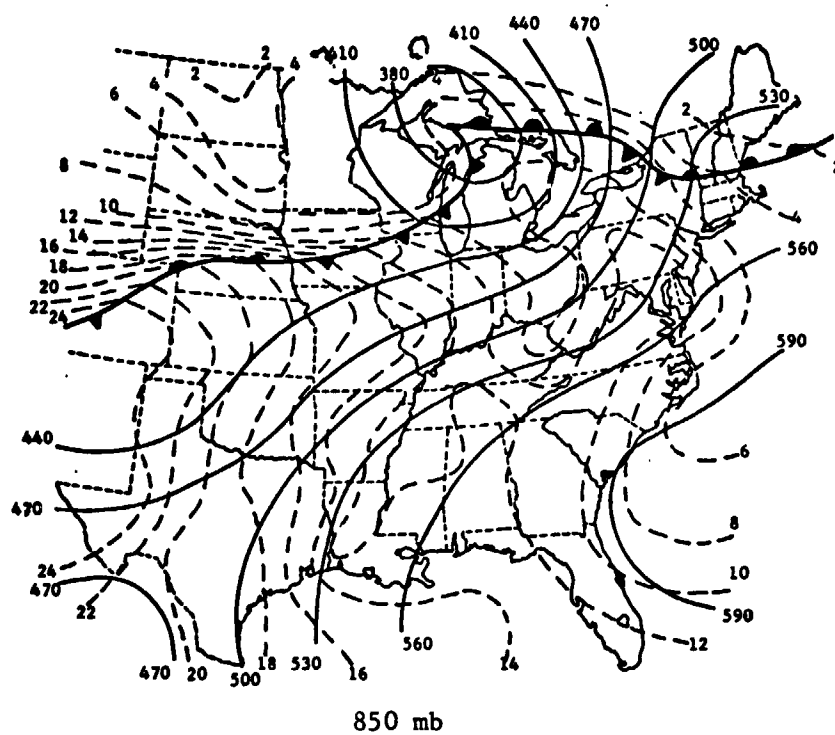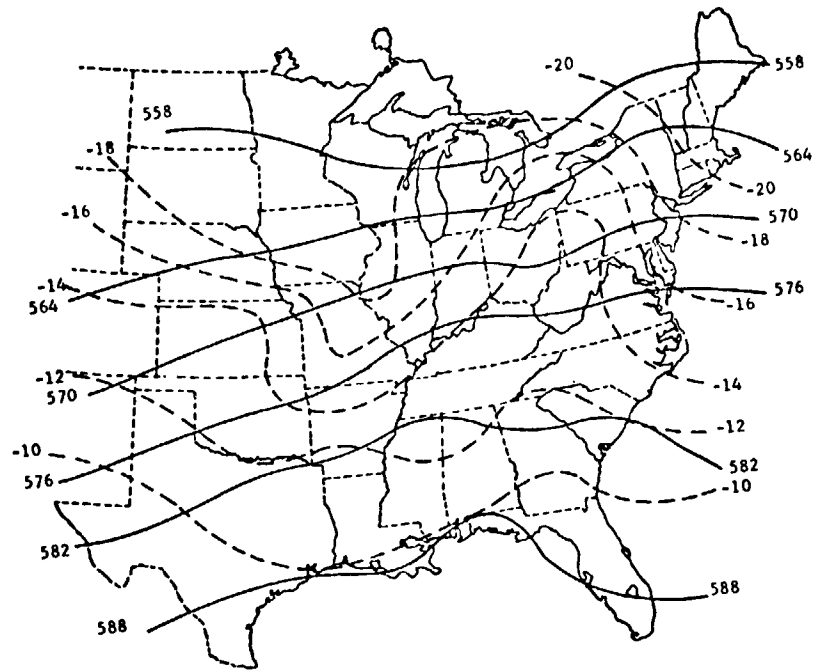

500 mb

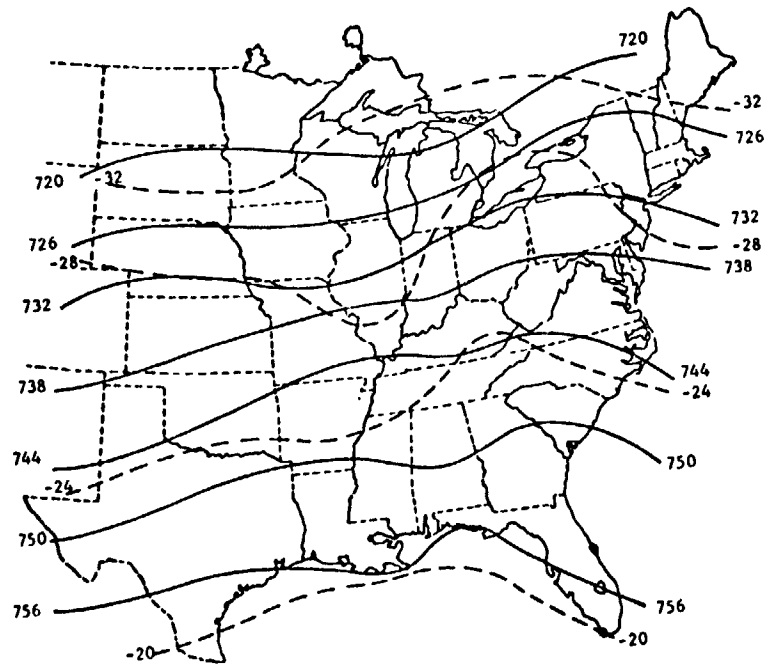

400 mb

Fig. 3. (Continued)




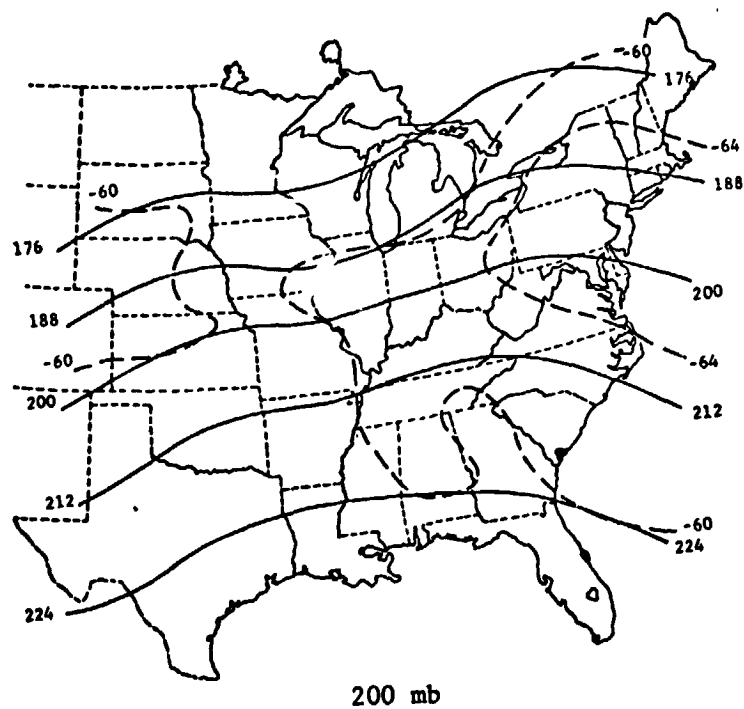


Fig. 3. (Continued)

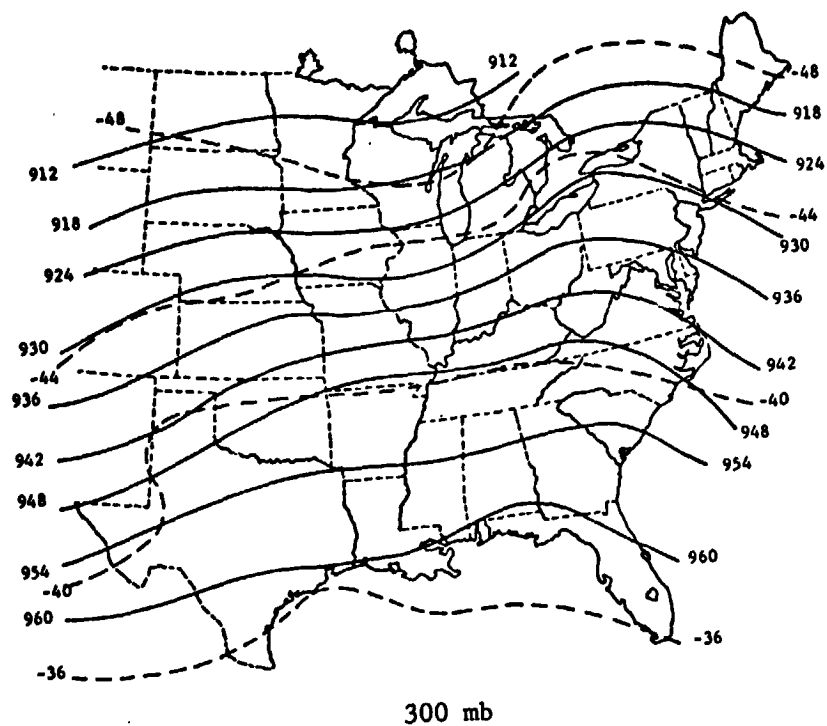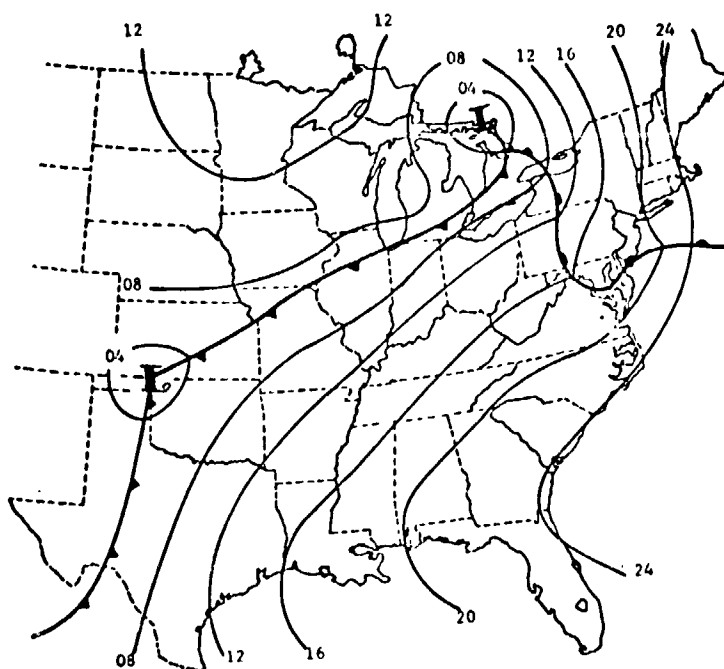


Surface

Fig. 4. Synoptic charts for 0600 GMT, 24 April 1975.

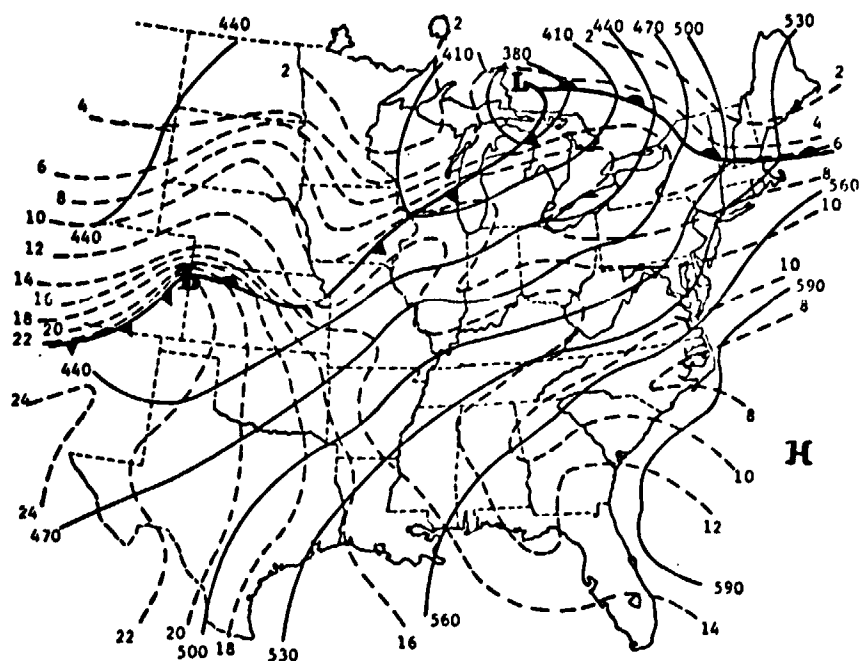

850 mb

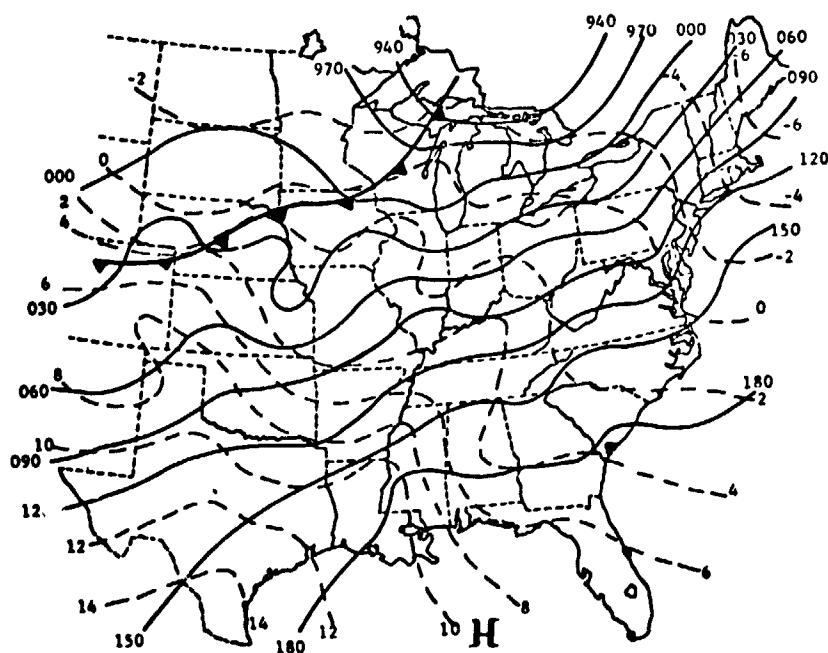

700 mb

Fig. 4. (Continued)

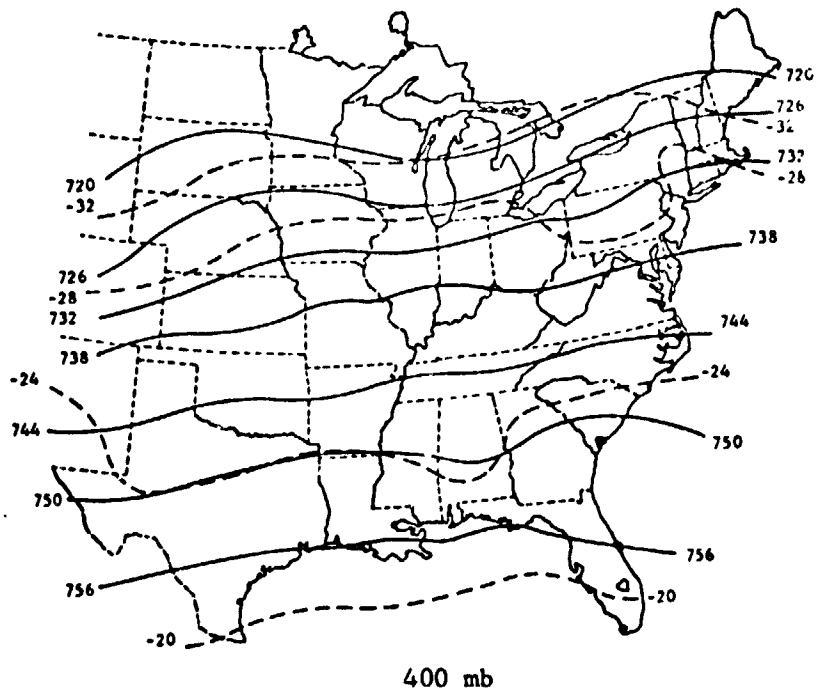
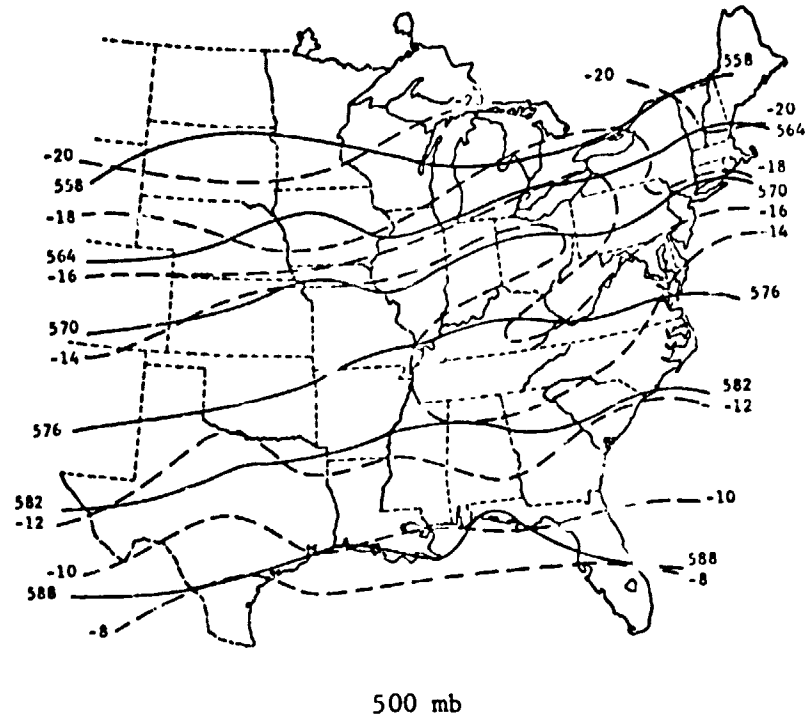


Fig. 4. (Continued)

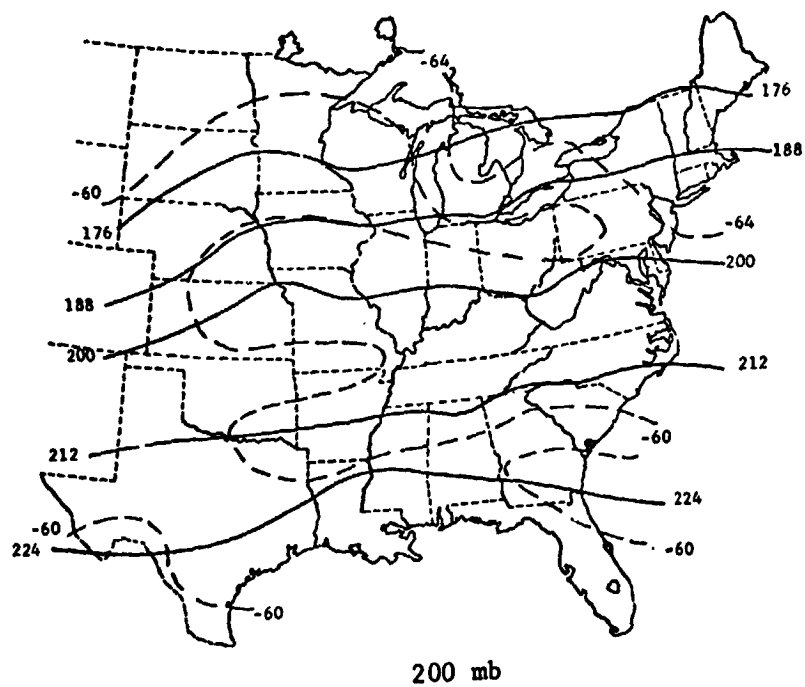
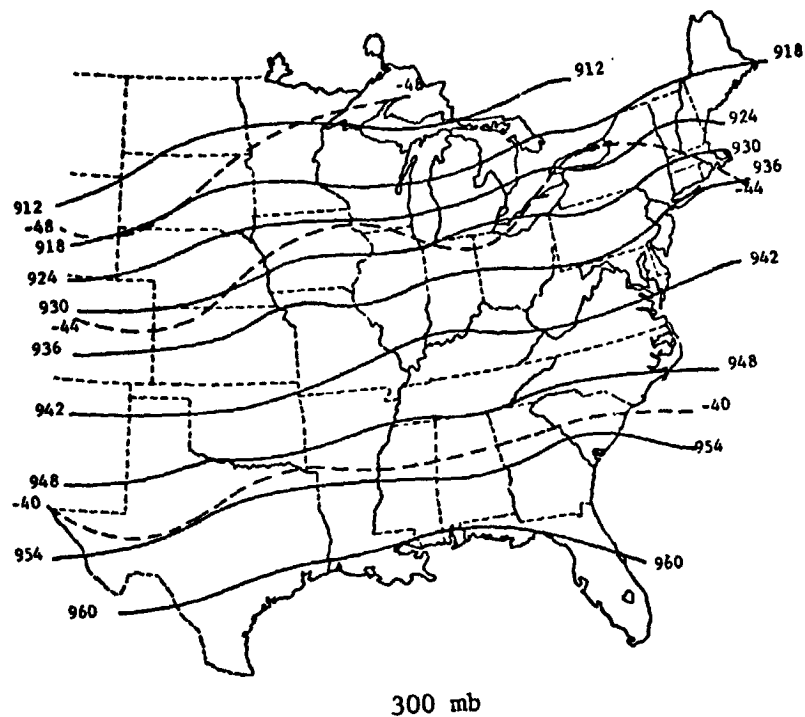


Fig. 4. (Continued)



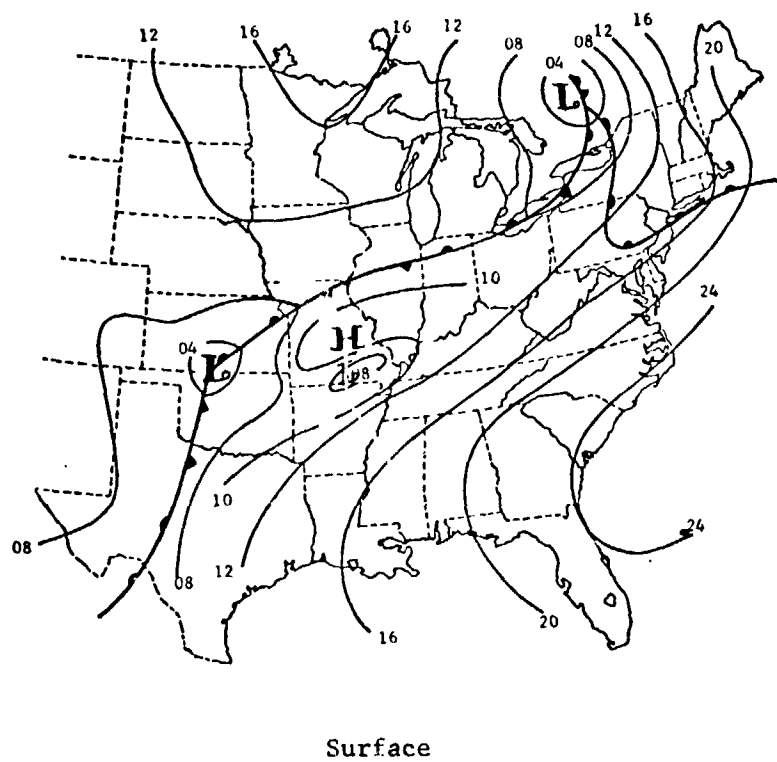


Fig. 5. Synoptic charts for 1200 GMT, 24 April 1975.

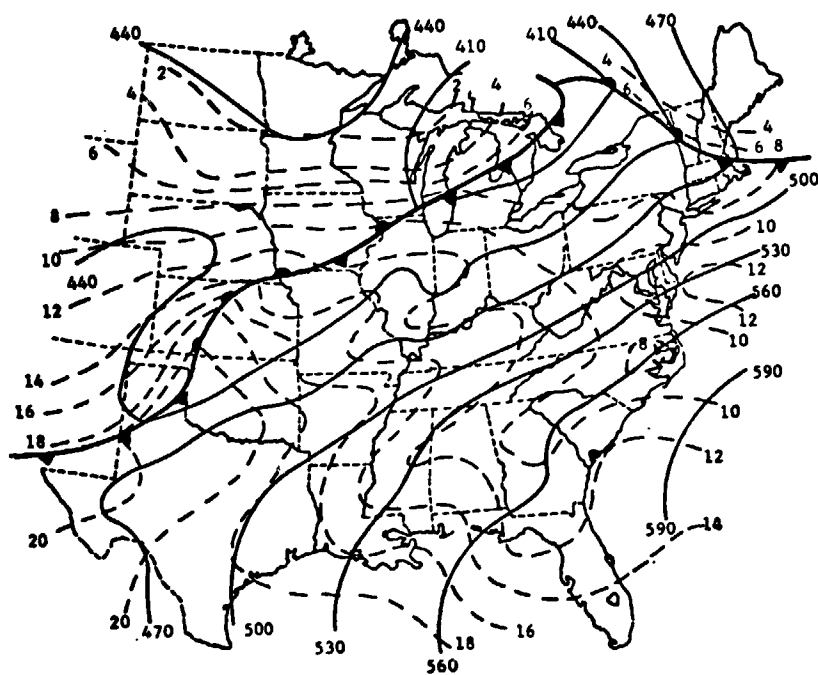

850 mb

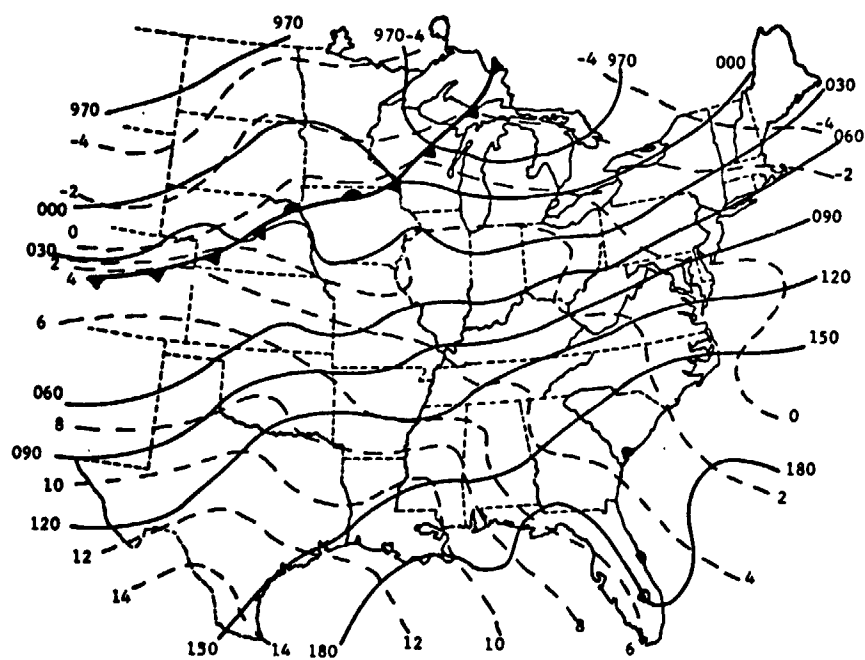

700 mb

Fig. 5. (Continued)

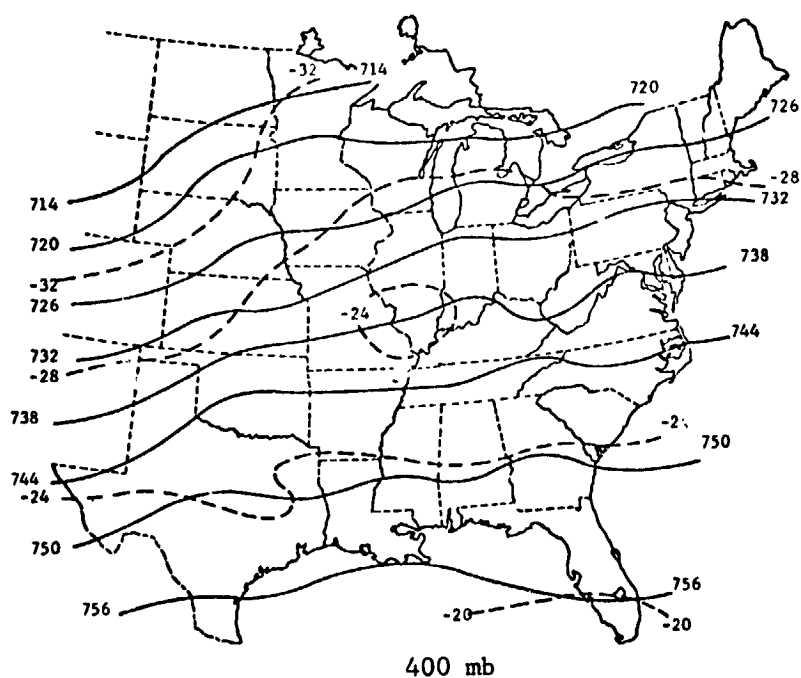
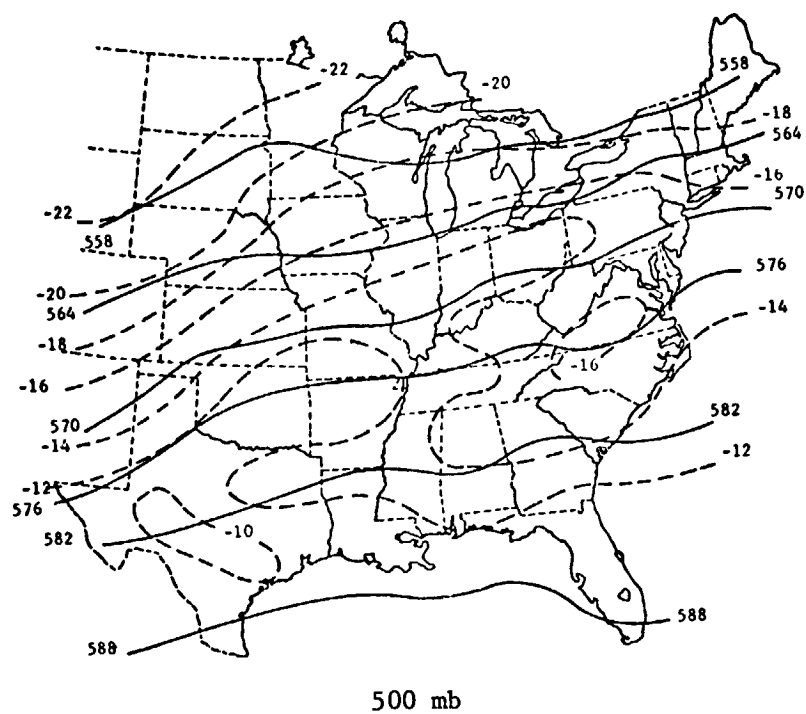


Fig. 5. (Continued)




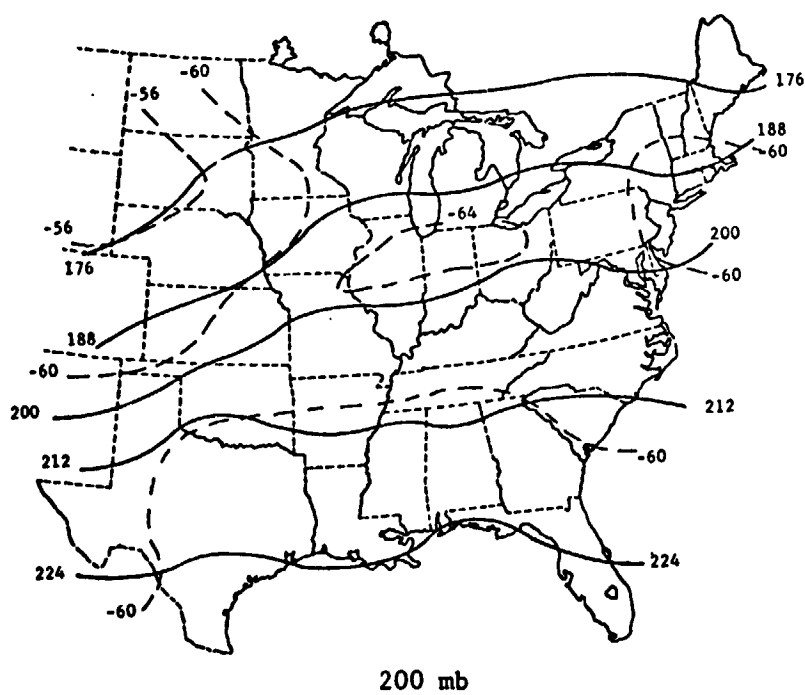


Fig. 5. (Continued)

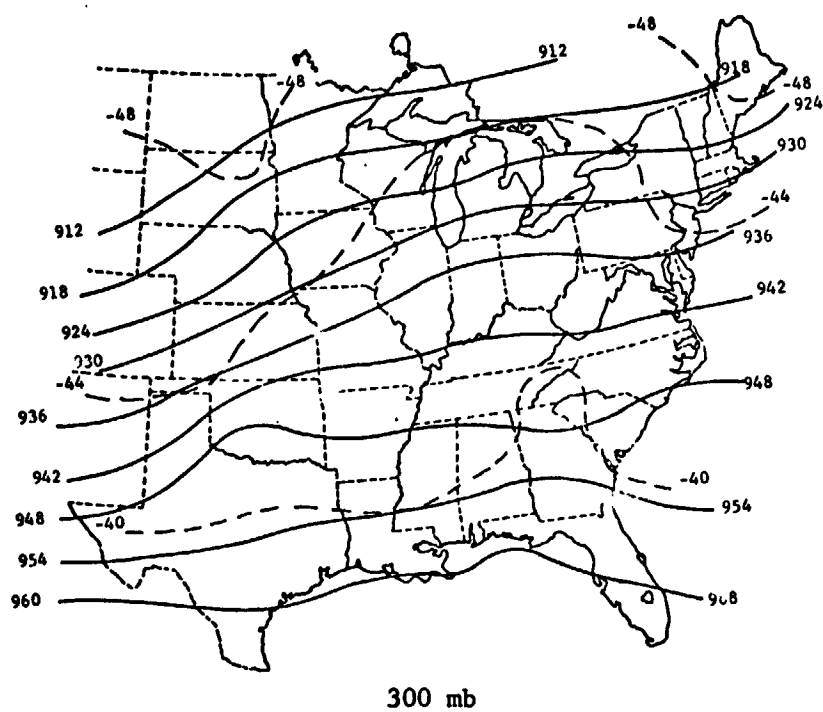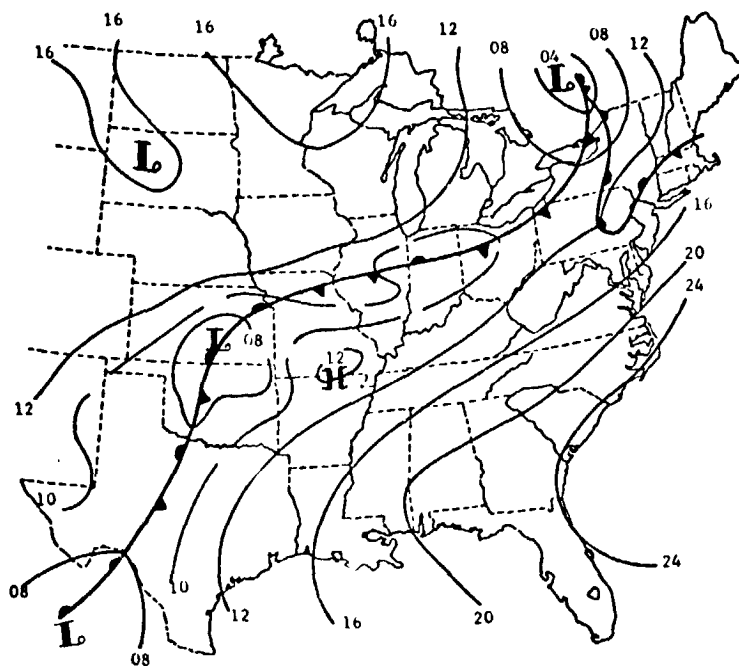


Surface

Fig. 6. Synoptic charts for 1500 GMT, 24 April 1975.

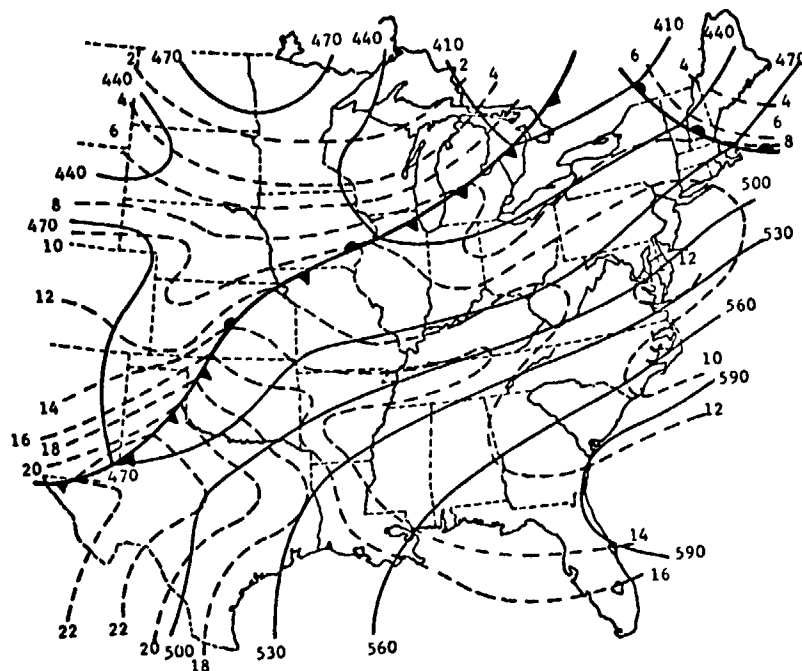


850 mb

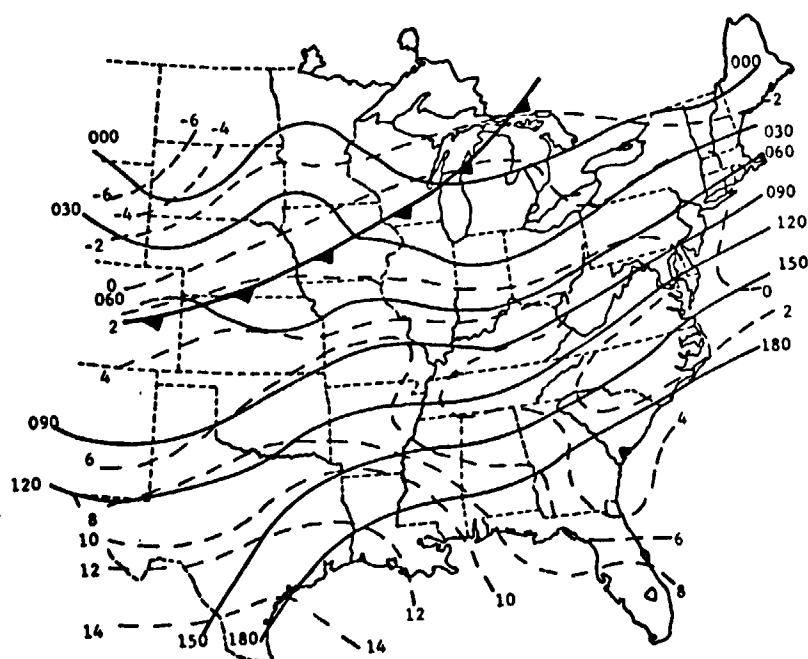


700 mb

Fig. 6. (Continued)

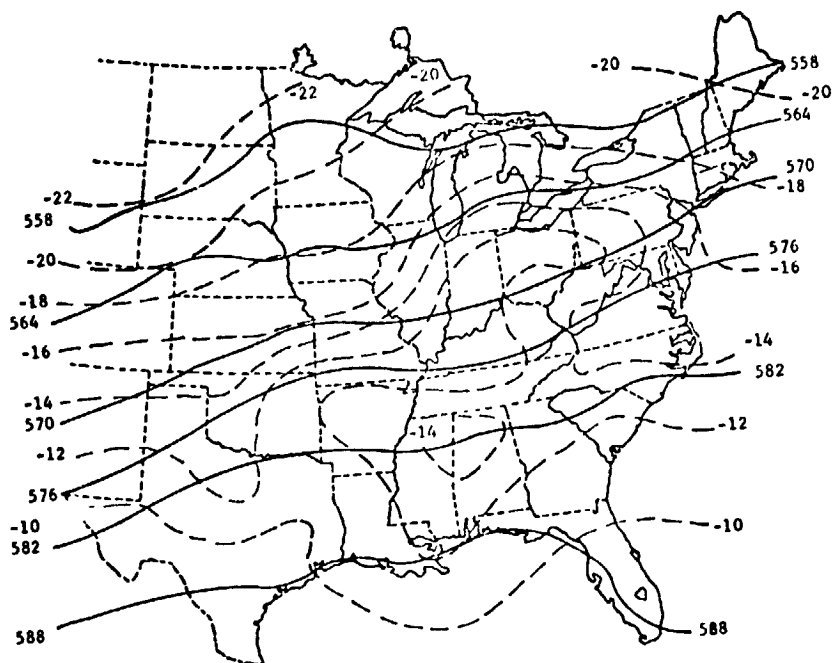


500 mb

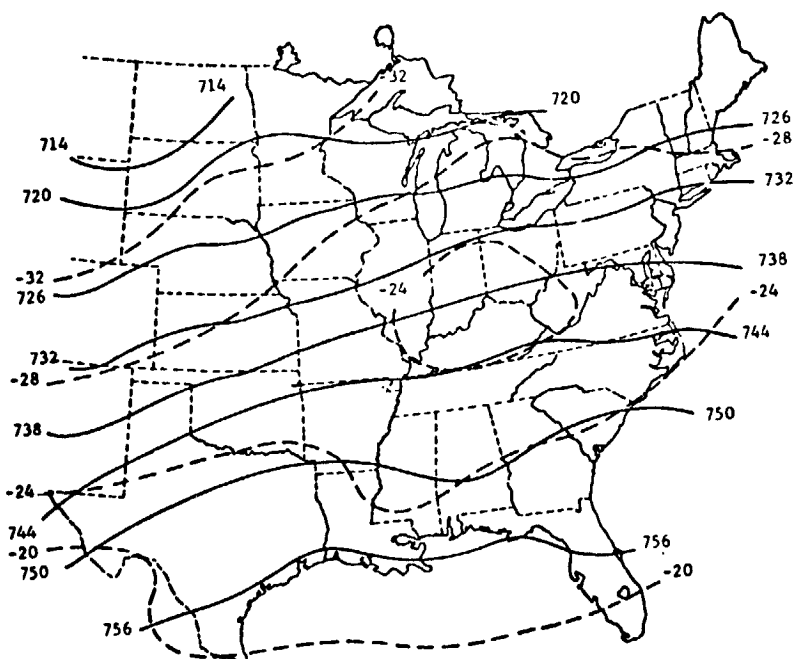


400 mb

Fig. 6. (Continued)

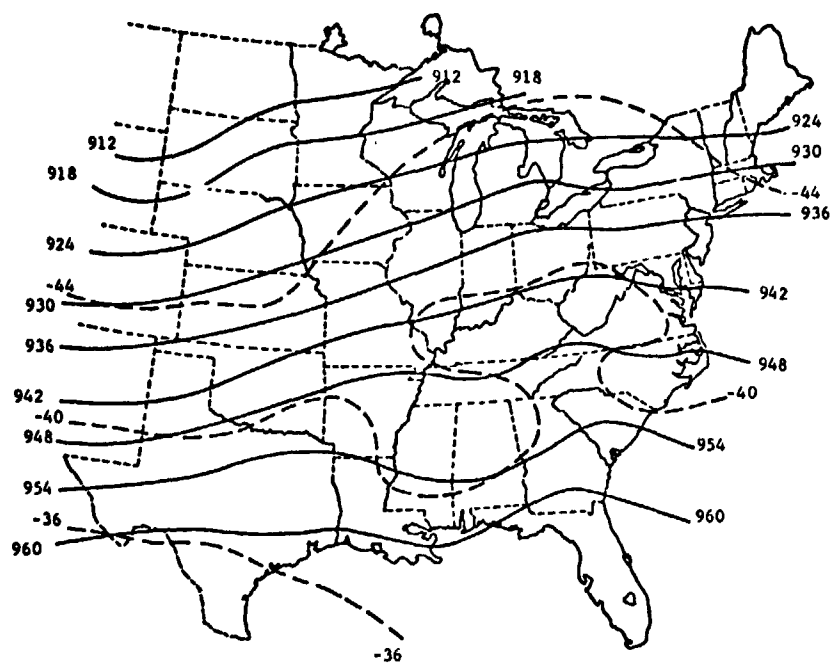


300 mb

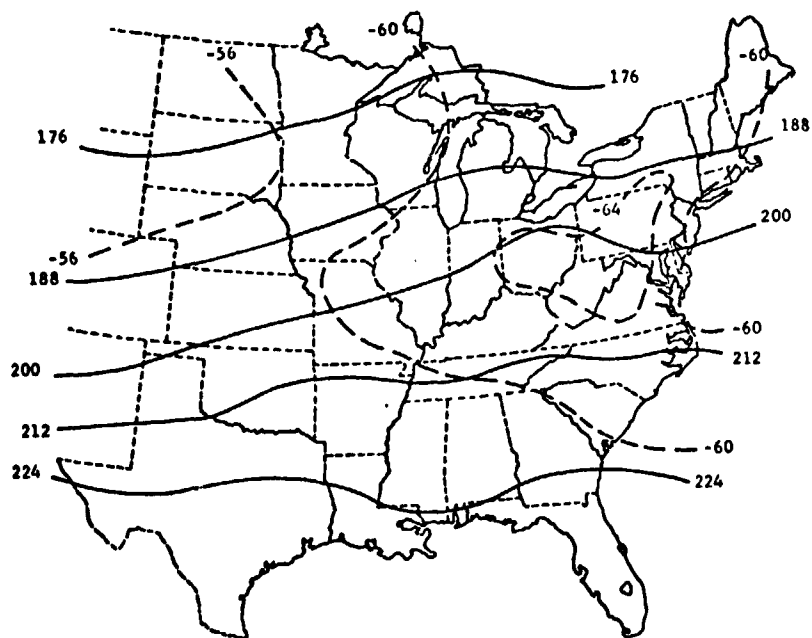


200 mb

Fig. 6. (Continued)

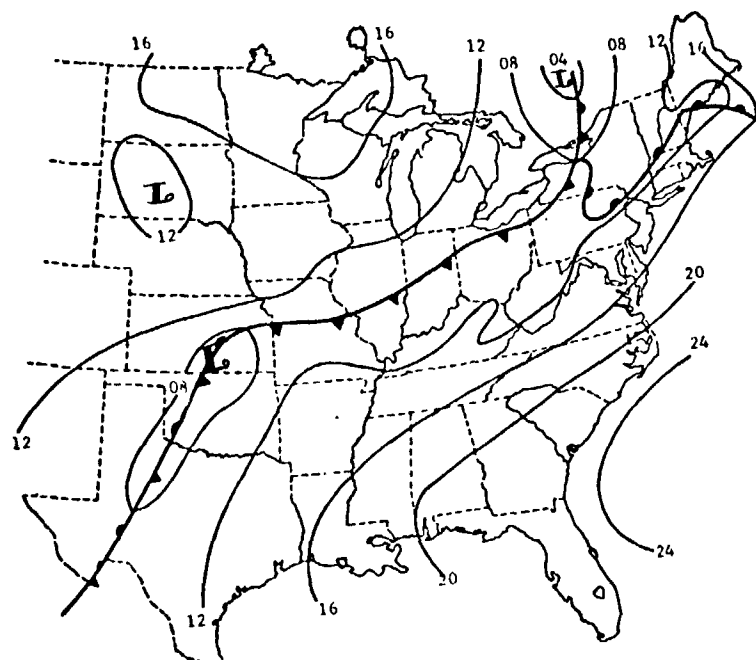


Surface

Fig. 7. Synoptic charts for 1800 GMT, 24 April 1975.

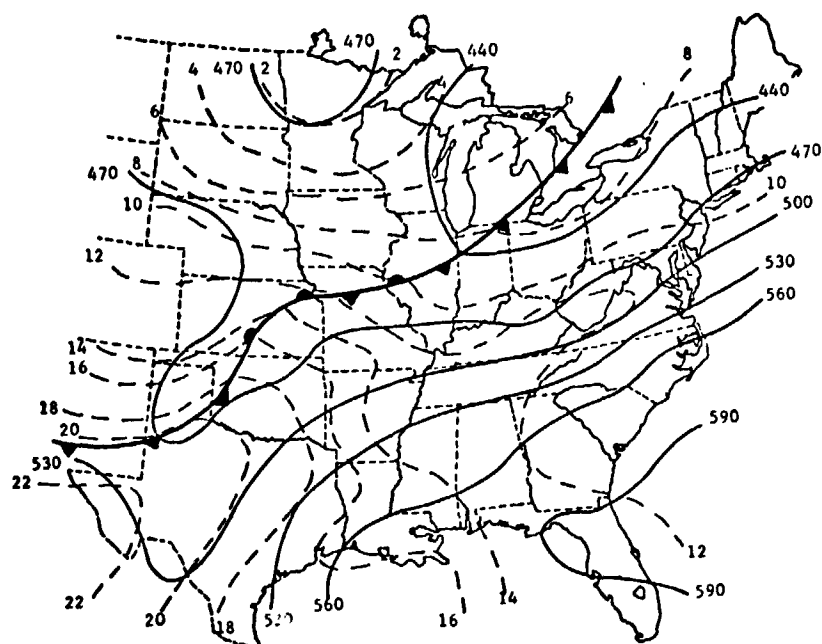

850 mb

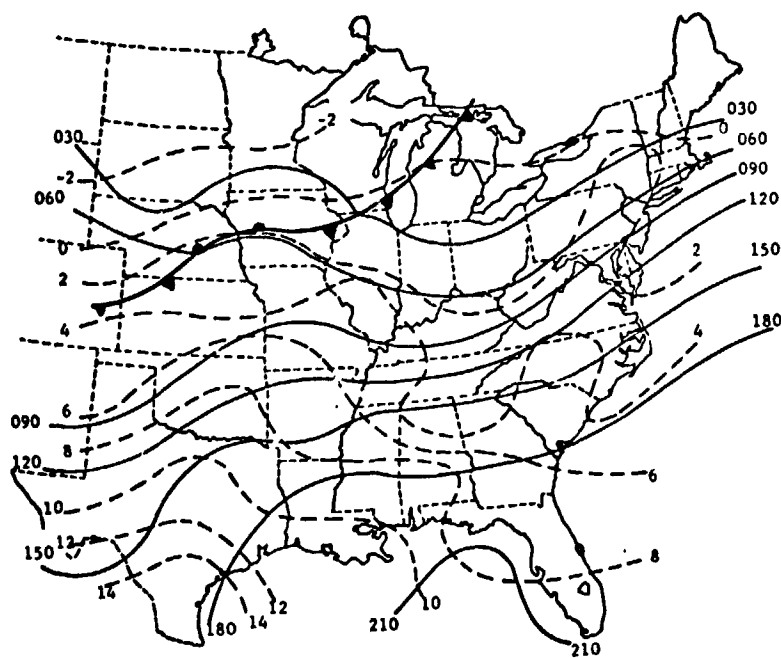

700 mb

Fig. 7. (Continued)




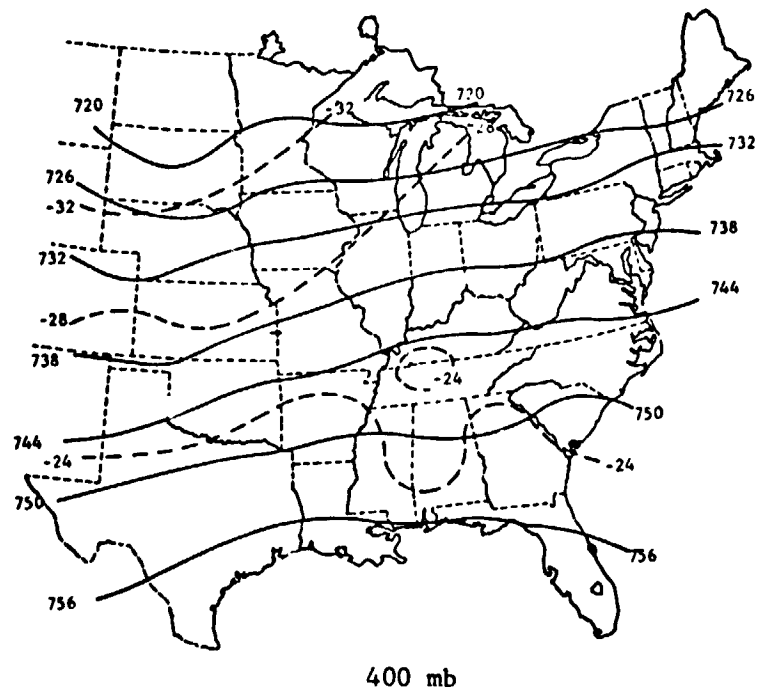


Fig. 7. (Continued)

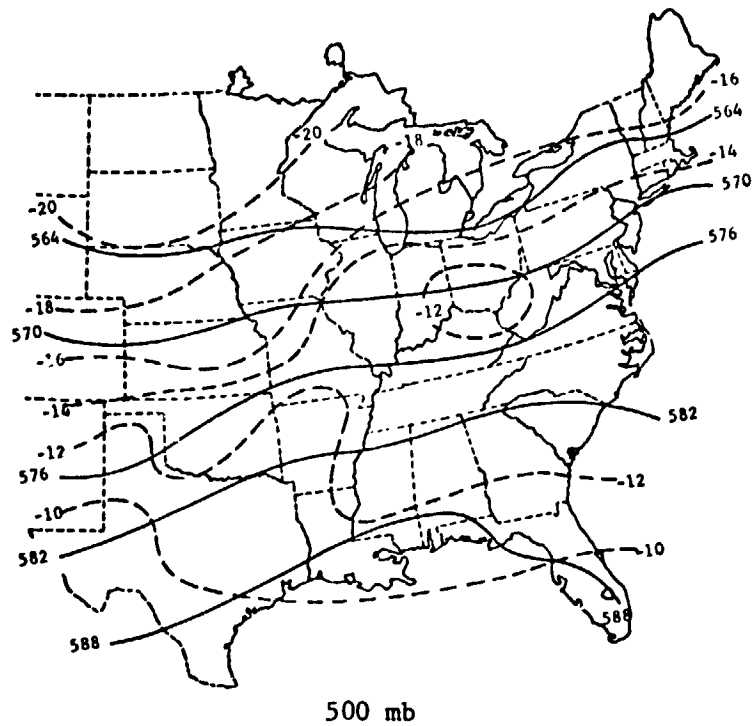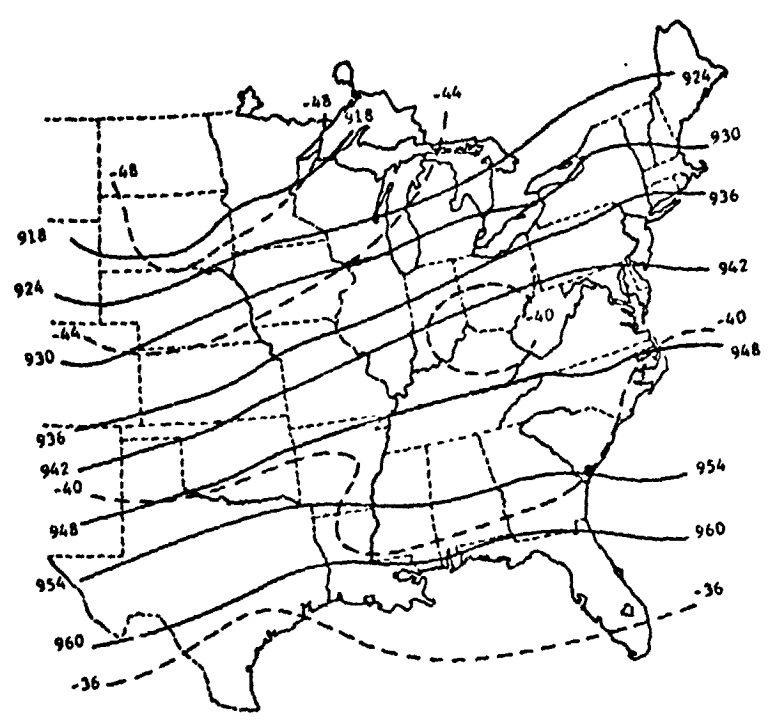

300 mb

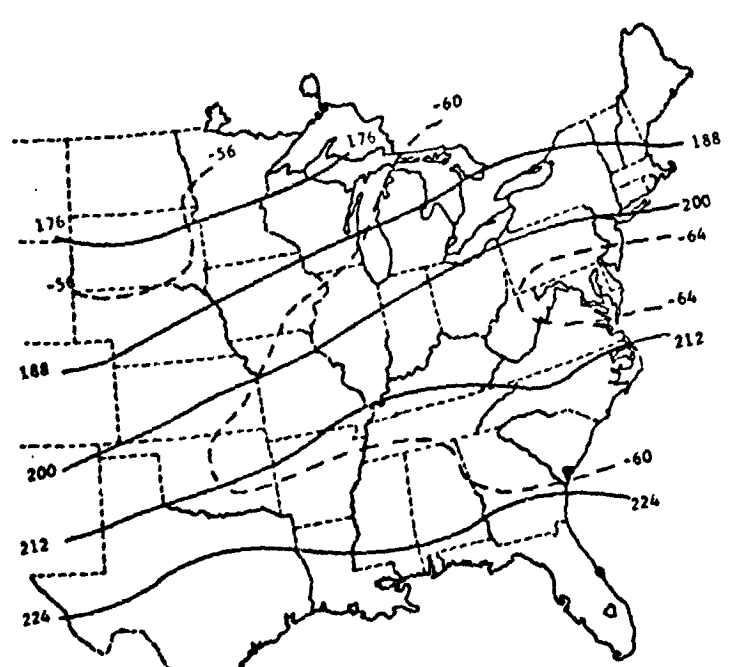

200 mb

Fig. 7. (Continued)



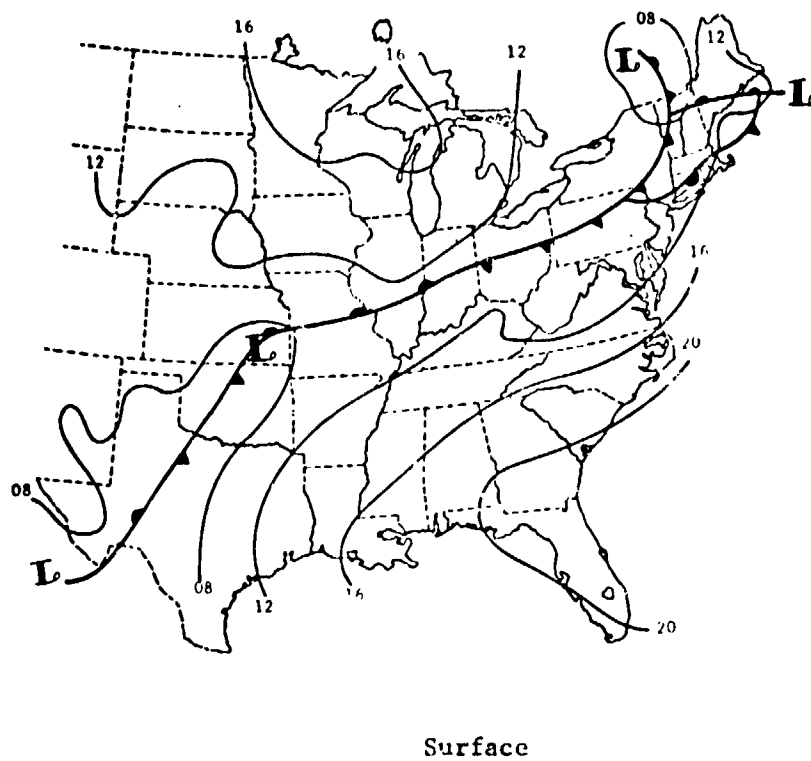


Fig. 8. Synoptic charts for 2100 GMT, 24 April 1975.

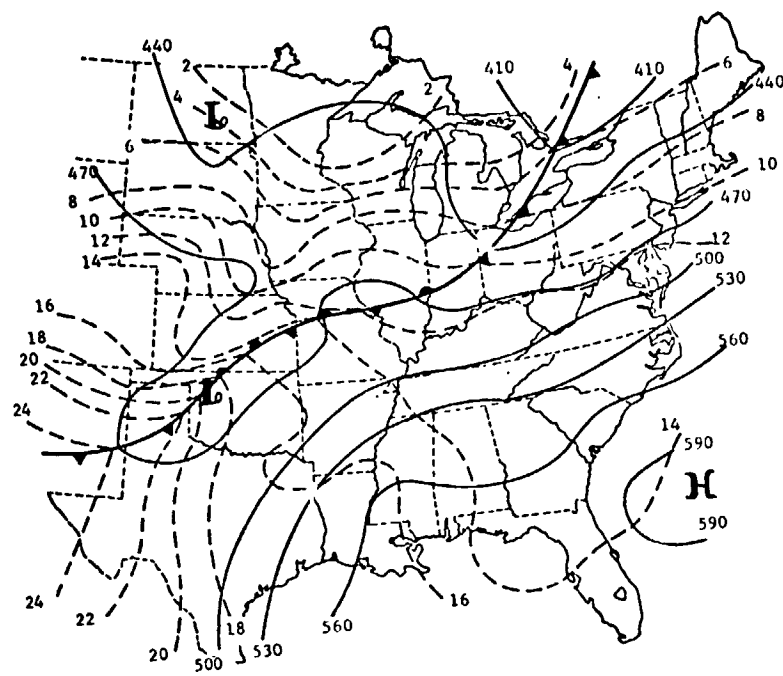


850 mb

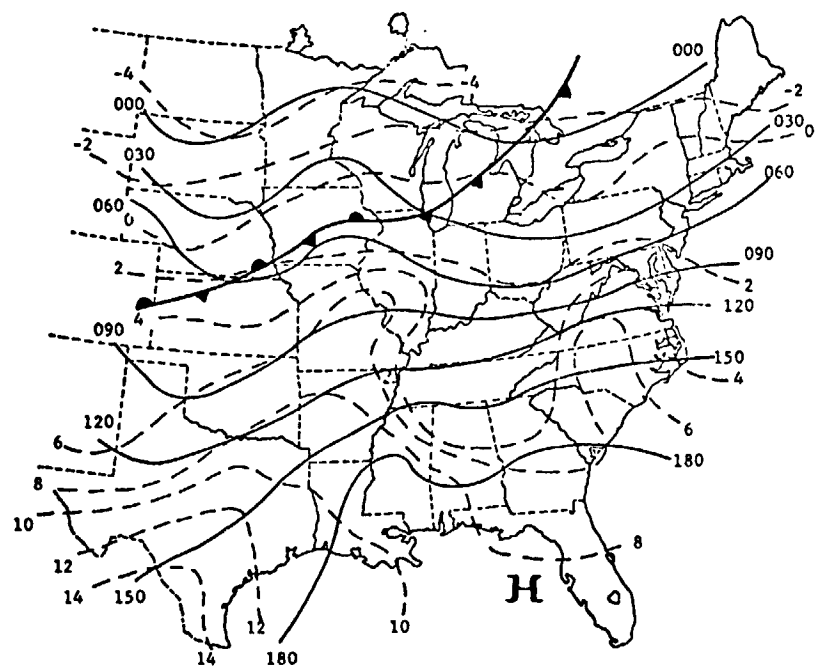


700 mb

Fig. 8. (Continued)

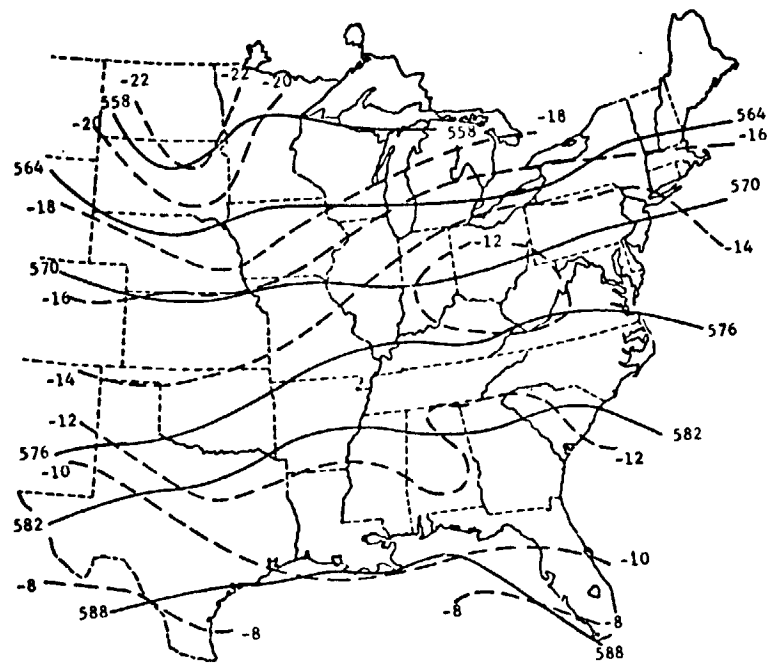


500 mb

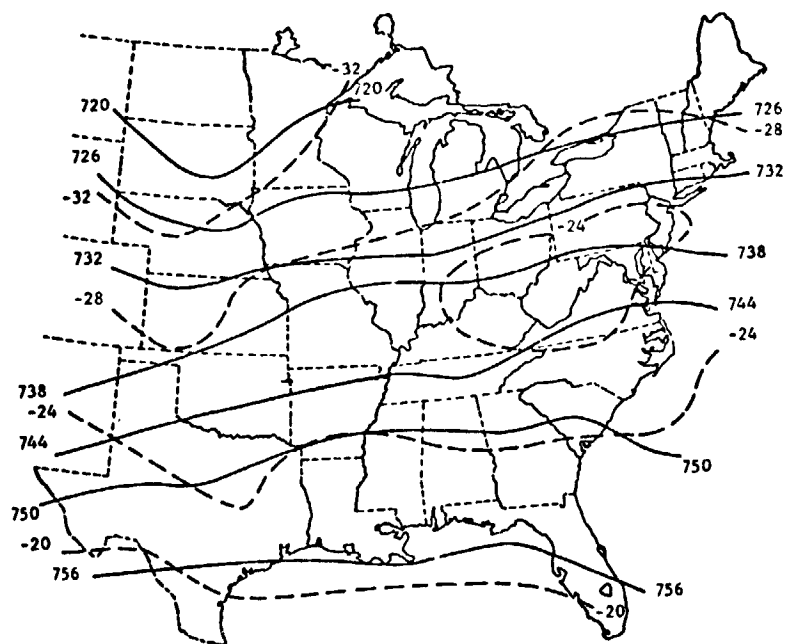


400 mb

Fig. 8. (Continued)

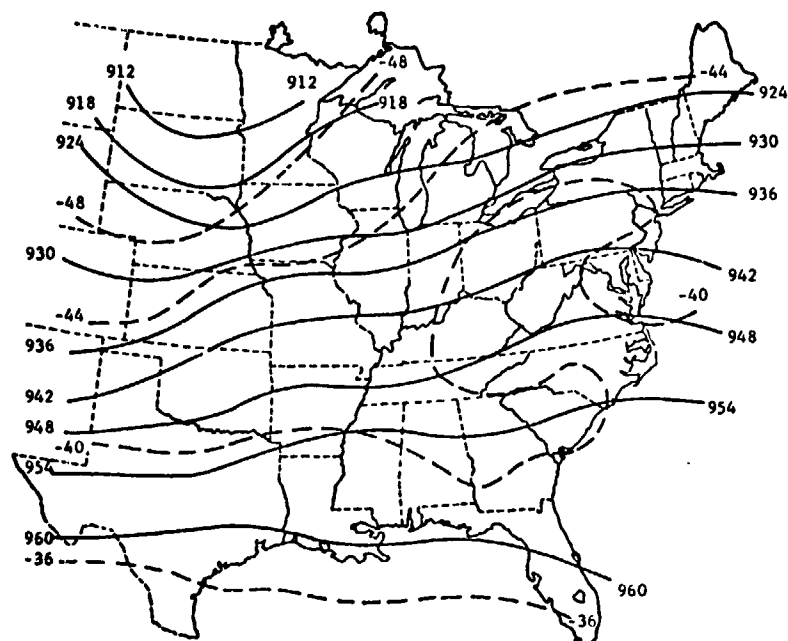


300 mb

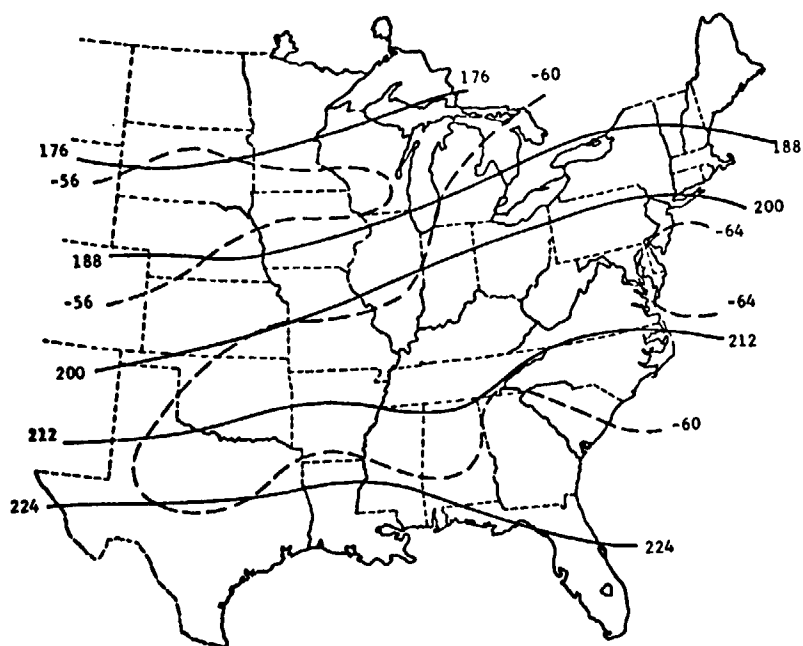


200 mb

Fig. 8. (Continued)

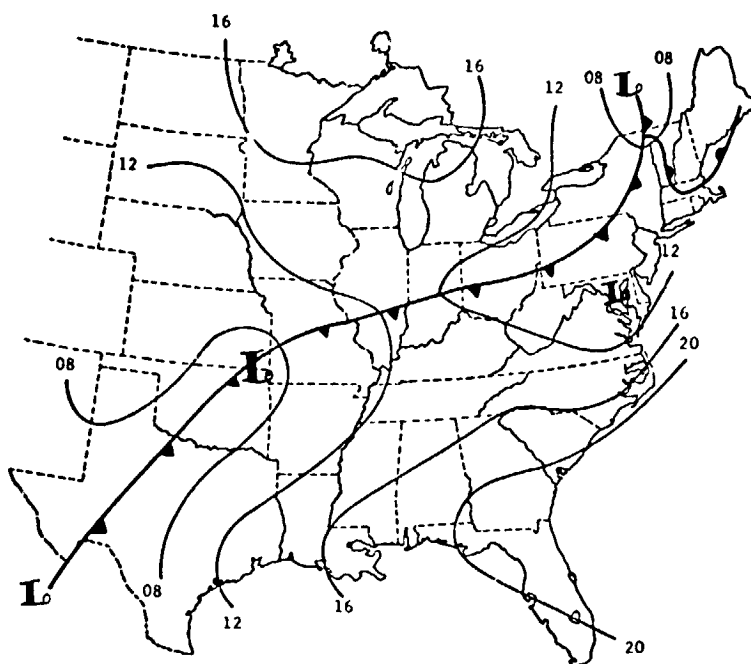


Surface

Fig. 9. Synoptic charts for 0000 GMT, 25 April 1975.

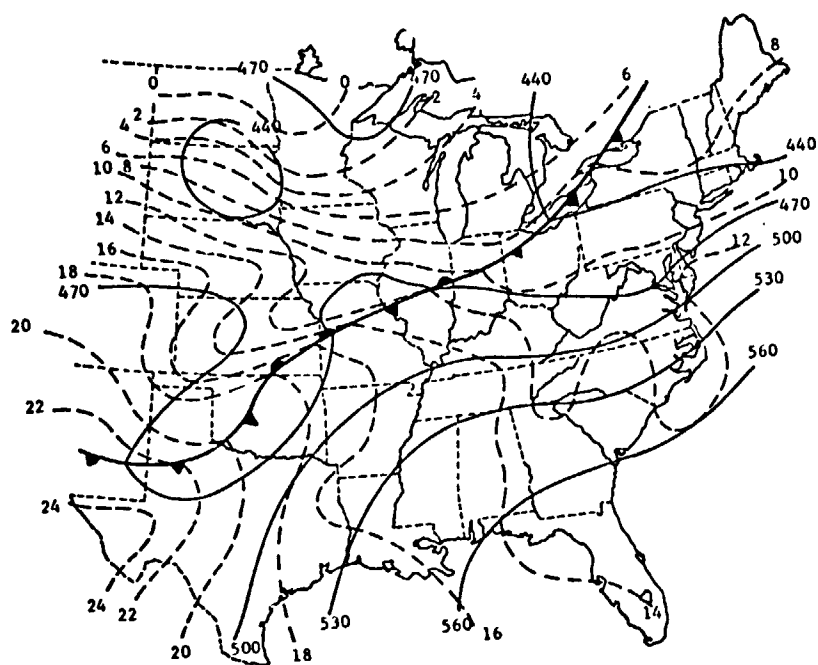


850 mb

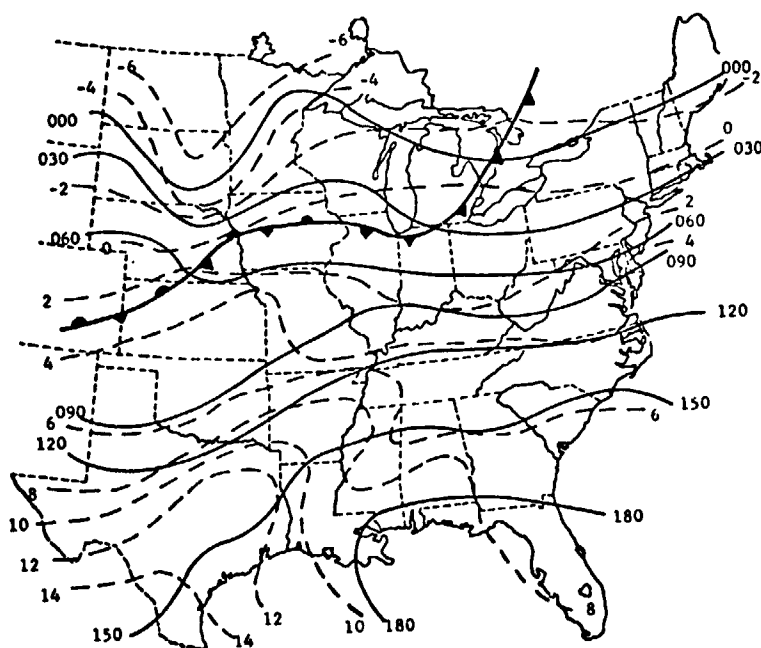


700 mb

Fig. 9. (Continued)

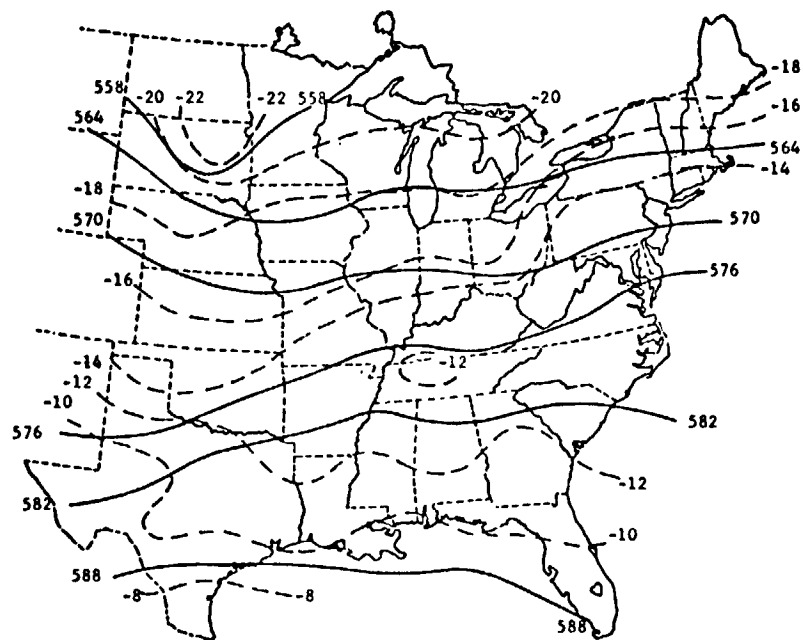


500 mb

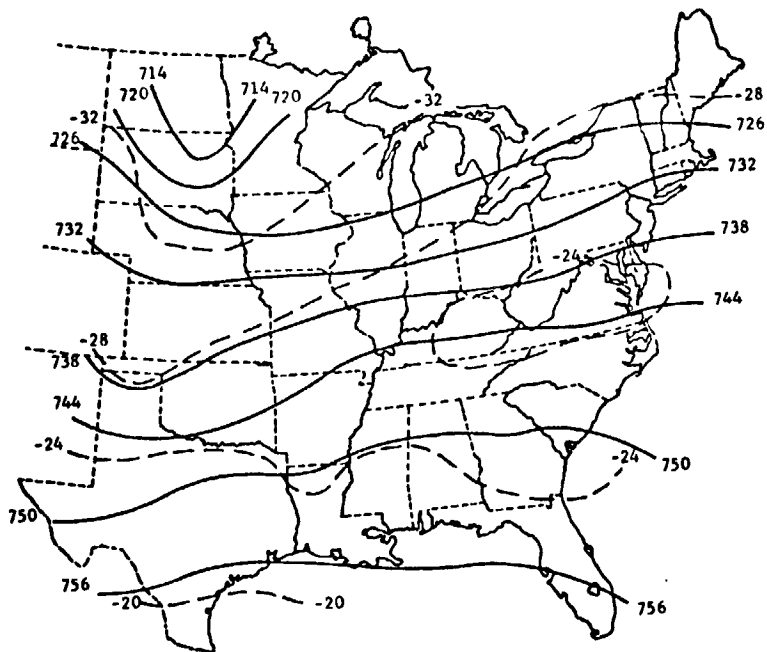


400 mb

Fig. 9. (Continued)

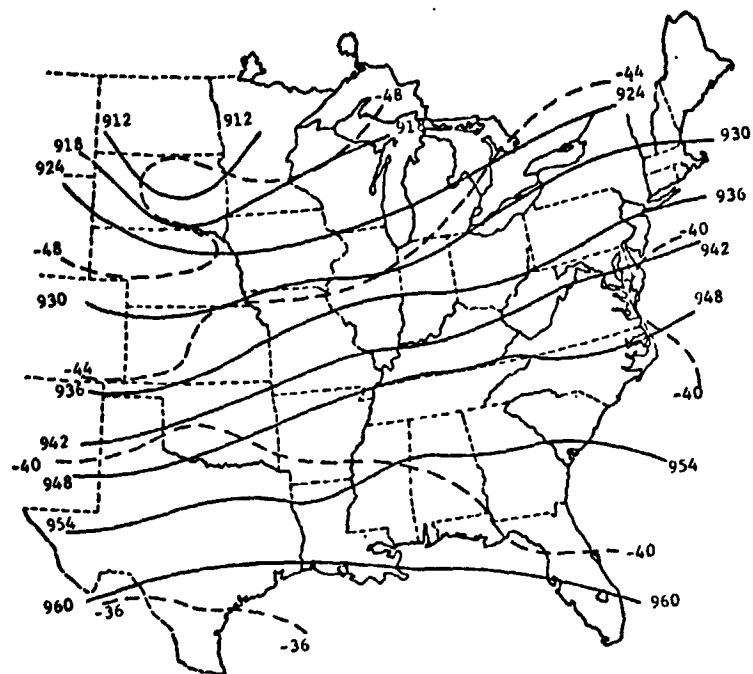


300 mb

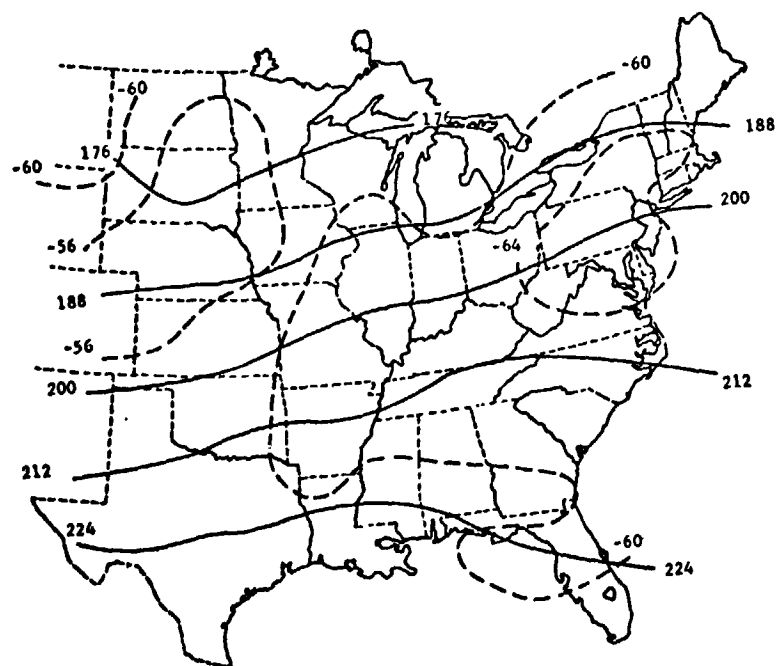


200 mb

Fig. 9. (Continued)

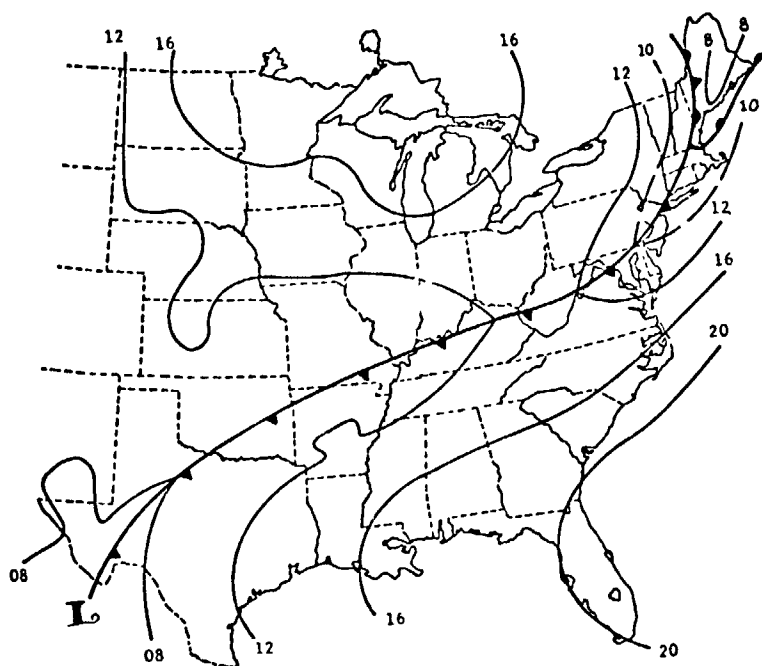


Surface

Fig. 10. Synoptic charts for 0600 GMT, 25 April 1975.

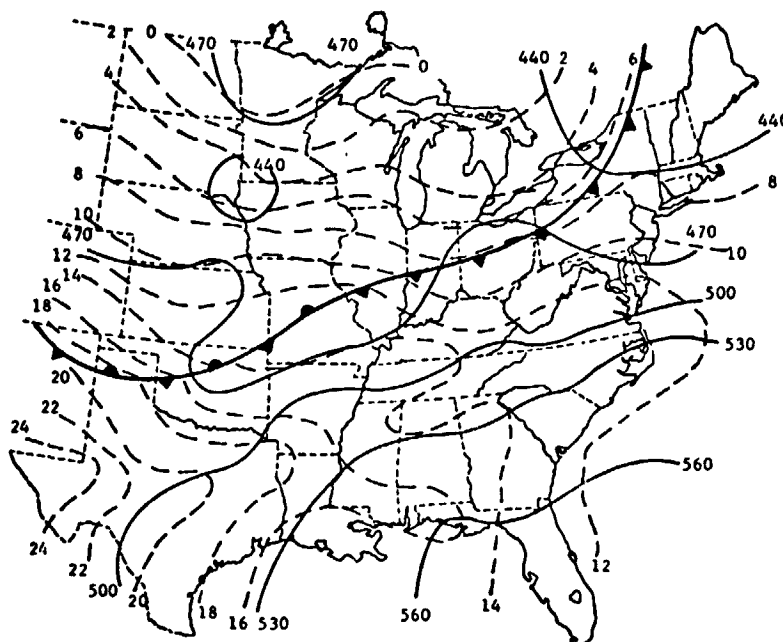


850 mb

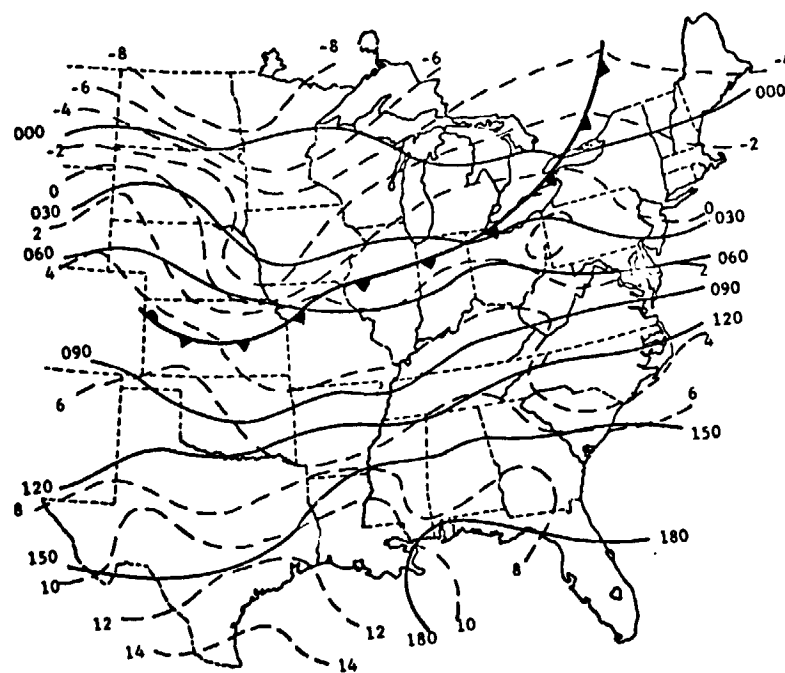


700 mb

Fig. 10. (Continued)

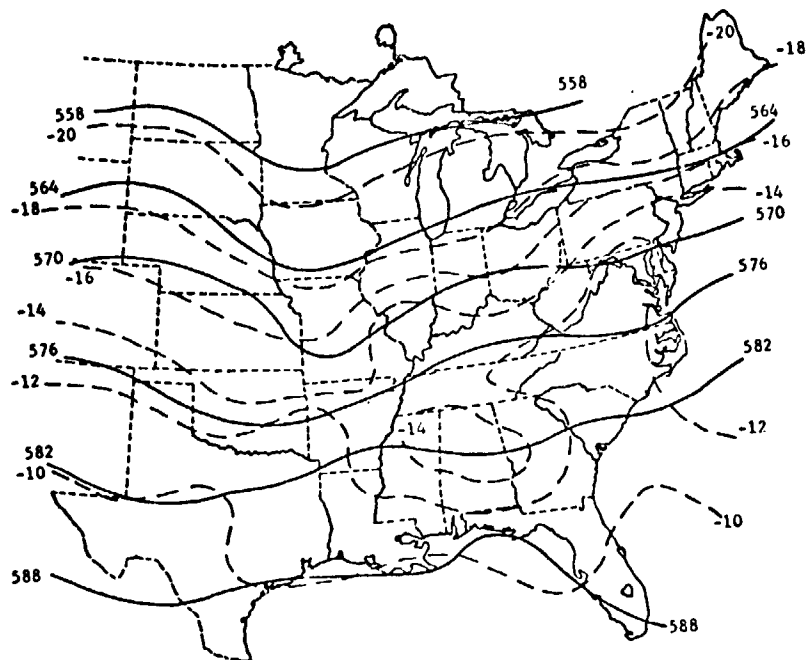


500 mb

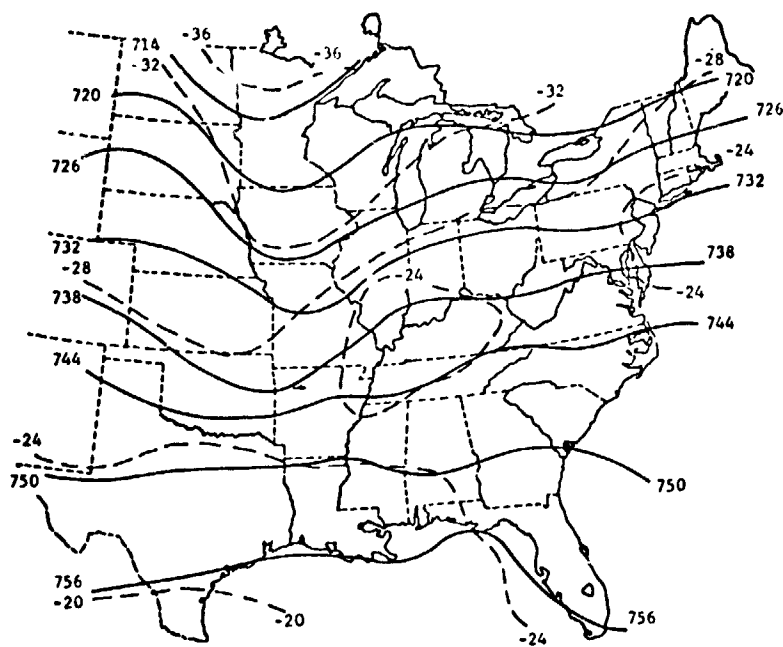


400 mb

Fig. 10. (Continued)

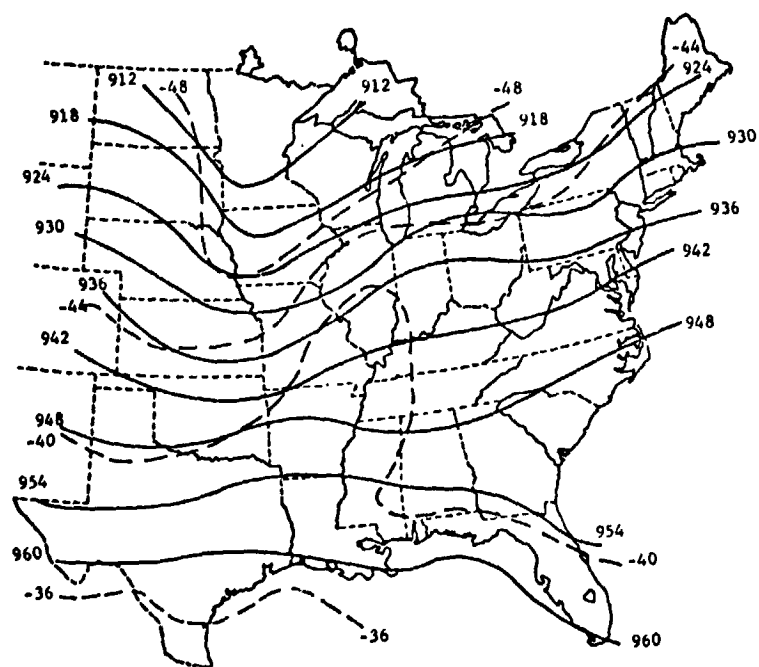

300 mb

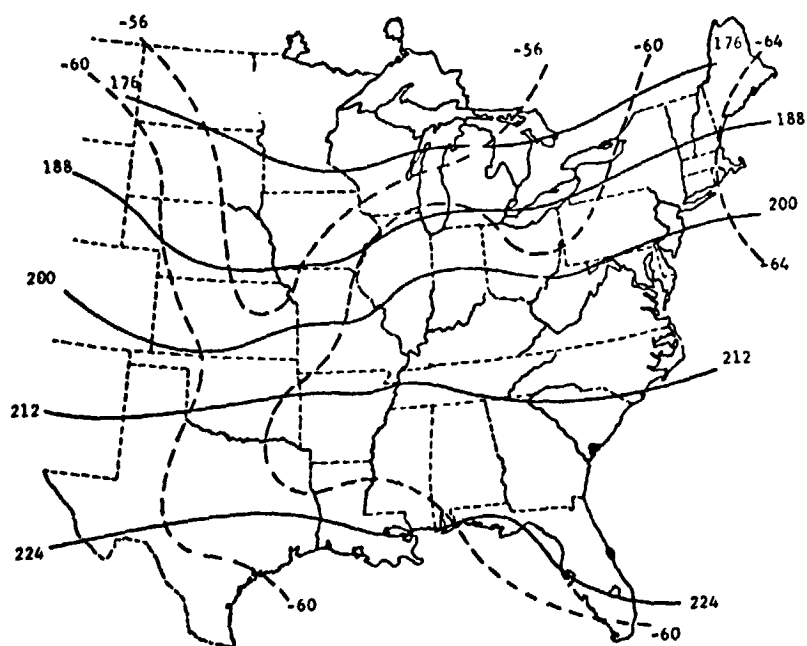

200 mb

Fig. 10. (Continued)



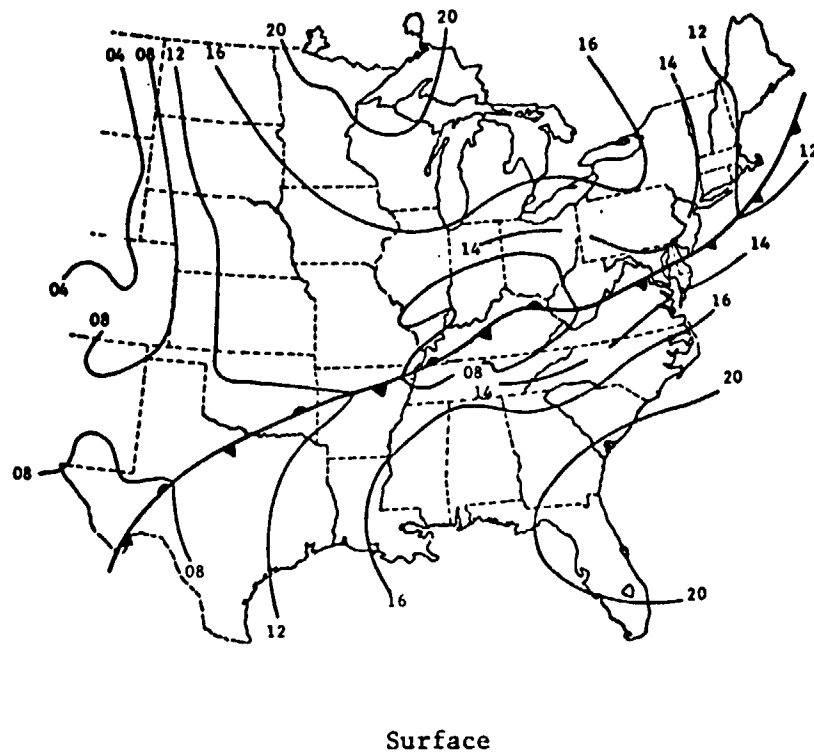


Fig. 11. Synoptic charts for 1200 GMT, 25 April 1975.

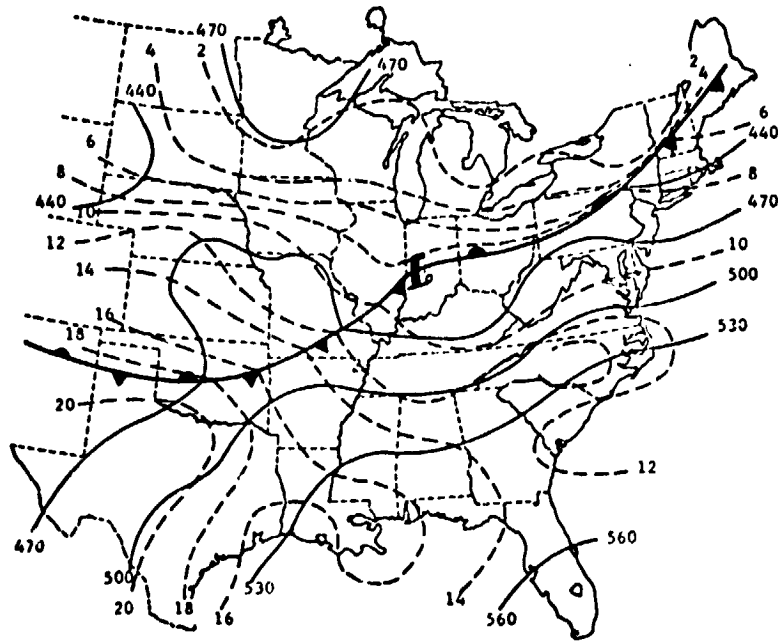

850 mb

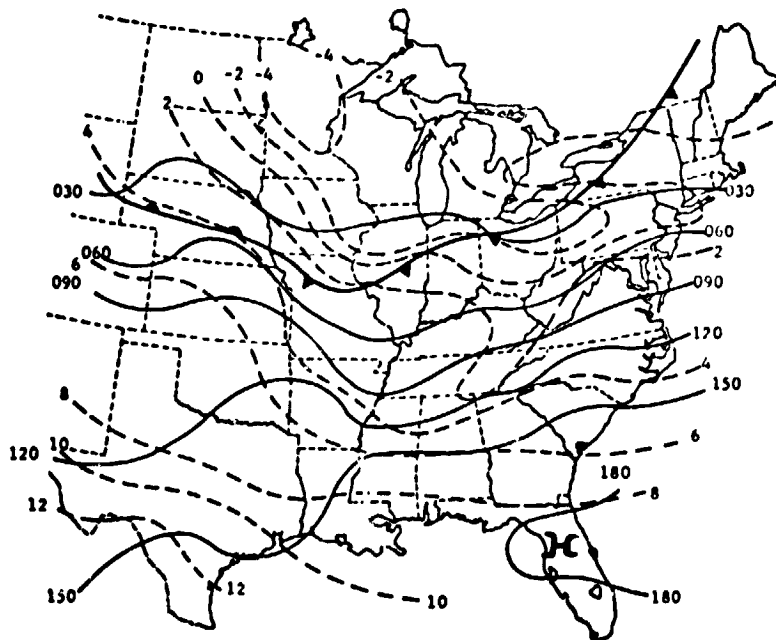

700 mb

Fig. 11. (Continued)




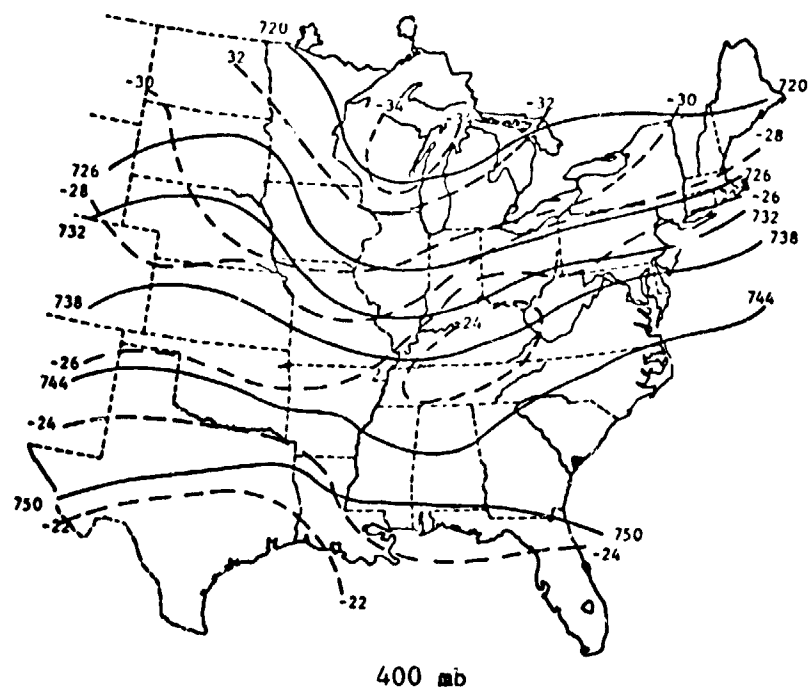


Fig. 11. (Continued)

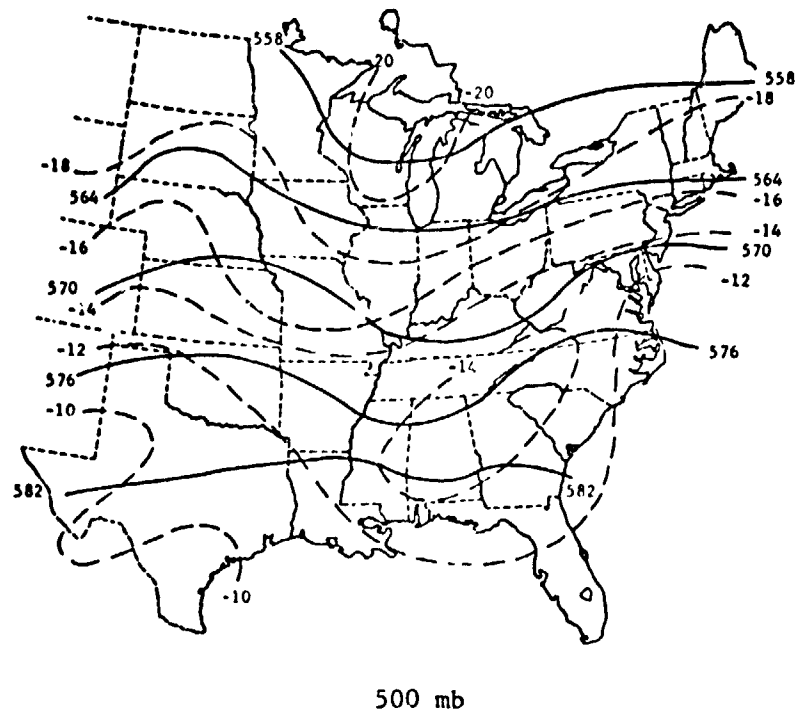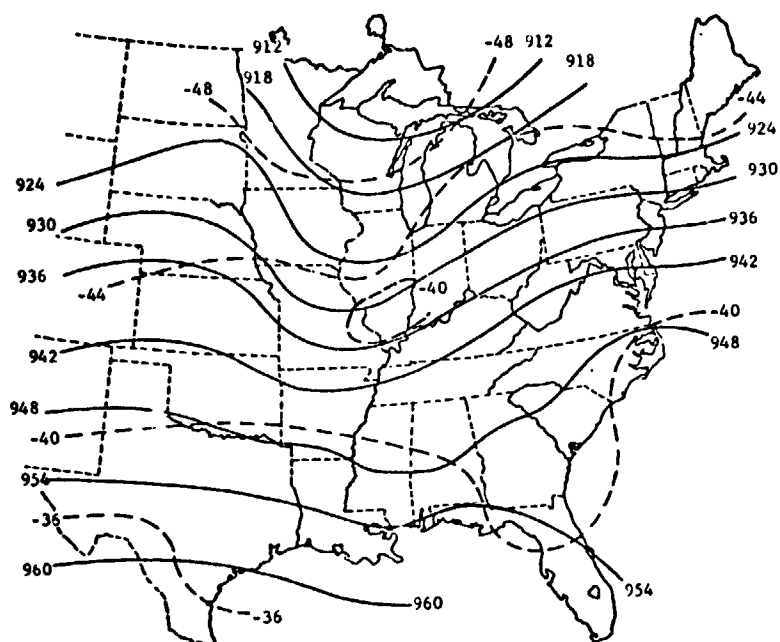

300 mb

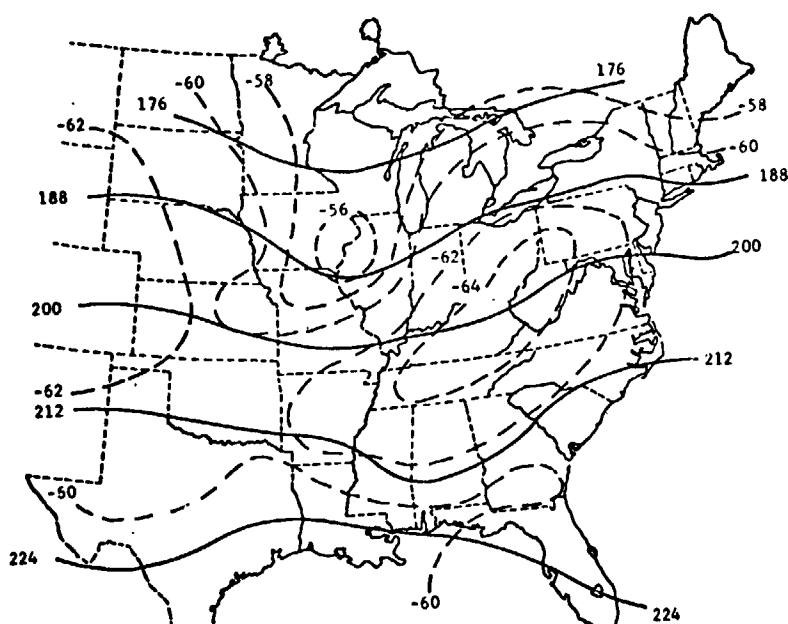

200 mb

Fig. 11. (Continued)

Intentionally Left Blank

Sounding Data

24 April 1975

0000 GMT

STATION NO. 208
CHARLESTON, SC23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0-0	4-3	12-0	1024-0	21-1	12-6	190-0	5-2	0-9	5-1	293-5	317-4	9-1	59-0	0-0	0
0-6	6-0	212-3	1008-0	20-2	12-4	183-0	6-7	0-3	6-6	294-5	318-6	9-1	61-0	0-3	4
1-4	8-0	436-2	575-0	18-2	12-0	182-4	7-8	0-3	7-6	294-7	318-7	9-1	66-9	0-6	4
2-0	10-2	658-2	950-0	15-8	11-8	178-4	8-2	-0-2	8-2	294-4	318-7	9-2	77-4	0-9	3
2-8	12-2	884-4	925-0	13-8	12-2	182-9	8-2	0-4	8-1	294-7	320-4	9-7	90-0	1-3	2
3-5	14-3	1115-3	900-0	11-8	11-4	191-1	10-1	1-9	9-9	294-9	319-9	9-5	97-0	1-7	3
4-3	16-3	1351-1	875-0	10-4	9-8	193-6	10-4	2-8	10-0	295-7	319-0	8-8	96-2	2-2	5
5-0	18-5	1592-1	850-0	8-3	6-8	197-6	9-8	3-0	9-3	295-8	315-5	7-3	90-6	2-6	7
5-8	20-7	1839-4	825-0	8-9	-7-9	198-4	9-8	3-1	9-3	298-4	307-1	3-1	35-4	3-1	9
6-6	23-0	2093-0	800-0	7-3	-12-3	201-8	9-5	3-5	8-8	298-2	304-7	1-9	23-2	3-5	10
7-5	25-4	2353-5	775-0	5-4	-8-8	204-2	7-8	3-8	6-8	299-9	307-3	2-5	35-2	4-0	12
8-3	27-6	2621-0	750-0	4-9	-15-8	224-0	6-1	4-4	4-2	302-1	306-9	1-6	21-9	4-3	14
9-2	30-2	2896-6	725-0	3-7	-19-7	248-0	5-8	5-4	2-2	303-6	307-1	1-1	16-1	4-5	16
10-1	32-8	3180-2	700-0	1-5	-18-0	255-7	6-2	6-0	1-5	304-3	309-1	1-6	25-9	4-7	20
10-9	35-3	3472-4	675-0	0-3	-20-4	258-1	6-6	6-5	1-2	308-2	309-7	1-1	19-4	4-9	23
11-9	37-9	3774-3	650-0	-0-7	-25-5	274-3	6-4	6-4	-0-7	308-2	310-1	0-6	10-1	5-1	27
12-9	40-5	4087-0	625-0	-1-6	-32-2	257-3	7-1	6-3	-2-2	310-6	312-0	0-4	7-5	5-1	31
13-9	42-1	4410-8	600-0	-2-8	-31-8	298-5	8-9	7-8	-4-2	312-9	314-4	0-4	8-5	5-2	37
15-0	46-1	4747-1	575-0	-4-4	-32-6	308-3	10-6	8-3	-6-6	314-9	314-4	0-4	8-8	5-3	43
16-1	49-1	5096-0	550-0	-6-3	-28-5	310-3	11-7	8-9	-7-5	316-6	319-3	0-8	18-4	5-3	52
17-2	52-0	5458-4	525-0	-8-6	-24-1	306-5	11-4	8-8	-7-2	318-2	322-2	1-2	32-6	5-6	59
18-4	55-0	5834-6	500-0	-11-8	-19-3	311-0	12-2	9-2	-8-0	318-8	324-2	1-7	53-4	5-9	67
19-6	59-1	6225-9	475-0	-14-2	-22-5	297-1	13-0	11-6	-5-5	320-6	324-9	1-3	49-0	6-4	74
21-0	61-5	6634-4	450-0	-16-4	-22-6	285-6	14-7	13-9	-5-0	322-7	327-3	1-4	58-8	7-3	79
22-4	65-0	7061-9	425-0	-19-8	-28-2	294-4	17-0	15-5	-7-0	323-7	327-2	1-1	56-6	8-5	84
23-9	68-4	7505-4	400-0	-23-3	-29-3	297-0	16-8	15-0	-7-6	324-8	327-7	0-8	57-7	9-9	89
25-5	71-7	7679-0	375-0	-26-3	-35-2	293-8	15-7	14-4	-6-3	326-8	328-6	0-5	42-7	11-2	92
27-1	75-5	8473-8	350-0	-30-6	-35-3	257-4	18-0	17-0	-5-3	327-4	329-3	0-5	63-2	12-8	95
28-8	75-5	8956-3	325-0	-34-5	-40-6	294-8	19-4	17-6	-8-1	329-1	330-3	0-3	53-4	14-6	98
30-6	83-6	9551-1	300-0	-36-9	-43-2	256-6	20-2	18-1	-9-1	330-5	331-5	0-3	63-2	16-7	100
32-6	87-8	10141-8	275-0	-43-8	98-9	295-4	22-9	20-7	-7-6	331-8	331-8	99-9	99-9	19-1	102
34-9	92-6	13772-3	250-0	-50-0	98-9	299-7	25-3	22-0	-12-5	331-8	331-8	99-9	99-9	22-2	105
37-3	97-5	11451-9	225-0	-56-6	98-9	304-0	26-0	21-6	-14-6	331-8	331-8	99-9	99-9	25-9	107
39-7	102-8	12187-4	200-0	-62-6	98-9	310-7	28-7	21-7	-18-7	333-6	333-6	99-9	99-9	29-6	110
43-1	108-8	13006-2	175-0	-63-5	98-9	301-8	32-3	27-4	-17-0	343-2	343-2	99-9	99-9	36-1	113
47-1	115-0	13959-4	150-0	-60-5	98-9	305-1	33-9	27-7	-19-5	343-8	343-8	99-9	99-9	44-0	115
52-1	122-0	15055-9	125-0	-61-8	98-9	310-5	23-7	18-0	-15-4	363-1	363-1	99-9	99-9	53-5	117
58-0	130-0	16443-6	100-0	-71-3	98-9	292-2	25-1	23-3	-9-5	390-1	390-1	99-9	99-9	60-9	117
65-5	138-0	18148-2	75-0	-70-1	98-9	8-2	8-0	-1-1	-7-9	423-5	423-5	99-9	99-9	69-4	119
76-5	146-3	20615-9	50-0	-63-0	98-9	266-1	3-0	3-0	0-2	495-1	495-1	99-9	99-9	72-7	121
94-1	155-3	25013-8	25-0	-53-6	98-9	320-4	9-2	5-9	-7-1	630-9	630-9	99-9	99-9	78-5	121

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 10 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA

23 APRIL 1975
2315 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

166 16. 1

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.5	8.0	1020.4	27.0	13.4	90.0	7.7	-7.7	0.0	299.7	325.3	9.5	43.0	0.0	0.
0.6	6.1	185.3	1000.0	26.0	11.5	117.1	1.9	-1.7	0.9	300.3	323.5	8.6	40.4	0.6	273.
1.4	8.4	408.4	975.0	23.7	11.2	59.5	10.4	-10.2	1.7	300.2	323.7	8.6	45.5	0.9	275.
2.4	10.5	634.6	950.0	21.2	10.8	103.5	10.6	-10.3	2.5	299.5	323.2	8.6	51.4	1.6	278.
3.4	12.5	864.7	925.0	19.0	10.2	111.0	11.5	-10.8	4.1	295.8	323.0	8.5	57.0	2.2	280.
4.5	15.2	1099.5	900.0	16.7	10.0	118.8	10.1	-8.9	4.9	299.9	323.2	8.6	64.5	2.9	284.
5.5	17.3	1339.0	875.0	14.5	9.3	124.7	10.4	-8.5	5.5	300.0	322.9	8.4	70.9	3.5	287.
6.6	19.8	1583.4	850.0	12.2	8.0	140.8	7.6	-4.8	5.9	300.0	322.6	8.3	78.9	4.0	291.
7.6	22.1	1833.4	825.0	10.2	7.9	153.6	7.4	-3.3	6.6	300.5	322.7	8.2	86.2	4.4	294.
8.5	24.6	2085.3	800.0	8.4	7.3	171.0	6.5	-1.0	6.4	301.1	322.2	8.1	93.0	4.7	297.
9.5	27.0	2351.6	775.0	6.9	5.7	205.9	5.0	2.2	4.5	302.2	322.0	7.5	92.5	4.8	301.
10.6	29.6	2621.0	750.0	5.6	-0.6	247.8	3.9	3.6	1.5	303.3	317.3	4.9	64.7	4.7	305.
11.6	32.3	2856.9	725.0	6.3	-19.7	312.6	3.3	2.5	-2.3	306.5	310.0	1.1	13.4	4.6	306.
12.9	35.1	3135.5	700.0	4.8	-20.0	335.8	5.5	2.3	-5.0	307.9	311.4	1.1	14.6	4.3	305.
13.9	37.7	3485.4	675.0	6.1	-20.9	335.7	8.0	3.3	-7.3	312.6	316.0	1.1	12.3	3.9	301.
14.9	40.4	3790.3	650.0	3.9	-18.5	340.3	7.7	2.6	-7.3	313.5	317.9	1.4	17.6	3.5	292.
16.2	43.3	4107.2	625.0	1.3	-17.8	343.8	5.8	1.6	-5.6	314.1	318.9	1.5	22.4	3.2	296.
17.4	46.3	4434.4	600.0	-0.4	-21.5	312.3	6.0	4.5	-4.1	315.8	319.5	1.1	18.4	2.9	283.
18.8	49.4	4773.4	575.0	-2.4	-18.3	295.8	6.9	6.2	-3.0	317.4	322.5	1.6	28.5	2.3	280.
20.1	52.3	5125.7	550.0	-3.3	-29.3	289.9	7.4	6.9	-2.5	320.2	325.3	0.6	11.3	1.8	275.
21.4	55.4	5492.2	525.0	-5.4	-28.4	286.0	9.2	8.8	-2.5	322.0	325.2	0.7	14.2	1.2	269.
22.7	58.7	5873.2	500.0	-8.1	-31.2	284.8	8.8	8.5	-2.2	323.2	325.2	0.6	13.6	0.5	246.
24.2	62.1	6269.9	475.0	-10.4	-28.7	291.5	7.4	6.9	-2.7	325.1	327.7	0.7	20.6	0.5	153.
25.5	65.6	6683.5	450.0	-14.1	-29.5	289.0	7.2	6.8	-2.4	325.6	328.1	0.7	25.5	1.0	130.
27.1	69.3	7114.0	425.0	-18.1	-31.1	306.7	6.9	5.6	-4.2	325.8	328.1	0.7	30.7	1.6	123.
28.7	72.9	7564.3	400.0	-21.1	-32.2	314.6	9.4	6.7	-6.6	327.6	329.8	0.6	36.0	2.3	127.
30.6	76.3	8038.1	375.0	-24.0	-42.8	314.5	14.4	10.3	-10.1	329.8	330.6	0.2	15.6	3.7	130.
32.6	80.5	8537.9	350.0	-27.9	-37.6	309.5	17.0	13.1	-10.8	331.1	332.6	0.4	38.9	5.6	130.
34.5	85.1	9055.5	325.0	-32.3	-41.4	319.0	17.4	11.4	-13.1	332.1	333.3	0.3	39.6	7.6	131.
36.5	89.5	9625.2	300.0	-36.9	-46.9	328.7	16.0	8.3	-13.7	333.3	334.0	0.2	34.0	9.6	134.
38.8	94.4	10220.5	275.0	-42.0	99.9	324.3	20.3	11.8	-16.4	334.5	334.5	99.9	99.9	11.8	137.
41.0	99.3	10857.8	250.0	-47.8	99.9	317.6	21.9	14.7	-18.2	335.1	335.1	99.9	99.9	14.9	137.
43.6	104.5	11544.0	225.0	-53.6	99.9	323.4	28.0	16.7	-22.5	336.3	336.3	99.9	99.9	18.6	138.
46.8	110.4	12291.3	200.0	-59.6	99.9	330.5	31.4	15.5	-27.4	338.5	338.5	99.9	99.9	24.5	141.
50.5	116.5	13122.2	175.0	-61.6	99.9	327.2	22.3	12.1	-18.8	348.3	348.3	99.9	99.9	30.8	143.
54.1	123.5	14073.8	150.0	-61.2	99.9	305.9	22.3	18.1	-13.1	364.8	364.8	99.9	99.9	35.9	142.
58.4	131.0	15155.0	125.0	-64.1	99.9	296.3	18.2	16.4	-8.1	379.0	379.0	99.9	99.9	41.1	139.
63.2	139.0	16541.1	100.0	-71.5	99.9	314.8	11.7	8.3	-8.2	384.7	384.7	99.9	99.9	45.3	137.
68.9	147.0	18222.9	75.0	-71.7	99.9	5.8	4.2	-0.4	-6.1	422.6	422.6	99.9	99.9	48.4	136.
77.2	156.0	20673.8	50.0	-62.6	99.9	359.6	6.1	0.0	-6.1	496.0	496.0	99.9	99.9	50.3	139.
91.4	165.7	25084.5	25.0	-52.5	99.9	59.1	8.1	-6.9	-8.2	634.2	634.2	99.9	99.9	50.2	143.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 213
WAYCROSS, GA

23 APRIL 1975

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

164 15. 1

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	3.3	44.0	1017.6	24.0	12.6	140.0	5.2	-3.3	4.0	296.9	321.1	9.1	49.0	0.0	0.
0.5	4.8	196.6	1000.0	23.0	12.8	999.9	99.9	99.9	99.9	297.4	322.4	9.4	52.6	999.9	999.
1.2	6.8	416.7	975.0	20.9	11.7	999.9	99.9	99.9	99.9	297.4	321.3	8.9	55.4	999.9	999.
1.9	8.3	640.6	950.0	18.4	10.5	999.9	99.9	99.9	99.9	297.4	319.7	8.5	60.0	999.9	999.
2.6	10.9	896.7	925.0	16.4	10.2	999.9	99.9	99.9	99.9	297.2	318.9	8.5	66.7	999.9	999.
3.4	13.1	1131.4	900.0	14.4	9.9	999.9	99.9	99.9	99.9	297.5	320.5	8.5	74.1	999.9	999.
4.2	15.3	1335.2	875.0	12.3	9.8	999.9	99.9	99.9	99.9	297.7	321.2	8.8	85.0	999.9	999.
5.0	17.5	1531.9	850.0	10.2	9.4	999.9	99.9	99.9	99.9	298.0	321.5	8.8	94.7	999.9	999.
5.7	19.8	1830.5	825.0	10.8	-5.5	999.9	99.9	99.9	99.9	300.4	322.6	3.2	32.2	999.9	999.
6.7	22.0	2056.2	800.0	9.1	-3.7	195.5	7.2	1.9	7.0	301.3	311.8	3.7	40.4	2.6	311.
7.7	24.5	2248.6	775.0	6.9	2.2	203.2	8.5	3.3	7.8	301.9	318.2	5.8	72.0	3.0	337.
8.6	26.3	2617.7	750.0	5.5	0.9	214.7	9.3	5.3	7.6	303.2	318.6	5.5	72.2	3.3	345.
9.6	29.3	2894.5	725.0	3.9	-1.4	222.5	9.1	6.2	6.7	304.3	318.0	4.8	66.2	3.7	351.
10.5	31.9	3178.9	700.0	2.2	-15.6	245.8	7.5	6.8	3.1	305.2	310.3	1.7	26.2	3.9	357.
11.5	34.7	3472.5	675.0	1.3	-30.0	292.2	7.9	7.3	-3.0	307.2	309.5	0.7	14.4	3.9	3.
12.4	37.1	3776.0	650.0	1.9	-48.8	312.6	9.2	6.6	-6.2	311.1	311.3	0.1	1.0	3.7	10.
13.7	40.0	4091.7	625.0	1.2	-49.2	318.9	9.9	6.5	-7.5	313.8	314.1	0.1	1.0	3.3	21.
14.9	42.6	4416.7	600.0	-1.1	-24.8	322.8	10.1	6.1	-8.1	315.0	317.8	0.9	14.5	3.0	33.
15.9	45.6	4750.6	575.0	-3.3	-24.5	325.0	10.3	5.9	-8.4	316.2	319.4	1.0	16.4	2.8	45.
17.2	48.8	5106.7	550.0	-5.4	-27.1	326.0	10.7	6.0	-8.9	317.7	320.3	0.8	16.7	2.8	61.
18.4	51.6	5470.3	525.0	-7.6	-24.8	327.7	9.8	5.2	-8.3	319.3	322.6	1.0	23.7	2.9	76.
19.5	54.9	5846.3	500.0	-9.8	-44.9	313.3	9.0	6.5	-6.2	321.1	321.6	0.1	3.6	3.2	87.
20.9	58.3	6242.6	475.0	-11.7	-51.6	296.2	10.7	9.6	-4.7	323.4	323.7	0.1	2.0	3.9	44.
22.4	61.5	6653.9	450.0	-15.4	-58.2	287.2	14.3	13.7	-4.2	323.9	324.0	0.0	1.2	5.0	97.
23.8	65.1	7082.5	425.0	-18.7	-49.2	283.8	16.8	16.3	-4.0	325.0	325.4	0.1	4.8	6.2	99.
25.3	69.7	7531.3	400.0	-22.1	-27.3	291.5	15.9	14.6	-6.3	326.3	329.7	1.0	62.8	7.9	100.
26.9	72.3	8023.1	375.0	-25.6	-26.7	302.3	15.0	12.7	-8.0	327.8	331.7	1.1	90.2	9.1	103.
28.6	76.5	8500.7	350.0	-28.7	-38.4	306.6	16.6	13.3	-9.5	330.1	331.5	0.4	38.2	16.6	107.
30.5	80.7	9026.6	325.0	-33.2	-38.4	296.9	22.2	19.4	-10.7	330.9	332.4	0.4	59.5	12.8	109.
32.2	85.0	9581.7	300.0	-37.5	-41.8	295.5	23.7	21.4	-10.2	332.5	333.6	0.3	64.0	15.0	111.
34.2	89.6	10177.6	275.0	-42.8	59.9	294.2	25.2	23.0	-10.4	333.3	333.9	99.9	99.9	16.1	112.
36.3	94.8	10812.4	250.0	-48.7	59.9	290.8	30.4	26.4	-15.1	333.7	333.7	99.9	99.9	21.4	112.
38.7	100.0	11497.0	225.0	-53.7	99.9	298.7	35.2	30.9	-16.9	336.2	336.2	99.9	99.9	25.9	114.
41.4	105.9	12243.6	200.0	-59.7	99.9	302.5	39.1	33.0	-21.0	338.2	338.2	99.9	99.9	29.9	115.
44.2	112.0	13066.6	175.0	-65.1	99.9	307.8	39.7	31.4	-24.3	342.5	342.5	99.9	99.9	38.2	117.
47.3	118.8	14016.4	150.0	-61.3	99.9	298.7	28.5	25.0	-13.7	364.5	364.5	99.9	99.9	44.0	118.
51.6	126.7	15148.2	125.0	-63.7	99.9	295.3	24.9	22.6	-10.6	379.6	379.6	99.9	99.9	51.2	117.
56.1	135.0	16500.6	100.0	-70.1	99.9	296.7	14.3	12.8	-6.4	392.4	392.4	99.9	99.9	57.1	118.
62.1	143.5	18193.6	75.0	-69.4	99.9	313.4	9.2	6.7	-6.3	427.5	427.5	99.9	99.9	60.8	118.
70.2	152.7	20665.7	50.0	-61.6	99.9	320.1	3.4	2.2	-2.6	498.5	498.5	99.9	99.9	63.5	119.
83.2	162.3	25088.0	25.0	-51.5	99.9	396.6	3.8	-2.4	-2.6	636.9	636.9	99.9	99.9	65.0	121.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 220
APALACHICOLA, FLA

23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX ATO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	3.8	11.0	1022.2	23.4	14.1	140.0	2.1	-1.3	1.6	296.0	322.4	10.0	56.0	0.0	0.
0.7	5.6	202.5	1000.0	22.0	9.7	999.9	99.9	99.9	95.9	296.2	316.6	7.6	45.7	999.9	999.
1.5	7.9	421.7	975.0	20.5	8.8	999.9	99.9	99.9	99.9	296.8	310.5	7.3	46.8	999.9	999.
2.3	10.2	645.5	950.0	18.5	10.3	155.9	5.7	-2.3	5.2	297.1	319.4	4.3	58.8	0.8	320.
2.9	12.3	673.6	925.0	16.4	11.1	155.8	6.1	-1.1	6.0	297.3	321.5	9.1	71.0	1.0	325.
3.7	14.7	1106.4	900.0	14.3	11.0	176.2	6.1	-0.4	6.1	297.5	322.1	9.2	80.6	1.3	331.
4.6	16.9	1344.2	875.0	12.4	10.4	185.2	7.1	0.6	7.0	297.9	322.4	9.1	87.6	1.6	337.
5.3	19.3	1527.4	850.0	10.6	15.8	185.7	7.3	0.7	7.2	299.5	303.5	1.3	12.2	1.9	342.
6.0	21.6	1837.9	825.0	13.1	-17.3	185.4	6.6	0.6	6.6	302.6	306.2	1.2	10.4	2.2	345.
6.9	24.2	2055.3	800.0	11.3	-18.5	189.5	5.8	1.0	5.8	303.3	306.8	1.1	10.6	2.5	348.
7.8	26.5	2358.6	775.0	10.5	-18.3	224.3	4.3	1.8	3.9	305.2	308.9	1.2	11.4	2.7	351.
9.7	29.1	2631.4	750.0	6.7	-13.4	224.8	2.1	1.5	1.5	306.3	311.9	1.8	19.5	2.9	353.
9.6	31.8	2916.7	725.0	6.4	-1.4	277.0	2.3	2.3	-0.3	307.1	321.0	4.8	58.3	2.9	354.
10.5	34.4	3157.9	700.0	4.6	-3.8	273.6	3.8	3.4	-1.5	308.1	320.3	4.1	54.4	2.8	356.
11.5	37.0	3493.4	675.0	2.7	-6.6	323.9	4.4	2.6	-3.5	309.1	319.4	3.5	50.4	2.7	3.
12.5	39.9	3799.1	650.0	3.4	-22.5	324.2	6.1	3.6	-5.0	312.9	316.0	1.0	12.9	2.4	6.
13.5	42.5	4116.0	625.0	1.2	-18.9	316.0	6.8	4.7	-4.9	314.0	318.3	1.4	20.5	2.2	14.
14.6	45.4	4442.7	600.0	-1.4	-16.8	325.6	6.9	3.9	-5.7	314.7	320.1	1.7	29.7	2.0	25.
15.7	48.4	4780.9	575.0	-2.7	-22.6	332.7	8.2	2.3	-7.9	316.9	320.6	1.1	20.7	1.7	36.
16.3	51.1	5131.8	550.0	-4.8	-22.0	342.7	9.6	2.9	-9.2	318.5	322.4	1.2	24.5	1.3	60.
18.1	54.3	5496.6	525.0	-6.3	-24.3	332.7	7.6	3.5	-6.7	320.8	322.2	0.4	8.7	1.5	47.
19.5	57.3	5876.2	500.0	-8.7	-39.5	313.6	9.3	6.7	-6.4	322.5	323.3	0.2	6.2	1.8	104.
20.8	60.6	6271.7	475.0	-11.5	-34.2	301.6	12.1	10.3	-6.3	323.8	325.3	0.4	13.1	2.7	111.
22.2	64.0	6683.1	450.0	-15.0	-38.1	294.5	11.8	10.8	-4.9	324.4	325.5	0.3	11.7	3.7	112.
23.4	67.1	7113.5	425.0	-17.9	-36.5	300.0	11.1	9.6	-5.6	324.1	327.5	0.4	17.7	4.8	114.
25.4	70.7	7564.1	400.0	-21.4	-31.6	300.0	10.3	8.9	-5.1	327.2	329.6	0.7	38.0	5.8	115.
27.0	74.3	8037.0	375.0	-24.5	-33.8	300.9	13.9	12.0	-7.2	329.1	331.2	0.6	42.0	6.9	115.
28.8	78.2	8535.7	350.0	-28.1	-36.3	305.7	18.6	14.3	-11.9	330.8	332.5	0.5	45.3	8.6	118.
30.7	82.0	9043.8	325.0	-32.0	-43.7	309.0	23.4	18.2	-14.9	332.5	333.4	0.2	30.1	11.1	120.
32.7	86.0	9622.8	300.0	-36.9	-46.2	310.3	24.3	18.6	-15.7	333.3	334.1	0.2	38.9	13.9	122.
34.9	90.5	10219.0	275.0	-41.7	99.9	314.7	23.4	16.7	-16.5	334.5	999.9	99.9	999.9	17.1	124.
37.4	95.2	10857.8	250.0	-47.1	99.9	317.5	25.3	17.1	-18.6	336.1	999.9	99.9	999.9	20.6	126.
40.3	100.0	11546.3	225.0	-53.0	99.9	320.1	27.6	17.7	-21.2	337.3	999.9	99.9	999.9	24.6	124.
42.9	105.0	12295.1	200.0	-59.0	99.9	329.5	16.9	8.6	-14.6	339.3	999.9	99.9	999.9	28.3	130.
46.2	110.6	13121.0	175.0	-64.3	99.9	319.4	25.1	16.3	-19.0	343.9	999.9	99.9	999.9	33.4	132.
50.0	116.5	14074.9	150.0	-60.7	99.9	310.6	21.6	16.4	-14.0	365.5	999.9	99.9	999.9	38.9	132.
54.5	123.3	15158.9	125.0	-65.4	99.9	298.0	16.1	14.2	-7.6	376.6	999.9	99.9	999.9	43.8	132.
59.8	130.5	16544.4	100.0	-71.0	99.9	307.2	17.7	14.1	-10.7	390.5	999.9	99.9	999.9	48.5	132.
66.4	138.3	18234.7	75.0	-71.8	99.9	0.3	3.4	-0.0	-3.4	422.4	999.9	99.9	999.9	53.2	131.
75.8	146.3	20693.3	50.0	-62.1	99.9	25.8	4.1	-1.8	-3.7	457.2	999.9	99.9	999.9	55.9	132.
90.4	154.7	25126.7	25.0	-51.8	99.9	49.3	6.0	-4.6	-3.9	636.3	999.9	99.9	999.9	57.1	134.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 226
CENTERVILLE, ALA

23 APRIL 1975
2315 GMT

158 16. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.8	140.0	1003.4	23.8	18.2	170.0	5.2	-0.9	5.1	258.5	333.4	13.3	71.0	0.0	0.
0.1	6.3	169.6	1000.0	22.2	12.9	247.0	1.3	1.2	0.5	298.6	321.6	9.4	55.5	0.7	353.
0.9	8.3	389.7	975.0	21.3	12.1	191.9	3.6	0.7	3.5	257.8	322.4	9.0	55.8	0.7	355.
1.5	10.5	614.3	950.0	19.4	11.4	176.1	11.3	-0.4	11.3	258.1	322.2	9.0	59.6	1.0	357.
2.3	12.9	843.1	925.0	17.2	10.4	172.2	13.1	-0.6	13.1	298.0	321.1	8.6	64.2	1.7	357.
3.1	15.3	1076.6	900.0	15.2	9.2	183.0	14.6	0.8	14.6	298.2	320.3	8.2	67.5	2.4	357.
3.9	17.5	1215.0	875.0	13.6	8.1	188.0	14.7	2.0	14.5	298.9	320.0	7.8	69.1	3.1	360.
4.7	20.0	1558.9	850.0	12.6	5.6	193.5	13.2	3.1	12.9	300.2	318.8	6.7	62.2	3.7	1.
5.6	22.3	1810.6	825.0	13.3	3.6	214.7	12.9	7.4	10.6	303.5	320.4	6.0	51.5	4.4	5.
6.5	24.9	2069.4	800.0	12.8	1.9	236.3	11.8	9.8	6.6	305.5	321.2	5.5	47.5	4.9	10.
7.3	27.3	2335.1	775.0	10.6	0.5	246.1	13.2	12.0	5.3	305.9	320.6	5.1	49.7	5.3	15.
8.2	29.9	2607.2	750.0	8.3	-0.6	249.9	13.5	12.7	4.6	306.3	320.4	4.9	53.4	5.7	21.
9.1	32.7	2886.4	725.0	5.8	-2.2	253.3	12.5	12.0	3.6	306.4	319.5	4.5	56.2	6.2	24.
10.0	35.4	3172.5	700.0	3.0	-4.8	259.4	12.5	12.3	2.3	306.4	319.2	4.5	65.8	6.7	31.
10.9	38.0	3464.1	675.0	0.8	-2.9	268.0	13.5	13.5	0.2	307.1	320.4	4.6	76.4	7.1	35.
12.0	40.7	3769.5	650.0	-1.2	-6.3	276.4	16.2	15.9	-2.6	308.1	318.9	3.7	68.0	7.6	41.
13.1	43.7	4080.8	625.0	-2.0	-6.4	282.7	18.8	18.3	-4.1	310.7	321.9	3.8	71.7	8.2	44.
14.0	46.6	4405.0	600.0	-3.8	-5.6	287.0	19.1	18.2	-5.6	312.3	324.8	4.2	87.1	8.9	54.
15.1	49.6	4740.8	575.0	-4.8	-5.0	297.1	16.9	15.0	-7.7	318.8	327.6	4.2	91.4	9.7	60.
16.4	52.6	5089.9	550.0	-6.7	-10.4	304.2	15.4	12.8	-8.7	316.6	326.3	3.2	74.9	10.2	66.
17.5	55.6	5452.1	525.0	-9.0	-12.7	303.2	14.9	12.4	-8.1	317.9	326.5	2.7	74.4	10.8	71.
18.7	58.9	5829.0	500.0	-11.8	-14.1	302.7	14.5	12.2	-7.8	319.0	327.0	2.6	82.7	11.5	75.
19.9	62.3	6219.7	475.0	-14.1	-16.2	301.5	14.3	12.2	-7.5	320.8	328.0	2.3	83.8	12.2	78.
21.2	65.6	6628.5	450.0	-16.5	-18.8	296.3	15.1	13.2	-7.4	322.6	329.3	1.8	75.5	13.1	82.
22.6	69.1	7055.5	425.0	-19.9	-23.0	292.4	16.4	15.2	-6.2	323.6	328.3	1.4	76.1	14.2	85.
24.1	72.7	7502.7	400.0	-23.1	-26.2	287.6	19.1	16.3	-5.8	325.0	328.8	1.1	76.0	15.6	87.
25.6	76.5	7972.9	375.0	-26.2	-29.8	279.4	18.7	16.5	-3.0	325.9	329.8	0.9	71.9	17.3	89.
27.2	80.4	8467.8	350.0	-30.3	-33.7	274.7	17.8	17.8	-1.5	327.5	330.1	0.6	68.5	19.0	90.
29.0	84.5	8990.6	325.0	-34.3	-38.1	271.1	20.7	20.7	-0.4	329.3	330.9	0.4	64.5	21.1	90.
30.8	88.6	9545.1	300.0	-38.9	-42.3	276.7	24.4	24.3	-2.8	330.5	331.4	0.2	55.9	23.5	90.
32.7	93.2	10135.0	275.0	-44.4	-46.9	286.0	29.2	28.0	-5.1	331.0	330.9	99.9	99.9	26.5	92.
35.1	98.3	10766.6	250.0	-48.8	-50.9	284.5	34.6	33.5	-8.7	333.5	330.9	99.9	99.9	31.1	94.
37.6	102.8	11450.4	225.0	-53.9	-54.9	282.3	39.0	38.1	-8.2	335.9	329.9	99.9	99.9	36.4	95.
40.2	108.4	12156.3	200.0	-60.3	-59.9	283.0	42.2	41.2	-9.5	337.3	329.9	99.9	99.9	42.6	96.
43.2	114.3	13017.2	175.0	-63.2	-63.9	286.0	39.1	38.0	-10.8	345.6	329.9	99.9	99.9	50.3	96.
46.7	120.3	13974.6	150.0	-59.1	-59.1	286.6	34.1	33.0	-8.6	368.3	329.9	99.9	99.9	57.8	98.
51.0	127.3	15104.0	125.0	-65.0	-65.0	279.0	23.9	23.6	-3.7	377.2	329.9	99.9	99.9	65.2	99.
56.0	135.0	16454.8	100.0	-68.7	-68.7	277.8	14.8	14.6	-3.0	395.0	329.9	99.9	99.9	72.7	98.
62.3	142.3	18153.9	75.0	-65.1	-65.1	277.0	10.9	10.8	-1.3	428.0	329.9	99.9	99.9	77.4	99.
71.4	150.5	20627.6	50.0	-61.1	-61.1	264.7	3.6	3.4	-1.6	498.6	329.9	99.9	99.9	79.9	100.
85.4	155.0	25058.3	25.0	-53.2	-53.2	320.2	9.4	8.0	-7.2	631.6	329.9	99.9	99.9	83.3	101.

ORIGINAL PAGE IS
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 232
BOOTHVILLE, LA23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.8	1.0	1019.9	23.7	21.6	130.0	3.1	-2.4	2.0	297.4	339.4	16.2	88.0	0.0	0.
0.8	6.5	173.6	1000.0	22.0	21.2	136.1	5.5	-3.0	4.0	297.3	339.1	16.1	94.8	0.3	306.
1.6	9.0	393.9	975.0	20.7	20.0	152.6	7.4	-3.4	6.6	498.0	338.0	15.3	95.7	0.6	317.
2.7	11.3	619.0	950.0	19.3	14.5	167.1	9.0	-2.0	8.7	298.7	336.3	14.3	95.0	1.1	327.
3.6	13.8	848.9	925.0	18.2	17.1	173.3	10.2	-1.2	10.2	299.7	335.3	13.4	92.5	1.6	314.
4.5	16.1	1083.7	900.0	16.6	15.0	181.4	10.1	0.3	10.1	300.2	332.3	12.0	90.3	2.1	340.
5.6	18.7	1323.7	875.0	15.0	11.8	183.0	8.6	0.5	6.6	300.7	327.8	10.1	81.6	2.7	345.
6.5	21.1	1565.3	850.0	13.8	12.0	195.4	7.0	1.9	6.8	302.0	330.2	10.4	84.5	3.1	349.
7.5	23.4	1821.1	825.0	12.9	9.2	208.6	7.7	3.7	6.7	303.4	327.9	8.9	78.5	3.4	352.
8.3	26.4	2080.1	800.0	11.8	7.2	197.7	7.3	2.2	6.9	304.7	327.0	8.0	73.6	3.7	355.
9.1	29.2	2345.8	775.0	11.0	4.0	194.6	6.6	2.2	6.3	306.5	325.2	6.6	61.8	4.1	357.
9.9	32.3	2618.7	750.0	9.3	1.4	198.3	9.0	2.8	8.6	307.4	323.7	5.7	57.8	4.5	359.
10.9	35.0	2895.0	725.0	7.5	-4.1	199.4	9.2	3.1	8.7	308.2	319.6	3.9	43.3	5.0	1.
12.0	37.7	3187.5	700.0	6.3	-16.6	207.5	8.1	3.8	7.2	309.6	314.3	1.5	17.5	5.5	3.
13.1	40.6	3485.1	675.0	5.9	-33.8	242.7	5.6	5.0	2.6	312.2	313.5	0.4	4.2	5.9	6.
14.2	43.6	3793.1	650.0	4.8	-39.6	283.2	5.3	5.1	-1.2	314.4	315.0	0.2	2.3	6.3	9.
15.6	46.7	4111.4	625.0	2.6	-18.8	284.8	5.5	5.3	-1.4	316.5	319.0	1.1	14.6	5.9	13.
16.8	49.9	4439.9	600.0	0.2	-16.0	292.0	6.6	6.1	-2.5	318.5	321.4	1.5	24.1	5.2	18.
19.1	52.3	4779.9	575.0	-2.1	-13.4	293.5	8.6	7.9	-3.4	317.9	325.3	2.4	41.4	5.9	23.
19.3	56.0	5131.8	550.0	-4.5	-13.1	288.7	9.4	8.9	-3.0	319.1	327.0	2.5	50.7	6.0	30.
20.7	58.5	5457.3	525.0	-6.1	-18.7	284.7	8.9	8.6	-2.3	321.2	326.6	1.7	36.2	6.2	37.
22.2	63.3	5877.4	500.0	-8.5	-22.0	287.4	8.9	8.5	-2.7	322.8	327.2	1.3	32.7	6.5	41.
23.7	66.4	6272.9	475.0	-11.7	-22.8	292.5	9.5	8.8	-3.6	323.6	327.9	1.3	39.4	6.9	49.
25.2	70.3	6644.4	450.0	-15.2	-23.1	300.3	10.0	9.1	-5.3	324.2	328.6	1.3	50.7	7.3	56.
26.6	73.9	7113.8	425.0	-18.6	-25.9	295.0	9.1	8.6	-3.0	325.2	328.9	1.1	52.2	7.7	62.
28.3	78.3	7563.7	400.0	-20.2	-25.8	278.2	11.0	10.8	-1.6	328.6	328.9	1.1	2.5	8.4	66.
30.0	82.0	8039.2	375.0	-23.4	-24.9	279.9	14.9	14.6	-2.6	330.5	330.6	0.0	1.0	5.6	70.
31.7	86.3	8539.9	350.0	-27.3	-27.3	275.2	19.2	19.1	-1.7	331.9	332.0	0.0	1.0	11.1	74.
33.5	90.5	9049.2	325.0	-31.7	-28.4	274.2	22.5	22.4	-1.6	332.9	333.1	0.0	5.1	13.4	78.
35.4	95.3	9630.1	300.0	-36.4	-29.8	276.4	22.6	22.4	-2.5	333.9	334.1	0.0	6.8	15.8	80.
37.5	100.2	10226.9	275.0	-41.7	-29.9	281.3	23.7	23.3	-4.7	334.6	334.9	99.9	95.9	18.6	83.
39.8	105.3	10855.8	250.0	-46.9	-29.9	285.6	25.9	25.0	-7.0	336.4	336.4	99.9	99.9	22.0	86.
42.3	110.9	11555.2	225.0	-52.3	-29.9	286.3	30.4	29.2	-8.5	338.3	338.3	99.9	99.9	25.9	90.
44.8	116.6	12306.7	200.0	-58.3	-29.9	282.8	29.8	29.0	-6.6	340.5	339.9	99.9	99.9	30.5	92.
47.7	123.3	13134.8	175.0	-64.5	-29.9	290.8	29.4	27.5	-10.4	343.5	339.9	99.9	99.9	35.6	94.
50.9	130.3	14082.7	150.0	-60.7	-29.9	292.8	24.1	23.5	-5.3	365.5	339.9	99.9	99.9	40.8	95.
54.8	137.5	15207.0	125.0	-65.4	-29.9	271.1	17.7	17.7	-0.3	376.6	339.9	99.9	99.9	45.7	96.
59.6	145.0	16545.0	100.0	-70.9	-29.9	264.0	15.5	15.4	1.6	390.8	339.9	99.9	99.9	50.5	95.
65.3	153.0	18244.4	75.0	-65.5	-29.9	307.5	8.5	6.8	-5.2	427.1	339.9	99.9	99.9	54.7	96.
73.7	161.7	20704.8	50.0	-60.6	-29.9	342.8	4.7	1.4	-4.5	500.3	339.9	99.9	99.9	55.3	97.
90.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTC GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.2	1000.0	1006.8	24.4	17.1	170.0	4.6	-0.8	4.5	298.7	331.3	12.3	64.0	0.0	0.
0.2	4.2	159.5	1000.0	23.8	17.0	172.0	9.9	-1.4	5.8	298.6	331.2	12.3	65.6	0.2	356.
1.1	6.7	380.9	975.0	22.5	16.4	173.1	12.5	-1.5	12.4	298.4	331.8	12.2	66.7	0.7	354.
1.9	5.0	606.7	950.0	21.0	16.0	173.3	15.9	-1.8	15.8	300.1	332.6	12.2	73.4	1.3	354.
2.8	11.1	837.1	925.0	17.9	14.6	176.6	13.5	-0.8	13.5	259.2	323.6	11.4	81.2	2.2	354.
3.8	13.4	1071.6	900.0	16.1	14.5	183.6	12.6	0.8	12.6	259.7	330.7	11.6	90.0	2.6	354.
4.7	15.6	1311.3	875.0	14.5	12.8	193.2	12.6	2.9	12.3	300.3	323.0	10.7	89.6	3.6	358.
5.7	16.0	1556.1	850.0	12.6	11.1	196.2	13.9	3.9	13.4	300.7	327.3	9.8	90.3	4.3	1.
6.7	20.4	1807.3	825.0	12.6	8.0	208.6	15.3	7.3	13.4	303.0	325.5	8.2	73.8	5.2	4.
7.8	22.7	2065.2	800.0	12.8	5.8	215.0	18.2	10.5	14.9	303.7	326.1	7.3	62.7	6.1	9.
8.8	25.2	2332.3	775.0	10.8	2.7	216.1	17.8	10.5	14.4	306.2	323.3	6.0	57.3	7.2	13.
9.8	27.6	2605.2	750.0	10.0	-6.0	218.7	16.1	10.1	12.6	307.8	317.8	3.4	32.9	8.2	16.
10.8	30.2	2936.6	725.0	9.5	-2.3	240.5	14.1	12.3	7.0	310.5	323.6	4.5	43.5	8.9	19.
11.4	33.0	3177.3	700.0	8.1	-1.7	263.7	16.3	16.2	1.8	312.0	326.2	4.8	45.9	9.4	23.
12.9	35.5	3476.7	675.0	6.0	-3.4	285.5	17.5	17.5	0.2	313.0	326.1	4.4	50.7	10.0	29.
14.2	38.4	3784.7	650.0	3.5	-4.6	282.6	14.0	14.2	-3.2	313.4	326.0	4.2	55.6	10.6	36.
15.6	41.0	4101.4	625.0	0.5	-5.0	262.9	14.8	14.4	-3.3	313.5	326.1	4.2	66.5	11.0	41.
17.1	44.1	4427.5	600.0	-2.8	-5.3	282.8	15.7	15.3	-3.5	313.4	326.3	4.3	83.0	11.8	42.
18.3	47.1	4763.9	575.0	-4.8	-5.8	279.0	16.6	16.6	-2.6	313.9	327.9	4.3	92.8	12.5	52.
19.4	50.2	5112.9	550.0	-7.0	-7.8	278.3	18.8	14.6	-2.7	315.3	328.1	3.9	93.9	13.4	55.
20.7	53.3	5474.9	525.0	-9.1	-10.1	280.6	18.5	14.2	-3.4	317.9	328.3	3.4	92.4	14.5	60.
22.0	56.4	5851.5	500.0	-11.1	-12.6	274.1	18.7	13.6	-1.3	319.8	328.9	2.9	89.1	15.6	63.
23.4	59.3	6244.1	475.0	-13.7	-15.2	272.0	20.4	20.4	-0.7	321.3	323.2	2.5	88.0	17.0	65.
24.8	62.3	6653.4	450.0	-16.4	-17.8	273.5	22.0	21.9	-1.3	322.8	329.6	2.1	89.0	18.7	68.
26.4	66.9	7081.1	425.0	-19.5	-21.8	270.1	21.9	21.9	-0.1	324.1	329.2	1.6	82.0	20.6	70.
28.2	70.6	7529.3	400.0	-22.5	-25.3	265.4	21.1	21.0	1.7	325.8	329.5	1.1	70.9	22.8	72.
30.0	74.5	7999.7	375.0	-26.2	-30.1	263.0	20.9	20.7	2.6	326.9	329.8	0.8	69.8	25.0	73.
31.8	78.7	8495.2	350.0	-30.1	-34.3	264.3	21.2	21.1	2.1	328.1	330.2	0.6	66.5	27.2	74.
33.7	82.0	9018.8	325.0	-33.6	-38.0	264.5	25.4	25.3	2.5	330.0	331.5	0.4	61.5	30.0	75.
35.7	87.2	9574.8	300.0	-38.4	-43.7	273.2	29.5	28.3	-1.6	331.1	332.1	0.3	57.4	33.0	76.
37.7	92.3	10167.6	275.0	-42.5	-48.9	273.4	35.7	35.6	-2.1	333.6	927.9	99.9	99.9	36.8	78.
40.0	97.3	10603.7	250.0	-48.0	-54.9	273.4	38.7	38.6	-2.9	334.7	99.9	99.9	99.9	42.0	80.
42.6	102.9	11490.2	225.0	-53.4	-59.4	272.7	39.0	39.0	-1.8	336.7	99.9	99.9	99.9	47.8	82.
45.3	108.9	12238.1	200.0	-59.4	-64.9	273.3	41.4	41.3	-2.4	338.2	99.9	99.9	99.9	54.6	83.
48.4	115.2	13066.7	175.0	-61.5	-69.9	271.9	38.5	38.4	-1.3	340.4	99.9	99.9	99.9	62.0	85.
52.2	122.3	14023.3	150.0	-61.3	-69.9	272.1	31.7	31.7	-1.2	364.4	99.9	99.9	99.9	70.3	85.
56.3	130.3	15149.2	125.0	-64.3	-69.9	267.9	30.6	30.5	1.1	378.6	99.9	99.9	99.9	77.8	86.
61.2	138.7	16495.2	100.0	-68.2	-69.9	259.9	22.6	22.2	4.0	398.0	99.9	99.9	99.9	85.0	86.
67.5	147.5	18206.9	75.0	-65.3	-69.9	265.8	10.9	10.5	-3.0	427.5	99.9	99.9	99.9	89.6	87.
76.2	157.3	20687.6	50.0	-59.3	-69.9	17.1	3.5	-1.0	-3.3	503.9	99.9	99.9	99.9	90.9	87.
90.3	167.3	25127.5	25.0	-51.6	-69.9	341.8	7.4	2.3	-7.1	636.7	99.9	99.9	99.9	92.9	89.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

* BY SV SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 240
LAKE CHARLES, LA

23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	3.3	5.0	1015.7	24.4	20.5	160.0	6.3	-2.0	7.0	298.3	338.0	15.2	79.0	0.0	0.
0.4	4.5	141.9	1000.0	23.4	20.4	162.0	9.3	-2.9	8.0	298.6	338.7	15.3	83.2	0.3	34.2
1.2	6.3	363.0	975.0	21.2	19.5	164.8	9.7	-2.5	9.3	298.5	337.6	14.9	90.7	0.7	34.2
1.9	8.3	568.1	950.0	19.2	18.2	170.1	11.2	-1.9	11.1	298.5	335.3	14.0	94.1	1.1	34.2
2.5	10.2	817.7	925.0	17.4	16.3	185.1	13.0	1.2	13.0	298.9	332.6	12.8	93.1	1.6	34.7
3.3	12.1	1051.8	900.0	15.8	14.6	192.4	14.1	3.1	13.7	299.3	330.5	11.7	92.9	2.2	35.5
4.2	14.2	1291.3	875.0	14.5	13.0	196.1	12.3	3.4	11.8	300.3	329.5	10.9	91.1	2.9	35.5
5.0	16.1	1535.6	850.0	12.0	-1.4	195.2	11.3	3.0	10.9	299.2	310.8	4.1	40.1	3.5	2.
5.8	18.2	1784.8	825.0	14.1	-9.9	189.5	7.3	1.1	7.3	303.8	310.5	2.3	18.7	3.6	1.
6.6	20.4	2045.7	800.0	12.4	0.2	194.0	6.6	1.6	6.4	305.0	318.9	4.9	43.3	4.2	3.
7.5	22.5	2311.3	775.0	11.0	1.6	195.9	7.1	1.9	6.8	306.3	322.2	5.6	52.4	4.5	5.
8.5	24.7	2585.3	750.0	13.0	-42.0	201.5	6.6	3.1	8.0	310.7	311.1	0.1	1.0	5.0	6.
9.5	26.7	2870.2	725.0	13.6	-31.9	221.0	10.0	6.5	7.5	314.4	315.8	0.4	3.0	5.5	8.
10.3	29.1	3144.0	700.0	11.9	-20.1	237.1	11.7	9.8	6.4	315.7	317.9	0.6	5.2	5.9	11.
11.5	31.6	3466.4	675.0	9.0	-22.4	244.4	13.5	12.2	5.9	315.8	318.9	0.9	9.0	6.5	19.
12.6	34.1	3776.9	650.0	6.3	-22.0	248.0	13.0	12.0	4.9	316.2	319.5	1.0	11.0	7.2	23.
13.7	36.4	4096.7	625.0	3.5	-20.5	251.0	13.2	12.5	4.3	316.6	320.4	1.2	15.2	7.7	27.
14.8	39.0	4426.1	600.0	0.9	-13.5	248.3	13.3	12.3	4.9	317.4	324.5	2.2	33.1	8.4	34.
15.9	41.5	4766.6	575.0	-1.9	-14.3	237.0	12.8	10.8	7.0	318.0	325.0	2.2	38.0	9.1	35.
17.0	44.2	5115.4	550.0	-4.9	-12.4	236.9	13.2	10.8	7.6	318.6	327.1	2.7	55.6	10.0	42.
18.2	47.0	5482.2	525.0	-8.3	-11.3	242.9	13.8	12.8	6.3	318.8	328.4	3.1	78.9	10.9	34.
19.5	50.0	5859.6	500.0	-10.6	-14.4	248.6	13.8	12.8	5.0	320.4	328.3	2.5	73.5	11.9	40.
20.7	52.8	6252.7	475.0	-13.7	-18.1	260.3	13.4	13.2	2.3	321.2	327.4	1.9	69.0	12.7	43.
22.1	55.7	6662.1	450.0	-16.2	-18.7	268.5	14.9	14.9	0.4	323.0	329.3	1.9	20.9	13.6	40.
23.6	58.6	7090.0	425.0	-19.5	-21.1	276.4	17.3	17.2	-1.9	324.2	329.7	1.7	87.0	14.5	50.
25.0	62.1	7531.1	400.0	-22.6	-29.9	273.4	21.6	21.6	-1.3	325.7	328.4	0.8	51.2	15.8	51.
26.5	65.4	8003.3	375.0	-25.8	-34.7	271.6	22.2	22.2	-0.6	327.5	329.3	0.5	42.5	17.5	52.
28.2	69.0	8500.9	350.0	-28.8	-34.4	277.0	23.5	23.3	-2.9	329.9	331.9	0.6	58.2	19.1	63.
29.9	72.5	9032.9	325.0	-32.0	-44.5	272.4	26.7	26.7	-1.1	332.6	333.4	0.2	28.1	21.	66.
31.6	76.5	9592.3	300.0	-36.3	-51.1	268.3	29.3	29.2	0.5	334.1	334.5	0.1	19.9	24.3	66.
33.5	80.6	10190.8	275.0	-41.4	99.9	268.6	30.7	30.7	0.8	335.2	999.9	99.9	99.9	27.5	71.
35.6	85.0	10830.5	250.0	-46.4	99.9	269.0	32.9	32.9	0.6	337.1	999.9	99.9	99.9	31.3	74.
37.7	89.5	11522.8	225.0	-51.4	99.9	269.9	32.3	32.1	2.8	336.8	999.9	99.9	99.9	35.2	75.
40.0	94.8	12275.7	200.0	-56.4	99.9	263.3	30.4	30.2	3.5	340.3	999.9	99.9	99.9	39.6	76.
42.4	100.2	13104.4	175.0	-65.2	99.9	266.4	32.1	32.1	2.0	342.4	999.9	99.9	99.9	44.0	77.
45.2	106.3	14050.5	150.0	-61.0	99.9	267.8	29.8	29.8	1.2	345.0	999.9	99.9	99.9	49.0	78.
48.7	113.0	15172.2	125.0	-65.3	99.9	267.0	23.5	23.5	1.2	376.8	999.9	99.9	99.9	54.2	79.
53.0	121.3	16514.3	100.0	-70.0	99.9	251.8	19.2	18.3	6.0	392.5	999.9	99.9	99.9	59.6	79.
58.3	130.7	18221.1	75.0	-70.6	99.9	271.7	15.5	15.5	-0.4	424.9	999.9	99.9	99.9	64.3	79.
64.0	142.0	20700.8	50.0	-41.0	99.9	358.7	1.0	0.0	-1.0	459.7	999.9	99.9	99.9	65.7	74.
76.2	159.0	25136.9	25.0	-51.1	99.9	18.4	7.8	-2.5	-7.4	637.8	999.9	99.9	99.9	65.8	80.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 248
SHREVEPORT, LA

23 APRIL 1975
2322 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	WEIGHT GPH	PRES MM	TEMP DG C	DEW PT DG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.1	79.0	1004.7	23.9	18.3	180.0	4.6	0.0	4.6	298.5	333.6	13.3	71.0	0.0	0.
0.1	4.3	120.2	1020.0	23.8	18.3	176.6	1.9	-0.0	1.9	298.7	334.0	13.4	71.3	0.3	35.0
0.9	6.4	342.1	975.0	21.3	17.8	176.1	4.0	-0.3	4.0	300.5	335.9	13.3	71.1	0.5	30.0
1.6	8.3	568.7	950.0	21.4	17.0	170.7	15.4	-0.9	15.4	300.6	335.1	13.0	76.2	1.0	35.8
2.6	10.6	798.7	925.0	19.3	16.0	160.5	15.0	0.4	15.0	300.7	334.0	12.5	81.1	1.9	35.6
3.5	12.6	1033.3	850.0	17.4	14.5	160.0	15.3	2.6	16.1	301.0	332.2	11.6	83.1	2.7	0.
4.3	14.8	1276.0	875.0	16.1	13.5	154.2	15.0	4.7	16.5	302.0	332.2	11.2	84.7	3.6	3.
5.3	16.9	1522.7	850.0	14.7	13.2	20.3	15.7	6.2	14.4	303.1	333.8	11.4	90.9	4.6	6.
6.4	19.2	1775.3	825.0	13.1	11.7	207.0	15.8	7.2	14.0	303.9	332.7	10.6	91.1	5.5	10.
7.3	21.3	2034.7	800.0	13.1	7.4	210.3	14.4	7.3	12.4	306.2	329.9	8.1	68.3	6.4	12.
8.2	23.6	2302.1	775.0	12.6	3.2	205.4	12.2	5.2	11.0	308.2	328.1	6.3	52.6	7.1	14.
9.2	25.9	2578.3	750.0	13.7	-1.3	198.9	10.6	3.4	10.0	312.1	325.9	4.7	35.5	7.7	1.
10.4	28.3	2843.2	725.0	12.2	-1.5	205.7	11.0	5.5	9.6	313.4	327.5	4.7	38.5	8.5	15.
11.5	30.9	3156.4	700.0	10.4	-2.3	228.0	12.8	9.5	8.6	314.6	328.7	4.7	41.7	9.2	17.
12.4	32.5	3457.7	675.0	7.5	-3.2	243.7	15.4	14.7	7.4	314.6	328.0	4.5	46.5	9.8	22.
14.0	36.0	3767.0	650.0	3.9	-3.9	243.7	15.9	18.1	8.2	314.0	327.2	4.4	56.7	11.0	27.
15.6	38.7	4085.0	625.0	2.0	-5.1	243.3	19.4	17.6	8.1	315.3	327.9	4.2	59.2	12.7	32.
16.7	41.3	4413.5	600.0	0.2	-7.0	255.9	20.9	20.3	5.1	318.8	328.3	3.8	58.4	13.7	35.
17.9	44.2	4752.0	575.0	-3.0	-7.7	258.7	23.2	22.8	4.6	317.0	328.4	3.7	69.7	15.0	40.
19.3	47.1	5103.8	550.0	-5.3	-9.0	259.2	23.9	23.8	2.0	318.2	329.1	3.5	75.4	16.5	4.
20.5	50.1	5462.9	525.0	-8.0	-9.9	272.4	24.2	24.2	-1.0	319.2	329.8	3.4	86.2	17.9	48.
21.9	53.1	5845.3	500.0	-11.3	-12.9	274.6	24.3	24.2	-1.8	319.6	329.4	2.8	87.5	19.1	52.
23.6	56.1	6237.9	475.0	-13.3	-15.3	266.9	24.5	24.5	1.4	321.7	329.5	2.4	84.8	21.1	56.
24.7	59.4	6647.9	450.0	-16.1	-17.3	267.0	25.1	25.0	1.3	323.2	330.3	2.2	90.4	22.6	54.
25.8	63.0	7076.1	425.0	-15.1	-20.4	266.9	23.0	23.0	1.3	324.6	330.4	1.8	90.0	24.0	60.
27.2	66.3	7524.8	400.0	-22.6	-28.2	268.5	21.0	20.9	2.0	325.7	330.3	1.3	86.5	25.6	62.
28.9	70.1	7995.0	375.0	-26.6	-28.5	262.4	22.3	22.1	2.0	326.5	329.8	1.0	83.7	27.5	63.
30.7	73.9	8486.6	350.0	-31.0	-38.6	261.6	25.8	25.6	3.9	327.0	329.0	0.6	70.3	30.0	65.
33.2	78.0	9012.3	325.0	-34.9	-42.0	257.4	31.7	30.9	6.9	328.6	329.6	0.3	47.9	34.3	67.
35.1	82.2	9585.0	300.0	-38.5	-48.5	263.6	34.0	33.9	2.6	331.0	331.7	0.2	42.2	38.0	64.
37.2	86.2	10157.2	275.0	-43.2	-50.3	263.8	34.5	34.4	3.1	332.7	329.9	99.9	99.9	41.9	70.
39.9	91.4	10753.0	250.0	-47.9	-54.9	264.1	39.4	39.2	4.1	334.8	329.9	99.9	99.9	46.0	72.
42.5	96.3	11479.4	225.0	-52.9	-58.9	261.8	40.5	40.1	5.8	337.4	329.9	99.9	99.9	54.3	73.
45.6	101.9	12228.3	200.0	-58.9	-68.9	262.7	40.4	40.0	5.2	338.6	329.9	99.9	99.9	62.1	74.
48.7	108.0	13053.6	175.0	-61.6	-70.9	260.9	50.0	49.4	7.9	348.2	329.9	99.9	99.9	66.9	75.
52.2	114.7	14015.1	150.0	-60.4	-59.9	261.1	28.9	28.5	4.9	350.0	329.9	99.9	99.9	77.7	76.
56.7	122.1	15139.1	125.0	-64.2	-64.2	261.4	28.6	28.3	4.4	376.7	329.9	99.9	99.9	86.0	77.
61.9	130.9	16457.0	100.0	-67.6	-69.9	262.3	28.1	27.8	3.8	397.2	329.9	99.9	99.9	93.7	77.
68.3	140.0	18206.0	75.0	-69.3	-69.9	248.3	14.9	13.8	5.5	427.7	329.9	99.9	99.9	99.1	77.
77.5	150.0	20685.2	50.0	-56.2	-59.9	265.3	13.5	13.5	0.2	504.1	329.9	99.9	99.9	102.4	77.
92.3	160.5	23126.1	25.0	-51.8	-59.9	333.0	4.2	2.8	-5.5	636.1	329.9	99.9	99.9	104.3	76.

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 255
VICTORIA, YER23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTD GM/KG	PH PCT	RANGE KM	AZ DG
0.0	4.4	23.0	1007.4	26.8	19.7	170.0	12.8	-2.2	12.6	301.3	329.8	14.5	65.2	0.0	0.
0.1	4.8	58.3	1000.0	26.2	19.5	171.9	13.3	-1.9	13.2	301.4	340.5	14.7	66.0	0.4	35.3
0.7	6.7	321.6	975.0	26.1	18.9	167.4	15.1	-3.1	13.8	301.3	339.1	14.2	72.2	0.7	350.
1.4	8.8	588.9	930.0	22.3	16.8	166.1	17.3	-4.7	16.6	301.5	335.9	12.8	71.3	1.4	344.
2.2	10.6	780.8	925.0	21.4	12.3	180.3	20.7	0.1	20.7	302.6	329.2	9.8	55.9	2.2	344.
2.8	13.1	1015.7	900.0	21.7	8.0	180.4	22.2	0.2	22.2	302.9	325.9	7.5	41.6	3.1	352.
3.6	15.4	1263.2	875.0	21.4	3.3	175.8	19.2	-0.1	15.2	302.5	325.2	6.4	35.0	4.1	354.
4.7	17.6	1513.3	850.0	19.4	3.7	180.2	17.0	1.2	17.0	302.3	324.1	5.9	35.3	5.0	354.
5.4	20.0	1765.7	825.0	18.0	0.1	190.6	16.7	4.9	13.8	306.3	321.9	4.7	29.8	5.9	354.
6.3	22.2	2032.5	800.0	15.1	-13.3	215.8	12.8	7.5	10.4	311.7	317.1	1.7	10.0	6.4	1.
7.2	24.7	2334.3	775.0	18.3	-16.1	212.4	16.2	8.7	13.7	313.7	319.2	1.4	6.3	7.1	5.
8.2	27.0	2594.2	750.0	17.8	-18.1	208.4	15.7	8.2	14.6	316.1	320.1	1.2	7.2	8.1	6.
9.2	29.7	2872.3	725.0	15.4	-24.5	208.2	15.4	7.3	13.6	316.4	319.8	0.7	4.8	9.0	10.
10.1	32.3	3167.9	700.0	13.6	-18.2	203.8	15.0	6.1	13.8	317.7	322.0	1.3	9.3	9.7	11.
11.1	35.0	3472.5	675.0	11.6	-13.8	150.0	15.1	4.9	14.3	318.9	325.1	2.0	15.4	10.7	12.
12.2	37.7	3740.6	650.0	9.2	-11.4	201.9	15.0	5.2	12.0	315.7	327.5	2.5	22.0	11.6	13.
13.1	40.4	4109.9	625.0	6.2	-11.2	214.7	11.2	6.1	9.4	319.9	328.1	2.6	27.5	12.3	14.
14.3	43.3	4442.5	600.0	3.1	-10.0	223.4	10.8	7.4	7.9	320.1	329.5	3.0	37.6	13.0	15.
15.4	46.3	4785.7	575.0	0.2	-8.8	226.7	11.1	8.1	7.6	320.6	331.3	3.4	51.7	13.6	16.
16.5	49.4	5140.2	550.0	-2.9	-8.6	240.2	9.6	8.3	4.8	321.1	332.4	3.6	64.8	14.2	18.
17.8	52.3	5507.0	525.0	-6.1	-11.6	242.8	9.4	9.3	1.2	321.4	330.8	3.0	65.2	14.6	20.
19.1	55.4	5886.9	500.0	-8.9	-18.9	260.3	11.6	11.5	1.1	322.3	326.1	1.8	45.4	15.0	23.
20.5	58.7	6292.4	475.0	-11.4	-19.9	256.8	12.4	12.0	2.8	323.9	325.9	0.6	17.5	15.5	26.
21.9	62.1	6654.8	450.0	-14.2	-27.1	256.5	12.8	12.5	3.0	325.4	328.6	0.9	32.4	16.3	29.
23.4	65.6	7120.9	425.0	-17.6	-35.7	252.8	15.5	15.2	3.0	326.4	327.9	0.4	18.7	17.2	32.
24.9	69.3	7576.1	400.0	-21.6	-38.5	263.7	17.4	17.4	1.3	326.9	328.4	0.4	24.5	18.1	36.
26.5	73.0	8046.2	375.0	-24.8	-38.5	263.7	17.4	17.4	1.3	326.9	328.4	0.4	24.5	18.1	36.
28.1	77.0	8547.2	350.0	-27.6	-47.4	265.1	24.7	24.3	4.3	331.5	332.0	0.1	13.0	21.7	44.
29.7	80.7	9076.0	325.0	-31.7	-34.6	253.9	27.5	27.1	4.8	333.0	335.2	0.6	75.3	23.2	47.
31.9	85.1	9636.7	300.0	-36.2	-44.3	250.8	27.8	27.4	4.9	334.2	335.1	0.2	43.1	26.1	52.
34.1	89.6	10234.4	275.0	-40.9	99.9	260.1	29.6	29.2	5.1	335.9	335.9	99.9	96.9	29.6	54.
36.4	94.6	10875.5	250.0	-46.2	57.9	262.2	31.9	31.6	4.3	337.4	337.4	99.9	99.9	31.4	57.
39.0	99.6	11568.5	225.0	-51.4	59.9	260.9	32.0	31.6	5.1	339.7	339.7	99.9	99.9	34.2	61.
41.7	105.3	12322.4	200.0	-57.5	99.9	258.2	31.8	31.1	4.5	341.7	339.9	99.9	99.9	43.0	63.
44.7	111.3	13192.4	175.0	-62.7	99.9	263.2	28.8	28.7	2.4	340.5	339.9	99.9	99.9	46.7	65.
48.7	116.3	14050.4	150.0	-61.7	99.9	260.3	28.0	28.6	4.9	343.2	343.2	99.9	99.9	54.9	67.
52.1	125.8	15216.5	125.0	-66.4	99.9	259.5	26.8	26.4	4.9	347.7	347.7	99.9	99.9	61.6	68.
57.0	134.3	16550.8	100.0	-65.8	99.9	243.7	20.9	18.7	9.3	392.8	392.8	99.9	99.9	67.6	69.
62.9	143.0	18251.3	75.0	-71.9	99.9	260.9	15.7	15.5	2.5	422.2	422.2	99.9	99.9	73.1	69.
71.5	153.0	22732.4	50.0	-80.6	99.9	216.3	4.1	2.4	3.3	500.7	500.7	99.9	99.9	75.3	70.
84.3	163.5	29159.4	25.0	-50.2	99.9	47.5	3.7	-2.7	-2.5	640.5	640.5	99.9	99.9	74.1	69.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 240
STEPHENVILLE, TEX

21 APRIL 1975

ANGLES ON THE HALP MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

140 25. 1

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MX RTG CM/SEC	RM PCT	RANGE FM	AZ DG
7.0	10.3	355.0	962.6	26.3	19.9	150.0	6.2	-3.1	5.4	304.2	345.4	15.4	68.0	0.0	0.
8.0	9.9	96.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.0	9.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	11.1	515.5	950.0	25.6	12.6	309.6	2.6	2.1	-1.8	305.2	344.0	14.4	65.2	0.7	33.
0.4	13.7	750.1	925.0	23.6	16.9	191.9	4.3	0.9	4.2	305.2	341.3	13.3	60.2	0.6	3.6
1.7	16.3	985.4	900.0	21.8	15.6	163.7	14.5	0.9	14.5	339.8	12.5	67.9	1.1	34.8	0.6
2.4	18.6	1233.9	875.0	19.9	15.0	190.2	14.2	2.5	14.0	304.2	340.1	12.4	73.3	1.7	35.
3.2	21.1	1483.7	850.0	18.0	14.7	194.8	15.1	4.9	14.3	304.7	341.0	12.5	81.0	2.4	0.
4.0	23.4	1736.3	825.0	15.7	14.4	207.2	15.6	7.1	17.8	306.9	341.5	12.7	92.4	3.1	6.
4.9	26.1	2030.6	800.0	13.7	13.1	214.1	15.5	9.6	17.7	307.3	340.3	12.0	96.5	3.9	11.
5.7	28.1	2258.4	775.0	12.3	11.4	219.4	15.1	9.6	11.7	310.5	11.0	94.6	94.6	4.6	13.
6.4	32.0	2543.3	750.0	10.4	8.8	228.4	15.8	11.8	10.5	309.2	335.9	9.5	89.5	5.2	19.
7.6	34.9	2824.2	725.0	14.1	-21.0	237.9	19.7	16.7	10.5	315.0	319.3	1.0	74.1	6.1	24.
8.5	37.6	3122.7	700.0	12.2	-24.1	241.6	20.3	17.8	9.7	316.9	317.0	0.6	5.7	8.1	3.
9.5	40.5	3425.4	675.0	10.0	-26.5	238.3	21.0	17.8	11.0	316.9	319.0	0.6	8.1	9.3	37.
10.4	43.4	3737.3	650.0	7.6	-24.5	234.5	21.2	17.3	12.3	317.6	320.3	0.8	8.1	9.3	37.
11.4	46.5	4058.4	625.0	4.8	-16.4	234.7	20.3	16.5	11.7	318.2	323.7	1.7	26.0	10.4	37.
12.5	49.9	4385.3	600.0	1.7	-11.5	235.9	21.7	16.0	12.2	318.4	326.6	2.4	36.9	11.7	41.
13.5	52.4	4731.0	575.0	-0.9	-13.2	236.4	22.2	14.5	12.3	317.2	326.8	2.4	36.5	13.0	4.
14.6	55.9	5083.7	550.0	-3.9	-22.8	234.5	22.7	14.9	12.5	317.6	323.3	1.1	21.3	14.6	4.
15.8	59.3	5446.8	525.0	-6.9	-30.4	231.8	20.8	17.6	11.1	320.2	322.2	0.6	13.7	16.1	4.
17.1	62.3	5826.6	500.0	-10.8	-23.4	235.7	21.9	18.9	11.1	320.0	323.8	1.2	34.3	17.2	4.
18.3	65.2	6218.5	475.0	-14.3	-22.4	244.7	21.4	19.3	9.2	320.4	324.7	1.3	50.1	19.2	4.
19.7	68.9	6624.0	450.0	-17.6	-24.3	250.7	21.3	21.9	8.4	321.1	323.9	0.8	36.8	20.9	4.
21.0	72.5	7052.1	425.0	-19.6	-24.4	254.2	21.3	22.6	5.6	323.7	323.8	0.0	1.0	22.4	5.
22.4	77.1	7499.4	400.0	-22.9	-24.6	253.0	21.3	22.6	7.4	325.2	325.2	0.0	1.0	24.5	5.
23.9	81.2	7959.3	375.0	-26.1	-26.6	254.4	27.0	24.0	7.3	328.5	327.1	0.0	1.0	26.9	5.
25.4	85.4	8444.8	350.0	-29.8	-29.3	256.7	27.4	24.7	6.3	328.5	324.5	0.0	1.0	29.4	5.
27.0	90.5	8949.2	325.0	-33.2	-31.3	257.7	31.8	31.2	6.2	330.6	330.8	0.0	1.0	32.4	5.
28.4	94.2	9447.3	300.0	-37.2	-34.3	256.0	34.3	34.1	6.5	332.9	333.0	0.0	7.7	36.2	6.1
31.3	98.5	10433.8	275.0	-41.0	-39.9	251.5	39.2	42.8	13.9	335.8	99.9	99.9	99.9	40.6	6.1
33.6	102.5	10785.1	250.0	-46.0	-46.0	247.9	46.2	46.7	17.4	337.7	99.9	99.9	99.9	46.5	6.1
36.1	109.0	11474.7	225.0	-52.0	-59.9	247.7	46.7	46.7	17.8	338.8	99.9	99.9	99.9	53.4	6.1
38.9	114.8	12228.4	200.0	-58.3	-66.9	247.4	38.1	15	14.6	340.5	99.9	99.9	99.9	60.3	6.1
41.7	120.9	13057.1	175.0	-63.0	-74.9	250.0	41.0	32.6	14.3	345.9	99.9	99.9	99.9	67.4	6.1
45.3	127.5	14012.2	150.0	-60.0	-66.9	256.6	33.5	32.6	7.4	346.7	99.9	99.9	99.9	74.7	6.1
49.1	134.9	15147.4	125.0	-60.9	-66.9	253.0	34.1	32.6	10.0	348.7	99.9	99.9	99.9	83.0	6.1
53.0	142.0	16312.5	100.0	-67.2	-66.9	244.4	20.1	20.0	2.0	358.0	99.9	99.9	99.9	90.2	6.1
56.8	150.5	17435.7	75.0	-67.7	-66.9	182.3	4.6	0.5	4.6	430.9	99.9	99.9	99.9	96.1	6.1
60.7	159.5	18751.9	50.0	-57.4	-66.9	69.7	17.3	-2.6	-2.7	508.3	99.9	99.9	99.9	99.1	6.1
64.1	169.0	20211.0	25.0	-50.8	-66.9	99.9	99.9	99.9	99.9	638.7	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 4 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 201
OEL RIO, TEX
23 APRIL 1975
2315 GMT

TIME MIN	CATCT	WEIGHT GEM	PRES MB	TEMP DEG C	CEM PT DEG C	DIR D	SPEED M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MX RTD CM/SEC	RM PCT	RANGE KM	AZ DEG
0.0	8.9	314.0	969.8	32.6	18.4	140.0	9.7	-3.7	310.4	348.9	13.9	43.0	0.9	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	10.7	498.6	975.0	29.0	17.0	140.6	7.2	-3.9	308.4	348.3	13.0	48.5	0.3	337
1.5	13.0	735.6	925.0	27.0	15.3	140.3	6.6	-4.2	308.7	343.6	12.6	51.6	0.7	324
2.2	15.4	977.4	905.0	24.7	13.3	136.1	6.4	-5.8	308.6	342.6	12.3	54.2	1.0	327
3.1	17.8	1223.8	875.0	22.2	11.1	128.3	9.1	-7.2	308.4	340.7	11.7	60.0	1.5	321
4.1	20.3	1475.3	850.0	19.8	12.7	126.1	9.7	-7.9	308.4	338.7	10.9	63.4	2.0	317
5.1	22.8	1732.6	825.0	19.0	7.7	132.5	9.2	-6.6	308.4	332.7	8.1	69.0	2.5	310
6.0	25.4	1996.9	800.0	18.4	3.1	181.1	3.2	0.1	312.6	320.1	6.0	34.0	2.7	316
6.9	27.6	2269.3	775.0	18.0	0.3	248.3	6.3	5.7	313.8	320.8	5.1	30.4	2.8	311
8.0	30.7	2549.0	750.0	14.9	-3.2	262.7	11.0	10.9	315.5	327.7	4.0	25.1	2.5	317
9.0	33.4	2836.9	725.0	14.9	-6.0	262.2	12.0	11.9	316.4	328.3	3.9	26.8	2.4	350
9.9	36.0	3132.1	700.0	12.2	-9.6	258.2	11.9	11.5	316.5	327.5	3.6	28.3	2.4	7
11.0	38.9	3435.5	675.0	9.5	-7.7	247.8	11.9	11.0	316.7	326.6	3.2	24.8	2.8	20
11.8	41.5	3747.3	650.0	7.1	-9.3	241.4	13.3	11.7	317.4	326.5	2.9	29.9	3.1	24
12.0	44.4	4068.4	625.0	4.7	-12.0	237.5	14.5	12.2	318.1	325.7	2.4	29.5	4.1	34
14.1	47.5	4355.3	600.0	1.8	-16.7	238.3	16.0	13.6	318.5	325.0	2.0	28.1	5.1	34
15.4	50.5	4740.9	575.0	-0.8	-17.0	239.2	16.0	15.5	319.2	324.8	1.8	28.1	6.4	42
16.8	53.6	5094.1	550.0	-3.2	-19.2	238.9	18.6	16.2	320.5	325.4	1.5	27.7	7.3	46
18.0	56.6	5460.3	525.0	-6.2	-20.0	238.0	17.2	14.7	321.1	324.6	1.0	22.9	9.2	47
19.3	60.0	5836.4	500.0	-9.5	-20.8	241.2	16.7	14.6	321.5	324.4	0.8	22.8	10.5	46
20.5	63.4	6233.5	475.0	-12.4	-30.8	248.3	18.1	16.3	322.7	324.8	0.6	19.7	11.7	51
21.7	66.7	6644.1	450.0	-15.5	-29.0	248.8	20.8	19.2	323.8	320.4	0.8	30.3	13.0	52
23.1	70.3	7072.6	425.0	-19.2	-27.3	258.2	22.7	21.7	324.8	327.7	0.9	48.3	14.9	54
24.6	73.9	7520.3	400.0	-22.9	-32.3	258.1	23.1	22.4	325.3	327.5	0.6	41.7	16.5	57
26.3	77.5	7990.4	375.0	-26.3	-30.5	258.1	27.5	26.7	326.8	329.6	0.8	67.4	19.2	60
28.1	81.7	8485.8	350.0	-29.9	-38.4	253.4	28.4	27.2	328.4	329.8	0.4	44.0	22.1	62
29.8	85.7	9009.9	325.0	-33.4	-43.4	253.2	32.0	30.5	329.4	331.5	0.2	35.0	25.2	63
31.9	90.0	9567.4	300.0	-37.4	-48.5	256.5	32.6	30.9	330.4	331.2	0.1	29.8	29.1	65
33.9	94.8	10162.1	275.0	-42.1	99.9	251.9	34.3	32.0	335.3	335.9	99.9	99.9	33.2	67
36.0	99.4	10800.0	250.0	-47.3	99.9	249.4	36.1	33.8	338.8	339.9	99.9	99.9	37.8	67
38.4	104.4	11487.9	225.0	-53.0	99.9	252.4	40.6	38.7	337.3	339.9	99.9	99.9	43.2	67
41.1	110.2	12236.6	200.0	-58.0	99.9	249.3	39.9	37.4	339.4	339.9	99.9	99.9	49.6	67
43.9	115.8	13064.4	175.0	-63.9	99.9	258.2	36.3	35.5	344.5	339.9	99.9	99.9	56.1	68
47.1	122.3	14011.5	150.0	-62.8	99.9	258.1	31.0	29.5	341.8	339.9	99.9	99.9	62.2	66
51.0	125.7	15127.4	125.0	-66.9	99.9	249.5	30.0	28.1	331.9	339.9	99.9	99.9	70.0	66
55.3	137.3	16468.5	100.0	-68.8	99.9	239.3	18.2	15.6	339.8	339.9	99.9	99.9	75.6	66
60.7	145.3	18174.1	75.0	-69.4	99.9	265.5	10.0	9.9	427.4	339.9	99.9	99.9	81.7	66
66.6	154.5	20649.1	50.0	-60.8	99.9	214.0	8.2	4.7	500.2	339.9	99.9	99.9	84.9	69
80.6	164.3	25072.2	25.0	-63.4	99.9	165.3	2.0	-0.5	631.7	339.9	99.9	99.9	85.4	68

9 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 9 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 99 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 265
MIDLAND, TEX23 APRIL 1978
2315 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	12.8	873.0	908.9	31.7	-1.2	280.0	9.3	8.7	3.2	313.8	325.5	3.9	12.0	0.0	0.
0.3	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.2	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.5	13.3	961.1	900.0	30.3	8.4	249.0	10.4	9.8	3.6	313.9	336.2	7.7	26.4	0.3	86.
1.8	15.5	1211.5	875.0	27.5	6.1	252.4	10.4	9.9	3.1	313.4	333.0	6.8	25.5	0.4	90.
2.1	17.8	1466.6	850.0	24.9	3.9	257.7	11.2	10.9	2.4	313.1	330.6	6.0	25.6	0.9	78.
2.4	20.2	1726.9	825.0	22.2	1.7	252.8	10.9	10.4	3.2	312.7	328.2	5.3	25.8	1.4	77.
2.7	22.5	1992.7	800.0	19.7	0.2	247.3	10.5	9.6	4.0	312.6	327.2	4.9	26.9	1.9	75.
3.0	25.0	2258.6	775.0	17.3	-1.7	243.3	10.0	8.9	4.5	312.0	326.0	4.4	27.2	2.4	73.
3.3	27.3	2524.6	750.0	14.0	-4.3	238.4	11.1	9.5	5.8	312.3	323.4	3.7	27.8	3.2	70.
3.6	30.0	2827.0	725.0	11.3	-6.5	237.8	13.6	11.5	7.2	312.2	322.1	3.3	28.2	4.3	67.
3.9	32.8	3119.0	700.0	9.0	-8.1	242.8	15.5	13.8	7.1	312.8	321.8	3.0	29.0	4.9	65.
4.2	35.3	3418.7	675.0	6.5	-10.4	245.4	18.2	16.5	7.6	312.3	321.2	2.6	28.5	5.4	63.
4.5	37.9	3726.8	650.0	4.4	-12.8	244.5	21.4	14.3	9.2	312.2	321.0	2.2	27.2	6.7	60.
4.8	40.6	4035.0	625.0	2.4	-15.4	243.3	24.6	22.0	11.1	315.4	321.2	1.8	25.5	7.7	58.
5.1	43.4	4374.4	600.0	1.4	-16.3	243.0	28.6	22.8	11.6	317.9	321.6	1.8	25.2	9.0	55.
5.4	46.4	4715.6	575.0	-1.1	-18.4	247.9	22.9	21.2	8.6	318.9	323.9	1.6	25.3	10.5	53.
5.7	49.3	5058.5	550.0	-3.8	-20.7	259.3	22.4	22.0	4.1	316.7	324.0	1.3	25.5	12.0	50.
6.0	52.4	5434.1	525.0	-6.2	-22.7	261.1	24.3	25.0	3.8	321.1	325.0	1.2	25.6	13.8	48.
6.3	55.6	5813.5	500.0	-9.5	-25.5	261.8	24.2	26.3	3.5	321.5	324.7	1.0	25.7	15.9	45.
6.6	58.9	6206.7	475.0	-13.5	-28.9	262.5	26.5	26.3	3.5	321.3	323.9	0.7	25.9	18.2	42.
6.9	62.1	6615.1	450.0	-16.9	-31.8	252.2	28.5	27.2	4.7	324.0	324.0	0.6	26.0	20.5	40.
7.2	65.6	7024.4	425.0	-19.7	-34.1	249.5	30.6	28.7	10.7	323.8	325.5	0.5	26.1	22.9	37.
7.5	69.1	7499.2	400.0	-23.2	-37.1	249.8	32.5	30.5	11.2	328.9	328.2	0.4	26.3	25.9	34.
7.8	72.7	7958.4	375.0	-26.8	-40.3	251.9	30.7	29.2	9.6	328.0	327.1	0.3	26.4	29.4	31.
8.1	76.7	8432.2	350.0	-30.9	-43.8	253.1	32.6	31.2	5.3	327.1	327.9	0.2	26.6	32.9	28.
8.4	80.4	8973.9	325.0	-35.0	-47.4	251.6	29.7	28.2	9.4	328.4	329.0	0.2	26.8	36.3	25.
8.7	84.7	9526.2	300.0	-40.3	-50.9	250.9	29.1	27.5	9.5	328.5	329.9	99.9	99.9	39.7	22.
9.0	89.0	10112.2	275.0	-45.0	-54.9	251.9	36.8	34.9	11.5	330.0	329.9	99.9	99.9	43.7	19.
9.3	94.0	10745.4	250.0	-48.5	-58.9	250.1	39.1	36.7	13.3	333.9	329.9	99.9	99.9	49.3	16.
9.6	99.3	11430.2	225.0	-53.8	-63.9	249.8	44.9	42.1	15.5	336.1	329.9	99.9	99.9	55.1	13.
9.9	104.3	12178.1	200.0	-58.8	-68.9	250.0	43.4	40.8	14.8	338.7	329.9	99.9	99.9	61.8	10.
10.2	110.2	13015.0	175.0	-64.7	-74.9	250.1	38.7	35.4	13.2	351.4	329.9	99.9	99.9	68.3	7.
10.5	116.7	13975.9	150.0	-69.7	-80.9	249.3	34.3	31.4	13.6	365.6	329.9	99.9	99.9	75.3	4.
10.8	124.3	15104.6	125.0	-74.4	-86.9	250.5	37.5	35.4	12.6	378.6	329.9	99.9	99.9	83.1	1.
11.1	132.3	16459.6	100.0	-79.3	-92.9	251.7	30.5	30.5	3.3	401.6	329.9	99.9	99.9	92.9	71.
11.4	141.0	18273.8	75.0	-85.4	-99.9	250.7	9.8	9.3	3.3	436.9	329.9	99.9	99.9	97.7	71.
11.7	150.5	20750.3	50.0	-85.7	-99.9	242.6	4.9	4.4	2.3	512.4	329.9	99.9	99.9	101.9	71.
12.0	160.5	23164.3	25.0	-91.1	-99.9	86.6	2.5	-2.3	-1.0	630.1	329.9	99.9	99.9	103.2	70.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 304
MATTERAS, NC

23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	3.6	4.0	1025.5	19.7	19.5	250.0	5.2	4.9	1.8	292.1	318.6	10.2	72.0	0.0	0.
0.8	5.8	220.2	1300.0	18.0	11.3	222.3	13.5	9.1	10.0	292.3	314.6	8.5	84.9	0.6	41.
1.6	8.0	436.6	975.0	16.2	10.4	216.3	15.1	9.5	11.7	292.6	314.1	8.2	84.3	1.2	41.
2.4	10.2	657.3	950.0	14.3	10.0	210.0	15.0	9.0	12.0	292.8	314.2	8.1	75.2	1.9	40.
3.1	12.3	882.2	925.0	12.3	10.5	217.7	15.2	9.3	12.0	292.9	315.8	8.7	69.2	2.6	39.
3.8	14.6	1111.5	900.0	10.0	9.3	216.9	15.9	9.6	12.0	292.9	314.6	8.2	95.2	3.3	39.
4.5	16.7	1342.6	875.0	7.8	6.0	217.9	14.3	8.8	11.3	292.7	310.7	6.8	88.5	3.9	39.
5.4	19.1	1583.6	850.0	5.4	-7.2	231.7	12.8	10.0	7.9	292.1	299.5	1.8	39.8	4.6	39.
6.2	21.3	1824.9	825.0	7.0	-12.4	243.4	11.5	10.3	5.1	290.3	301.5	1.0	23.5	5.2	41.
7.1	23.7	2080.9	800.0	5.1	-9.3	248.4	8.2	7.7	3.0	290.9	303.7	2.4	34.6	5.6	43.
8.0	26.0	2338.6	775.0	3.1	-7.0	262.2	7.3	7.2	1.0	290.5	305.9	2.9	47.4	6.0	45.
9.0	28.6	2604.0	750.0	1.4	-7.3	288.9	5.9	5.6	-1.9	290.5	307.0	2.9	52.0	6.3	49.
10.9	31.1	2876.2	725.0	0.1	-10.2	295.7	3.9	3.5	-1.7	290.7	303.7	1.3	25.3	6.4	51.
11.0	33.7	3157.1	700.0	-0.7	-39.0	279.3	3.2	3.2	-0.5	301.7	302.4	0.2	4.0	6.4	52.
12.8	36.2	3446.6	675.0	-1.9	-51.1	256.7	4.9	4.8	1.0	303.5	303.7	0.0	1.0	6.4	53.
13.7	38.9	3745.5	650.0	-3.1	-37.2	262.3	7.2	7.2	1.0	305.4	306.3	0.3	5.4	6.9	54.
14.7	41.5	4055.4	625.0	-4.3	-37.7	263.5	8.7	8.7	1.0	307.5	308.7	0.4	7.9	7.4	54.
15.8	44.3	4375.5	600.0	-6.7	-38.2	270.5	10.0	10.0	-0.1	308.4	309.5	0.3	8.2	7.9	58.
16.9	47.2	4706.7	575.0	-8.2	-38.2	276.6	13.6	13.3	-1.5	310.3	311.4	0.3	8.3	8.4	61.
18.2	50.2	5055.3	550.0	-10.4	-38.2	281.4	14.6	14.3	-2.9	311.7	312.9	0.3	10.9	9.2	61.
19.6	53.1	5467.0	525.0	-12.9	-37.1	276.2	14.7	14.5	-2.4	312.9	313.9	0.3	11.0	10.2	64.
20.9	56.0	5777.2	500.0	-15.2	-31.7	276.1	15.0	14.9	-1.6	314.6	315.4	0.5	22.7	11.3	71.
22.3	59.4	6133.0	475.0	-17.9	-27.5	282.3	15.7	15.3	-3.3	315.9	316.7	0.8	42.7	12.3	72.
23.6	62.0	6566.3	450.0	-19.0	-37.4	286.2	18.2	17.5	-5.1	318.4	320.6	0.3	18.0	13.5	77.
24.3	65.6	6989.3	425.0	-22.6	-31.9	293.0	17.7	16.3	-6.9	320.0	323.1	0.6	42.4	14.8	80.
26.2	73.0	7432.2	400.0	-24.9	-28.4	306.6	21.9	17.6	-13.0	323.6	325.7	0.9	72.6	15.9	83.
27.7	76.8	7898.5	375.0	-28.5	-32.6	308.0	28.0	22.5	-18.7	323.9	328.2	0.7	67.6	17.4	85.
29.3	80.8	8389.0	350.0	-32.3	-38.8	312.0	31.1	23.1	-20.8	325.2	328.5	0.4	51.9	19.5	93.
31.0	85.0	8906.6	325.0	-37.1	-42.9	313.9	30.3	22.0	-20.8	325.5	328.5	0.3	54.2	22.0	94.
32.9	89.2	9454.3	300.0	-41.8	99.9	317.2	25.9	17.6	-19.0	325.4	329.9	99.9	99.9	24.2	102.
34.9	94.0	10036.6	275.0	-47.5	99.9	314.1	25.0	18.0	-17.4	324.5	329.9	99.9	99.9	26.3	104.
37.0	98.8	10659.1	250.0	-53.2	99.9	315.2	26.9	20.0	-19.1	327.0	329.9	99.9	99.9	29.3	104.
39.4	104.0	12056.1	200.0	-63.7	99.9	310.6	37.3	28.3	-20.6	327.6	329.9	99.9	99.9	32.5	111.
41.9	110.0	12874.4	175.0	-63.5	99.9	316.4	32.7	22.5	-20.3	331.9	329.9	99.9	99.9	36.6	114.
44.9	116.3	13625.5	150.0	-62.0	99.9	302.5	34.9	20.4	-23.7	343.1	329.9	99.9	99.9	42.2	117.
48.7	123.3	14961.4	125.0	-60.9	99.9	311.6	40.0	29.9	-24.5	384.7	329.9	99.9	99.9	47.6	118.
52.6	130.3	16339.3	100.0	-65.5	99.9	327.4	25.2	13.6	-21.3	401.1	329.9	99.9	99.9	55.4	120.
58.1	139.3	18079.3	75.0	-65.6	99.9	352.2	7.1	0.2	-7.1	435.3	329.9	99.9	99.9	63.7	121.
65.9	147.7	20589.7	50.0	-55.3	99.9	319.5	10.1	6.5	-7.6	503.8	329.9	99.9	99.9	71.0	124.
77.9	156.3	25023.6	25.0	-52.0	99.9	353.0	1.0	0.1	-1.0	635.7	329.9	99.9	99.9	74.9	125.

** BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 311
ATHENS, GA23 APRIL 1975
2315 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCOMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	0.0	246.0	992.9	23.3	15.6	190.0	5.7	1.0	5.6	298.6	328.7	11.3	62.0	0.0	0.
0.9	5.3	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
1.0	8.2	404.3	975.0	21.6	12.9	178.0	8.7	-0.2	8.7	298.2	324.0	9.6	57.5	0.3	1.
1.1	10.4	625.4	950.0	19.9	12.3	184.5	9.4	0.7	9.4	298.6	324.3	9.6	61.9	0.6	1.
2.0	12.5	658.7	925.0	17.5	12.0	191.0	9.1	1.7	8.9	298.5	324.2	9.6	70.3	1.1	4.
2.7	16.8	1092.3	900.0	15.3	11.4	195.7	6.7	2.4	8.4	298.6	323.9	9.5	77.3	1.5	7.
3.7	18.9	1330.8	875.0	13.1	9.2	201.3	11.3	4.1	10.5	298.6	321.3	8.4	77.2	2.0	10.
4.6	19.3	1574.4	850.0	11.2	8.2	206.1	14.6	6.9	13.1	298.9	320.9	8.1	82.0	2.7	13.
5.4	21.5	1823.7	825.0	9.3	7.8	213.0	12.7	6.9	10.7	299.5	321.5	8.1	89.8	3.4	17.
6.5	23.9	2077.9	800.0	6.5	5.5	213.8	12.8	7.1	10.6	299.0	319.4	7.1	93.2	4.1	20.
7.4	26.1	2236.3	775.0	5.1	4.1	218.6	13.3	8.3	10.4	300.2	318.6	6.7	93.1	4.8	22.
8.3	28.7	2604.8	750.0	2.4	1.5	227.2	13.9	10.2	9.5	300.0	315.8	5.7	93.8	5.5	25.
9.1	31.2	2877.9	725.0	-0.9	-1.9	239.0	13.8	11.9	7.1	298.7	303.8	1.8	36.2	6.0	27.
9.9	33.5	3155.7	700.0	1.8	-28.8	261.2	13.7	13.6	2.1	304.5	306.2	0.5	8.6	6.7	32.
11.0	36.3	3452.4	675.0	0.1	-5.4	278.5	15.3	15.2	-2.3	306.3	317.4	3.8	68.4	7.1	39.
12.3	39.0	3753.0	650.0	-1.6	-2.2	283.6	16.1	15.6	-3.8	307.8	322.3	5.0	95.2	7.8	47.
13.5	41.6	4066.1	625.0	-2.9	-4.0	286.8	15.0	14.3	-4.3	309.7	323.1	4.6	91.9	8.4	53.
14.7	44.4	4389.1	600.0	-4.3	-6.6	286.2	15.3	14.7	-4.3	311.6	323.2	3.9	83.9	9.0	59.
15.7	47.3	4724.5	575.0	-5.5	-10.4	280.3	15.4	15.2	-2.9	313.9	323.1	3.0	68.3	9.6	63.
16.9	50.2	5071.8	550.0	-6.0	-12.3	270.1	15.1	15.1	-0.0	314.5	323.2	2.7	71.5	10.7	66.
18.1	53.1	5322.0	525.0	-10.4	-12.6	276.4	14.2	14.1	-1.6	316.2	324.8	2.8	83.6	11.7	68.
19.4	55.9	5607.9	500.0	-11.4	-14.6	283.3	13.4	13.0	-3.1	319.4	327.1	2.5	77.1	12.7	71.
20.8	59.1	6199.5	475.0	-14.1	-17.9	282.7	15.5	15.1	-3.4	320.7	327.1	2.0	72.6	13.6	73.
22.2	62.4	6608.3	450.3	-16.6	-20.4	285.8	14.5	17.4	-5.0	322.5	328.0	1.7	72.3	14.8	76.
23.6	65.8	7035.7	425.0	-19.5	-22.7	276.7	17.1	16.9	-2.6	324.0	328.8	1.4	75.7	16.2	79.
25.2	69.1	7483.8	400.0	-22.4	-25.9	274.1	18.8	18.8	-1.4	326.0	329.9	1.2	73.1	17.7	80.
26.7	72.6	7954.8	375.0	-24.7	-30.0	263.1	23.4	22.8	-5.3	326.8	329.7	0.8	70.4	19.6	82.
28.3	76.3	8430.2	350.0	-27.1	-34.0	284.3	25.2	24.4	-6.2	328.5	330.6	0.6	66.6	21.9	84.
30.0	80.1	8973.9	325.0	-34.1	-38.8	280.6	24.4	24.0	-4.5	329.6	331.1	0.4	61.7	25.2	86.
31.8	84.2	9528.4	300.0	-39.0	99.9	277.1	21.8	23.7	-3.3	330.3	330.9	99.9	99.9	26.7	87.
33.8	88.3	10118.2	275.0	-44.7	99.9	275.3	26.6	26.3	-4.3	330.5	330.9	99.9	99.9	29.7	88.
36.0	92.9	10758.1	250.0	-50.2	99.9	283.4	30.1	29.3	-7.0	331.4	330.9	99.9	99.9	33.4	90.
38.2	97.4	11427.2	225.0	-55.6	99.9	290.1	32.3	30.3	-11.1	333.3	330.9	99.9	99.9	37.5	91.
41.0	102.4	12171.1	200.0	-59.3	99.9	296.2	37.1	33.3	-16.4	338.8	330.9	99.9	99.9	43.3	95.
43.9	107.0	12937.9	175.0	-63.2	99.9	295.2	31.3	28.3	-13.3	345.7	330.9	99.9	99.9	49.7	97.
47.6	114.0	13955.3	150.0	-64.7	99.9	286.1	33.9	32.6	-9.4	360.9	330.9	99.9	99.9	56.1	99.
51.5	120.5	15096.8	125.0	-63.0	99.9	284.5	28.8	27.9	-7.2	369.9	330.9	99.9	99.9	63.5	100.
55.7	127.8	16482.4	100.0	-66.4	99.9	303.8	14.4	12.0	-8.0	432.2	330.9	99.9	99.9	69.1	101.
61.7	136.0	18168.4	75.0	-67.1	99.9	306.3	10.0	8.1	-5.9	439.6	330.9	99.9	99.9	74.5	102.
69.9	143.7	20552.2	50.0	-62.2	99.9	16.5	3.0	-0.4	-2.8	487.0	330.9	99.9	99.9	77.0	103.
84.8	152.3	25058.0	25.0	-52.8	99.9	323.9	7.3	4.3	-5.9	633.2	330.9	99.9	99.9	80.0	104.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC

23 APRIL 1975
2315 GMT

TIME MIN	CNCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT CG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX WTD GM/KG	RM PCT	RANGE KM	AZ DG
0-0	7-2	275-0	989-6	22-8	11-8	200-0	7-7	2-6	7-2	298-0	321-8	8-9	50-0	0-0	0
0-3	6-3	59-9	1000-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
0-6	6-6	404-2	975-0	21-4	6-5	208-2	11-5	5-4	10-2	297-5	314-6	6-2	30-1	0-3	25
1-2	16-8	628-3	950-0	19-5	6-2	209-5	12-9	6-4	11-3	297-8	315-0	6-3	41-0	0-8	27
2-0	13-3	857-0	925-0	17-4	5-7	213-3	14-2	7-8	11-9	298-0	315-0	6-2	46-1	1-5	29
2-9	15-7	1000-1	900-0	14-9	6-1	213-3	16-0	8-8	13-4	297-7	315-5	6-6	55-8	2-2	30
3-5	18-1	1327-0	875-0	12-7	5-5	214-4	16-7	9-5	13-8	297-8	315-5	6-5	61-4	2-9	31
4-3	20-5	1576-5	850-0	10-4	4-9	214-4	16-8	10-8	12-9	297-9	315-5	6-4	66-7	3-7	32
5-2	23-1	1818-2	825-0	8-0	3-4	224-2	17-6	12-3	12-6	297-9	314-2	5-9	72-5	4-6	34
6-0	25-6	2071-7	800-0	5-9	2-0	224-6	18-6	13-5	12-9	298-2	313-5	5-6	78-1	5-5	36
7-0	28-2	2331-2	775-0	4-2	0-7	236-7	17-8	14-9	9-8	298-9	313-4	5-2	77-9	6-4	39
7-9	30-9	2598-0	750-0	4-8	-12-0	242-8	17-9	15-9	8-2	302-1	309-3	2-1	29-6	7-3	41
8-7	33-7	2874-3	725-0	4-1	-14-2	241-4	17-7	15-6	8-5	304-2	309-5	1-8	24-8	8-2	44
9-5	36-3	3159-3	700-0	1-9	-15-8	237-8	17-3	16-6	9-2	304-8	309-8	1-6	23-9	9-0	45
10-4	38-3	3450-4	675-0	-0-2	-17-9	240-9	16-8	14-7	8-2	305-5	309-8	1-4	24-8	9-9	46
11-3	42-0	3750-9	650-0	-2-7	-21-0	249-7	17-3	16-3	6-0	306-0	309-4	1-1	22-9	10-7	48
12-2	45-0	4060-3	625-0	-4-9	-28-8	255-8	17-9	17-4	4-4	306-9	308-7	0-6	13-3	11-7	50
13-2	48-1	4360-1	600-0	-6-8	-36-3	264-7	17-2	17-1	1-6	308-2	309-2	0-3	7-4	12-6	52
14-3	51-1	4711-2	575-0	-7-9	-45-9	269-2	19-0	19-0	0-3	310-9	316-5	1-8	48-9	13-6	55
15-7	54-4	5037-5	550-0	-8-1	-57-2	281-4	23-7	23-3	-4-7	314-9	325-8	3-6	95-4	15-0	60
16-7	57-5	5418-1	525-0	-10-2	-11-1	287-1	25-6	24-4	-7-5	316-6	326-2	3-1	92-8	16-1	52
17-8	60-9	5792-3	500-0	-13-3	-13-6	292-6	25-1	23-2	-6-7	317-2	325-5	2-7	97-5	17-2	67
18-8	64-5	6185-1	475-0	-15-5	-15-7	293-5	25-4	23-3	-10-1	319-0	326-5	2-4	98-7	18-4	71
20-0	67-9	6568-9	450-0	-17-9	-18-3	293-9	24-5	22-4	-9-9	320-9	327-3	2-0	98-4	19-7	74
21-3	71-4	7016-1	425-0	-20-9	-24-6	286-1	25-8	24-8	-7-1	322-3	326-5	1-2	72-9	21-2	77
22-6	75-3	7459-3	400-0	-24-2	-30-6	281-0	24-5	24-1	-4-7	323-6	326-2	0-7	55-2	23-3	80
24-0	78-5	7927-1	375-0	-27-4	-30-8	282-4	19-0	18-6	-4-1	325-4	328-1	0-8	72-4	24-8	81
25-1	83-4	8420-5	350-0	-31-1	-35-6	276-9	21-7	21-5	-2-6	326-8	328-6	0-5	64-4	26-3	82
26-6	87-6	8901-5	325-0	-35-5	-39-3	274-2	23-1	23-3	-1-7	327-8	329-2	0-4	67-5	28-0	83
28-0	92-2	9493-5	300-0	-40-2	-45-9	281-1	20-7	20-3	-4-0	328-6	329-9	99-9	99-9	30-1	85
29-6	96-8	10079-8	275-0	-45-6	-51-9	283-4	27-2	26-4	-6-3	329-2	329-9	99-9	99-9	32-1	86
31-3	101-8	10777-9	250-0	-50-8	-58-9	283-1	28-7	28-0	-6-5	330-6	329-9	99-9	99-9	34-7	87
33-0	107-4	11364-1	225-0	-57-0	-64-9	272-6	30-4	30-4	-1-4	331-1	329-9	99-9	99-9	37-5	88
34-8	113-0	12119-7	200-0	-61-8	-71-9	268-3	34-1	32-4	-10-7	334-5	329-9	99-9	99-9	41-2	89
37-0	119-3	12942-2	175-0	-64-1	-78-9	295-0	35-6	32-1	-15-1	334-2	329-9	99-9	99-9	45-2	91
39-6	126-0	13902-9	150-0	-57-5	-85-9	258-8	39-2	34-4	-18-9	331-1	329-9	99-9	99-9	50-4	94
43-1	133-7	15049-3	125-0	-60-9	-94-9	306-5	31-3	25-2	-18-6	336-8	329-9	99-9	99-9	57-5	98
47-6	141-3	16406-7	100-0	-65-3	-99-9	293-0	28-9	26-0	-11-3	353-9	329-9	99-9	99-9	63-3	100
50-9	155-9	99-9	75-0	-69-9	-99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
54-9	99-9	99-9	50-0	-69-9	-99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
59-9	99-9	99-9	25-0	-69-9	-99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 327
NASHVILLE, TENN23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	QFW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DC K	E POT Y DC K	MX RTD CM/KG	RM PCT	RANGE KM	AZ DG
0.1	5.2	180.0	995.7	22.5	14.9	180.0	3.6	0.0	3.6	267.6	326.0	10.8	62.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
0.5	6.5	363.4	973.0	22.5	13.9	191.3	9.8	1.9	9.6	290.2	326.9	10.4	58.4	6.3	4.
1.4	8.5	580.1	950.0	21.0	12.9	190.9	12.1	4.1	11.4	299.9	326.4	9.9	59.6	6.9	11.
2.1	10.5	819.6	925.0	19.0	12.0	203.3	14.8	5.9	13.6	300.0	325.8	9.6	63.9	1.4	15.
2.9	12.4	1054.4	900.0	16.9	11.1	206.4	17.2	7.7	15.4	300.2	325.2	9.3	68.5	2.2	12.
3.6	14.5	1294.2	875.0	14.6	10.5	208.2	20.1	9.5	17.7	300.2	325.0	9.2	76.4	3.0	21.
4.5	16.4	1539.0	850.0	12.8	10.7	216.3	20.7	13.1	16.0	300.8	326.7	9.6	87.0	4.0	23.
5.2	18.6	1789.6	825.0	11.2	9.9	236.0	22.3	18.5	12.5	301.6	326.4	9.7	85.7	4.9	22.
6.0	20.7	2246.6	800.0	10.2	5.7	249.6	22.9	21.4	8.0	303.0	323.0	7.2	73.8	5.7	34.
6.4	23.0	2310.6	775.0	9.6	2.9	252.4	22.7	21.7	6.3	304.9	322.1	6.1	62.9	6.7	41.
7.4	25.2	2562.0	750.0	7.1	1.8	252.3	22.5	21.4	6.9	305.0	321.5	5.8	69.9	7.3	43.
8.0	27.4	2860.2	725.0	5.1	1.5	253.0	21.1	20.2	6.2	305.4	322.6	5.9	77.9	9.1	51.
10.0	29.4	3146.1	700.0	3.1	-2.6	255.9	18.7	16.1	4.5	306.5	319.7	4.5	66.1	10.4	53.
11.0	32.3	3440.5	675.0	1.8	-3.1	265.3	16.7	16.7	1.4	308.2	321.4	4.5	70.4	11.4	55.
12.2	34.9	3744.1	650.0	-0.5	-0.4	276.3	17.4	17.2	-2.8	309.1	325.2	5.6	97.9	12.3	52.
13.2	37.2	4057.5	625.0	-2.1	-2.4	283.3	18.4	17.9	-4.2	310.6	325.3	5.0	95.6	13.1	62.
14.2	39.9	4380.8	600.0	-4.7	-8.0	282.1	20.4	20.0	-4.3	311.1	321.6	3.5	77.8	14.0	65.
15.1	42.3	4715.9	575.0	-5.9	-10.7	282.0	21.2	20.8	-4.4	313.4	322.4	2.9	69.0	14.9	64.
16.3	45.1	5062.3	550.0	-8.3	-12.5	287.9	21.3	20.2	-6.5	315.5	322.7	2.7	71.7	16.2	71.
17.5	47.9	5422.2	525.0	-10.3	-21.0	284.3	23.6	22.7	-6.7	316.2	320.6	1.4	41.4	17.5	74.
18.4	50.7	5766.2	500.0	-13.3	-25.4	281.2	24.6	24.1	-4.6	316.9	320.1	1.0	35.2	19.1	77.
20.2	53.8	6144.9	475.0	-15.4	-30.3	277.8	24.9	24.7	-3.4	318.9	321.1	0.6	26.3	21.1	70.
21.7	56.6	6500.7	450.0	-18.7	-33.6	272.5	22.7	22.7	-1.0	319.9	324.1	1.3	67.1	23.1	41.
23.1	59.9	7014.9	425.0	-21.2	-45.0	270.1	24.5	24.5	-0.0	321.8	322.4	0.2	9.9	25.2	81.
24.6	63.3	7459.1	400.0	-24.8	-56.1	277.8	21.5	21.3	-2.9	322.7	324.9	0.0	3.6	27.1	82.
25.3	66.6	7925.3	375.0	-28.2	-57.8	269.9	26.9	26.9	0.0	324.2	324.4	0.0	4.0	29.6	83.
27.9	70.1	8416.7	350.0	-31.5	-59.5	269.2	28.6	28.6	0.4	326.2	326.3	0.0	4.4	32.1	84.
29.7	73.8	8937.0	325.0	-35.6	-61.7	274.1	26.9	26.9	-1.9	327.6	327.7	0.0	4.9	35.2	84.
31.7	77.8	9489.0	300.0	-39.8	-69.9	276.3	27.2	27.1	-3.0	329.2	329.9	99.9	99.9	38.4	45.
33.7	81.8	10077.9	275.0	-44.5	-99.9	271.1	33.3	33.3	-0.5	330.8	329.9	99.9	99.9	42.0	86.
35.9	86.0	10709.7	250.0	-49.1	-99.9	271.0	30.2	30.2	-0.5	333.1	329.9	99.9	99.9	46.2	87.
38.1	90.8	11392.2	225.0	-55.0	-99.9	271.5	35.2	35.2	-0.3	336.2	329.9	99.9	99.9	50.2	97.
40.6	95.8	12134.2	200.0	-60.4	-99.9	272.9	39.4	39.4	-2.0	337.2	329.9	99.9	99.9	55.9	87.
43.5	101.3	12959.5	175.0	-63.6	-99.9	275.9	45.6	45.6	-0.7	343.0	329.9	99.9	99.9	63.2	84.
46.8	107.5	13927.1	150.0	-57.0	-99.9	272.6	40.5	40.5	-1.8	371.9	329.9	99.9	99.9	71.3	64.
50.9	114.5	15075.2	125.0	-60.2	-99.9	273.9	39.3	39.3	-3.4	380.0	329.9	99.9	99.9	80.9	30.
55.3	122.5	16450.7	100.0	-64.2	-99.9	284.7	15.3	14.6	-3.9	390.8	329.9	99.9	99.9	88.0	91.
61.0	132.0	18177.0	75.0	-64.6	-99.9	300.3	14.7	12.7	-7.4	437.5	329.9	99.9	99.9	93.1	91.
64.4	142.0	20085.8	50.0	-59.8	-99.9	222.2	4.4	2.9	-3.2	502.7	329.9	99.9	99.9	94.7	91.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 19 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 340
LITTLE ROCK, ARK23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.6	79.0	1004.4	25.5	16.6	200.0	4.6	1.6	4.3	299.9	331.8	12.0	55.0	0.0	0.
0.2	6.0	117.7	1000.0	25.0	16.2	194.9	13.1	3.3	12.6	300.6	331.8	11.7	55.2	0.3	12.
1.0	8.2	340.3	975.0	23.9	15.5	196.1	11.2	3.3	11.3	306.6	331.8	11.4	55.0	0.6	14.
1.9	10.4	567.0	950.0	21.5	14.8	198.2	11.2	3.5	10.6	307.5	330.7	11.2	55.6	1.2	16.
2.5	12.5	797.8	925.0	19.3	14.3	202.9	11.3	4.4	10.4	300.6	330.6	10.9	72.8	1.8	17.
3.6	14.8	1033.0	900.0	17.0	13.6	212.1	9.8	5.2	8.3	300.5	329.9	10.5	80.2	2.4	14.
4.5	17.0	1273.0	875.0	14.6	13.1	221.6	11.2	7.4	8.1	300.8	329.8	10.5	86.9	2.9	23.
5.4	19.3	1518.1	850.0	12.8	10.6	226.9	11.9	8.7	8.1	300.8	326.5	9.5	91.7	3.4	27.
6.6	21.5	1768.9	825.0	11.5	10.2	228.9	15.3	11.6	10.1	304.0	327.9	9.5	91.7	4.4	31.
7.8	24.1	2026.4	800.0	10.3	9.0	244.6	15.8	14.2	6.8	303.3	326.2	9.1	91.9	5.4	36.
9.1	26.4	2291.0	775.0	9.2	8.0	242.2	19.3	17.0	9.0	304.9	329.0	8.7	91.9	6.0	42.
9.9	29.0	2552.5	750.0	7.6	6.3	241.6	19.9	17.5	9.5	305.9	329.3	8.1	91.8	7.6	44.
10.5	31.6	2842.0	725.0	6.2	5.0	243.0	18.1	14.1	8.2	307.2	329.6	7.6	92.0	8.5	44.
11.8	34.3	3125.3	700.0	3.9	-5.3	245.1	19.4	17.6	8.1	307.3	318.1	3.7	51.1	9.6	44.
12.6	36.8	3426.8	675.0	7.1	-6.0	250.0	18.7	17.6	6.4	314.0	324.9	3.6	38.8	16.5	50.
13.5	39.7	3735.9	650.0	4.6	-9.9	253.1	15.4	14.7	4.5	314.5	323.0	2.8	34.1	11.4	57.
14.6	42.3	4034.0	625.0	1.8	-6.8	252.8	14.7	14.1	4.4	315.0	326.1	3.7	52.6	12.2	53.
15.7	45.2	4381.5	600.0	-1.2	-8.1	248.4	15.9	14.7	5.8	315.1	325.7	3.5	59.5	13.2	55.
16.9	48.3	4713.6	575.0	-3.8	-12.2	247.0	18.9	17.7	6.6	317.1	321.7	1.3	28.6	15.5	57.
19.1	51.1	5065.3	550.0	-6.0	-21.1	249.7	20.3	19.9	4.1	317.8	321.3	1.2	31.9	16.9	56.
19.3	54.3	5431.6	525.0	-8.9	-22.6	258.4	20.3	21.5	2.7	318.3	320.8	0.8	25.1	18.3	50.
20.5	57.4	5807.4	500.0	-12.1	-28.2	262.9	21.7	21.5	1.6	318.1	320.9	0.8	35.9	20.1	67.
21.9	60.7	6194.9	475.0	-10.1	-27.7	267.4	23.5	23.5	1.1	319.3	319.4	0.0	1.0	21.9	64.
23.3	64.1	6601.5	450.0	-19.0	-42.0	267.4	23.9	23.9	-0.6	321.3	321.4	0.0	1.0	23.9	67.
24.7	67.5	7025.3	425.0	-21.5	-43.6	271.3	25.2	25.2	-0.2	321.4	321.4	0.0	1.0	25.2	67.
26.3	71.3	7460.6	400.0	-24.3	-45.4	270.4	27.3	27.3	-0.2	321.4	321.4	0.0	1.0	27.3	71.
28.0	75.0	7936.9	375.0	-27.4	-47.5	269.5	28.4	28.3	2.2	325.2	325.3	0.0	1.0	28.4	71.
29.5	79.0	8430.2	350.0	-31.1	-49.9	263.0	29.6	29.4	3.3	326.7	326.8	0.0	1.0	31.1	72.
31.1	83.0	8951.8	325.0	-35.0	-52.5	263.1	29.5	29.3	4.0	328.3	328.3	0.0	1.0	34.2	73.
32.9	87.2	9504.7	300.0	-39.8	-55.9	263.4	29.8	29.6	3.4	329.2	329.2	99.9	99.9	37.2	75.
34.9	92.0	10092.6	275.0	-45.2	-59.9	267.4	33.4	33.4	1.5	329.8	329.8	99.9	99.9	41.0	75.
37.2	96.6	10724.7	250.0	-48.8	-59.9	267.7	34.5	34.5	1.4	333.5	333.5	99.9	99.9	45.5	76.
39.7	101.8	11409.8	225.0	-53.7	-59.9	267.4	43.8	43.8	2.0	335.3	335.3	99.9	99.9	51.5	77.
42.3	107.5	12157.4	200.0	-59.7	-59.9	267.1	49.0	48.8	5.1	338.3	338.3	99.9	99.9	58.6	78.
45.4	113.5	12985.1	175.0	-62.0	-59.9	267.7	47.7	47.7	1.9	347.7	347.7	99.9	99.9	67.5	79.
49.2	120.0	13943.9	150.0	-66.6	-59.9	265.4	48.2	44.1	3.6	369.2	369.2	99.9	99.9	77.4	84.
51.6	127.3	15090.2	125.0	-60.2	-59.9	257.5	23.0	22.4	5.0	386.0	386.0	99.9	99.9	85.2	91.
57.6	135.3	16460.2	100.0	-65.2	-59.9	268.8	23.5	23.5	0.5	401.7	401.7	99.9	99.9	91.7	81.
63.2	143.3	18185.0	75.0	-71.0	-59.9	261.0	13.3	13.2	2.1	424.2	424.2	99.9	99.9	96.2	81.
71.2	152.0	20675.3	50.0	-58.6	-59.9	277.4	8.9	8.8	-1.1	505.5	505.5	99.9	99.9	99.4	81.
83.7	161.0	23117.4	25.0	-50.7	-59.9	319.3	9.2	6.0	-6.9	639.0	639.0	99.9	99.9	103.3	92.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 349
MONETTE, MO23 APRIL 1975
2315 GMT

TIME MIN	CNTCY	HEIGHT CMP	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	WX RTO CM/KG	RH PCT	RANGE KM	SL DEG	0
00	00	438.0	959.0	22.8	17.5	210.0	9.3	4.6	8.1	301.3	336.7	13.3	72.0	0.0	0.0	0.0
01	00	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
02	00	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
03	00	520.2	953.0	21.5	16.2	206.2	14.3	6.3	12.5	300.7	333.6	12.3	71.9	0.5	2.0	0.0
04	00	751.4	925.0	19.5	15.4	210.7	15.5	7.9	13.3	300.6	332.9	12.0	77.2	1.2	2.7	0.0
05	00	987.2	900.0	17.5	15.1	213.3	16.0	8.8	13.3	301.2	333.7	12.1	85.9	1.8	2.6	0.0
06	00	1227.8	875.0	15.3	13.8	214.6	17.1	9.7	14.1	301.1	331.8	11.4	91.4	2.4	3.0	0.0
07	00	1474.1	850.0	13.0	12.0	222.2	17.9	12.0	13.3	303.6	332.1	10.5	80.7	3.2	3.2	0.0
08	00	1727.6	825.0	14.9	9.8	225.7	17.2	12.3	12.1	305.6	331.3	9.3	71.5	4.2	3.5	0.0
09	00	1587.7	800.0	12.8	8.1	226.1	19.1	13.7	13.2	305.5	329.7	8.5	73.2	5.2	3.7	0.0
10	00	2254.2	775.0	10.8	6.0	229.4	15.4	11.7	10.6	306.5	327.9	7.6	72.3	6.1	3.9	0.0
11	00	2527.5	750.0	9.6	2.0	224.1	13.5	9.4	9.7	307.8	326.8	5.9	59.2	6.7	4.0	0.0
12	00	3097.2	700.0	5.5	-1.2	215.3	11.2	6.5	9.1	309.0	323.1	4.8	51.6	7.4	4.0	0.0
13	00	3393.6	675.0	3.1	-5.7	212.7	9.2	5.0	7.7	309.0	319.6	3.6	44.3	8.0	3.9	0.0
14	00	3658.9	650.0	2.0	-9.1	213.8	10.4	5.8	8.6	309.5	319.5	2.6	40.2	8.6	3.6	0.0
15	00	4014.4	625.0	0.1	-12.3	234.1	18.1	14.7	10.6	312.8	320.2	2.4	36.4	9.5	3.6	0.0
16	00	4340.3	600.0	-2.6	-6.8	246.2	19.5	17.8	11.0	313.6	325.1	3.8	38.8	10.6	3.9	0.0
17	00	4670.4	575.0	-5.7	-10.2	253.8	19.6	18.8	5.5	313.7	323.0	3.1	70.1	11.7	4.1	0.0
18	00	5023.2	550.0	-8.9	-12.1	252.5	20.8	19.9	6.3	313.8	322.4	2.8	78.3	14.2	4.7	0.0
19	00	5381.5	525.0	-11.8	-15.3	254.1	22.0	21.2	6.0	314.5	321.4	2.2	74.9	15.7	5.0	0.0
20	00	5722.8	500.0	-15.4	-22.1	299.9	99.9	99.9	99.9	316.7	319.7	0.9	56.8	99.9	93.6	0.0
21	00	6138.6	475.0	-17.3	-26.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	44.4	99.9	93.9	0.0
22	00	99.9	450.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
23	00	99.9	425.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
24	00	99.9	400.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
25	00	99.9	375.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
26	00	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
27	00	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
28	00	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
29	00	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
30	00	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
31	00	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
32	00	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
33	00	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
34	00	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
35	00	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
36	00	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
37	00	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
38	00	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
39	00	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
40	00	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 363
AMARILLO, TEX23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPH	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD CM/KG	MM PCT	RANGE KM	AZ DG
0-0	14-2	1055-0	882-8	28-7	1-9	230-0	8-3	6-4	5-3	311-4	320-1	5-0	20-0	0-0	Ca
00-0	00-0	1000-0	1000-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0
00-0	00-0	075-0	075-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0
00-0	00-0	050-0	050-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0
00-0	00-0	025-0	025-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0
00-0	00-0	000-0	000-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0	00-0
0-3	14-8	1173-0	875-0	25-5	-2-8	235-2	10-0	8-2	5-7	310-2	321-6	3-6	15-4	0-2	39
1-2	16-3	1425-9	850-0	22-7	-5-4	235-2	10-0	8-5	5-9	310-3	319-4	3-0	14-8	0-7	52
2-3	16-0	1683-8	825-0	20-2	-6-3	235-6	9-4	7-8	5-3	310-3	319-1	2-9	16-2	1-4	54
3-3	21-0	1947-6	800-0	17-6	-7-8	244-2	9-9	8-9	4-3	310-3	318-4	2-7	16-9	1-7	56
4-4	23-3	2217-2	775-0	14-9	-9-0	247-1	11-1	10-2	4-3	310-2	317-8	2-3	18-2	2-6	58
5-7	25-5	2493-0	750-0	12-0	-10-2	247-4	10-9	10-1	4-2	309-9	317-0	2-3	20-0	3-4	61
7-0	27-8	2775-2	725-0	9-3	-11-2	246-1	11-8	10-8	4-5	310-0	316-8	2-2	22-1	4-3	52
8-3	30-2	3064-5	700-0	6-6	-11-9	244-6	10-4	9-4	4-5	310-0	316-7	2-2	25-3	5-1	52
9-5	32-7	3351-6	675-0	4-1	-12-3	251-4	12-5	11-8	4-0	310-5	317-1	2-2	29-1	6-0	63
10-8	35-3	3660-8	650-0	1-1	-13-7	253-9	13-5	12-3	3-7	310-4	316-8	2-0	32-2	7-0	65
12-1	37-7	3980-8	625-0	-1-5	-16-4	251-9	14-7	13-9	4-6	310-5	316-2	1-7	31-1	8-0	66
13-2	40-3	4303-1	600-0	-2-4	-23-2	243-5	19-8	17-7	8-9	313-5	315-7	1-0	18-7	9-2	56
14-3	42-9	4642-7	575-0	-2-1	-29-5	237-8	24-0	20-6	12-8	317-6	319-5	0-6	10-0	10-6	55
15-4	45-7	4990-1	550-0	-5-1	-30-5	237-7	22-2	18-8	11-9	318-1	320-0	0-5	11-5	12-1	54
16-5	48-6	5337-4	525-0	-8-3	-31-0	241-1	19-9	17-4	9-6	318-5	320-4	0-5	14-0	13-2	54
17-8	51-4	5733-7	500-0	-11-6	-31-8	247-5	21-0	19-4	8-6	319-0	320-8	0-5	16-7	15-1	54
18-1	54-4	6124-6	475-0	-14-7	-32-9	248-8	22-1	20-6	8-0	319-6	321-6	0-5	19-3	16-8	54
20-5	57-4	6531-3	450-0	-18-3	-32-6	251-7	23-2	22-0	7-3	320-2	322-1	0-5	27-0	18-7	65
21-9	60-7	6955-0	425-0	-22-2	-35-1	250-9	24-8	23-5	8-1	320-5	322-1	0-4	29-8	20-7	66
23-3	64-1	7367-2	400-0	-25-9	-39-8	248-6	26-9	25-1	9-8	321-3	322-4	0-3	25-6	22-6	66
24-6	67-4	7861-7	375-0	-29-4	-43-1	248-5	29-8	27-7	10-9	322-0	323-4	0-2	25-1	25-1	66
26-2	71-0	8356-1	350-0	-33-3	-46-6	244-3	34-2	30-9	14-9	323-6	324-4	0-2	24-6	24-1	66
28-0	74-8	8867-9	325-0	-35-8	-50-1	242-9	33-7	30-0	15-3	327-2	327-7	0-1	21-3	31-7	66
29-9	76-3	9419-7	300-0	-39-8	-53-6	244-7	41-0	37-1	17-5	329-2	329-5	0-1	21-1	30-1	66
31-8	83-0	10008-9	275-0	-44-5	99-9	243-5	36-9	33-9	16-5	330-8	330-9	99-9	99-9	40-6	65
33-7	87-4	10639-8	250-0	-50-1	99-9	244-2	38-7	34-8	16-8	331-6	331-6	99-9	99-9	45-8	65
35-8	92-4	11320-6	225-0	-55-0	99-9	246-0	52-6	48-0	21-4	334-2	334-2	99-9	99-9	50-4	65
39-1	97-4	12025-3	200-0	-58-4	99-9	247-3	30-4	28-1	11-7	340-3	340-3	99-9	99-9	55-6	65
40-4	103-0	12907-2	175-0	-56-9	99-9	248-2	45-8	42-6	17-0	356-0	356-0	99-9	99-9	62-4	65
43-1	109-5	13882-0	150-0	-57-9	99-9	258-4	28-7	28-2	5-8	370-4	370-4	99-9	99-9	68-2	66
44-8	114-3	15030-5	125-0	-58-6	99-9	242-4	45-0	40-2	21-0	388-8	388-8	99-9	99-9	74-0	66
50-7	125-0	16417-1	100-0	-63-0	99-9	259-1	39-8	39-1	7-5	405-9	405-9	99-9	99-9	84-4	67
55-4	135-8	19189-8	75-0	-67-1	99-9	232-0	19-5	15-4	12-0	432-1	432-1	99-9	99-9	91-1	67
62-6	145-7	20707-9	50-0	-54-9	99-9	259-3	10-2	10-0	1-9	514-1	514-1	99-9	99-9	92-9	67
70-4	158-5	25180-1	25-0	-51-4	99-9	243-8	14-2	12-7	0-3	637-2	637-2	99-9	99-9	98-4	67

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 402
WALLOPS ISLAND, VA23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DEG C	CIN PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR RTO CM/KG	RH PCT	RANGE M	AZ DEG
0.0	4.4	4.0	1020.5	13.3	9.9	999.9	99.9	99.9	99.9	285.8	305.2	7.6	80.0	999.9	999.9
0.7	5.9	176.5	1000.0	20.4	10.0	999.9	99.9	99.9	99.9	294.6	315.2	7.7	51.5	999.9	999.9
1.4	6.1	325.3	975.0	20.4	8.7	999.9	99.9	99.9	99.9	296.7	316.4	7.3	47.6	999.9	999.9
2.1	10.2	619.1	950.0	18.7	8.0	999.9	99.9	99.9	99.9	297.1	316.4	7.1	49.7	999.9	999.9
2.9	12.3	647.2	925.0	16.7	7.4	999.9	99.9	99.9	99.9	297.3	316.3	7.0	54.2	999.9	999.9
3.7	14.6	1080.0	900.0	14.6	6.6	999.9	99.9	99.9	99.9	297.5	316.2	6.9	59.3	999.9	999.9
4.5	16.7	1317.4	875.0	12.3	6.2	999.9	99.9	99.9	99.9	297.5	316.0	6.8	64.4	999.9	999.9
5.2	19.0	1559.8	850.0	10.2	5.9	999.9	99.9	99.9	99.9	297.7	316.3	6.9	75.1	999.9	999.9
6.0	21.1	1807.8	825.0	8.2	6.2	999.9	99.9	99.9	99.9	298.2	317.9	7.2	87.8	999.9	999.9
6.9	23.6	2061.6	800.0	6.1	4.3	999.9	99.9	99.9	99.9	298.5	316.4	6.3	87.9	999.9	999.9
7.8	25.3	2321.5	775.0	5.2	3.9	999.9	99.9	99.9	99.9	298.9	310.5	3.7	51.9	999.9	999.9
8.6	28.4	2582.4	750.0	3.1	7.6	999.9	99.9	99.9	99.9	300.3	308.7	2.9	45.3	999.9	999.9
9.5	31.0	2861.9	725.0	0.9	7.1	999.9	99.9	99.9	99.9	300.6	309.8	3.1	53.1	999.9	999.9
10.5	33.8	3143.0	700.0	-1.6	-6.8	999.9	99.9	99.9	99.9	301.1	310.6	3.3	67.8	999.9	999.9
11.4	36.2	3432.4	675.0	-2.4	-7.2	999.9	99.9	99.9	99.9	303.3	312.9	3.3	69.7	999.9	999.9
12.3	38.0	3731.1	650.0	-4.3	-9.5	999.9	99.9	99.9	99.9	304.5	312.9	2.9	67.0	999.9	999.9
13.2	41.6	4039.4	625.0	-6.2	-14.6	999.9	99.9	99.9	99.9	305.6	311.7	2.0	52.6	999.9	999.9
14.2	44.5	4357.7	600.0	-7.9	-24.3	999.9	99.9	99.9	99.9	307.1	309.9	0.9	25.3	999.9	999.9
15.3	47.6	4687.7	575.0	-9.4	-25.0	999.9	99.9	99.9	99.9	309.1	311.9	0.9	26.7	999.9	999.9
16.5	50.5	5030.3	550.0	-11.2	-25.0	999.9	99.9	99.9	99.9	310.9	313.6	0.8	26.1	999.9	999.9
17.7	53.5	5325.4	525.0	-13.9	-27.0	999.9	99.9	99.9	99.9	311.8	314.4	0.8	31.9	999.9	999.9
18.9	56.6	5754.3	500.0	-16.3	-29.4	999.9	99.9	99.9	99.9	313.2	315.6	0.7	34.2	999.9	999.9
20.1	59.9	6138.4	475.0	-18.5	-23.7	999.9	99.9	99.9	99.9	315.1	319.0	1.2	63.6	999.9	999.9
21.4	63.4	6540.8	450.0	-20.4	-22.6	999.9	99.9	99.9	99.9	317.7	322.2	1.4	82.1	999.9	999.9
22.6	66.8	6961.6	425.0	-23.5	-25.8	999.9	99.9	99.9	99.9	318.9	322.5	1.1	81.0	999.9	999.9
23.9	70.4	7404.5	400.0	-25.1	-26.9	999.9	99.9	99.9	99.9	322.4	325.9	1.0	84.8	999.9	999.9
25.4	74.3	7870.1	375.0	-29.0	-30.6	999.9	99.9	99.9	99.9	324.3	326.0	0.6	85.9	999.9	999.9
27.0	78.3	8360.0	350.0	-33.0	-38.7	999.9	99.9	99.9	99.9	325.6	326.2	0.6	84.2	999.9	999.9
29.5	82.3	8977.3	325.0	-37.1	-40.0	999.9	99.9	99.9	99.9	326.0	326.0	0.4	73.9	999.9	999.9
30.2	84.6	9425.0	300.0	-42.1	99.9	999.9	99.9	99.9	99.9	326.0	326.0	99.9	999.9	999.9	999.9
32.0	81.2	10006.6	275.0	-47.4	99.9	999.9	99.9	99.9	99.9	326.5	326.5	99.9	999.9	999.9	999.9
34.0	96.0	10628.2	250.0	-53.5	99.9	999.9	99.9	99.9	99.9	326.6	326.6	99.9	999.9	999.9	999.9
36.1	101.3	11257.3	225.0	-58.9	99.9	999.9	99.9	99.9	99.9	328.3	328.3	99.9	999.9	999.9	999.9
38.3	107.0	12025.8	200.0	-65.4	99.9	999.9	99.9	99.9	99.9	329.3	329.3	99.9	999.9	999.9	999.9
40.8	113.0	12840.9	175.0	-62.4	99.9	999.9	99.9	99.9	99.9	346.9	346.9	99.9	999.9	999.9	999.9
43.6	119.7	13754.8	150.0	-62.2	99.9	999.9	99.9	99.9	99.9	363.0	363.0	99.9	999.9	999.9	999.9
47.4	127.0	14928.3	125.0	-61.3	99.9	999.9	99.9	99.9	99.9	384.0	384.0	99.9	999.9	999.9	999.9
51.9	135.0	16311.8	100.0	-64.0	99.9	999.9	99.9	99.9	99.9	404.1	404.1	99.9	999.9	999.9	999.9
56.2	142.7	18066.3	75.0	-62.9	99.9	999.9	99.9	99.9	99.9	441.0	441.0	99.9	999.9	999.9	999.9
59.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE ON TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 405
STERLING, VA23 APRIL 1975
2315 GMT

156 23. 0

TIME MIN	CHTCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR STD CM/SEC	RM PCT	RANGE KM	AZ DEG
0-0	5-5	85-0	1007.3	19.4	8.4	100-0	3-1	-3-1	0-5	292.9	311.2	6-9	49-0	0-0	0-0
0-3	6-0	147.7	1000.0	20.6	8.6	145-1	7-5	-4-3	6-2	294.7	313.6	7-1	46-6	0-2	315-
1-2	6-2	360.3	975.0	19.7	7.6	145-4	8-2	-2-1	7-9	296.9	314.0	6-9	46-2	0-5	325-
2-0	10-5	590.0	950.0	19.2	8-1	145-7	11-8	1-2	11-8	297.7	317.1	7-2	48-3	0-9	343-
2-9	12-4	810-5	925.0	17-1	7-5	144-2	13-9	3-4	13-5	297.7	316.8	7-3	53-1	1-0	355-
3-8	15-0	1031-6	900.0	15-0	7-6	146-6	17-5	5-6	14-5	298.0	317.8	7-3	61-0	2-4	3-
4-7	17-1	1289-9	875-0	13-2	7-3	203-2	17-6	7-0	18-2	298.5	318-6	7-4	67-4	3-4	8-
5-7	19-6	1533-3	850-0	10-8	7-2	208-6	18-2	8-7	18-0	298.5	318-9	7-5	78-4	4-4	12-
6-5	21-8	1781-6	825-0	8-6	7-0	215-5	17-5	10-2	15-3	298.7	319-4	7-6	89-4	5-2	15-
7-4	24-3	2035-6	800-0	7-1	0-2	227-8	17-8	13-2	12-0	299.3	312-9	4-9	61-3	6-3	19-
8-3	26-7	2296-9	775-0	6-9	-6-2	235-6	17-5	14-5	9-9	301-6	310-4	3-1	38-6	6-8	24-
9-3	29-3	2565-2	750-0	4-9	-7-9	239-9	18-2	15-7	9-1	302-2	310-4	2-8	38-9	7-7	28-
10-2	31-9	2840-5	725-0	2-3	-9-0	239-7	17-7	15-3	9-0	302-3	310-1	2-7	42-8	8-6	32-
11-1	34-6	3122-5	700-0	-0-7	-10-0	237-6	16-6	14-1	8-8	302-0	309-6	2-6	49-3	9-4	34-
11-8	37-1	3412-1	675-0	-2-9	-10-4	237-6	16-7	14-1	8-9	302-7	310-3	2-6	56-2	10-1	36-
12-7	39-9	3789-8	650-0	-5-7	-10-4	238-1	17-1	14-5	9-0	302-9	311-0	2-7	69-1	10-9	39-
13-5	42-6	4015-8	625-0	-8-7	-10-4	234-8	16-9	14-1	9-3	302-9	311-0	2-8	87-0	11-7	39-
14-4	45-4	4331-8	600-0	-10-1	-11-1	234-8	17-2	14-0	9-9	304-8	312-9	2-7	92-7	12-6	40-
15-4	48-5	4596-9	575-0	-10-7	-11-5	237-9	18-7	15-8	9-9	307-8	316-1	2-8	94-0	13-6	41-
16-5	51-3	5001-6	550-0	-11-6	-12-4	252-5	23-7	22-6	7-1	310-6	318-7	2-7	93-9	14-9	43-
17-6	54-4	5357-4	525-0	-13-1	-13-7	268-0	26-9	26-9	0-9	313-0	320-7	2-5	94-8	16-3	47-
18-8	57-4	5728-6	500-0	-14-6	-15-3	278-6	27-3	27-0	-4-1	315-5	322-8	2-3	93-9	17-7	51-
20-0	60-7	6116-1	475-0	-16-6	-17-6	260-2	24-4	22-9	-8-4	317-6	324-0	2-0	92-4	18-9	56-
21-2	63-1	6521-4	450-0	-18-7	-19-9	290-7	23-2	21-7	-8-2	319-9	325-5	1-7	90-0	19-9	60-
22-4	67-4	6943-6	425-0	-21-5	-23-2	268-3	25-4	24-1	-8-0	321-6	326-2	1-4	85-9	21-1	64-
23-5	70-6	7389-9	400-0	-24-8	-24-7	293-3	25-9	23-8	-10-3	322-8	328-4	1-1	84-3	22-3	67-
25-0	74-4	7856-7	375-0	-28-3	-30-2	267-6	28-2	25-0	-13-1	324-1	328-9	0-8	84-1	23-9	71-
26-4	78-3	8347-6	350-0	-32-2	-34-4	298-5	25-6	22-5	-12-2	325-3	327-3	0-6	81-2	25-5	75-
27-9	82-3	8866-2	325-0	-36-3	-39-9	291-8	27-5	25-6	-16-2	327-9	328-1	0-4	76-4	27-4	78-
29-7	86-2	9415-0	300-0	-40-8	99-9	290-7	25-5	23-9	-9-0	327-9	999-9	99-9	99-9	29-6	81-
31-5	90-7	10071-3	275-0	-46-2	99-9	290-2	29-1	27-3	-10-0	328-3	999-9	99-9	99-9	32-3	84-
33-4	95-3	10626-5	250-0	-52-0	99-9	291-0	33-5	31-2	-12-0	328-8	999-9	99-9	99-9	35-5	86-
35-6	100-2	11298-9	225-0	-58-4	99-9	287-1	39-6	37-9	-11-7	329-0	999-9	99-9	99-9	39-9	89-
38-0	105-3	12028-2	200-0	-65-2	99-9	288-7	37-5	35-5	-12-1	329-6	999-9	99-9	99-9	44-7	91-
40-9	110-6	12835-8	175-0	-63-7	99-9	300-4	34-6	29-9	-17-5	348-8	999-9	99-9	99-9	51-7	94-
44-4	117-0	13901-4	150-0	-59-4	99-9	294-2	33-1	30-2	-13-6	367-8	999-9	99-9	99-9	57-2	96-
48-1	125-3	14908-8	125-0	-59-2	99-9	294-0	35-5	32-4	-15-4	387-9	999-9	99-9	99-9	65-2	99-
53-1	131-7	16331-7	100-0	-64-2	99-9	303-5	39-9	33-3	-22-0	403-7	999-9	99-9	99-9	73-9	102-
58-0	140-3	18094-4	75-0	-62-6	99-9	303-7	46-6	5-6	-3-8	441-6	999-9	99-9	99-9	75-2	104-
67-2	146-3	20430-8	50-0	-58-0	99-9	307-3	7-5	6-0	-9-6	507-0	999-9	99-9	99-9	83-2	105-
80-1	150-3	25059-1	25-0	-54-1	99-9	999-9	99-9	99-9	99-9	629-6	999-9	99-9	99-9	99-9	99-9

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 425
MOUNTING TCH. WVA23 APRIL 1975
2315 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR RTO GMS/KG	MR PCT	RANGE KM	AZ DEG
0.0	0.0	266.0	988.5	14.4	10.0	190.0	8.2	1.4	8.1	289.5	310.0	7.9	75.0	0.0	0.
0.1	99.9	1000.0	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	0.1	362.2	975.0	13.6	9.1	188.0	21.9	3.4	21.6	289.0	309.3	7.8	74.5	0.4	11.
1.2	10.4	821.0	950.0	12.8	6.3	198.2	24.2	7.6	23.0	291.0	307.7	6.3	64.5	1.3	12.
2.1	12.5	804.7	925.0	11.8	5.5	204.8	30.9	13.0	28.0	292.2	308.6	6.2	65.4	2.7	14.
2.9	14.9	1023.2	900.0	9.7	3.9	207.9	29.9	14.0	24.5	292.3	307.4	5.6	66.9	4.2	21.
3.7	17.1	1207.0	875.0	8.7	4.6	212.3	29.1	15.5	24.6	293.6	310.0	6.1	78.6	5.7	23.
4.5	19.6	1506.8	850.0	7.7	5.5	220.4	30.5	19.8	23.2	295.1	313.2	6.7	86.4	7.4	25.
5.2	21.8	1753.5	825.0	7.5	7.0	230.1	33.5	25.7	21.5	297.5	316.2	7.7	96.6	8.4	26.
6.2	24.4	2000.2	800.0	6.6	6.4	243.1	31.3	27.9	14.1	299.1	319.7	7.6	98.7	10.0	34.
7.1	26.7	2250.0	775.0	5.6	3.9	253.2	31.7	30.3	9.2	300.7	318.8	6.6	88.6	11.5	36.
8.0	29.3	2536.0	750.0	4.1	2.2	256.2	31.9	31.3	4.5	301.6	318.5	6.0	87.7	13.0	44.
9.0	32.0	2811.5	725.0	2.6	1.0	263.2	30.6	30.4	3.6	303.0	317.9	6.0	94.6	14.6	47.
9.9	34.7	3095.2	700.0	1.1	0.7	266.6	30.5	30.5	1.0	304.5	320.9	5.8	97.2	15.9	52.
10.0	37.2	3382.1	675.0	0.3	-0.0	277.2	27.0	26.8	-3.4	306.7	322.0	5.7	97.3	17.1	55.
11.8	40.6	3690.2	650.0	-1.6	-1.9	280.9	27.7	27.2	-8.2	307.8	322.5	5.1	97.7	18.3	56.
12.9	42.7	4027.7	625.0	-3.1	-3.4	282.0	31.0	30.3	-6.4	309.5	323.4	4.8	97.5	19.6	62.
13.9	45.6	4325.1	600.0	-5.1	-5.8	283.6	33.6	32.6	-7.9	310.7	323.0	4.2	95.0	21.4	66.
15.2	48.4	4658.9	575.0	-7.0	-7.9	284.2	33.5	32.5	-9.2	312.2	323.2	3.7	93.8	23.5	74.
16.5	51.4	5005.0	550.0	-8.7	-9.4	284.9	29.1	28.2	-7.5	314.2	324.5	3.4	94.7	25.4	73.
17.4	54.6	5345.0	525.0	-10.5	-11.1	279.4	31.6	31.2	-5.2	316.1	325.7	3.1	95.3	27.4	75.
19.0	57.6	5739.5	500.0	-12.7	-14.1	275.7	32.2	32.0	-3.2	317.8	325.9	2.6	89.3	29.4	77.
20.4	61.0	6129.2	475.0	-15.2	-16.7	276.1	27.9	27.7	-3.0	319.3	326.3	2.2	88.6	32.2	79.
21.5	64.6	6535.9	450.0	-18.2	-19.9	274.3	26.6	26.5	-2.5	320.6	326.2	1.6	86.6	34.4	80.
23.1	67.7	6953.9	425.0	-21.1	-23.0	275.4	26.6	26.5	-2.5	322.1	326.8	1.4	84.4	36.3	81.
24.5	71.3	7402.7	400.0	-24.0	-26.8	277.2	23.6	23.4	-3.0	323.1	326.7	1.1	81.9	38.6	81.
25.9	74.9	7872.3	375.0	-28.1	-30.3	272.8	23.6	23.5	-1.1	324.6	327.2	0.8	81.6	40.4	82.
27.1	78.8	8302.7	350.0	-32.0	-35.1	270.0	23.2	23.2	0.0	325.6	327.5	0.8	72.1	42.3	82.
28.9	82.8	8802.3	325.0	-34.6	-40.6	264.3	20.0	27.9	2.8	326.2	327.4	0.3	60.2	44.4	83.
30.5	87.2	9431.4	300.0	-41.3	-49.9	265.0	25.4	25.3	2.0	327.2	327.9	0.9	57.5	47.1	87.
32.1	91.4	10016.5	275.0	-45.9	-57.9	264.1	34.8	34.8	3.6	328.7	328.9	0.9	50.2	50.2	83.
33.9	94.2	10602.3	250.0	-51.9	-61.9	262.4	37.2	36.9	4.9	329.8	329.9	0.9	54.5	54.5	83.
36.2	101.2	11315.9	225.0	-57.9	-67.9	260.4	34.4	34.4	2.1	329.8	329.9	0.9	58.4	58.4	83.
38.5	104.9	12022.3	200.0	-61.7	-70.0	278.7	42.0	42.1	-6.4	335.0	329.9	0.9	64.2	64.2	84.
41.0	112.5	12874.5	175.0	-62.1	-70.9	271.3	44.0	44.0	-8.0	336.2	329.9	0.9	65.5	65.5	85.
43.7	116.3	13644.1	150.0	-54.5	-68.5	268.5	41.7	39.5	-13.2	376.2	329.9	0.9	77.0	77.0	87.
46.7	126.0	15004.0	125.0	-38.5	-69.9	291.4	27.2	25.3	-10.1	309.0	329.9	0.9	83.1	83.1	87.
51.8	134.3	16355.0	100.0	-65.6	-99.9	278.2	28.9	28.6	-4.1	400.6	329.9	0.9	90.4	90.4	90.
56.6	142.3	18136.4	75.0	-63.9	-99.9	303.3	8.0	0.7	-4.4	439.0	329.9	0.9	98.9	98.9	92.
57.9	150.5	20400.4	50.0	-57.7	-99.9	69.4	2.0	-1.8	-0.7	507.0	329.9	0.9	99.9	102.4	92.
61.7	156.3	23118.3	25.0	-50.6	-99.9	99.9	99.9	99.9	99.9	639.0	329.9	0.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 429
CAYTON, OHIO23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GPH	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PUT T DEG C	E POT T DEG C	MR RTD CM/SEC	RM PCY	RANGE NM	AZ DEG
000	00.7	295.7	978.5	13.9	12.1	200.0	7.2	2.5	6.8	250.0	313.7	9.1	89.0	6.0	00
000	00.0	99.0	1000.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
002	00.1	225.3	975.0	14.2	11.2	99.0	99.0	99.0	99.0	250.0	313.0	0.6	82.0	99.0	330
101	11.2	54.0	950.0	12.5	11.3	99.0	99.0	99.0	99.0	291.1	314.3	0.9	92.5	99.0	330
109	13.8	771.1	925.0	10.0	10.3	224.0	21.1	14.9	15.0	291.5	313.9	0.6	96.0	1.7	15
209	15.0	950.0	900.0	10.0	9.0	230.7	26.7	20.7	16.5	292.9	315.0	0.4	96.0	2.9	01
309	17.8	1234.1	875.0	0.0	0.0	238.5	27.7	23.4	14.5	254.0	315.1	7.5	94.0	4.2	01
409	20.3	1474.3	850.0	0.0	2.2	237.7	22.4	21.9	4.0	296.0	319.5	5.3	64.0	7.5	50
509	22.5	1722.5	825.0	10.1	-1.4	280.5	15.6	15.3	-2.8	296.0	311.7	4.2	44.0	7.0	57
609	25.0	1972.5	800.0	0.2	-1.9	285.3	17.0	17.1	-4.7	300.4	312.3	4.2	44.0	7.0	57
709	27.3	2232.3	775.0	4.5	-1.4	293.0	18.3	16.7	-7.4	301.6	314.1	4.5	50.0	7.0	57
809	29.8	2502.7	750.0	4.7	-2.0	285.3	20.0	19.2	-3.0	302.3	314.9	4.4	61.0	8.6	73
909	32.3	2782.6	725.0	2.9	-2.1	280.4	20.0	20.3	-2.7	303.2	318.1	4.5	69.7	9.6	70
1009	34.8	3062.1	700.0	1.0	-3.5	281.0	19.0	19.4	-4.0	305.0	317.2	4.2	67.7	10.7	70
1109	37.4	3340.3	675.0	0.0	-14.0	288.0	19.0	18.0	-4.2	306.6	311.5	1.6	26.7	11.8	82
1209	40.2	3602.3	650.0	-0.5	-50.3	285.2	20.9	20.1	-5.5	308.3	309.5	0.1	1.0	17.1	86
1309	42.7	3875.0	625.0	-1.2	-50.7	288.0	23.2	22.1	-7.2	311.1	311.3	0.1	1.0	17.1	86
1409	45.7	4295.0	600.0	-3.4	-52.1	292.0	23.6	21.9	-9.4	312.1	312.3	0.0	1.0	16.4	86
1509	48.0	4633.5	575.0	-6.3	-53.0	294.5	21.0	20.0	-9.1	312.5	312.7	0.0	1.0	17.9	92
1609	51.4	4970.9	550.0	-9.3	-55.0	288.3	22.5	21.3	-7.1	313.1	313.2	0.0	1.0	17.9	92
1709	54.5	5337.3	525.0	-11.3	-60.4	295.3	21.5	19.5	-6.2	315.0	315.2	0.1	3.7	21.3	95
1809	57.0	5700.5	500.0	-14.3	-68.3	300.0	22.4	19.4	-11.2	315.6	315.9	0.1	3.7	22.9	94
1909	60.7	6055.0	475.0	-17.0	-60.0	294.5	25.0	22.0	-16.4	316.9	316.0	0.2	12.3	24.5	90
2009	64.1	6417.9	450.0	-20.0	-31.9	283.9	32.1	31.1	-7.7	317.1	319.1	0.6	35.9	27.2	90
2109	67.3	6817.0	425.0	-23.0	-31.6	272.5	35.9	35.9	-1.6	318.5	320.6	0.6	48.2	29.8	90
2209	70.8	7258.1	400.0	-26.8	-39.0	254.5	34.1	33.6	0.0	320.2	321.3	0.3	30.7	32.1	90
2309	74.3	7651.5	375.0	-29.3	-50.5	254.7	36.4	35.1	9.6	322.0	323.0	0.0	5.6	36.3	90
2409	78.3	8310.0	350.0	-32.0	-71.0	251.5	32.2	30.6	10.2	324.5	324.5	0.0	1.0	36.5	90
2509	82.1	8827.0	325.0	-37.4	-74.1	255.4	36.1	34.9	9.1	325.0	325.0	0.0	1.0	42.7	90
2609	86.3	9374.3	300.0	-42.2	99.9	256.0	37.0	35.9	9.0	325.0	325.0	0.0	99.0	42.7	90
2709	90.0	9550.7	275.0	-47.2	99.9	259.0	34.9	34.3	6.7	326.9	326.9	0.0	99.0	42.7	90
2809	93.0	10590.0	250.0	-51.9	99.9	261.0	41.20	40.7	6.0	328.9	328.9	0.0	99.0	51.0	90
2909	96.0	11258.9	225.0	-56.1	99.9	264.0	48.50	46.2	4.6	332.6	332.6	0.0	99.0	53.6	90
3009	105.0	11552.4	200.0	-61.3	99.9	266.7	40.00	40.5	0.9	336.7	336.7	0.0	99.0	62.4	90
3109	110.0	12422.4	175.0	-61.3	99.9	267.2	42.00	42.4	2.1	340.5	340.5	0.0	99.0	74.5	90
3209	116.0	13792.3	150.0	-50.1	99.9	284.3	32.90	31.9	-8.2	370.0	370.0	0.0	99.0	81.7	90
3309	123.3	14511.9	125.0	-37.9	99.9	277.1	30.00	30.3	-3.0	380.2	380.2	0.0	99.0	84.4	90
3409	129.5	16340.9	100.0	-61.0	99.9	274.1	27.00	27.7	-2.0	400.3	400.3	0.0	99.0	97.4	90
3509	136.3	18111.0	75.0	-62.9	99.9	278.5	11.30	11.2	-1.7	410.0	410.0	0.0	99.0	104.1	90
3609	140.0	99.0	50.0	99.9	99.9	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
3709	140.0	99.0	25.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0

0.07 SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0.17 TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 00.07 SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 433
SALEM, ILL23 APRIL 1975
2315 GMT

TIME MIN	CNCT	HEIGHT GFM	PRES MB	TEMP DG C	DPW G C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WIND CM/RS	RM PCT	RANGE NM	AZ DG
0.0	5.1	175.0	999.4	20.0	12.3	176.0	8.0	-1.5	0.7	2.5.3	319.4	9.1	61.0	130	105.0
00.0	49.0	96.0	1000.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
0.3	6.6	301.0	975.0	19.4	13.0	178.0	17.0	-0.4	17.9	255.0	321.6	9.7	60.5	0.4	350.
1.0	8.9	325.0	950.0	19.0	13.2	182.1	18.7	1.7	18.6	267.9	325.9	10.1	69.1	0.9	350.
1.8	11.7	754.9	925.0	18.3	13.5	197.7	19.4	5.9	18.5	249.5	327.9	10.0	73.6	1.6	5.
2.6	13.4	989.9	900.0	16.8	12.9	192.4	17.3	9.5	16.4	300.2	328.3	10.5	77.6	2.0	9.
3.3	15.6	1230.1	875.0	15.6	11.9	205.7	16.6	8.2	14.5	301.3	328.6	10.1	78.0	3.5	12.
4.1	17.9	1476.0	850.0	14.0	11.9	225.2	14.9	10.5	10.5	302.2	330.4	10.4	87.3	4.2	16.
4.9	20.3	1728.0	825.0	12.3	11.3	234.4	14.1	12.0	7.4	303.0	330.3	10.0	91.3	4.7	21.
5.7	22.6	1506.1	800.0	10.9	9.6	246.0	15.7	14.4	6.2	304.0	330.0	9.5	92.1	5.3	26.
6.5	25.2	2251.2	775.0	9.7	7.5	256.2	17.3	16.8	4.1	304.3	328.6	8.4	86.2	5.8	31.
7.3	27.5	2423.4	750.0	8.2	4.6	263.7	19.9	19.7	2.2	304.5	328.6	7.2	78.0	6.4	37.
8.2	30.2	3003.4	725.0	7.7	-5.6	267.5	21.0	21.8	0.9	304.7	315.9	3.5	30.6	7.2	44.
9.1	32.6	3091.6	700.0	6.3	-12.9	269.5	21.7	21.7	0.2	309.7	315.9	2.0	21.8	8.1	50.
10.0	35.3	3368.9	675.0	4.3	-15.5	275.2	21.7	21.6	-2.0	310.7	318.0	1.7	21.9	9.1	55.
11.0	38.2	3694.6	650.0	2.1	-17.3	276.4	22.2	22.3	-2.5	311.5	318.2	1.5	22.1	10.1	60.
12.0	40.3	4006.8	625.0	-0.1	-21.9	277.7	20.6	20.5	-2.8	312.4	315.9	1.1	17.5	11.2	64.
13.1	43.0	4334.6	600.0	-3.2	-22.1	278.2	20.1	19.9	-2.9	312.4	315.9	1.1	17.5	12.3	64.
14.2	46.9	4669.4	575.0	-6.4	-20.3	274.4	20.8	20.7	-1.6	312.4	316.9	1.3	32.4	13.5	71.
15.3	50.9	5015.1	550.0	-9.3	-20.0	270.1	21.5	21.6	-0.0	313.2	317.1	1.4	41.4	14.0	73.
16.6	54.9	5372.8	525.0	-12.7	-19.4	261.2	25.0	24.7	3.8	313.3	318.2	1.6	57.0	16.4	74.
17.7	59.3	5743.0	500.0	-15.0	-20.5	257.0	27.1	26.4	6.1	313.9	318.7	1.9	65.8	18.2	74.
19.0	64.4	6127.0	475.0	-18.4	-22.2	260.7	29.8	29.4	4.8	314.5	318.5	1.4	78.2	20.5	75.
20.3	69.4	6522.7	450.0	-22.9	-24.2	259.4	29.4	28.9	4.4	314.5	318.4	1.2	89.7	22.9	75.
21.6	74.3	6843.2	425.0	-26.1	-27.6	260.3	29.0	28.6	4.9	315.6	318.7	0.9	86.8	25.1	76.
23.0	79.0	7378.9	400.0	-28.0	-40.1	269.0	33.0	33.0	0.6	317.5	318.5	0.3	32.3	27.6	76.
24.7	73.7	7801.9	375.0	-29.6	-44.4	270.7	37.3	37.3	-0.5	322.4	323.1	0.2	22.0	30.8	78.
26.1	77.8	8330.0	350.0	-33.8	-47.2	278.1	37.6	37.6	1.3	323.1	323.7	0.1	24.0	34.2	79.
27.8	81.8	8843.5	325.0	-37.7	-50.7	267.5	42.3	42.3	1.9	324.6	325.0	1.1	24.0	34.2	79.
29.6	86.2	9391.3	300.0	-42.3	99.9	99.9	99.9	99.9	99.9	325.7	99.9	99.9	99.9	99.9	99.9
31.4	90.4	9774.9	275.0	-45.3	99.9	99.9	99.9	99.9	99.9	326.6	99.9	99.9	99.9	99.9	99.9
33.4	95.9	10635.9	250.0	-48.0	99.9	99.9	99.9	99.9	99.9	327.7	99.9	99.9	99.9	99.9	99.9
35.0	101.7	11287.4	225.0	-52.2	99.9	99.9	99.9	99.9	99.9	330.0	99.9	99.9	99.9	99.9	99.9
36.8	106.0	12031.2	200.0	-56.1	99.9	99.9	99.9	99.9	99.9	337.6	99.9	99.9	99.9	99.9	99.9
41.2	113.3	12808.0	175.0	-60.2	99.9	99.9	99.9	99.9	99.9	350.6	99.9	99.9	99.9	99.9	99.9
43.7	116.7	13636.5	150.0	-57.0	99.9	99.9	99.9	99.9	99.9	370.9	99.9	99.9	99.9	99.9	99.9
46.7	127.3	14611.2	125.0	-57.0	99.9	99.9	99.9	99.9	99.9	393.1	99.9	99.9	99.9	99.9	99.9
49.0	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
51.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
53.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
55.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
57.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
59.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS

STATION NO. 456
TOPENNA, KAN23 APRIL 1975
2337 GMT

VIVE MIN	CNTCT	WEIGHT GMM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.8	268.0	971.0	32.2	17.7	220.0	5.2	3.3	4.0	309.8	346.4	13.2	42.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.6	8.5	463.2	950.0	28.1	15.6	199.1	10.9	3.6	10.3	307.4	340.0	11.9	46.6	0.4	47.
1.2	10.5	652.6	925.0	26.2	15.6	206.4	12.4	5.5	11.1	307.8	341.4	12.2	52.2	0.8	34.
2.0	12.6	940.4	900.0	23.5	14.1	213.5	12.9	7.1	10.8	307.3	338.6	11.4	55.8	1.4	32.
3.0	14.9	1125.8	875.0	21.3	13.4	222.5	14.6	9.8	10.7	307.4	338.3	11.2	61.0	2.2	34.
3.8	16.7	1436.5	850.0	18.9	12.6	230.8	13.0	10.1	8.2	307.4	337.5	10.9	66.6	2.8	37.
4.5	19.0	1692.5	825.0	16.8	11.7	235.1	14.0	11.5	7.0	307.8	337.1	10.6	72.1	3.4	40.
5.2	21.0	1954.3	800.0	14.6	10.8	242.4	11.0	9.8	5.1	308.1	336.6	10.3	78.0	3.9	42.
6.1	23.4	2222.3	775.0	11.9	10.4	250.2	11.3	10.6	3.8	307.9	336.5	10.3	84.6	4.4	45.
7.0	25.6	2436.6	750.0	9.5	6.7	260.4	11.6	11.5	1.9	308.0	331.2	8.3	82.5	4.9	49.
8.1	27.9	2777.3	725.0	7.7	-0.8	260.9	13.7	13.5	2.2	308.6	323.1	5.0	84.9	5.6	54.
9.2	30.4	3066.0	700.0	6.4	-9.9	257.9	14.8	14.5	3.1	309.9	317.8	2.6	30.4	6.3	57.
10.2	32.0	3363.0	675.0	4.4	-16.2	250.9	17.6	16.6	5.8	310.8	315.8	1.6	20.7	7.4	59.
11.1	35.5	3665.1	650.0	2.2	-16.9	246.4	20.5	16.8	8.2	311.6	316.6	1.6	22.6	8.5	61.
12.3	38.0	3983.7	625.0	-1.0	-17.6	241.9	21.4	18.8	10.0	311.6	316.3	1.5	26.9	10.3	61.
13.5	40.6	4307.6	600.0	-4.1	-19.1	242.3	22.2	19.7	10.3	311.6	316.0	1.4	29.7	11.6	61.
14.7	43.3	4641.3	575.0	-7.2	-22.1	243.2	24.5	21.9	11.1	311.7	315.3	1.1	29.3	13.2	61.
15.9	46.2	4975.9	550.0	-10.1	-29.2	245.3	22.7	20.6	9.5	312.1	314.2	0.6	19.1	14.8	62.
16.9	49.1	5342.4	525.0	-13.2	-26.3	247.2	23.5	21.7	9.1	312.5	314.9	0.7	26.8	16.4	62.
18.1	52.0	5713.0	500.0	-14.3	-24.9	250.5	23.2	21.9	7.8	315.6	317.0	0.4	15.3	18.0	64.
19.2	54.0	6101.1	475.0	-16.1	-30.6	250.1	21.4	21.1	3.7	318.1	319.3	0.3	18.0	19.4	64.
20.4	58.0	6505.5	450.0	-19.6	-40.0	255.6	22.3	22.3	1.7	318.6	319.5	0.3	14.3	20.9	65.
21.9	61.4	6927.7	425.0	-22.5	-40.8	265.4	27.2	27.2	1.7	320.2	321.1	0.2	16.9	22.9	67.
23.6	64.9	7370.1	400.0	-25.5	-39.0	268.3	26.8	26.7	2.7	321.8	322.9	0.3	26.8	25.6	69.
25.2	68.3	7834.9	375.0	-29.4	-40.1	268.1	29.8	29.5	4.1	322.7	323.8	0.3	34.1	28.3	70.
26.9	71.8	8323.2	350.0	-33.6	-43.0	261.6	28.0	27.7	4.1	323.3	324.2	0.2	37.8	31.2	71.
28.8	75.8	8838.1	325.0	-38.3	-47.6	261.2	32.4	32.0	4.9	323.7	324.3	0.2	36.4	34.6	72.
31.2	80.0	9385.5	300.0	-40.9	99.9	267.8	37.0	36.9	1.4	327.8	999.9	99.9	999.9	36.7	74.
33.1	84.2	9973.0	275.0	-45.3	99.9	268.3	41.1	41.1	1.2	329.7	999.9	99.9	999.9	43.8	75.
35.0	88.8	10601.7	250.0	-50.1	99.9	264.6	46.8	46.6	4.4	331.7	999.9	99.9	999.9	46.9	77.
37.0	94.0	11281.5	225.0	-53.5	99.9	263.6	51.9	51.6	5.8	333.5	999.9	99.9	999.9	54.3	77.
39.5	99.2	12028.2	200.0	-59.5	99.9	261.5	47.2	46.7	7.0	336.6	999.9	99.9	999.9	61.5	78.
42.8	105.0	12863.2	175.0	-58.4	99.9	267.2	40.1	40.1	1.9	333.6	999.9	99.9	999.9	68.9	78.
46.1	111.7	13626.0	150.0	-60.2	99.9	265.7	28.4	28.3	2.1	366.3	999.9	99.9	999.9	75.7	79.
51.3	119.3	14970.8	125.0	-58.0	99.9	254.2	35.0	33.7	9.5	389.9	999.9	99.9	999.9	85.1	79.
56.6	127.7	16367.2	100.0	-59.8	99.9	251.4	24.7	23.5	7.9	412.3	999.9	99.9	999.9	95.1	78.
63.0	137.3	18141.7	75.0	-64.3	99.9	221.7	11.9	7.9	8.9	438.1	999.9	99.9	999.9	101.0	77.
73.2	147.5	20665.8	50.0	-56.5	99.9	227.5	7.1	6.5	2.7	510.4	999.9	99.9	999.9	106.7	77.
89.6	158.3	25129.7	25.0	-50.0	99.9	328.4	4.5	2.3	-3.8	641.4	999.9	99.9	999.9	109.3	78.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 480
FORT TOTTEN, N Y

23 APRIL 1975
2315 GMT

181 21.0 0

TIME MIN	CATCY	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCOMP M/SEC	POT T DG K	E POT T DG K	MX RTO GI MG	RH PCT	RANGE KM	AZ DG
0.0	3.9	8.0	1023.2	10.2	-3.5	999.9	99.9	99.9	99.9	281.9	289.6	2.9	38.0	999.9	999.9
0.7	5.6	168.5	1000.0	6.8	-2.2	999.9	99.9	99.9	99.9	282.4	291.0	3.2	45.7	999.9	999.9
1.4	7.7	407.4	975.0	7.1	-3.5	999.9	99.9	99.9	99.9	282.7	290.8	3.0	48.7	999.9	999.9
2.2	9.9	621.0	950.0	7.7	-2.5	999.9	99.9	99.9	99.9	285.5	294.8	3.3	48.2	999.9	999.9
3.0	11.9	840.8	925.0	7.1	3.2	999.9	99.9	99.9	99.9	287.3	301.2	5.3	76.8	999.9	999.9
3.8	14.2	1066.3	900.0	6.8	4.8	999.9	99.9	99.9	99.9	289.3	305.2	6.0	87.3	999.9	999.9
4.6	16.2	1297.9	875.0	6.9	0.5	999.9	99.9	99.9	99.9	291.5	303.9	4.5	63.7	999.9	999.9
5.3	18.5	1526.2	850.0	6.6	-0.4	999.9	99.9	99.9	99.9	293.6	305.6	4.4	60.9	999.9	999.9
6.2	20.7	1781.2	825.0	5.9	0.6	999.9	99.9	99.9	99.9	295.4	308.7	4.8	68.7	999.9	999.9
7.0	23.0	2032.5	800.0	4.0	0.9	999.9	99.9	99.9	99.9	296.1	310.1	5.1	80.4	999.9	999.9
7.8	25.3	2290.2	775.0	2.1	-2.2	999.9	99.9	99.9	99.9	296.6	309.2	4.2	73.6	999.9	999.9
8.7	27.6	2554.3	750.0	0.1	0.0	999.9	99.9	99.9	99.9	297.3	311.8	5.1	99.7	999.9	999.9
9.6	30.1	2825.1	725.0	-0.9	-18.1	999.9	99.9	99.9	99.9	298.7	302.5	1.3	25.5	999.9	999.9
10.6	32.9	3104.1	700.0	-2.7	-21.0	999.9	99.9	99.9	99.9	299.6	302.8	1.0	22.9	999.9	999.9
11.6	35.3	3392.0	675.0	-4.0	-10.6	999.9	99.9	99.9	99.9	301.4	308.9	2.5	60.2	999.9	999.9
12.6	37.9	3694.8	650.0	-6.2	-8.0	999.9	99.9	99.9	99.9	302.3	311.7	3.2	87.9	999.9	999.9
13.6	40.5	3994.8	625.0	-8.3	-12.3	999.9	99.9	99.9	99.9	303.2	310.3	2.4	73.2	999.9	999.9
14.7	43.0	4310.3	600.0	-10.7	-16.7	999.9	99.9	99.9	99.9	303.9	309.2	1.7	60.9	999.9	999.9
15.9	45.9	4636.0	575.0	-13.7	-20.9	999.9	99.9	99.9	99.9	304.1	308.0	1.3	54.4	999.9	999.9
17.0	48.3	4972.6	550.0	-15.4	-17.1	999.9	99.9	99.9	99.9	306.0	311.8	1.8	87.4	999.9	999.9
18.7	51.6	5323.5	525.0	-16.8	-18.7	999.9	99.9	99.9	99.9	308.4	313.6	1.7	85.0	999.9	999.9
19.4	54.8	5688.4	500.0	-19.3	-22.4	999.9	99.9	99.9	99.9	309.6	313.6	1.3	76.1	999.9	999.9
20.7	57.6	6058.1	475.0	-22.0	-25.9	999.9	99.9	99.9	99.9	310.8	313.9	1.0	70.3	999.9	999.9
22.0	61.0	6403.8	450.0	-24.4	-30.7	999.9	99.9	99.9	99.9	312.6	313.5	0.3	22.4	999.9	999.9
23.4	64.3	6875.8	425.0	-27.0	-33.8	999.9	99.9	99.9	99.9	314.4	316.2	0.5	52.1	999.9	999.9
24.8	67.6	7314.1	400.0	-29.2	-33.1	999.9	99.9	99.9	99.9	317.1	319.0	0.6	68.7	999.9	999.9
26.3	71.0	7773.0	375.0	-31.2	-35.2	999.9	99.9	99.9	99.9	320.2	322.0	0.5	67.8	999.9	999.9
27.9	74.8	8258.7	350.0	-34.0	-39.4	999.9	99.9	99.9	99.9	321.6	322.9	0.3	63.0	999.9	999.9
29.6	78.8	8770.6	325.0	-39.6	99.9	999.9	99.9	99.9	99.9	322.0	322.9	99.9	999.9	999.9	999.9
31.4	82.7	9313.4	300.0	-43.9	99.9	999.9	99.9	99.9	99.9	323.5	323.5	99.9	999.9	999.9	999.9
33.1	86.8	9891.7	275.0	-48.7	99.9	999.9	99.9	99.9	99.9	324.7	324.7	99.9	999.9	999.9	999.9
34.7	91.4	10510.4	250.0	-54.2	99.9	999.9	99.9	99.9	99.9	325.6	325.6	99.9	999.9	999.9	999.9
37.5	98.2	11176.8	225.0	-60.0	99.9	999.9	99.9	99.9	99.9	326.6	326.6	99.9	999.9	999.9	999.9
39.9	101.3	11902.2	200.0	-65.8	99.9	999.9	99.9	99.9	99.9	328.6	328.6	99.9	999.9	999.9	999.9
42.5	107.0	12706.6	175.0	-64.6	99.9	999.9	99.9	99.9	99.9	329.3	329.3	99.9	999.9	999.9	999.9
45.7	112.0	13659.7	150.0	-58.5	99.9	999.9	99.9	99.9	99.9	329.3	329.3	99.9	999.9	999.9	999.9
48.4	116.7	14606.0	125.0	-60.1	99.9	999.9	99.9	99.9	99.9	328.6	328.6	99.9	999.9	999.9	999.9
53.8	127.3	16200.9	100.0	-59.5	99.9	999.9	99.9	99.9	99.9	328.6	328.6	99.9	999.9	999.9	999.9
59.3	135.5	17962.6	75.0	-61.6	99.9	999.9	99.9	99.9	99.9	328.6	328.6	99.9	999.9	999.9	999.9
67.1	143.3	20531.7	50.0	-57.5	99.9	999.9	99.9	99.9	99.9	328.6	328.6	99.9	999.9	999.9	999.9
81.0	151.7	24088.6	25.0	-52.5	99.9	999.9	99.9	99.9	99.9	328.6	328.6	99.9	999.9	999.9	999.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 B' SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 518
ALBANY, N. Y.23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MR RTO CM/KG	RM PCT	RANGE NM	AZ DG
0.0	4.7	86.0	1010.3	16.7	0.4	180.0	4.2	-2.1	3.6	289.5	300.1	3.9	33.0	0.0	0.
0.3	5.4	173.4	1000.0	16.7	-2.5	162.2	6.8	-2.7	6.4	290.3	299.2	3.2	26.8	0.2	337.
1.2	7.6	384.1	975.0	15.2	-4.6	165.2	9.9	-2.5	5.5	290.8	298.6	2.8	25.1	0.5	341.
2.0	10.0	607.0	950.0	13.2	-6.3	167.8	10.9	-2.3	10.6	290.8	298.6	2.5	25.2	1.0	345.
2.7	12.1	830.3	925.0	11.4	-7.1	164.4	13.4	-3.6	12.9	291.3	298.1	2.4	26.6	1.6	345.
3.4	14.5	1052.3	900.0	9.5	-7.7	164.4	12.1	-3.2	11.6	291.6	298.3	2.4	26.8	1.6	344.
4.4	16.8	1290.9	875.0	7.4	-7.4	171.1	8.4	-1.3	8.3	291.6	298.8	2.5	34.2	2.7	345.
5.3	19.3	1528.7	850.0	5.4	-7.6	177.3	7.0	-0.3	7.0	292.1	299.2	2.5	37.7	3.2	346.
6.3	21.7	1771.6	825.0	3.3	-8.4	192.6	6.1	1.3	5.9	292.4	299.3	2.5	41.9	3.5	346.
7.3	24.4	2020.3	800.0	1.3	-9.3	211.5	5.7	3.0	4.9	292.8	299.6	2.4	45.1	3.8	351.
8.2	26.9	2275.4	775.0	0.8	-12.9	247.4	7.6	7.1	2.9	294.9	300.3	1.8	35.1	4.0	355.
9.1	29.7	2539.0	750.0	0.9	-14.1	264.7	10.3	10.3	1.0	297.8	302.8	1.7	31.5	4.1	2.
10.0	32.4	2810.8	725.0	-0.3	-15.3	278.2	11.5	11.4	-1.6	299.3	304.1	1.6	31.4	4.2	11.
11.0	35.3	3090.7	700.0	-2.2	-16.3	282.9	10.6	10.4	-2.4	300.2	304.9	1.5	33.4	4.2	21.
11.9	38.0	3378.3	675.0	-4.5	-18.0	286.9	10.7	10.3	-3.1	300.7	304.9	1.4	34.0	4.3	27.
12.8	40.7	3674.2	650.0	-7.3	-19.2	290.1	13.2	12.4	-4.6	301.1	309.6	2.9	86.7	4.4	36.
13.9	43.6	3979.2	625.0	-8.6	-18.6	287.1	15.6	14.9	-6.6	302.7	311.9	3.1	100.0	4.8	47.
15.1	46.9	4294.5	600.0	-10.9	-11.2	286.2	17.5	17.3	-3.1	303.8	311.8	2.7	97.4	5.5	57.
16.3	50.0	4620.8	575.0	-12.5	-13.4	276.9	21.3	21.1	-2.6	305.6	312.7	2.4	52.8	6.6	65.
17.5	53.0	4954.5	550.0	-14.3	-15.6	276.6	21.1	20.9	-2.4	307.3	313.6	2.1	89.7	8.0	71.
18.9	56.1	5310.7	525.0	-16.9	-18.7	276.8	18.2	18.1	-2.2	308.3	313.5	1.7	65.7	9.6	79.
20.3	58.6	5675.6	500.0	-19.5	-21.5	279.2	20.0	19.8	-3.2	309.4	313.7	1.4	83.6	10.9	79.
21.7	63.0	6055.2	475.0	-21.7	-24.3	270.9	17.6	17.6	-0.3	311.3	314.6	1.1	79.1	12.5	41.
23.1	66.4	6451.4	450.0	-24.4	-27.6	266.0	20.0	19.9	1.4	312.6	315.4	0.9	74.7	14.0	42.
24.7	70.1	6865.3	425.0	-27.7	-30.9	266.0	22.6	22.6	0.8	313.6	315.8	0.7	73.6	16.0	42.
26.1	73.6	7300.3	400.0	-29.1	-32.1	268.4	26.8	26.8	0.8	317.2	319.4	0.6	74.6	18.3	63.
27.8	77.7	7758.9	375.0	-32.5	-36.1	271.4	28.3	28.3	-0.7	319.5	320.1	0.5	70.3	21.0	84.
29.5	81.5	8242.0	350.0	-35.9	-39.4	281.7	34.8	34.1	-7.1	320.3	321.5	0.3	69.8	24.1	45.
1.3	85.6	8751.7	325.0	-40.9	-40.9	289.3	13.8	31.9	-11.2	320.4	320.9	99.9	99.9	27.7	89.
33.4	90.0	9291.3	300.0	-44.7	-44.7	292.3	32.8	30.4	-12.4	322.3	322.3	99.9	99.9	31.5	71.
35.2	94.6	9867.9	275.0	-49.4	-49.4	301.7	36.7	31.2	-19.3	323.7	323.7	99.9	99.9	35.2	94.
37.5	99.4	10485.2	250.0	-54.9	-54.9	297.8	45.4	40.2	-21.2	324.5	324.5	99.9	99.9	39.3	57.
39.7	104.4	11150.1	225.0	-60.6	-60.6	297.6	46.2	41.0	-21.4	325.7	325.7	99.9	99.9	43.7	100.
42.2	110.0	11871.8	200.0	-67.0	-67.0	298.1	48.5	42.8	-22.9	326.6	326.6	99.9	99.9	52.4	102.
45.1	115.9	12675.3	175.0	-64.3	-64.3	304.4	42.1	34.7	-23.8	331.2	331.2	99.9	99.9	60.4	104.
48.9	122.3	13641.1	150.0	-55.4	-55.4	301.0	26.5	22.7	-13.6	378.7	378.7	99.9	99.9	67.7	106.
52.4	129.7	14802.9	125.0	-50.1	-50.1	301.7	25.7	21.8	-13.5	389.7	389.7	99.9	99.9	73.0	108.
57.2	137.5	16204.7	100.0	-58.8	-58.8	326.3	24.3	13.8	-20.2	418.2	418.2	99.9	99.9	80.7	110.
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 520
PITTSBURGH, PA

23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT FT	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	7.0	350.0	971.9	19.3	5.0	215.0	15.3	8.8	12.5	295.6	311.0	5.6	39.0	0.0	0.
9.0	9.9	1000.0	999.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.3	5.3	59.9	975.0	59.9	99.9	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	8.7	55.6	950.0	18.1	4.5	212.7	23.3	12.6	19.6	296.3	311.6	5.6	40.8	0.4	36.
1.3	10.6	782.0	925.0	15.8	4.0	208.4	24.4	11.6	19.4	296.2	311.3	5.5	45.4	1.8	33.
2.1	12.7	1013.8	900.0	13.5	2.9	206.3	22.2	9.8	19.9	296.1	310.5	5.2	48.6	3.0	31.
3.1	14.9	1249.6	875.0	10.2	1.9	207.5	24.1	11.1	21.4	295.1	309.6	5.0	56.0	4.2	29.
3.9	16.9	1490.3	850.0	8.4	1.4	209.5	23.7	11.7	20.6	295.6	309.3	5.0	61.1	5.5	29.
4.6	14.2	1736.6	825.0	6.6	1.4	209.1	23.0	11.2	20.1	296.2	310.7	5.1	69.5	6.4	27.
5.2	21.3	1982.7	800.0	4.5	0.9	208.6	22.0	10.5	19.3	296.6	310.3	5.1	77.1	7.3	27.
6.0	23.6	2246.4	775.0	1.8	0.3	210.9	24.1	12.4	20.7	296.3	310.3	5.1	90.3	8.3	29.
6.7	25.8	2510.1	750.0	-0.4	-0.5	210.6	24.8	12.2	21.5	296.8	310.3	4.9	99.0	9.4	29.
7.9	24.1	2781.0	725.0	-2.0	-2.0	211.0	27.0	13.9	23.1	297.6	310.5	4.6	99.7	11.2	27.
8.8	30.7	3060.2	700.0	-2.7	-2.8	218.4	27.9	17.2	21.7	300.0	312.6	4.5	99.6	12.7	30.
9.8	32.2	3348.7	675.0	-3.2	-3.3	230.2	28.4	21.8	18.2	302.6	315.3	4.5	99.5	14.3	31.
10.7	35.7	3647.7	650.0	-3.8	-3.8	250.9	31.1	27.2	15.1	305.3	318.0	4.4	99.5	15.7	34.
11.7	38.2	3937.2	625.0	-5.3	-5.4	251.7	32.0	30.4	10.1	306.9	318.9	4.1	99.3	17.4	37.
12.9	40.9	4277.9	600.0	-6.3	-6.4	263.0	29.8	29.6	3.8	309.3	321.0	4.0	99.1	19.3	42.
14.1	43.5	4610.3	575.0	-7.8	-8.0	255.8	31.0	37.5	5.5	311.3	322.2	3.7	98.9	20.9	46.
15.3	46.4	4952.5	550.0	-9.4	-9.6	258.7	31.7	31.1	6.2	313.3	323.5	3.4	98.7	22.9	49.
16.6	49.4	5314.2	525.0	-11.3	-11.6	262.6	29.2	25.0	3.7	315.1	324.3	3.0	97.6	25.0	52.
17.9	52.3	5687.8	500.0	-13.3	-13.7	262.2	32.0	31.7	4.3	317.1	325.3	2.6	96.7	26.9	54.
19.1	55.3	6077.4	475.0	-15.4	-15.9	284.7	32.5	32.4	3.0	319.2	326.6	2.3	95.8	29.0	56.
20.4	58.4	6494.2	450.0	-18.1	-18.8	276.0	28.6	28.6	-0.0	320.7	326.9	1.9	94.3	31.2	57.
21.5	61.8	6909.1	425.0	-21.1	-22.1	266.5	29.1	29.0	1.8	322.1	327.1	1.5	91.6	33.2	51.
23.2	65.2	7353.8	400.0	-24.8	-26.2	266.6	29.3	29.3	1.7	322.8	326.5	1.1	88.6	35.4	52.
24.8	68.7	7810.7	375.0	-28.8	-37.8	266.5	29.5	29.5	1.8	323.5	326.2	0.8	82.5	38.1	54.
26.4	72.3	8306.8	350.0	-32.7	-35.1	270.9	29.5	29.5	-0.5	324.6	326.5	0.5	79.0	40.5	56.
28.1	76.3	8827.3	325.0	-37.1	-39.6	264.0	36.0	36.0	1.3	325.5	326.9	0.4	77.4	43.6	59.
29.9	80.4	9375.0	300.0	-42.0	-49.9	276.1	29.0	28.8	-3.1	326.2	326.9	0.9	99.9	46.4	67.
31.8	84.4	9554.9	275.0	-47.6	-59.9	272.4	31.8	31.7	-1.3	326.2	326.9	0.9	99.9	49.7	71.
33.8	89.2	10574.2	250.0	-52.9	-69.9	278.2	35.3	35.2	-2.6	327.4	326.9	0.9	99.9	53.6	73.
35.8	94.4	11249.2	225.0	-59.1	-99.9	270.9	34.2	34.2	-0.5	327.9	326.9	0.9	99.9	57.3	74.
37.8	99.5	11978.7	200.0	-64.5	-99.9	268.2	36.5	36.5	1.1	330.7	326.9	0.9	99.9	61.6	75.
40.2	105.3	12791.3	175.0	-68.9	-99.9	280.0	40.4	39.8	-7.1	342.9	326.9	0.9	99.9	67.0	77.
43.0	111.7	13756.8	150.0	-50.0	-99.9	297.6	32.2	28.5	-14.9	370.2	326.9	0.9	99.9	72.7	79.
46.6	119.0	14903.1	125.0	-57.6	-99.9	295.8	26.4	23.8	-11.5	390.7	326.9	0.9	99.9	78.0	82.
51.1	127.5	16259.1	100.0	-62.0	-99.9	289.8	28.3	26.6	-9.4	407.9	326.9	0.9	99.9	84.0	84.
56.5	137.0	18072.5	75.0	-62.7	-99.9	288.1	17.9	17.2	-5.0	441.5	326.9	0.9	99.9	90.9	86.
64.5	147.5	20604.3	50.0	-57.4	-99.9	38.4	4.3	-2.7	-3.4	508.4	326.9	0.9	99.9	93.3	87.
99.9	99.9	50.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

9.2 V SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
9.8 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
99.9 V SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

AL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 52R
BUFFALO, N Y23 APRIL 1975
2115 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO CM/KG	RH PCY	RANGE KM	AZ DG
0.0	5.7	218.0	985.8	18.9	7.7	210.0	7.3	3.6	6.3	294.1	312.1	6.7	48.0	0.0	0.
99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	6.5	312.6	975.0	18.9	1.3	182.6	12.3	0.5	1.3	294.8	306.7	4.3	30.8	0.3	2.
1.1	8.5	534.8	950.0	17.1	-0.0	182.6	12.4	0.6	12.4	295.1	306.2	4.0	31.3	0.7	2.
1.7	10.6	761.6	925.0	15.6	1.2	190.4	10.9	2.0	10.9	295.8	309.3	4.5	37.9	1.2	3.
2.5	12.6	993.1	900.0	13.6	0.7	203.8	12.3	5.0	11.3	296.2	308.6	4.5	41.2	1.6	7.
3.1	14.8	1229.6	875.0	11.7	-0.4	208.8	15.6	7.5	13.7	296.5	308.3	4.2	43.2	2.2	12.
4.0	16.8	1471.0	850.0	9.2	-0.9	214.4	17.4	9.9	14.4	296.3	308.1	4.2	49.3	3.0	14.
4.9	18.1	1717.5	825.0	6.8	-1.3	219.2	17.9	11.3	13.8	296.3	307.9	4.2	55.5	4.0	22.
6.0	21.2	1965.5	800.0	4.7	-1.3	217.1	18.0	10.8	14.4	296.8	308.9	4.4	64.9	5.1	27.
6.8	23.5	2227.4	775.0	2.3	-1.3	220.0	19.3	12.4	14.8	296.9	309.3	4.5	76.8	6.9	27.
7.5	25.7	2491.7	750.0	0.1	-1.3	220.1	20.2	13.0	15.5	297.3	310.2	4.6	90.2	8.9	30.
8.2	28.1	2762.9	725.0	-2.1	-2.2	220.2	20.8	13.4	15.9	297.7	310.3	4.5	98.2	7.7	11.
8.9	30.5	3043.9	700.0	-3.9	-3.9	219.7	20.9	13.4	16.1	298.7	310.3	4.1	100.3	8.5	34.
9.7	32.0	3327.6	675.0	-5.1	-5.1	220.2	21.0	13.6	16.1	300.4	311.5	3.9	100.1	9.5	33.
10.4	34.4	3624.3	650.0	-6.2	-6.2	222.5	21.6	14.6	15.9	302.4	313.0	3.7	100.3	10.4	31.
11.3	37.9	3930.3	625.0	-8.3	-8.3	222.9	23.6	16.1	17.3	303.4	313.0	3.3	101.3	11.5	34.
12.3	40.5	4246.4	600.0	-10.3	-10.3	225.1	28.3	20.1	20.0	304.6	313.2	2.9	101.0	13.0	35.
13.2	43.2	4574.4	575.0	-10.4	-10.4	235.0	26.7	23.1	16.2	308.2	317.2	3.0	101.0	14.7	37.
14.1	46.0	4916.7	550.0	-11.1	-11.1	253.1	23.9	22.9	6.9	311.3	320.3	3.0	100.9	16.0	39.
15.3	49.3	5273.7	525.0	-12.6	-12.9	265.5	22.2	22.1	1.7	313.5	321.8	2.7	97.8	17.2	43.
16.3	51.8	5644.9	500.0	-14.8	-15.2	264.1	20.0	19.9	2.0	315.2	322.5	2.3	97.2	18.2	47.
17.3	54.8	6031.6	475.0	-17.4	-17.8	258.8	17.8	17.5	3.5	316.6	322.9	2.0	96.5	19.1	49.
18.5	57.9	6434.7	450.0	-20.2	-20.8	263.8	20.0	19.9	2.2	318.0	323.1	1.6	94.8	20.2	50.
19.6	61.1	6855.4	425.0	-24.1	-27.1	275.7	20.0	19.9	-2.0	318.1	323.1	1.0	76.6	21.3	52.
21.1	64.6	7295.8	400.0	-26.7	-33.2	274.6	24.0	23.9	-1.9	320.4	322.3	0.6	53.6	22.6	54.
22.5	67.9	7752.6	375.0	-30.2	-37.1	275.9	25.4	25.3	-2.6	321.6	323.1	0.4	50.6	24.6	59.
24.0	71.3	8246.0	350.0	-33.7	-39.8	283.1	25.0	24.3	-5.6	323.2	324.4	0.3	53.7	26.2	62.
25.6	75.3	8761.2	325.0	-37.8	-43.4	279.2	25.9	25.6	-4.1	324.5	325.4	0.2	55.3	27.9	64.
27.0	79.3	9307.4	300.0	-42.4	-49.9	266.5	30.0	30.0	1.8	325.7	325.9	99.9	99.9	30.2	67.
28.7	83.4	9899.1	275.0	-47.5	-59.9	263.8	34.2	34.0	3.7	326.5	326.9	99.9	99.9	33.3	69.
30.7	87.9	10511.5	250.0	-52.8	-69.9	261.9	38.7	38.3	5.4	327.6	327.6	99.9	99.9	37.6	70.
33.1	92.5	11182.7	225.0	-58.4	-79.9	263.0	43.6	43.3	5.3	329.0	329.0	99.9	99.9	43.2	72.
35.6	97.5	11913.4	200.0	-64.1	-89.9	265.0	38.1	38.0	3.4	331.3	331.3	99.9	99.9	49.4	73.
38.0	103.2	12734.3	175.0	-62.2	-99.9	278.8	33.1	32.7	-5.1	337.3	337.3	99.9	99.9	54.4	75.
41.3	107.8	13694.0	150.0	-60.1	-99.9	280.9	26.3	25.8	-5.0	366.6	366.6	99.9	99.9	59.4	78.
45.3	116.0	14842.8	125.0	-57.0	-99.9	280.5	37.6	37.0	-6.9	391.8	391.8	99.9	99.9	64.3	80.
50.7	124.3	16268.0	100.0	-55.9	-99.9	296.9	27.5	24.1	-13.1	419.7	419.7	99.9	99.9	74.5	84.
56.8	133.5	18068.9	75.0	-61.2	-99.9	303.6	14.8	12.3	-8.2	444.5	444.5	99.9	99.9	80.5	87.
99.9	99.9	99.9	50.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 532
GEORGIA, ILL23 APRIL 1975
2315 GMT

TIME MIN	CATCY	HEIGHT CFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCNP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/SEC	RM PCT	RANGE KM	AZ DG
0.0	7.3	200.0	983.4	20.6	16.2	180.0	7.3	0.0	7.3	296.8	328.1	11.9	76.8	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	8.3	275.0	975.0	20.9	16.6	198.5	14.8	4.7	13.0	257.9	330.3	12.3	76.0	0.3	11.
1.1	10.5	459.1	950.0	18.7	15.9	203.9	14.9	6.0	13.6	297.8	329.6	12.1	83.5	0.8	16.
1.9	12.5	727.9	925.0	16.7	14.9	212.5	15.9	8.6	13.4	297.9	328.7	11.6	89.2	1.4	22.
2.5	14.9	561.0	900.0	14.7	13.5	222.6	16.2	10.9	11.9	298.1	327.1	10.9	92.9	2.1	25.
3.3	17.0	1193.5	875.0	13.3	12.3	234.2	16.5	13.4	9.7	299.0	326.6	10.3	93.6	2.8	32.
4.2	19.4	1443.9	850.0	12.2	10.9	243.0	14.3	12.7	6.5	300.2	325.4	9.7	92.0	3.6	39.
5.0	21.6	1698.2	825.0	10.7	8.7	241.3	16.3	14.3	7.8	301.1	324.6	8.6	87.4	4.3	43.
5.5	24.1	1950.6	800.0	9.2	7.8	240.3	15.0	13.0	7.4	302.0	323.0	8.4	91.5	4.9	45.
6.5	26.4	2213.7	775.0	7.5	6.1	236.3	14.0	11.6	7.8	302.9	322.3	7.7	90.7	5.6	47.
7.4	28.9	2483.6	750.0	6.1	4.1	233.3	12.6	10.1	7.6	303.1	323.3	6.9	87.1	6.3	48.
8.1	31.5	2761.2	725.0	4.3	2.7	230.6	11.3	8.7	7.2	303.1	323.2	6.5	89.3	6.9	48.
9.1	34.1	3046.4	700.0	2.7	-0.3	231.4	12.2	9.5	7.6	303.2	321.5	5.4	80.5	7.5	48.
10.0	36.6	3341.0	675.0	2.1	-12.1	239.5	15.9	13.5	8.1	303.2	319.1	2.3	34.6	8.2	48.
10.9	39.3	3644.6	650.0	0.4	-19.4	244.1	20.0	18.0	8.8	303.6	313.5	1.3	20.9	9.2	50.
11.9	41.9	3957.6	625.0	-2.2	-21.4	244.8	21.8	19.7	9.3	310.1	313.6	1.1	21.1	10.4	52.
12.9	44.5	4288.1	600.0	-5.1	-21.2	248.6	20.6	18.9	8.2	310.3	314.0	1.2	27.0	11.7	53.
14.0	47.8	4612.3	575.0	-8.5	-20.7	246.2	20.3	18.6	8.2	310.2	314.2	1.3	36.4	13.0	55.
14.8	50.6	4953.2	550.0	-11.7	-20.5	247.6	19.8	18.3	7.5	310.4	314.7	1.4	47.7	14.0	55.
15.8	53.0	5309.3	525.0	-15.3	-20.4	248.8	21.0	19.6	7.6	310.2	314.7	1.4	64.6	15.1	57.
16.9	56.5	5678.6	500.0	-18.5	-21.2	249.7	22.0	20.6	7.6	310.6	315.0	1.4	79.7	16.6	58.
18.4	59.8	6052.3	475.0	-21.3	-26.2	251.4	24.2	22.9	7.7	311.7	314.7	0.9	64.7	18.5	59.
19.9	63.1	6452.7	450.0	-24.5	-29.2	250.8	21.2	20.0	7.0	314.5	315.0	0.7	64.3	20.5	60.
21.2	66.4	6846.4	425.0	-27.8	-32.7	248.7	24.9	23.2	9.1	313.4	315.3	0.6	62.8	22.1	61.
22.6	70.0	7250.4	400.0	-30.6	-34.5	251.3	30.9	29.3	9.9	313.3	317.0	0.5	67.9	24.6	62.
24.2	73.5	7753.6	375.0	-33.7	-38.5	263.1	26.9	26.7	3.2	317.0	320.2	0.4	61.3	27.4	63.
25.6	77.4	8236.1	350.0	-36.8	-40.6	261.6	28.9	28.6	4.2	319.0	320.1	0.3	67.3	29.5	65.
27.1	81.3	8746.0	325.0	-40.2	99.9	269.0	30.1	30.1	0.5	321.3	999.9	99.9	999.9	31.9	65.
28.7	85.3	9256.7	300.0	-43.1	99.9	270.2	31.8	31.8	-0.1	323.6	999.9	99.9	999.9	34.5	65.
30.6	89.5	9869.5	275.0	-47.6	99.9	273.6	36.9	36.8	-2.3	326.3	999.9	99.9	999.9	38.6	71.
32.8	94.3	10491.8	250.0	-53.2	99.9	279.4	41.3	40.8	-6.7	327.0	999.9	99.9	999.9	43.2	76.
35.2	99.2	11161.7	225.0	-58.7	99.9	270.1	39.1	39.1	-0.1	328.6	999.9	99.9	999.9	48.3	76.
37.5	104.3	11890.4	200.0	-61.2	99.9	264.2	44.3	44.1	4.5	333.9	999.9	99.9	999.9	54.3	77.
40.9	110.2	12733.8	175.0	-56.0	99.9	260.3	44.2	43.6	7.5	357.4	999.9	99.9	999.9	62.5	75.
44.9	116.3	13713.9	150.0	-54.6	99.9	270.8	42.8	42.8	-0.6	376.0	999.9	99.9	999.9	71.1	75.
49.7	123.7	14867.9	125.0	-58.2	99.9	265.9	37.4	37.4	2.7	389.6	999.9	99.9	999.9	80.8	81.
55.4	131.2	16276.4	100.0	-57.1	99.9	266.1	24.0	23.9	1.6	417.4	999.9	99.9	999.9	91.9	81.
62.3	139.7	18528.6	75.0	-66.4	99.9	299.3	12.7	11.1	-8.2	433.7	999.9	99.9	999.9	99.4	82.
72.4	148.3	20571.2	50.0	-58.4	99.9	259.7	9.3	9.2	1.7	505.9	999.9	99.9	999.9	102.7	83.
89.3	157.7	24999.9	25.0	-53.2	99.9	300.3	6.2	5.4	-7.1	632.1	999.9	99.9	999.9	105.0	84.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 553
CHAMA, NEB23 APRIL 1975
2315 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
00	7.0	400.0	959.0	19.0	14.5	20.0	4.2	-1.4	-3.9	297.1	325.9	10.9	75.0	163	20.9
00.9	90.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0.0	0.
00.9	90.3	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.3	9.0	481.3	950.0	18.4	14.4	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.1	10.6	709.5	925.0	15.8	14.1	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
2.1	12.6	942.2	900.0	14.5	10.6	30.1	6.1	-3.0	-5.2	297.0	326.2	11.1	89.8	99.9	99.9
2.9	14.2	1180.7	875.0	16.1	8.0	18.7	3.6	-1.2	-3.4	301.6	321.8	9.0	77.9	99.9	99.9
3.9	16.9	1427.1	850.0	15.4	-0.3	10.1	3.1	-0.6	-3.1	302.9	322.8	7.7	58.5	99.9	99.9
4.9	19.2	1675.2	825.0	13.6	-1.1	339.2	5.6	2.0	-5.2	303.5	315.5	4.4	34.3	99.9	99.9
5.9	21.4	1537.7	800.0	12.2	-4.2	318.3	6.8	4.5	-5.1	304.6	315.8	4.3	34.3	99.9	99.9
6.9	23.9	2232.9	775.0	10.8	-5.3	293.2	7.6	7.0	-3.9	305.9	315.0	3.3	31.7	99.9	99.9
7.9	26.0	2474.9	750.0	8.5	-7.4	295.5	7.9	7.2	-3.4	306.2	314.9	2.9	31.7	99.9	99.9
8.9	28.5	2723.9	725.0	5.9	-8.8	294.2	7.7	7.0	-3.2	306.3	314.4	2.7	33.6	99.9	99.9
9.0	31.1	3040.1	700.0	3.7	-10.0	295.2	7.4	6.7	-3.2	306.9	314.5	2.5	33.6	99.9	99.9
11.2	33.7	3314.2	675.0	1.4	-10.9	281.5	6.1	7.0	-1.6	307.5	315.4	2.4	33.6	99.9	99.9
12.3	36.2	3636.7	650.0	-1.0	-11.8	266.2	12.0	12.0	0.8	308.2	315.4	2.4	33.6	99.9	99.9
13.4	38.9	3948.4	625.0	-3.6	-11.8	255.3	14.5	14.0	3.7	308.7	316.1	2.5	33.6	99.9	99.9
14.6	41.6	4269.6	600.0	-6.5	-12.9	249.5	16.1	15.1	5.6	308.9	316.0	2.4	33.6	99.9	99.9
15.8	44.4	4600.6	575.0	-9.6	-14.0	245.8	17.6	16.1	7.2	309.0	316.0	2.4	33.6	99.9	99.9
17.1	47.4	4942.5	550.0	-11.9	-20.1	246.9	20.0	18.4	7.8	310.1	316.5	1.4	33.6	99.9	99.9
18.5	50.4	5295.8	525.0	-14.8	-27.0	251.5	19.8	18.8	4.3	310.7	316.5	1.4	33.6	99.9	99.9
19.9	53.5	5643.8	500.0	-18.1	-29.6	259.9	20.2	19.9	3.5	311.1	313.2	0.6	33.6	99.9	99.9
21.3	56.5	6045.1	475.0	-20.5	-33.1	266.8	21.5	21.5	1.8	312.6	314.3	0.5	31.1	99.9	99.9
22.9	60.0	6443.1	450.0	-23.2	-40.1	265.6	23.9	23.8	1.8	314.1	315.0	0.3	19.4	99.9	99.9
24.6	63.4	6854.1	425.0	-26.5	-43.9	262.1	24.2	24.0	3.3	315.0	315.6	0.2	17.5	99.9	99.9
26.2	66.9	7295.4	400.0	-28.6	-46.1	265.1	28.7	28.6	2.5	317.8	318.3	0.1	16.6	99.9	99.9
28.1	70.6	7754.2	375.0	-32.4	-48.4	268.7	33.3	33.3	0.8	318.7	319.2	0.1	18.3	99.9	99.9
29.9	74.6	8237.1	350.0	-36.0	-48.5	263.8	36.2	36.0	3.9	320.2	320.7	0.1	26.0	99.9	99.9
31.8	78.7	8748.0	325.0	-39.9	-49.9	265.5	38.2	39.1	3.0	321.7	321.7	0.1	99.9	99.9	99.9
33.8	82.8	9299.1	300.0	-44.5	-49.9	262.1	43.6	43.2	6.0	322.6	322.6	0.1	99.9	99.9	99.9
36.1	87.4	9866.6	275.0	-49.0	-49.9	262.1	49.3	49.9	7.8	324.3	324.3	0.1	99.9	99.9	99.9
38.3	92.4	10485.6	250.0	-53.5	-49.9	262.1	50.1	49.6	7.2	326.5	326.5	0.1	99.9	99.9	99.9
40.6	97.5	11159.0	225.0	-56.6	-49.9	261.4	49.3	48.8	7.2	328.8	328.8	0.1	99.9	99.9	99.9
43.4	102.2	11902.2	200.0	-57.7	-49.9	262.4	47.5	47.1	6.3	339.9	339.9	0.1	99.9	99.9	99.9
46.4	106.5	12743.8	175.0	-57.2	-49.9	261.3	47.5	46.8	7.2	355.5	355.5	0.1	99.9	99.9	99.9
50.2	116.3	13720.4	150.0	-56.5	-49.9	251.9	41.2	39.2	12.8	372.8	372.8	0.1	99.9	99.9	99.9
54.3	124.3	14879.9	125.0	-57.4	-49.9	249.1	41.1	38.4	16.7	391.1	391.1	0.1	99.9	99.9	99.9
58.0	132.0	16290.8	100.0	-57.0	-49.9	234.4	32.6	26.6	18.9	417.6	417.6	0.1	99.9	99.9	99.9
64.4	143.6	18056.8	75.0	-60.3	-49.9	230.0	8.8	4.4	-7.7	445.1	445.1	0.1	99.9	99.9	99.9
73.0	152.7	20655.9	50.0	-54.5	-49.9	215.6	9.4	5.8	7.7	515.1	515.1	0.1	99.9	99.9	99.9
85.9	166.5	25138.3	25.0	-50.3	-49.9	50.4	6.1	-4.7	-3.9	640.3	640.3	0.1	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

* BY TEMP MEANS TEMPERATURE ON TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 562
NORTH PLATTE, NEB23 APRIL 1975
2315 GMT

147 100 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR RTD GM/SEC	RM PCT	RANGE KM	AZ DEG
0.0	14.3	847.0	908.2	23.9	6.2	120.0	7.2	-6.2	3.6	306.2	324.0	6.6	32.0	0.0	0.0
99.9	99.9	1000.0	999.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	15.0	926.0	908.0	22.0	6.5	99.9	99.9	99.9	99.9	305.3	327.0	7.8	41.9	99.9	99.9
1.3	17.2	1169.4	875.0	19.3	6.9	99.9	99.9	99.9	99.9	305.8	324.0	7.2	44.5	99.9	99.9
2.1	19.6	1417.9	859.0	17.2	7.0	135.8	6.9	-4.8	5.0	305.1	325.9	7.4	51.1	1.1	31.6
2.8	21.8	1671.7	825.0	14.7	5.5	146.0	6.9	-3.9	5.8	305.1	324.5	6.9	54.0	1.4	31.6
3.7	24.3	1931.3	800.0	12.3	4.0	146.0	4.5	-2.3	3.9	305.1	323.1	6.4	56.8	1.7	31.6
4.5	26.7	2196.5	775.0	10.0	2.7	167.9	5.6	-1.2	5.5	305.4	322.4	6.0	60.5	1.7	32.0
5.2	29.3	2468.2	750.0	7.4	1.5	190.9	5.3	1.0	5.2	305.4	321.6	5.7	65.9	2.1	32.0
6.0	31.9	2746.3	725.0	4.9	0.4	213.5	5.3	2.9	4.4	305.5	321.0	5.4	72.5	2.3	31.6
6.9	34.6	3031.6	700.0	2.0	-1.1	229.5	4.8	3.6	3.1	305.4	319.9	5.1	79.8	2.3	31.6
7.8	37.1	3324.5	675.0	-0.2	-1.8	248.0	4.6	6.1	2.5	305.0	320.4	5.0	89.2	2.4	31.6
8.9	39.9	3625.6	650.0	-2.6	-2.4	253.0	9.2	8.8	2.7	305.5	317.2	3.7	74.9	2.4	35.0
10.0	42.4	3936.1	625.0	-4.6	-12.1	252.4	11.5	11.0	3.5	307.5	314.8	2.4	55.6	2.7	13.0
11.5	45.4	4250.0	600.0	-7.4	-16.2	248.9	13.1	12.2	4.7	307.8	314.2	2.1	57.9	3.3	2.0
12.7	48.4	4555.9	575.0	-9.9	-18.5	250.1	13.6	12.8	4.6	308.6	313.5	1.6	49.6	4.2	3.0
14.0	51.3	4927.5	550.0	-12.2	-25.1	252.2	14.2	13.5	4.4	309.6	312.5	0.9	33.2	5.0	4.3
15.1	54.4	5282.1	525.0	-13.9	-35.3	253.5	14.8	14.2	4.2	311.7	312.9	0.4	14.4	6.0	4.4
16.5	57.4	5551.2	500.0	-15.7	-36.4	258.6	14.6	14.4	2.6	313.9	315.3	0.4	18.5	7.0	5.2
17.9	60.6	6036.1	475.0	-18.2	-32.4	258.7	14.3	14.0	2.9	315.4	317.2	0.5	27.5	9.1	5.7
19.4	64.0	6437.2	450.0	-21.1	-37.1	256.4	15.4	15.0	3.6	316.7	317.9	0.3	22.1	9.1	5.7
21.0	67.4	6856.3	425.0	-24.6	-38.1	262.0	17.9	17.7	2.5	317.5	318.9	0.4	33.1	10.9	5.2
22.6	70.9	7294.7	400.0	-28.1	-38.3	262.8	21.0	20.9	2.6	318.4	319.6	0.3	36.5	12.6	5.2
24.3	74.3	7754.7	375.0	-31.8	-41.7	261.5	22.0	21.8	3.3	319.5	320.4	0.3	36.2	14.7	5.2
26.1	78.3	8238.3	350.0	-36.1	-46.6	259.9	23.0	22.6	4.0	320.0	320.6	0.2	32.7	17.2	7.0
27.9	82.0	8747.9	325.0	-40.3	-46.9	258.7	27.0	26.2	6.7	321.1	320.9	99.9	99.9	19.7	71.0
29.9	86.2	9288.1	300.0	-45.2	-49.9	250.5	29.2	27.5	9.7	321.7	320.9	99.9	99.9	23.2	71.0
31.7	90.6	9864.9	275.0	-50.2	-49.9	246.9	33.6	30.9	13.2	322.6	320.9	99.9	99.9	26.6	71.0
33.6	95.3	10478.0	250.0	-55.6	-49.9	246.4	37.5	33.8	16.2	323.4	320.9	99.9	99.9	30.5	71.0
35.7	100.3	11140.3	225.0	-60.0	-49.9	247.2	36.6	33.8	14.2	326.6	320.9	99.9	99.9	35.1	6.0
38.6	105.3	11875.2	200.0	-60.2	-49.9	248.1	32.9	30.5	12.2	337.5	320.9	99.9	99.9	41.4	0.0
41.4	110.8	12713.6	175.0	-57.2	-49.9	248.9	36.7	34.3	13.2	335.5	320.9	99.9	99.9	47.8	0.0
44.0	117.0	13686.6	150.0	-57.4	-49.9	249.1	29.3	27.4	10.5	371.3	320.9	99.9	99.9	54.1	0.0
46.5	124.0	14544.1	125.0	-54.2	-49.9	248.4	28.8	24.4	11.1	350.9	320.9	99.9	99.9	61.6	0.0
53.0	131.3	16266.5	100.0	-58.1	-49.9	243.9	26.6	24.3	15.6	415.6	320.9	99.9	99.9	69.2	5.0
59.4	139.2	18095.1	75.0	-58.2	-49.9	235.1	20.3	16.7	11.6	450.8	320.9	99.9	99.9	79.3	6.7
67.5	147.0	20440.1	50.0	-56.8	-49.9	242.8	4.0	3.6	1.8	509.5	320.9	99.9	99.9	81.3	6.7
80.3	155.0	23110.0	25.0	-50.2	-49.9	270.1	2.5	2.5	-0.3	640.3	320.9	99.9	99.9	84.8	6.7

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 606
PORTLAND, ME

23 APRIL 1975
2315 GMT

TIME MIN	TCT	HEIGHT CM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED K/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.5	20.0	1021.4	9.4	-2.8	190.0	6.2	1.1	6.1	281.2	289.3	3.0	42.0	0.0	0.
0.6	6.2	195.9	1000.0	10.0	-4.7	202.2	8.3	3.1	7.7	283.5	290.7	2.7	35.1	0.4	13.
1.3	11.0	622.1	975.0	10.1	-6.9	205.8	6.4	3.0	7.6	285.6	292.1	2.3	29.5	0.8	19.
2.1	11.0	622.1	950.0	10.7	-10.2	214.8	6.7	3.8	5.5	288.3	293.5	1.9	21.9	1.1	22.
2.7	13.5	843.4	925.0	8.9	-11.4	231.2	5.4	4.2	3.4	288.6	293.5	1.7	22.5	1.4	25.
3.5	15.8	1062.2	900.0	7.0	-12.2	253.6	4.3	4.1	1.2	289.0	293.7	1.7	23.8	1.5	30.
4.2	16.4	1256.7	875.0	4.8	-12.6	267.5	4.0	4.0	0.2	288.9	293.7	1.7	27.1	1.6	35.
5.0	20.8	1538.9	850.0	2.6	-13.0	270.5	4.6	4.6	-0.8	289.1	293.8	1.7	30.5	1.8	40.
5.8	23.4	1775.2	825.0	0.3	-14.7	285.9	5.5	5.5	0.4	289.1	293.8	1.5	31.2	1.9	45.
6.5	26.0	2021.0	800.0	-1.4	-20.3	282.6	5.3	5.2	-1.2	289.8	293.6	0.9	22.0	2.1	50.
7.3	28.7	2273.3	775.0	-3.1	-22.7	318.9	5.1	3.6	-3.6	290.6	293.0	0.8	20.3	2.2	56.
8.2	31.5	2532.2	750.0	-4.3	-23.7	318.9	6.7	4.4	-5.3	292.0	294.3	0.7	20.1	2.2	64.
9.2	34.3	2758.5	725.0	-5.8	-23.7	310.8	8.4	6.4	-5.3	293.2	295.6	0.8	22.7	2.4	74.
10.2	37.0	3072.1	700.0	-7.9	-26.1	304.1	9.8	8.1	-5.5	293.8	295.8	0.6	21.5	2.8	81.
11.4	40.0	3353.2	675.0	-7.9	-28.2	303.4	11.3	9.5	-6.2	296.8	298.6	0.5	17.7	3.4	92.
12.3	42.8	3647.9	650.0	-9.5	-28.5	301.5	12.5	10.7	-6.6	298.3	300.1	0.6	19.3	4.0	97.
13.4	45.9	3949.6	625.0	-11.7	-29.3	299.2	13.3	11.6	-6.5	299.1	300.8	0.5	21.5	4.7	100.
14.5	49.0	4260.7	600.0	-14.6	-29.2	301.3	14.2	12.1	-7.4	299.2	301.0	0.6	27.5	5.6	104.
15.5	51.9	4581.6	575.0	-17.2	-29.6	301.2	14.7	12.6	-7.6	299.8	301.6	0.6	33.0	6.5	109.
16.6	55.1	4913.6	550.0	-18.1	-21.9	297.8	17.3	15.3	-6.1	302.7	306.4	1.2	71.9	7.4	139.
17.6	58.1	5260.7	525.0	-19.4	-20.7	296.7	19.6	17.5	-8.8	305.3	309.5	1.4	88.9	8.6	109.
18.9	61.6	5622.3	500.0	-21.3	-22.3	299.0	23.4	20.5	-11.4	307.2	311.1	1.3	91.3	10.2	110.
20.1	65.1	5995.2	475.0	-23.7	-24.8	302.4	25.4	21.4	-13.6	308.8	312.2	1.1	90.2	11.9	112.
21.4	68.6	6392.4	450.0	-26.3	-27.3	304.1	24.7	20.4	-13.8	310.2	313.1	0.9	91.6	13.9	114.
23.0	72.0	6803.5	425.0	-28.7	-31.0	306.9	29.4	23.5	-17.7	312.2	314.4	0.7	80.6	16.4	115.
24.5	75.9	7234.9	400.0	-31.9	-35.6	307.4	29.0	23.1	-17.6	313.5	315.0	0.5	69.4	19.0	117.
26.3	79.8	7687.5	375.0	-35.6	-39.6	305.7	31.5	25.6	-18.4	314.4	315.5	0.3	66.4	22.2	119.
28.3	83.8	8168.7	350.0	-38.8	-42.5	305.5	32.9	26.8	-19.1	316.3	317.2	0.3	67.6	26.1	120.
30.5	88.0	8659.2	325.0	-42.6	99.9	307.0	37.3	29.8	-22.4	318.0	999.9	99.9	999.9	30.7	120.
32.9	92.6	9203.1	300.0	-46.3	99.9	310.5	40.9	31.1	-26.6	320.2	999.9	99.9	999.9	36.2	122.
35.2	97.2	9750.1	275.0	-49.5	99.9	308.3	49.5	38.8	-30.7	323.6	999.9	99.9	999.9	42.6	123.
37.8	102.0	10346.4	250.0	-52.2	99.9	309.2	52.4	40.7	-33.1	324.1	999.9	99.9	999.9	51.3	124.
40.5	107.5	11061.7	225.0	-59.8	99.9	311.5	56.9	42.6	-37.7	327.0	999.9	99.9	999.9	58.0	125.
42.0	113.3	11794.9	200.0	-61.9	99.9	311.3	44.0	27.5	-34.3	334.2	999.9	99.9	999.9	66.5	126.
45.5	119.5	12610.9	175.0	-65.5	99.9	303.7	32.1	26.7	-17.8	340.2	999.9	99.9	999.9	72.1	127.
48.8	126.3	13574.9	150.0	-68.5	99.9	314.3	36.3	26.0	-25.3	346.6	999.9	99.9	999.9	81.7	127.
54.6	133.7	14740.4	125.0	-58.2	99.9	309.8	22.5	17.3	-14.4	393.2	999.9	99.9	999.9	89.7	127.
60.2	141.0	16124.6	100.0	-58.0	99.9	307.3	23.1	18.4	-14.0	419.6	999.9	99.9	999.9	95.9	127.
67.6	149.0	17585.8	75.0	-57.2	99.9	127.3	3.6	-2.8	2.2	453.1	999.9	99.9	999.9	104.4	129.
78.3	157.3	20576.1	50.0	-53.7	99.9	336.3	6.3	2.7	-5.7	517.1	999.9	99.9	999.9	108.3	128.
94.3	161.7	25045.1	25.0	-51.6	99.9	339.1	3.7	1.3	-3.8	636.8	999.9	99.9	999.9	118.0	128.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 18 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 637
PLINT, MICH23 APRIL 1975
2315 GMT

153 15. 0

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DEG C	DEB PT DEG C	CIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR RTO CM/KG	RM PCT	RANGE RM	AZ DEG
0.0	5.2	236.0	977.2	13.9	12.8	210.0	8.7	4.3	7.5	290.2	314.9	9.6	93.6	0.2	0.
99.9	99.9	99.9	1000.0	19.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	7.4	250.0	975.0	13.9	12.5	211.1	9.9	5.1	8.5	290.4	314.8	9.4	91.2	0.1	6.
0.7	7.3	475.5	950.0	13.0	11.6	215.9	15.0	0.3	12.9	291.6	315.2	9.1	90.9	0.6	10.
1.4	6.3	699.7	925.0	11.6	10.5	227.2	19.8	14.5	13.4	292.3	315.0	8.7	93.2	1.3	36.
2.2	11.2	528.8	900.0	10.4	9.4	242.5	21.2	18.8	9.6	293.3	315.2	8.3	93.7	2.2	43.
2.9	13.3	1163.5	875.0	9.6	8.6	253.7	24.2	23.2	6.8	294.9	316.3	8.1	93.7	3.1	51.
3.6	15.2	1408.1	850.0	8.4	7.5	265.3	24.0	23.9	2.0	296.0	316.6	7.7	93.6	4.1	56.
4.7	17.4	1651.0	825.0	7.0	6.1	278.3	21.4	21.4	-1.7	297.0	316.5	7.2	94.0	5.4	61.
5.7	19.5	1903.9	800.0	5.4	4.5	270.3	24.6	24.6	-0.1	297.8	316.8	6.6	93.4	6.6	72.
6.6	21.5	2163.4	775.0	4.3	3.3	273.6	22.1	22.1	-1.4	299.2	316.6	6.3	93.7	7.9	75.
7.6	23.4	2429.9	750.0	4.2	-0.4	281.5	25.2	24.7	-5.0	301.4	309.8	2.5	36.7	9.1	74.
8.5	25.6	2736.4	725.0	4.9	-13.3	288.5	25.4	24.4	-7.2	305.1	310.9	1.9	25.3	10.5	92.
9.5	26.2	2991.7	700.0	3.5	-23.7	290.7	26.0	24.5	-8.8	306.4	309.0	0.8	11.5	11.7	95.
10.4	30.5	3245.5	675.0	1.5	-29.2	290.7	25.5	23.8	-9.0	307.4	309.1	0.5	8.0	13.1	85.
11.4	32.2	3582.0	650.0	-0.7	-26.2	298.3	25.2	23.9	-7.9	308.2	310.5	0.7	12.4	14.4	90.
12.3	35.5	3899.6	625.0	-3.4	-27.7	294.9	25.0	24.2	-6.4	308.6	310.6	0.6	13.2	15.9	92.
13.4	38.1	4220.4	600.0	-6.3	-28.6	281.4	25.6	25.0	-5.0	308.9	311.3	0.7	18.0	17.4	91.
14.5	40.5	4591.6	575.0	-9.1	-26.5	278.9	24.8	24.5	-3.8	309.4	311.9	0.8	22.8	19.1	93.
15.7	43.2	4893.6	550.0	-11.8	-31.5	272.9	25.3	25.1	-2.7	310.1	311.8	0.5	17.7	20.8	94.
16.9	46.3	5246.2	525.0	-13.9	-41.5	272.9	25.9	24.9	-1.3	311.6	312.3	0.2	7.5	22.7	94.
19.2	49.9	5617.1	500.0	-18.1	-33.6	269.3	23.8	23.8	0.3	313.3	313.9	0.2	7.2	24.5	94.
19.5	51.9	6001.5	475.0	-18.8	-45.1	264.9	25.0	24.9	2.2	314.6	315.1	0.1	7.6	26.4	91.
20.6	54.6	6402.2	450.0	-21.6	-47.1	260.0	29.3	20.0	3.5	316.0	316.5	0.1	7.9	28.2	93.
22.0	57.9	6820.4	425.0	-25.0	-47.5	261.9	18.9	19.8	2.7	316.9	317.3	0.1	10.3	29.6	92.
23.3	61.3	7257.6	400.0	-28.5	-48.3	265.4	18.6	18.5	1.5	317.9	318.3	0.1	11.9	30.7	91.
24.7	64.4	7718.8	375.0	-32.4	-52.6	272.2	27.6	27.6	-1.1	318.7	319.0	0.1	11.2	33.9	91.
26.3	67.9	8198.5	350.0	-36.6	-53.1	268.7	31.9	31.9	0.8	319.3	319.6	0.1	16.1	35.4	91.
27.6	71.4	8707.7	325.0	-40.8	-59.9	259.3	34.0	33.4	6.3	320.5	319.9	99.9	99.9	38.9	91.
29.6	75.3	9248.2	300.0	-45.4	-59.2	240.6	34.2	29.5	14.8	322.2	319.9	99.9	99.9	42.4	92.
31.4	78.4	9826.1	275.0	-48.0	-59.9	236.5	35.0	29.4	20.8	325.7	319.9	99.9	99.9	45.5	90.
33.4	83.7	10447.9	250.0	-52.0	-59.9	233.4	39.1	31.5	23.2	327.2	319.9	99.9	99.9	48.2	94.
35.4	88.2	11119.5	225.0	-56.1	-59.9	230.4	37.7	32.5	19.2	329.4	319.9	99.9	99.9	53.3	91.
37.7	92.2	11856.9	200.0	-58.7	-59.9	240.0	35.8	33.4	12.8	330.0	319.9	99.9	99.9	58.5	92.
40.3	98.4	12699.3	175.0	-58.9	-59.9	263.8	43.7	43.5	4.7	337.7	319.9	99.9	99.9	63.9	80.
43.3	104.5	13682.6	150.0	-51.3	-59.9	266.3	32.1	37.1	2.1	342.2	319.9	99.9	99.9	70.0	91.
46.8	111.3	14648.9	125.0	-50.8	-59.9	265.3	30.7	30.7	0.4	342.8	319.9	99.9	99.9	76.5	81.
50.8	119.0	16245.9	100.0	-57.0	-59.9	275.8	45.2	29.0	-2.9	417.6	319.9	99.9	99.9	83.2	82.
54.1	128.7	18074.4	75.0	-61.1	-59.9	273.8	29.5	20.4	-1.4	444.9	319.9	99.9	99.9	87.1	93.
62	139.5	20628.0	50.0	-54.6	-59.9	320.1	6.9	4.0	-5.6	518.2	319.9	99.9	99.9	91.1	87.
73.3	152.0	25071.2	25.0	-54.0	-59.9	278.1	10.1	10.0	-1.4	635.2	319.9	99.9	99.9	92.7	90.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 645
GREEN BAY, WIS20 APRIL 1975
2115 GBT

TIME MIN	CATCY	HEIGHT CM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V CCM M/SEC	POT T DEG K	E PUT Y DEG K	WZ RTO CM/SEC	RM PCT	RANGE KM	AZ DEG
0.0	0.2	210.0	979.0	16.1	10.4	270.0	0.2	4.2	0.0	292.1	313.5	0.1	69.6	0.0	0
0.0	0.0	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	0.0	244.9	975.0	16.0	10.3	270.2	5.3	5.2	-0.6	292.3	313.7	0.1	69.2	0.1	35
0.9	10.0	445.0	950.0	13.2	6.3	280.0	7.2	7.1	-1.3	291.6	310.7	7.3	71.0	0.3	30
1.7	13.1	689.8	925.0	11.3	6.6	285.9	9.2	6.9	-2.5	291.7	309.3	6.6	73.0	0.7	32
2.5	15.4	917.4	900.0	9.4	6.9	293.3	10.2	9.5	-3.7	292.1	310.6	7.0	84.0	1.1	126
3.3	17.6	1150.5	875.0	7.3	6.1	298.0	9.9	8.7	-4.8	292.2	310.2	6.8	92.3	1.6	130
4.2	20.3	1389.9	850.0	5.4	4.3	299.1	11.1	9.7	-5.2	292.6	309.1	6.2	92.9	2.2	135
5.1	22.6	1632.8	825.0	4.6	1.1	297.7	14.9	10.2	-4.5	294.1	307.9	5.1	78.9	2.9	130
6.1	25.2	1882.7	800.0	8.0	-1.8	290.6	15.9	14.9	-5.6	300.2	312.1	4.2	50.2	3.9	130
6.9	27.6	2147.4	775.0	7.3	-10.6	286.4	16.2	15.5	-4.6	302.9	306.5	2.2	26.6	4.6	110
7.9	30.3	2416.2	750.0	5.7	-18.1	287.6	16.8	16.0	-5.1	302.9	306.7	1.2	16.0	5.5	104
8.7	32.0	2692.1	725.0	3.3	-18.1	285.4	17.7	17.1	-4.7	303.3	307.2	1.3	18.9	6.4	104
9.8	35.6	2975.7	700.0	1.3	-20.1	283.8	19.9	19.5	-4.1	303.0	307.5	1.1	16.5	7.6	104
10.7	41.0	3266.9	675.0	-1.1	-20.8	279.1	20.2	19.8	-3.2	303.5	307.9	1.1	20.4	8.7	104
12.0	43.9	3975.2	625.0	-5.8	-24.8	281.0	19.3	18.9	-3.7	305.9	308.5	0.8	20.6	11.3	135
14.0	46.9	4193.4	600.0	-8.6	-21.6	280.2	18.5	17.2	-3.3	306.3	309.8	1.1	34.0	12.5	130
15.2	50.0	4571.4	575.0	-11.6	-25.3	275.0	16.4	16.3	-2.0	305.5	309.2	0.8	31.0	13.9	134
16.5	52.9	4861.3	550.0	-12.7	-29.0	277.4	19.9	19.7	-2.6	309.1	311.0	0.6	22.1	15.5	104
17.8	55.9	5212.9	525.0	-15.2	-31.3	275.0	20.6	20.4	-3.2	310.1	311.9	0.5	23.7	17.1	135
19.2	59.1	5581.4	500.0	-18.0	-30.7	277.0	20.8	20.6	-2.5	311.1	312.2	0.3	17.9	18.6	130
20.5	62.6	5962.6	475.0	-20.8	-43.2	271.1	20.4	20.4	-0.4	312.2	312.2	0.0	1.0	20.4	104
21.8	65.0	6359.8	450.0	-24.0	-63.2	271.0	21.9	21.9	-0.4	313.0	313.1	0.0	1.0	21.3	101
23.2	69.3	6774.2	425.0	-26.9	-67.1	271.9	24.3	24.2	-0.8	314.5	314.6	0.0	1.0	24.0	130
24.8	72.9	7208.4	400.0	-30.4	-65.5	277.5	25.8	25.6	-3.4	315.4	315.4	0.0	1.0	25.3	130
26.4	76.7	7662.5	375.0	-34.4	-72.1	277.1	26.7	26.5	-3.3	316.0	316.1	0.0	1.0	26.7	94
28.1	80.5	8141.9	350.0	-38.4	-74.9	274.9	26.9	26.8	-2.3	316.5	316.5	0.0	1.0	31.5	34
30.1	84.6	8645.8	325.0	-42.4	-79.9	272.8	29.6	29.6	-1.4	317.0	317.0	99.9	99.9	34.9	94
32.0	89.7	9178.9	300.0	-46.4	-90.9	272.9	32.2	32.2	-1.6	317.1	317.1	99.9	99.9	42.5	94
34.2	93.3	9745.7	275.0	-50.4	-90.9	272.3	32.2	32.2	-1.3	318.2	318.2	99.9	99.9	46.2	94
36.3	98.0	10253.4	250.0	-54.4	-90.9	269.1	33.3	33.1	3.4	322.1	322.1	99.9	99.9	51.1	94
38.4	103.0	10723.6	225.0	-58.4	-90.9	259.9	35.0	34.1	7.4	333.5	333.5	99.9	99.9	56.4	94
40.4	108.3	11769.6	200.0	-62.4	-90.9	251.1	36.3	33.7	6.5	341.5	341.5	99.9	99.9	67.1	94
42.4	114.3	12619.8	175.0	-66.4	-90.9	261.5	36.9	34.9	5.5	349.1	349.1	99.9	99.9	67.1	94
44.9	120.7	13610.3	150.0	-70.4	-90.9	267.6	33.6	33.5	1.4	370.8	370.8	99.9	99.9	65.9	91
47.0	126.0	14769.4	125.0	-74.4	-90.9	253.0	24.2	24.1	7.1	390.6	390.6	99.9	99.9	76.7	91
49.1	132.8	16215.1	100.0	-78.4	-90.9	272.2	25.7	25.7	-1.0	420.5	420.5	99.9	99.9	84.7	91
51.7	139.0	17951.7	75.0	-82.4	-90.9	253.5	3.7	3.6	1.1	451.8	451.8	99.9	99.9	90.4	91
53.2	144.0	19951.7	50.0	-86.4	-90.9	237.7	5.1	-4.3	-2.7	513.5	513.5	99.9	99.9	95.0	91
55.0	153.3	22090.5	25.0	-90.4	-90.9	21.9	8.1	-6.3	-0.5	640.1	640.1	99.9	99.9	97.0	92

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS

STATION NO. 004
MORON. S O
23 APRIL 1975
2315 GMT

TIME MIN	CHYCT	WEIGHT GPH	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	NR WTD CAV/KG	RM PCT	RANGE NM	AZ DEG
000	000	39200	902.4	13.9	9.3	300	4.2	-2.1	-3.4	291.0	306.5	5.0	54.0	0.0	00
005	000	10000	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
010	000	99.0	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
015	000	501.1	950.0	12.2	4.0	230.4	10.6	0.5	0.3	290.3	305.4	5.7	61.0	0.5	230
101	110	723.9	925.0	9.8	4.0	99.9	99.9	99.9	99.9	290.1	305.4	5.0	70.2	99.9	99.9
109	130	950.0	900.0	7.7	5.1	799.9	99.9	99.9	99.9	290.7	304.3	0.1	83.5	99.9	99.9
207	150	1102.0	875.0	5.5	4.5	99.9	99.9	99.9	99.9	290.4	304.3	0.1	93.3	99.9	99.9
305	170	1419.2	850.0	3.0	3.4	100.7	3.1	-0.9	-3.6	290.0	304.3	0.1	93.3	99.9	99.9
402	190	1602.4	825.0	7.0	-10.4	340.1	2.2	0.4	-3.2	290.2	304.3	1.1	14.2	0.0	104
501	210	1918.4	800.0	6.0	-13.3	292.4	3.2	3.0	-1.2	290.0	304.3	1.0	23.0	0.9	100
509	230	2175.1	775.0	5.0	-12.0	271.0	4.3	4.3	-0.3	290.4	304.3	2.0	27.9	0.9	175
609	250	2441.7	750.0	2.0	-11.1	271.3	5.0	5.0	-0.1	300.0	300.0	2.2	30.0	1.0	100
707	260	2715.5	725.0	1.1	-9.7	267.0	0.5	0.5	0.0	301.0	300.0	2.7	40.0	1.2	102
806	300	2976.9	700.0	-0.6	-12.9	260.4	10.0	10.0	0.0	302.1	300.0	2.0	30.0	1.5	125
905	320	3240.4	675.0	-2.7	-17.7	271.2	10.3	10.3	-0.2	302.8	300.0	1.6	30.3	2.1	114
1006	350	3500.7	650.0	-4.7	-23.8	273.0	11.6	11.6	-0.9	303.0	300.0	0.9	20.7	2.7	110
1100	370	3692.0	625.0	-6.6	-29.4	272.4	12.7	12.7	-1.3	303.0	300.0	0.9	23.3	3.4	106
1207	400	4000.0	600.0	-8.9	-35.7	272.0	14.3	14.3	-0.7	303.0	300.0	0.1	11.5	4.3	100
1300	420	4337.3	575.0	-11.5	-41.5	265.7	15.1	15.1	0.1	306.0	306.0	0.1	9.0	5.2	101
1500	450	4677.6	550.0	-13.0	-46.4	260.6	15.0	15.0	1.1	308.7	309.9	0.1	8.4	6.3	99
1602	480	5220.4	525.0	-16.2	-52.3	260.6	15.3	15.1	2.5	308.9	309.9	0.2	8.4	7.3	97
1705	510	5590.5	500.0	-19.1	-58.2	260.1	15.7	15.7	1.6	309.7	310.2	0.1	8.7	8.5	94
1807	540	5973.7	475.0	-22.7	-63.0	260.1	15.4	15.4	0.5	309.9	310.5	0.2	12.5	9.6	94
1900	570	6360.2	450.0	-25.5	-68.6	267.5	15.0	15.0	0.7	311.1	311.4	0.1	9.4	10.7	93
2103	600	6770.7	425.0	-29.4	-75.7	267.2	16.5	16.4	0.0	311.3	311.7	0.1	12.9	12.0	92
2206	630	7200.6	400.0	-32.1	-80.7	267.7	17.3	17.2	1.3	313.2	313.4	0.0	8.6	13.3	92
2303	670	7603.4	375.0	-35.7	-85.6	263.1	18.4	18.3	1.0	315.6	315.7	0.0	4.0	15.2	91
2409	700	8141.5	350.0	-38.6	-90.7	260.3	17.4	17.1	2.9	316.7	316.7	0.0	4.0	16.9	90
2705	760	8603.0	325.0	-42.9	-99.9	261.5	20.5	20.3	3.0	317.0	317.0	99.9	99.9	18.6	89
2902	780	9192.1	300.0	-46.0	-109.0	267.7	20.7	20.7	0.0	320.0	319.9	99.9	99.9	20.7	84
3101	830	9775.0	275.0	-50.3	-119.9	267.9	21.0	21.0	0.0	322.0	319.9	99.9	99.9	23.1	80
3201	870	10370.2	250.0	-55.2	-129.9	263.6	23.0	23.7	2.7	324.0	319.9	99.9	99.9	25.0	80
3503	920	11033.9	225.0	-60.7	-139.9	261.4	25.7	25.4	3.0	325.5	319.9	99.9	99.9	26.7	97
3706	970	11765.7	200.0	-65.0	-149.9	263.6	25.2	25.0	2.0	334.0	319.9	99.9	99.9	30.9	86
4003	1030	12600.1	175.0	-69.2	-159.9	253.1	30.7	20.6	7.0	358.0	319.9	99.9	99.9	34.9	85
4304	1100	13290.5	150.0	-73.9	-169.9	253.1	23.1	23.0	1.0	375.5	319.9	99.9	99.9	42.3	85
4701	1170	14750.5	125.0	-78.0	-179.9	250.9	20.0	22.5	6.3	375.5	319.9	99.9	99.9	47.5	84
5100	1250	16100.5	100.0	-82.3	-189.9	240.9	20.0	22.0	9.7	424.5	319.9	99.9	99.9	54.3	81
5700	1350	18031.5	75.0	-86.7	-199.9	230.1	16.3	15.3	5.5	450.2	319.9	99.9	99.9	62.4	81
6400	1450	20411.1	50.0	-91.7	-209.9	235.7	7.3	7.3	0.0	510.0	319.9	99.9	99.9	67.6	80
7001	1500	21135.1	25.0	-96.0	-219.9	212.0	3.5	-3.2	1.3	639.2	319.9	99.9	99.9	69.2	74

00 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
00 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 655
SF C. QUD. MINN

23 APRIL 1978
2318 GMT

TIME MIN	CHTCY	WEIGHT CPA	PRES MB	TEMP DE C	CLV PT DE C	IR DE	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DE K	E POT T DE K	MR STO CA/SEC	RM PCT	RANGE K4	AZ DE
0.5	7.0	316.0	972.2	10.2	7.1	300.0	0.2	0.0	-0.2	200.2	303.4	0.5	01.0	0.0	0.0
0.5	9.0	99.0	1000.0	10.0	9.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
0.5	9.0	99.0	975.0	9.0	9.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
0.5	6.0	50.0	950.0	9.0	6.0	9.0	0.0	-0.0	-0.0	20.0	303.7	0.5	99.0	0.3 173.0	0.5 173.0
1.0	10.7	720.1	925.0	8.0	6.3	10.4	9.4	-1.0	-0.3	200.9	303.0	0.5	99.0	0.5 180.0	0.5 180.0
2.1	12.0	952.7	900.0	4.9	4.9	17.5	5.0	-1.5	-0.8	207.3	303.1	0.0	100.0	0.7 180.0	0.7 180.0
3.0	14.0	1102.5	875.0	5.1	5.0	7.4	2.5	-0.3	-2.5	205.9	306.5	0.3	99.0	0.9 180.0	0.9 180.0
4.0	16.0	1419.0	850.0	5.0	4.0	303.2	4.5	3.0	-2.5	202.2	307.2	0.4	98.0	1.0 181.0	1.0 181.0
4.0	16.1	1663.3	825.0	3.0	2.3	321.1	5.1	3.2	-0.9	203.3	308.1	5.5	90.1	1.2 172.0	1.2 172.0
5.3	21.1	1912.9	800.0	7.3	0.3	335.4	5.4	2.2	-0.9	202.2	307.0	4.9	80.0	1.4 160.0	1.4 160.0
6.3	23.5	2108.5	775.0	-0.3	-0.3	317.2	9.5	5.3	-0.3	203.7	297.2	1.7	24.0	1.7 140.0	1.7 140.0
7.1	25.6	2421.6	750.0	1.0	-20.9	317.2	9.5	6.4	-7.0	208.4	301.4	1.4	20.5	2.7 150.0	2.7 150.0
8.1	28.0	2704.5	725.0	1.5	-10.6	322.5	9.1	7.0	-0.9	301.3	305.7	1.4	20.5	3.1 140.0	3.1 140.0
9.1	30.4	2984.5	700.0	-0.1	-13.3	290.1	11.3	10.3	-0.4	305.6	308.4	2.0	36.3	3.1 140.0	3.1 140.0
10.1	32.9	3275.5	675.0	-2.1	-15.6	200.6	13.6	12.7	-0.8	303.5	308.6	1.7	34.7	3.0 141.0	3.0 141.0
11.0	35.4	3575.5	650.0	-0.4	-15.9	200.6	13.6	13.0	-3.0	303.2	309.0	1.8	43.4	4.5 135.0	4.5 135.0
12.1	37.9	3803.1	625.0	-0.7	-17.4	270.8	13.7	13.5	-2.3	303.0	309.7	1.6	42.1	2 130.0	2 130.0
13.0	40.5	4200.8	600.0	-0.8	-20.4	270.8	14.2	14.2	-1.5	300.1	311.4	1.3	38.4	3.9 126.0	3.9 126.0
14.1	43.1	4528.8	575.0	-11.4	-21.1	201.2	12.3	12.1	-2.4	300.7	310.4	1.2	42.0	6.6 123.0	6.6 123.0
15.2	46.0	4867.9	550.0	-14.3	-24.3	205.3	13.0	12.9	-3.4	307.2	310.3	1.0	42.1	7.4 121.0	7.4 121.0
16.4	48.9	5214.2	525.0	-16.3	-32.0	204.2	15.6	15.2	-3.8	308.0	310.4	0.5	22.4	6.4 119.0	6.4 119.0
17.7	51.5	5584.6	500.0	-19.1	-30.8	277.8	18.3	18.2	-2.5	306.0	310.0	0.3	12.0	9.6 117.0	9.6 117.0
18.7	54.6	5944.1	475.0	-22.1	-30.9	272.3	20.0	20.0	-0.0	310.6	311.6	0.3	19.9	11.1 114.0	11.1 114.0
19.4	57.6	6354.1	450.0	-25.5	-42.0	272.3	19.6	19.6	-0.7	311.2	311.9	3.2	19.5	12.6 111.0	12.6 111.0
21.0	61.3	6770.5	425.0	-29.3	-43.5	271.9	18.5	18.5	-0.6	311.4	312.1	0.2	23.5	14.1 109.0	14.1 109.0
22.3	64.4	7200.4	400.0	-33.2	-43.5	271.7	19.4	19.4	-0.6	311.0	312.5	0.2	34.4	15.6 107.0	15.6 107.0
24.7	67.9	7649.5	375.0	-37.6	-47.0	270.7	19.6	19.6	-1.5	311.8	312.3	0.1	30.1	17.4 106.0	17.4 106.0
26.3	71.4	8121.2	350.0	-41.0	-49.9	270.1	17.7	17.7	-0.1	312.3	309.9	99.9	99.0	18.9 105.0	18.9 105.0
27.9	75.3	8414.5	325.0	-45.2	-49.9	271.7	22.4	22.4	-0.4	311.4	309.9	99.9	99.0	20.8 103.0	20.8 103.0
29.0	76.5	9150.4	300.0	-48.0	-49.9	273.5	22.1	22.0	-1.3	310.9	309.9	99.9	99.0	23.3 102.0	23.3 102.0
31.0	81.7	9717.6	275.0	-52.5	-49.9	269.7	26.0	26.0	-0.1	319.1	309.9	99.9	99.0	26.1 101.0	26.1 101.0
33.0	86.2	10327.8	250.0	-55.5	-49.9	271.9	23.0	23.0	-0.8	323.5	309.9	99.9	99.0	25.3 100.0	25.3 100.0
36.1	93.3	10995.3	225.0	-58.9	-49.9	271.9	24.0	24.0	-0.6	320.3	309.9	99.9	99.0	32.4 99.0	32.4 99.0
38.5	98.5	11730.7	200.0	-57.1	-49.9	260.0	20.0	20.0	0.5	357.1	309.9	99.9	99.0	30.1 98.0	30.1 98.0
41.5	104.3	12504.3	175.0	-54.2	-49.9	260.0	20.5	20.1	4.5	357.1	309.9	99.9	99.0	40.1 95.0	40.1 95.0
44.7	110.8	13505.6	150.0	-54.9	-49.9	250.0	23.7	23.1	5.4	375.5	309.9	99.9	99.0	70.3 91.0	70.3 91.0
46.8	114.0	14733.4	125.0	-54.2	-49.9	240.0	22.5	21.1	0.0	390.8	309.9	99.9	99.0	70.3 91.0	70.3 91.0
53.4	120.3	16177.7	100.0	-53.4	-49.9	240.0	19.9	19.0	3.3	424.3	309.9	99.9	99.0	70.3 91.0	70.3 91.0
59.1	134.0	18017.4	75.0	-54.6	-49.9	270.5	10.0	17.7	3.3	454.5	309.9	99.9	99.0	70.3 91.0	70.3 91.0
67.0	140.0	23525.8	50.0	-54.4	-49.9	270.2	7.7	6.7	-3.0	415.3	309.9	99.9	99.0	70.3 91.0	70.3 91.0
78.0	150.3	25070.2	25.0	-52.4	-49.9	270.2	5.7	3.2	-0.7	434.4	309.9	99.9	99.0	70.3 91.0	70.3 91.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE AT TIME PAGE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 662
RAPID CITY, S D

23 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD CM/KG	RH PCT	RANGE KM	AZ DG
0.0	15.3	966.0	898.4	11.7	7.8	50.0	6.2	-4.7	-4.0	294.7	314.5	7.4	77.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.8	17.3	1126.5	875.0	9.7	6.6	70.3	5.6	-5.3	-1.9	294.8	313.6	7.0	80.8	0.1	24.3
1.7	15.9	1426.8	850.0	7.7	6.5	77.3	4.0	-3.9	-0.9	295.1	314.4	7.2	92.5	0.6	24.8
2.5	22.0	1672.6	825.0	5.9	5.3	70.9	1.5	-1.4	-0.5	295.8	314.4	6.9	97.2	0.7	25.0
3.3	24.5	1924.7	800.0	4.7	4.3	167.2	2.0	0.3	2.0	297.1	314.9	6.6	97.2	0.7	25.1
4.2	26.9	2187.6	775.0	3.6	3.1	188.7	5.6	0.8	5.5	298.5	315.5	6.2	96.3	0.7	26.4
5.1	29.4	2450.3	750.0	4.6	-0.1	99.9	99.9	99.9	99.9	302.0	311.3	3.2	45.6	99.9	99.9
5.9	32.1	2726.1	725.0	3.2	-7.0	99.9	99.9	99.9	99.9	303.3	312.4	3.1	47.2	99.9	99.9
6.9	34.8	3009.5	700.0	1.0	-9.4	242.2	14.0	12.4	6.5	303.9	311.9	2.7	45.7	1.0	24.
7.9	37.3	3300.8	675.0	-1.5	-9.0	248.2	12.0	10.8	5.2	304.3	312.8	2.9	56.4	1.9	42.
8.9	40.1	3600.0	650.0	-4.2	-11.0	248.4	13.0	11.9	5.2	304.6	312.1	2.5	58.8	2.4	48.
10.0	42.7	3907.8	625.0	-6.6	-18.7	250.7	14.1	13.3	4.7	304.8	309.1	1.4	38.6	3.3	53.
11.1	45.6	4225.2	600.0	-9.1	-19.6	256.3	15.1	14.6	3.8	305.8	310.0	1.3	42.0	4.2	54.
12.2	48.6	4553.1	575.0	-11.0	-27.2	255.9	16.1	15.6	3.9	307.1	309.6	0.8	27.1	5.2	62.
13.3	51.4	4893.2	550.0	-13.3	-36.0	99.9	99.9	99.9	99.9	308.3	303.4	0.3	12.7	99.9	99.9
14.5	54.5	5246.0	525.0	-15.4	-42.0	99.9	99.9	99.9	99.9	308.9	310.6	0.2	8.4	99.9	99.9
99.9	99.9	99.9	500.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	475.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	450.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	425.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	400.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	375.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

Intentionally Left Blank

Sounding Data

24 April 1975

0600 GMT

ORIGINAL PAGE IS

STATION NO. 208
CHARLESTON, SC24 APRIL 1975
600 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT P DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.3	13.0	1023.4	17.8	14.5	170.0	4.1	-0.7	4.0	290.4	316.7	10.2	61.0	0.0	0.
0.6	6.0	212.2	1000.0	20.0	13.9	183.5	13.6	0.8	13.5	290.5	320.8	10.0	67.6	0.5	2.
1.4	8.2	430.2	975.0	18.3	12.5	171.1	13.1	-2.0	12.9	290.8	319.6	9.4	68.8	1.0	358.
2.1	10.3	652.4	950.0	16.0	12.0	179.1	13.5	-0.2	13.5	290.7	319.3	9.3	77.2	1.6	357.
2.8	12.4	878.7	925.0	14.1	10.7	166.6	13.4	1.5	13.3	290.9	318.3	8.8	60.3	2.2	356.
3.6	14.6	1109.7	900.0	12.4	9.0	195.1	12.8	3.3	12.4	295.4	316.8	8.0	79.2	2.8	1.
4.4	16.7	1345.9	875.0	11.3	4.7	167.3	11.7	3.5	11.2	290.3	313.1	6.2	64.3	3.4	4.
5.2	19.1	1588.1	850.0	11.6	-2.4	220.0	9.8	6.3	7.5	290.8	309.5	3.8	37.4	3.9	7.
6.1	21.2	1837.4	825.0	10.8	-2.9	245.0	8.9	8.1	3.7	300.5	311.2	3.7	38.0	4.2	11.
6.9	23.6	2053.1	800.0	8.6	-0.5	263.3	7.7	7.7	0.9	300.9	313.9	4.6	52.8	4.4	16.
7.4	25.8	2354.9	775.0	6.5	1.3	276.9	7.7	7.6	-0.9	301.5	316.8	5.5	69.5	4.6	21.
8.8	28.4	2623.4	750.0	4.7	-2.9	282.7	9.0	8.8	-2.0	302.3	314.1	4.1	57.7	4.7	27.
9.7	30.9	2899.5	725.0	4.1	-7.9	261.7	9.0	8.9	-1.8	304.4	312.9	2.9	40.9	4.8	33.
10.6	33.4	3184.6	700.0	3.1	-13.7	288.2	8.3	7.9	-2.6	306.1	311.9	1.9	27.8	5.0	78.
11.6	36.0	3476.3	675.0	1.6	-15.2	303.7	8.1	6.7	-4.5	307.7	313.0	1.7	27.2	5.2	43.
12.7	38.7	3782.5	650.0	0.3	-0.4	317.3	9.1	6.2	-6.7	310.0	326.7	5.8	95.4	5.2	49.
13.7	41.3	4096.8	625.0	-1.3	-1.8	318.9	9.1	6.0	-6.8	311.6	326.4	5.4	96.8	5.2	56.
14.8	44.1	4421.5	600.0	-3.4	-4.0	304.8	8.4	6.9	-4.8	312.7	326.8	4.8	96.0	5.3	62.
15.8	47.1	4757.0	575.0	-6.0	-7.5	284.2	7.4	7.2	-1.8	313.4	324.8	3.8	89.3	5.6	66.
16.9	50.1	5104.4	550.0	-7.7	-8.4	261.9	10.0	9.9	1.4	315.4	326.6	3.7	94.6	6.1	68.
18.1	53.0	5465.2	525.0	-9.7	-9.4	256.0	13.1	12.7	3.2	317.1	327.8	3.5	99.9	6.9	69.
19.3	56.0	5841.0	500.0	-11.5	-11.7	262.8	14.2	14.1	1.8	319.4	329.2	3.1	98.5	7.9	70.
20.7	59.3	6233.4	475.0	-13.5	-14.8	278.9	15.3	15.1	-2.4	321.5	329.6	2.5	89.8	9.0	73.
22.2	62.7	6643.2	450.0	-16.1	-16.1	279.6	17.6	17.4	-2.9	323.1	329.7	1.7	71.7	10.4	77.
23.7	66.0	7071.4	425.0	-19.2	-20.3	266.4	18.9	18.2	-5.3	324.4	329.0	1.4	70.2	11.6	80.
25.1	69.6	7516.8	400.0	-22.8	-26.8	290.2	22.8	21.4	-7.9	325.4	329.0	1.1	70.0	13.4	84.
26.7	73.1	7985.9	375.0	-26.2	-28.0	283.4	23.2	22.6	-5.4	325.9	330.4	1.0	84.7	15.6	87.
28.2	77.0	8485.2	350.0	-30.2	-33.3	280.5	19.4	19.0	-3.5	328.0	330.3	0.7	74.6	17.4	89.
29.9	80.9	9007.9	325.0	-34.5	-37.6	283.5	20.8	20.2	-4.8	329.0	330.7	0.5	73.4	19.4	90.
31.7	85.1	9561.9	300.0	-39.3	-39.9	285.6	22.8	21.5	-7.7	329.9	330.9	99.9	99.9	21.5	92.
33.4	89.4	10158.7	275.0	-44.8	-39.9	294.9	26.0	23.6	-11.0	330.3	330.9	99.9	99.9	24.0	94.
36.9	94.2	10775.8	250.0	-50.8	-39.9	295.9	26.3	23.7	-11.5	330.5	330.9	99.9	99.9	26.2	96.
38.4	99.0	11455.8	225.0	-57.4	-39.9	303.6	27.0	22.2	-15.3	330.6	330.9	99.9	99.9	28.4	98.
40.3	104.2	12157.7	200.0	-59.8	-39.9	303.6	35.9	29.9	-19.9	330.0	330.9	99.9	99.9	35.2	103.
44.2	110.0	13023.8	175.0	-62.5	-39.9	299.6	37.1	32.2	-18.5	-0.8	330.9	99.9	99.9	43.1	107.
48.5	116.0	13588.9	150.0	-58.4	-39.9	296.9	25.4	22.6	-11.5	36.5	330.9	99.9	99.9	51.3	109.
53.4	123.5	15118.3	125.0	-64.7	-39.9	301.1	25.1	21.5	-13.0	377.9	330.9	99.9	99.9	54.6	110.
59.8	131.3	16467.7	100.0	-65.8	-39.9	289.7	13.9	13.0	-4.6	393.0	330.9	99.9	99.9	65.5	111.
68.4	140.0	18172.8	75.0	-69.9	-39.9	251.7	6.0	5.7	1.9	426.4	330.9	99.9	99.9	72.2	111.
82.1	149.5	20630.5	50.0	-61.9	-39.9	338.9	6.1	2.2	-5.7	457.6	330.9	99.9	99.9	76.9	111.
99.9	99.9	99.9	25.0	59.9	99.9	99.9	99.9	99.9	99.9	59.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA24 APRIL 1975
530 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MR RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.5	8.0	1022.4	20.6	15.2	110.0	4.1	-3.9	1.4	293.3	321.1	10.7	71.0	0.0	0.
0.8	6.4	199.9	1000.0	20.3	15.1	115.4	11.7	-10.5	5.0	294.9	323.4	10.9	72.0	0.4	292.
1.6	8.7	418.5	975.0	19.2	12.0	126.3	13.1	-10.6	7.7	295.7	319.8	9.1	63.1	1.0	297.
2.5	10.9	641.5	950.0	18.1	9.9	131.2	11.9	-8.9	7.8	296.7	318.4	8.1	58.7	1.6	302.
3.4	13.3	859.4	925.0	16.6	7.2	127.9	9.5	-7.5	5.8	297.2	315.9	6.9	53.8	2.3	304.
4.3	15.7	1102.4	900.0	16.1	3.3	130.0	5.0	-3.9	3.2	298.9	313.9	5.4	42.6	2.7	305.
5.2	18.1	1341.7	875.0	15.7	1.9	118.9	0.9	-0.8	0.4	300.7	314.9	5.0	39.7	2.8	305.
6.1	20.5	1586.9	850.0	13.5	5.	62.7	1.8	-1.6	-0.8	301.1	319.6	6.7	58.4	2.8	304.
7.0	23.0	1837.5	825.0	11.7	5.0	38.7	2.1	-1.3	-1.6	301.8	320.3	6.7	63.6	2.9	302.
8.0	25.5	2084.4	800.0	9.6	2.6	61.0	2.1	-1.8	-1.0	302.2	318.6	5.9	62.5	2.9	300.
9.9	28.1	2337.2	775.0	8.6	-11.2	82.0	2.1	-2.1	-0.3	303.3	309.6	2.1	23.1	3.0	298.
10.0	30.9	2627.9	750.0	8.5	-19.4	48.5	2.5	-1.9	-1.6	305.9	309.4	1.1	11.9	3.1	297.
11.2	33.6	2907.6	725.0	8.0	-20.4	37.7	4.6	-2.8	-3.6	308.4	311.7	1.0	11.2	3.1	292.
12.3	36.1	3196.0	700.0	6.9	-21.2	31.1	6.3	-3.2	-5.4	313.4	313.4	1.0	11.3	3.1	286.
13.3	39.0	3494.0	675.0	5.6	-22.1	22.7	6.2	-2.4	-5.7	312.1	315.2	1.0	11.4	3.4	279.
14.5	41.7	3801.4	650.0	3.6	-23.5	6.2	4.4	-0.5	-4.4	313.2	316.1	0.9	11.6	3.4	273.
15.6	44.8	4118.4	625.0	1.5	-25.0	356.8	4.7	0.3	-4.7	314.2	316.8	0.8	11.8	3.4	259.
16.8	47.8	4445.8	600.0	-0.2	-26.2	5.7	5.1	-0.5	-5.0	315.5	318.4	0.7	11.9	3.4	262.
18.0	50.7	4785.0	575.0	-2.1	-27.5	336.4	4.3	1.7	-3.9	317.6	319.9	0.7	12.1	3.5	256.
19.3	53.8	5137.1	550.0	-3.1	-28.2	306.3	5.0	4.0	-3.0	320.5	322.8	0.7	12.2	3.3	251.
20.7	57.0	5504.5	525.0	-4.4	-29.2	295.8	8.1	7.3	-3.5	323.1	325.3	0.6	12.3	3.0	244.
22.1	60.4	5836.6	500.0	-7.9	-29.9	257.6	10.1	9.0	-4.7	323.4	326.3	0.8	20.0	2.6	239.
23.6	63.9	6282.6	475.0	-11.4	-29.7	295.0	8.9	8.0	-3.7	323.9	326.3	0.7	20.2	2.4	234.
25.2	67.1	6654.7	450.0	-14.7	-30.9	289.4	7.8	7.4	-2.6	324.8	327.0	0.6	23.6	2.4	192.
26.9	70.8	7125.4	425.0	-17.4	-38.5	283.4	7.7	7.5	-1.8	326.7	327.8	0.3	13.8	2.7	174.
28.7	74.5	7576.8	400.0	-20.2	-40.0	289.9	9.8	9.2	-3.3	328.7	329.7	0.3	15.1	3.0	154.
30.5	78.5	8051.7	375.0	-23.7	-35.8	306.5	14.1	11.3	-8.4	330.1	331.9	0.5	31.9	4.1	147.
32.4	82.3	8552.4	350.0	-27.4	-42.8	302.9	17.3	14.5	-9.4	331.8	332.7	0.2	21.2	5.8	140.
34.4	86.5	9080.6	325.0	-32.2	-46.7	306.3	17.6	14.2	-10.4	332.2	332.8	0.2	22.0	7.9	130.
36.9	91.0	9639.7	300.0	-36.7	-46.5	312.8	21.1	15.5	-14.3	334.5	334.3	0.2	35.3	10.6	134.
39.2	95.7	10235.9	275.0	-42.1	99.9	313.6	19.9	14.4	-13.7	334.3	334.3	99.9	99.9	13.7	134.
41.6	100.5	10873.5	250.0	-47.3	99.9	313.4	23.8	17.3	-16.3	335.7	335.7	99.9	99.9	17.0	134.
44.7	105.9	11560.8	225.0	-53.3	99.9	315.7	25.9	18.1	-18.5	336.9	336.9	99.9	99.9	21.3	134.
47.8	111.5	12309.1	200.0	-59.2	99.9	313.7	31.5	22.6	-21.6	339.1	339.1	99.9	99.9	26.8	134.
51.0	117.5	13135.1	175.0	-64.6	99.9	317.1	31.0	21.1	-22.7	343.3	343.3	99.9	99.9	32.6	135.
54.6	124.3	14087.8	150.0	-61.4	99.9	309.7	20.8	18.0	-23.3	348.3	348.3	99.9	99.9	38.1	135.
59.2	131.3	15208.2	125.0	-66.1	99.9	294.3	19.3	17.6	-20.0	375.4	375.4	99.9	99.9	43.4	133.
64.3	138.5	16548.9	100.0	-71.5	99.9	293.4	9.4	8.6	-3.7	389.7	389.7	99.9	99.9	48.2	132.
70.5	145.5	18288.2	75.0	-72.7	99.9	332.3	3.2	1.5	-2.8	404.5	404.5	99.9	99.9	50.4	131.
79.6	153.0	20606.9	50.0	-60.9	99.9	65.7	2.8	-2.6	-1.1	500.0	500.0	99.9	99.9	51.7	132.
93.2	160.0	25076.1	25.0	-52.5	99.9	82.5	10.2	-10.1	-1.3	633.7	633.7	99.9	99.9	53.0	135.

• PV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 • 1/2 TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 • 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 213

WAYCROSS, GA

24 APRIL 1975
600 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	3.3	44.0	1017.4	20.3	17.5	170.0	4.1	-0.7	4.0	293.7	326.0	12.5	84.0	0.0	0
3.4	4.7	192.8	1000.0	18.5	15.5	959.9	99.9	99.9	99.9	293.1	322.1	11.2	82.9	999.9	999.9
1.1	6.5	410.4	975.0	18.0	14.4	999.9	99.9	99.9	99.9	294.7	322.6	10.7	79.5	999.9	999.9
1.7	8.7	612.7	950.0	16.7	12.1	995.9	99.9	99.9	99.9	295.3	320.2	9.4	74.2	999.9	999.9
2.5	10.7	800.2	925.0	16.2	10.6	995.9	99.9	99.9	99.9	296.1	320.4	8.7	69.3	999.9	999.9
3.3	12.9	1093.4	900.0	15.6	9.3	999.9	99.9	99.9	99.9	298.6	320.8	6.2	66.0	999.9	999.9
4.1	15.1	1332.2	875.0	14.3	6.7	999.9	99.9	99.9	99.9	299.5	318.8	7.1	60.2	999.9	999.9
4.9	17.2	1576.9	850.0	13.5	5.2	235.7	6.5	5.3	3.6	301.2	319.3	6.5	57.0	2.7	34.0
5.6	19.4	1827.8	825.0	12.4	0.3	218.6	5.6	3.5	4.3	302.3	315.7	4.7	43.4	2.4	35.0
6.7	21.7	2084.8	800.0	10.2	-3.6	205.5	5.6	2.4	5.1	302.5	313.2	3.7	38.0	3.1	35.0
7.6	24.2	2347.9	775.0	8.8	-23.0	233.8	4.3	3.5	2.6	303.4	306.0	0.0	9.0	3.1	1
8.4	26.5	2618.4	750.0	8.3	-42.7	291.5	3.6	3.3	-1.3	305.6	306.0	0.1	1.3	3.4	4
9.2	29.1	2837.2	725.0	6.6	-9.4	339.0	5.2	1.9	-0.9	307.1	315.0	2.6	31.2	3.2	7
10.1	31.7	3185.1	700.0	4.9	-1.3	346.7	6.0	1.4	-5.9	308.6	323.0	5.0	63.8	2.9	9
10.9	34.4	3481.2	675.0	3.2	-1.2	338.7	6.0	2.2	-5.9	310.0	325.2	5.2	72.8	2.6	12
11.8	37.0	3786.1	650.0	0.4	-3.4	329.1	6.9	3.6	-5.5	310.0	323.5	4.6	75.5	2.4	16
12.9	39.9	4099.8	625.0	-2.6	-3.3	308.5	8.5	6.6	-5.3	310.1	324.2	4.8	94.9	2.1	27
13.9	42.6	4424.4	600.0	-1.9	-4.9	283.2	10.3	10.1	-5.4	314.4	327.8	4.5	81.3	2.3	43
15.0	45.4	4742.6	575.0	-3.3	-20.3	269.7	10.5	10.5	0.0	316.3	320.6	1.3	25.4	2.8	55
16.2	48.8	5112.3	550.0	-6.6	-16.0	274.6	11.1	11.1	-6.9	316.4	322.7	2.0	47.6	3.4	61
17.3	51.8	5474.1	525.0	-9.3	-10.0	286.8	11.3	10.8	-3.3	317.6	328.1	3.4	95.1	4.1	45
18.5	55.1	5850.3	500.0	-11.7	-12.2	297.7	12.1	10.7	-5.6	319.1	328.5	3.0	95.7	4.7	70
19.7	58.4	6242.1	475.0	-14.0	-14.8	283.5	13.6	13.5	-3.2	321.0	329.1	2.6	93.4	5.4	84
21.0	61.9	6631.2	450.0	-16.3	-18.7	268.3	16.4	16.4	0.5	322.9	329.4	2.0	84.8	6.6	94
22.3	65.5	7079.4	425.0	-19.3	-21.0	267.0	18.9	18.9	1.0	324.4	329.7	1.6	81.9	8.0	86
23.9	69.3	7527.0	400.0	-22.9	-24.3	275.7	21.4	21.1	-3.6	325.3	329.8	1.3	88.4	9.8	86
25.0	73.2	7996.7	375.0	-26.7	-27.7	282.3	22.0	21.5	-4.7	326.3	329.9	1.0	91.3	12.0	87
27.4	77.5	8432.0	350.0	-29.8	-34.6	278.4	19.6	19.6	-2.9	328.6	330.6	0.6	62.6	14.2	91
29.2	82.0	9016.1	325.0	-34.0	-40.5	282.1	21.2	20.7	-4.4	329.8	331.0	0.3	51.1	16.4	92
30.9	86.3	9571.6	300.0	-38.5	-44.3	287.9	23.3	22.1	-7.2	331.0	331.9	0.2	54.3	18.7	93
33.0	91.3	10163.4	275.0	-43.2	99.9	293.1	27.8	25.6	-10.9	332.7	999.9	99.9	999.9	21.6	96
35.4	96.4	10755.0	250.0	-47.6	99.9	256.6	31.2	27.9	-14.0	333.4	999.9	99.9	999.9	25.8	96
38.1	102.0	11492.3	225.0	-53.2	99.9	302.1	33.3	28.2	-17.7	337.0	999.9	99.9	999.9	30.9	102
40.8	108.3	12231.7	200.0	-60.2	99.9	301.4	36.1	30.8	-18.8	337.5	999.9	99.9	999.9	36.4	105
43.8	114.5	13054.4	175.0	-63.8	99.9	294.1	39.5	36.0	-16.1	344.6	999.9	99.9	999.9	42.9	107
47.2	121.7	14004.2	150.0	-60.1	99.9	302.1	23.6	20.0	-12.5	368.6	999.9	99.9	999.9	49.5	108
51.2	129.0	15123.1	125.0	-64.1	99.9	286.1	34.7	33.1	-9.6	378.9	999.9	99.9	999.9	55.8	109
55.9	137.0	16496.4	100.0	-68.7	99.9	295.4	18.9	17.1	-8.1	355.0	999.9	99.9	999.9	61.4	109
61.6	181.0	18103.1	75.0	-68.9	99.9	234.3	4.2	3.4	2.4	428.4	999.9	99.9	999.9	64.2	106
70.1	153.3	20633.2	50.0	-55.8	99.9	302.1	6.9	5.9	-3.7	502.6	999.9	99.9	999.9	67.3	106
83.5	162.0	25049.9	25.0	-52.7	99.9	96.3	4.6	-4.6	0.5	633.1	999.9	99.9	999.9	68.9	111

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

APALACHICOLA, FLA

24 APRIL 1975

515 GMT

166 23.0

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.4	11.0	1021.0	18.1	13.4	140.0	1.0	-0.6	0.2	290.8	315.5	9.5	74.0	0.0	0.
0.2	6.2	191.7	1000.0	23.3	11.4	161.8	0.0	-2.5	7.6	297.6	320.4	8.5	47.2	0.3	33.
1.5	6.7	412.2	975.0	21.9	11.9	168.0	0.9	-1.8	6.7	298.4	322.6	9.0	53.0	0.7	30.
2.3	11.1	637.1	950.0	19.7	11.2	167.5	10.3	-2.2	10.1	298.4	322.1	8.8	57.9	1.1	34.
3.1	13.6	866.7	925.0	18.1	11.2	165.5	10.4	-2.6	10.0	299.1	323.5	9.1	63.8	1.6	34.
3.9	15.3	1100.8	900.0	15.8	9.5	165.1	11.3	-2.9	10.9	299.3	321.4	8.3	66.1	2.1	34.
4.7	16.6	1339.7	875.0	13.8	10.3	175.3	10.9	-0.9	10.5	299.3	323.8	9.1	79.3	2.7	34.
5.6	21.0	1583.7	850.0	11.5	10.4	186.6	11.5	1.3	11.5	299.4	324.6	9.4	92.6	3.2	34.
6.5	23.7	1833.5	825.0	10.1	6.0	199.4	12.1	4.1	11.3	300.3	320.1	7.3	76.6	3.8	35.
7.3	26.1	2089.8	800.0	11.3	-43.0	217.8	8.0	4.9	6.3	303.2	303.6	0.1	1.0	4.3	35.
8.4	28.9	2354.3	775.0	10.6	-43.4	250.7	4.9	4.6	1.6	305.8	305.6	0.1	1.0	4.4	1.
9.4	31.8	2626.1	750.0	8.1	-43.8	286.6	3.3	3.1	-0.9	305.8	317.1	3.9	43.1	4.5	4.
10.3	34.6	2905.5	725.0	7.0	-7.3	341.8	3.2	1.0	-3.0	307.5	316.7	3.1	35.6	4.3	6.
11.3	37.3	3193.4	700.0	5.9	-11.4	6.8	4.2	-0.5	-4.1	309.3	316.3	2.3	27.6	4.1	6.
12.4	40.3	3490.2	675.0	4.4	-31.1	358.4	4.7	0.3	-4.7	310.6	312.5	0.6	7.5	3.8	6.
13.4	43.0	3756.7	650.0	4.3	-22.9	340.2	5.7	1.9	-5.4	313.9	316.9	0.9	11.7	3.6	7.
14.5	46.1	4114.9	625.0	2.6	-21.8	348.8	6.5	1.7	-6.3	315.6	319.3	1.1	15.5	3.2	11.
15.7	49.3	4443.8	600.0	0.3	-9.5	344.1	7.9	2.2	-7.6	316.8	326.4	3.1	47.6	2.7	15.
16.8	52.3	4783.2	575.0	-2.6	-13.7	336.7	9.6	3.3	-9.0	317.2	324.5	2.3	42.1	2.3	23.
18.1	55.4	5133.9	550.0	-5.8	-12.4	326.0	12.1	6.2	-10.3	317.6	326.0	2.7	59.6	1.8	43.
19.4	58.7	5497.7	525.0	-7.1	-14.6	323.2	12.8	7.7	-10.3	320.2	327.6	2.3	55.0	1.9	7.
20.7	62.3	5876.3	500.0	-10.0	-16.3	321.9	11.8	7.3	-9.3	321.1	328.0	2.1	59.5	2.4	9.
21.9	65.7	6270.3	475.0	-12.5	-20.0	305.0	9.9	7.7	-6.2	322.7	329.1	1.6	53.4	3.1	10.
23.4	69.3	6680.9	450.0	-15.8	-23.9	295.5	11.0	10.4	-5.2	323.4	327.5	1.2	49.6	3.9	10.
24.8	72.8	7109.4	425.0	-18.7	-26.5	295.3	11.0	9.9	-4.7	325.1	328.6	1.0	50.1	5.0	11.
26.5	76.8	7559.1	400.0	-21.7	-29.3	293.1	10.0	9.2	-3.9	326.8	329.7	0.8	50.0	6.0	11.
28.2	80.7	8031.5	375.0	-24.1	-30.7	300.6	13.9	12.0	-7.1	329.7	329.9	0.0	2.9	7.2	11.
29.9	85.0	8530.5	350.0	-27.8	-37.7	266.8	17.9	16.0	-8.1	331.1	331.2	0.0	1.0	8.6	11.
31.7	89.0	9057.9	325.0	-32.4	-41.7	303.2	19.4	16.3	-10.6	332.0	333.1	0.3	38.6	10.9	11.
33.8	93.8	9616.6	300.0	-37.3	-45.3	305.1	21.6	17.7	-12.5	332.8	333.6	0.2	42.5	13.4	11.
36.0	98.5	10211.2	275.0	-42.6	-49.9	306.4	23.2	19.0	-15.0	333.6	333.6	99.9	99.9	16.3	11.
38.4	103.4	10847.4	250.0	-48.0	-54.9	313.3	27.6	20.1	-18.9	334.7	334.7	99.9	99.9	19.9	12.
41.2	109.0	11533.0	225.0	-53.7	-59.9	315.4	31.3	22.0	-22.3	336.2	336.2	99.9	99.9	24.6	12.
44.4	114.3	12281.4	200.0	-59.0	-64.6	315.2	34.0	23.9	-24.1	339.3	339.3	99.9	99.9	30.5	12.
47.5	121.0	13107.3	175.0	-64.6	-69.9	310.2	31.0	23.7	-20.0	343.4	343.4	99.9	99.9	36.4	12.
51.1	127.8	14055.2	150.0	-69.9	-74.9	308.5	28.4	16.8	-11.5	341.7	341.7	99.9	99.9	42.2	12.
55.4	135.3	15172.7	125.0	-65.9	-69.9	298.5	22.9	10.7	-8.2	345.6	345.6	99.9	99.9	47.7	12.
60.6	142.7	16213.5	100.0	-69.6	-69.9	307.3	13.5	10.7	-1.8	349.3	349.3	99.9	99.9	53.1	12.
66.5	150.7	18213.4	75.0	-65.6	-69.9	289.1	5.6	5.3	-1.8	427.1	427.1	99.9	99.9	55.1	12.
75.2	159.3	20871.5	50.0	-61.0	-69.9	283.9	3.4	3.3	-0.8	500.0	500.0	99.9	99.9	57.0	12.
89.6	168.3	25025.1	25.0	-53.2	-69.9	95.9	99.9	99.9	95.9	632.2	632.2	99.9	99.9	99.9	99.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ANAL PAGE IS
OF POOR QUALITY

STATION NO. 226
CENTERVILLE, ALA

20 APRIL 1975
514 GMT

TIME MIN	CATCY	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.8	140.0	1003.9	10.2	15.1	150.0	3.6	0.6	3.5	292.5	320.5	10.8	82.0	0.0	0.
0.2	6.2	171.6	1000.0	19.4	14.5	155.2	14.5	3.8	14.0	293.9	321.2	10.4	73.3	0.3	30.0
1.0	6.6	391.8	975.0	10.6	16.2	193.3	15.1	3.5	14.7	295.9	326.8	12.0	85.6	0.7	9.
2.1	10.8	614.8	950.0	10.8	2.0	191.5	19.3	3.9	19.0	297.0	310.5	4.9	34.6	1.9	10.
3.1	13.3	643.3	925.0	17.9	3.3	197.0	15.4	4.5	14.7	298.3	313.0	5.3	38.0	3.0	12.
4.2	15.7	1077.0	900.0	15.2	12.4	155.4	16.2	4.3	15.6	298.5	325.7	10.2	84.2	4.0	13.
5.2	18.1	1315.5	875.0	13.6	10.9	196.0	13.3	3.7	12.7	299.2	324.5	9.4	83.4	4.9	13.
6.3	20.5	1559.6	850.0	11.9	10.5	204.8	14.3	6.0	12.9	299.9	325.4	9.5	91.2	5.7	14.
7.4	23.0	1799.9	825.0	12.2	7.8	226.0	11.9	8.6	6.2	302.6	324.8	8.1	74.4	6.6	17.
8.6	25.5	2048.5	800.0	12.2	3.2	233.0	10.1	6.1	6.1	305.0	322.0	6.1	54.2	7.2	20.
9.9	28.1	2333.8	775.0	10.0	3.2	245.4	11.6	10.5	4.8	305.4	323.1	6.2	62.4	7.8	24.
11.1	30.9	2605.6	750.0	8.0	1.0	243.3	11.2	10.0	6.0	306.0	321.7	5.5	61.0	8.5	28.
12.5	33.6	2884.7	725.0	6.4	-2.9	237.0	11.7	9.4	6.4	307.0	319.4	4.3	51.6	9.2	31.
13.8	36.1	3171.8	700.0	4.8	-3.6	229.7	11.6	10.9	4.0	308.4	320.7	4.2	54.2	10.2	34.
15.1	39.0	3468.0	675.0	4.8	-4.8	226.4	13.3	13.2	-1.5	311.6	323.3	4.0	49.5	10.7	38.
16.6	41.5	3776.0	650.0	3.1	-5.7	220.2	14.7	14.4	-2.6	313.6	324.5	3.9	52.2	11.3	43.
18.1	44.7	4092.7	625.0	0.6	-8.6	275.2	13.5	13.5	-0.5	313.6	323.3	3.2	49.8	12.2	46.
19.7	47.8	4419.1	600.0	-2.0	-9.0	268.6	13.9	13.9	0.3	314.2	324.0	3.2	58.5	13.2	52.
21.3	50.8	4756.1	575.0	-4.7	-9.7	265.1	10.2	10.1	0.9	314.8	324.6	3.2	68.2	14.1	55.
22.7	53.9	5104.2	550.0	-7.4	-14.3	250.8	11.0	10.9	1.9	315.6	322.8	2.3	61.0	14.9	56.
24.3	57.0	5464.6	525.0	-10.7	-16.7	256.9	12.7	12.3	2.9	315.8	322.0	2.0	61.0	16.0	58.
26.0	60.4	5834.4	500.0	-12.9	-20.0	275.4	11.0	10.9	-1.0	317.5	322.5	1.6	54.9	17.0	59.
27.8	63.9	6227.5	475.0	-15.9	-30.4	287.6	13.7	15.0	-4.2	318.3	320.5	0.6	27.5	18.1	62.
29.8	67.3	6634.1	450.0	-17.6	-37.9	287.7	21.1	20.1	-6.4	321.1	322.3	0.3	15.0	19.7	67.
31.8	70.8	7060.1	425.0	-20.4	-27.1	281.4	22.9	22.4	-4.5	322.9	326.1	1.0	55.0	21.9	71.
33.9	74.6	7505.2	400.0	-24.9	-27.8	279.4	21.4	21.2	-3.5	322.7	325.9	1.0	76.8	24.3	75.
36.1	78.7	7971.4	375.0	-28.4	-30.1	275.3	25.4	25.4	-1.0	324.1	326.9	0.6	85.0	27.3	77.
38.5	82.5	8463.2	350.0	-31.3	-37.7	274.4	27.9	27.8	-2.2	326.5	328.0	0.4	53.2	30.5	79.
40.9	86.0	8923.7	325.0	-35.3	-44.7	280.5	30.2	29.7	-5.5	327.9	328.8	0.2	37.7	35.1	81.
43.3	91.2	9336.9	300.0	-38.0	99.9	281.3	32.6	31.9	-6.4	330.4	999.9	99.9	99.9	39.4	83.
46.7	95.8	10127.8	275.0	-44.2	99.9	290.8	30.3	28.4	-10.8	331.3	999.9	99.9	99.9	44.0	85.
49.9	100.7	10761.3	250.0	-48.3	99.9	284.2	37.5	36.3	-9.2	334.2	999.9	99.9	99.9	49.7	84.
52.3	106.0	11444.8	225.0	-54.4	99.9	282.7	43.4	42.3	-5.5	335.2	999.9	99.9	99.9	56.8	91.
55.8	111.6	12190.5	200.0	-59.8	99.9	282.3	39.6	38.6	-8.5	338.2	999.9	99.9	99.9	64.1	92.
59.1	117.8	13013.1	175.0	-65.7	99.9	275.3	30.6	30.5	-2.9	341.5	999.9	99.9	99.9	72.7	93.
63.4	124.7	13955.8	150.0	-62.8	99.9	276.2	32.7	32.5	-3.5	341.9	999.9	99.9	99.9	82.7	93.
68.4	132.0	15075.9	125.0	-64.0	99.9	286.7	24.1	23.1	-6.9	375.1	999.9	99.9	99.9	91.0	94.
73.7	139.3	16424.9	100.0	-68.6	99.9	280.6	14.3	14.0	-2.7	395.2	999.9	99.9	99.9	98.5	94.
80.9	147.3	18133.6	75.0	-68.6	99.9	341.6	4.7	1.5	-4.5	429.1	999.9	99.9	99.9	103.8	94.
91.2	156.0	20605.5	50.0	-61.2	99.9	267.7	4.6	4.6	0.2	499.3	999.9	99.9	99.9	107.3	94.
108.4	164.7	25002.0	25.0	-52.8	99.9	239.0	2.6	2.2	1.3	633.4	999.9	99.9	99.9	108.1	96.

ORIGINAL PAGE IS
OF POOR QUALITY

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 232
BOOTHVILLE, LA

24 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GFN	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.4	1.0	1019.1	20.6	20.4	130.0	3.6	-2.8	2.3	294.2	332.8	15.0	99.0	156	16. 0
0.6	6.3	165.6	1000.0	21.0	20.4	130.0	17.2	-9.4	14.4	296.2	335.9	15.3	96.7	0.5	322.0
1.5	8.5	305.4	975.0	20.0	19.4	157.8	13.6	-5.1	12.6	297.2	335.7	14.7	96.5	1.3	328.0
2.3	10.6	610.0	950.0	19.1	17.7	160.7	12.7	-3.4	12.3	298.4	334.2	13.6	91.8	2.0	333.0
3.2	12.6	839.7	925.0	18.3	15.7	160.9	10.9	-2.1	10.7	299.7	332.2	12.2	84.4	2.6	336.0
4.2	15.1	1074.8	900.0	17.0	14.1	160.1	8.7	-1.8	8.5	300.6	331.0	11.4	83.1	3.1	336.0
5.2	17.2	1315.4	875.0	15.2	9.3	173.6	10.7	-1.2	10.6	301.8	324.9	8.5	63.6	3.7	340.0
6.1	19.6	1541.9	850.0	15.0	6.5	180.3	10.5	0.1	10.5	302.8	322.7	7.2	56.7	4.3	343.0
7.1	21.8	1614.6	825.0	14.3	5.9	180.8	9.7	1.1	9.6	304.6	324.5	7.1	57.0	4.8	345.0
8.1	24.3	2074.1	800.0	12.8	3.9	193.7	10.8	2.5	10.5	305.7	323.6	6.3	54.4	5.4	348.0
9.1	26.6	2340.2	775.0	11.2	1.2	201.1	9.9	3.6	9.2	306.6	322.1	5.4	50.4	6.0	351.0
10.1	29.1	2613.6	750.0	10.9	-13.2	205.4	8.7	3.8	7.9	308.7	314.3	1.8	16.9	6.5	354.0
11.1	31.8	2896.3	725.0	11.4	-24.4	232.3	5.1	4.1	7.1	312.1	314.5	0.7	6.2	6.9	356.0
12.3	34.4	3182.2	700.0	9.8	-23.1	287.4	4.2	4.0	-1.2	313.4	314.5	0.3	3.1	6.9	359.0
13.4	36.9	3498.8	675.0	8.0	-24.9	301.7	3.4	2.9	-1.8	314.7	317.3	0.8	7.7	6.7	0.0
14.6	39.8	3758.5	650.0	5.5	-16.6	305.9	4.5	3.7	-2.7	315.4	320.5	1.6	18.5	6.5	2.0
15.8	42.3	4117.5	625.0	2.8	-16.3	301.5	5.8	4.9	-3.0	315.9	321.3	1.7	22.8	6.3	5.0
17.0	45.3	4446.3	600.0	0.3	-12.5	296.1	6.6	5.9	-2.9	316.8	324.4	2.4	37.3	6.1	9.0
18.3	48.3	4726.0	575.0	-2.5	-11.8	280.5	8.3	8.2	-1.5	317.4	325.8	2.7	48.7	6.1	14.0
19.6	51.1	5137.7	550.0	-4.1	-12.9	274.9	9.4	9.3	-0.8	319.5	327.6	2.6	50.3	6.2	21.0
21.0	54.3	5502.7	525.0	-7.2	-17.2	268.1	10.0	9.6	-2.8	320.0	326.0	1.9	44.4	6.4	28.0
22.5	57.3	5862.0	500.0	-8.8	-22.6	265.1	10.5	10.0	-3.4	322.3	326.5	1.2	31.1	6.6	35.0
23.9	60.5	6277.2	475.0	-12.0	-22.6	265.1	10.5	10.0	-3.4	322.3	327.6	1.3	40.7	6.2	41.0
25.4	64.0	6686.2	450.0	-15.4	-26.8	267.6	12.7	12.1	-3.9	324.0	327.1	0.9	36.6	7.4	45.0
27.0	67.2	7117.3	425.0	-18.6	-32.7	299.0	14.5	13.7	-4.7	325.2	327.1	0.6	27.4	8.1	52.0
28.6	70.7	7565.8	400.0	-22.8	-35.5	291.6	15.5	14.4	-5.7	325.4	327.0	0.5	30.1	9.1	64.0
30.3	74.3	8036.5	375.0	-25.4	-35.9	286.4	15.0	14.4	-4.2	327.9	329.7	0.5	38.5	10.3	70.0
32.1	78.3	8533.8	350.0	-29.0	-33.0	286.7	17.8	17.1	-5.1	329.7	332.1	0.7	68.1	11.7	75.0
34.3	82.2	9054.5	325.0	-32.9	-36.6	288.5	21.0	20.0	-6.7	331.3	333.1	0.5	69.4	13.6	80.0
36.0	86.3	9617.3	300.0	-37.6	-43.0	283.2	23.6	23.0	-5.4	332.3	333.4	0.3	56.2	16.2	85.0
38.5	91.3	10210.8	275.0	-42.7	99.9	274.7	24.6	24.5	-2.0	333.4	333.4	99.9	99.9	19.5	87.0
40.9	95.7	10847.9	250.0	-47.7	99.9	276.3	27.9	27.7	-2.9	335.2	335.2	99.9	99.9	23.3	87.0
43.2	100.5	11535.2	225.0	-53.1	99.9	272.4	29.1	29.1	-1.2	337.1	337.1	99.9	99.9	27.3	87.0
46.0	106.0	12287.4	200.0	-58.8	99.9	270.9	30.3	30.3	-0.5	339.6	339.6	99.9	99.9	32.4	90.0
49.1	111.8	13162.3	175.0	-65.4	99.9	270.9	29.1	29.1	-0.5	342.0	342.0	99.9	99.9	36.3	90.0
52.8	118.0	14057.1	150.0	-60.6	99.9	282.4	28.2	27.5	-6.2	345.6	345.6	99.9	99.9	44.3	91.0
57.0	125.3	15177.9	125.0	-66.2	99.9	286.2	21.5	21.4	1.4	375.1	375.1	99.9	99.9	50.3	92.0
62.1	132.7	16513.2	100.0	-70.9	99.9	270.7	16.1	16.1	-0.2	390.7	390.7	99.9	99.9	55.2	91.0
68.1	140.3	18204.9	75.0	-72.3	99.9	277.9	7.9	7.8	-1.1	421.4	421.4	99.9	99.9	58.7	92.0
77.0	148.3	20660.0	50.0	-60.9	99.9	286.3	1.8	1.8	-0.5	560.1	560.1	99.9	99.9	60.1	92.0
91.5	156.3	25070.4	25.0	-53.0	99.0	74.6	4.5	-4.3	-1.2	633.0	633.0	99.9	99.9	58.4	94.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS24 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MX W/O GM/KG	PH PCT	RANGE KM	AZ DG
0.0	4.2	100.0	1006.0	22.2	19.4	180.0	6.2	0.0	6.2	296.8	333.9	14.2	84.0	0.0	0.
0.2	4.7	152.2	1000.0	21.4	19.3	178.0	12.6	-0.4	12.6	296.4	333.6	14.3	86.2	0.2	357.
0.4	6.6	272.0	975.0	20.1	18.9	160.4	14.3	0.1	14.3	297.3	334.7	14.3	93.1	0.7	356.
1.7	6.9	596.3	950.0	18.1	17.3	190.8	17.2	3.2	16.9	297.3	332.1	13.2	95.3	1.3	1.
2.4	10.9	825.5	925.0	18.5	15.9	203.2	19.4	7.6	17.8	299.9	333.0	12.4	84.8	2.1	7.
3.2	13.3	1060.8	900.0	17.0	15.3	212.9	19.9	10.8	16.7	300.7	333.5	12.3	89.6	3.0	1.
4.0	15.3	1301.3	875.0	15.3	13.6	218.0	21.1	13.0	16.6	301.2	331.5	11.3	89.2	3.9	19.
4.7	17.7	1587.1	850.0	13.9	12.1	218.1	21.4	13.2	16.9	302.1	330.6	10.5	89.0	4.9	23.
5.6	20.2	1799.6	825.0	14.3	8.7	210.7	20.6	10.5	17.7	304.9	329.7	8.6	86.9	5.9	25.
6.4	22.5	2040.0	800.0	15.2	-10.9	217.2	19.5	11.8	15.5	307.6	313.9	2.1	15.3	7.0	26.
7.4	25.0	2328.0	775.0	14.5	-12.5	225.3	17.9	12.7	12.6	309.7	315.5	1.9	14.2	8.0	24.
8.3	27.3	2604.0	750.0	13.5	-13.9	225.6	16.1	11.7	11.1	311.4	317.0	1.8	14.8	9.9	30.
9.3	30.0	2868.5	725.0	12.4	-11.0	211.5	14.7	11.5	9.1	313.3	320.4	2.3	14.4	9.7	32.
10.1	32.8	3181.6	700.0	10.2	-9.7	213.2	14.2	12.7	6.4	314.2	322.3	2.6	24.6	10.4	33.
11.1	35.4	3482.7	675.0	7.9	-10.1	211.3	15.0	14.9	2.3	314.9	323.0	2.6	24.6	11.0	34.
12.7	38.0	3742.0	650.0	4.8	-11.8	215.4	14.1	14.1	1.1	314.7	322.1	2.4	28.7	12.1	44.
14.8	40.7	4110.3	625.0	1.8	-12.1	215.9	15.5	15.4	1.5	314.8	322.3	2.4	35.0	13.5	47.
16.2	43.6	4637.0	600.0	-2.1	-11.7	216.7	12.2	12.2	0.1	314.0	322.0	2.6	47.5	15.4	53.
19.3	46.4	4774.0	575.0	-4.5	-12.4	215.9	15.4	15.4	1.1	315.0	323.0	2.6	53.8	16.4	55.
20.3	49.8	5122.1	550.0	-7.3	-12.4	216.6	19.8	19.5	3.2	315.8	324.1	2.7	64.6	17.5	57.
21.6	52.8	5465.0	525.0	-6.5	-10.4	215.5	17.7	17.6	-1.1	318.5	328.7	3.3	80.4	18.7	59.
22.5	55.8	5861.9	500.0	-11.3	-12.4	217.7	17.5	17.5	-0.5	319.7	329.9	3.0	91.5	19.5	61.
23.7	59.3	6254.1	475.0	-13.6	-14.1	214.7	16.8	16.7	1.5	321.2	329.7	2.7	97.8	20.6	62.
24.8	62.7	6663.3	450.0	-16.8	-17.3	215.7	16.9	16.6	3.3	322.4	329.4	2.2	95.1	21.6	63.
26.2	66.1	7090.0	425.0	-20.1	-21.4	215.0	17.5	17.4	1.5	323.4	329.8	1.6	85.1	22.3	64.
27.8	70.0	7537.1	400.0	-23.4	-25.3	215.9	19.4	19.4	0.4	324.6	328.7	1.2	84.2	23.4	65.
29.3	73.5	8006.6	375.0	-27.0	-29.9	216.2	19.7	19.7	0.6	326.0	328.9	0.8	75.8	24.2	67.
30.9	77.7	8500.0	350.0	-31.2	-34.5	213.4	22.2	22.0	2.6	326.6	328.6	0.6	72.4	25.1	69.
32.5	81.7	9020.6	325.0	-35.4	-39.8	219.3	21.9	21.9	0.3	327.8	329.1	0.4	63.7	30.2	70.
34.3	86.0	9572.7	300.0	-39.8	-46.3	216.6	20.8	20.8	-0.8	325.1	329.9	0.2	49.4	32.7	72.
36.7	90.8	10160.9	275.0	-44.8	-49.9	217.4	35.7	35.7	-0.5	330.3	329.9	99.9	99.9	37.2	74.
39.7	95.7	10793.3	250.0	-48.7	-49.9	212.1	41.9	41.8	-1.7	333.6	329.9	99.9	99.9	44.3	77.
42.9	100.8	11475.3	225.0	-53.5	-49.9	216.6	36.5	36.4	2.3	336.6	329.9	99.9	99.9	51.6	79.
45.9	106.5	12226.6	200.0	-59.1	-49.9	212.1	46.7	46.3	6.1	339.3	329.9	99.9	99.9	58.9	80.
48.7	112.8	13052.8	175.0	-64.0	-49.9	216.6	31.6	31.2	4.5	344.4	329.9	99.9	99.9	65.3	80.
52.5	115.7	14006.3	150.0	-62.9	-49.9	212.7	25.8	25.8	-1.2	341.7	329.9	99.9	99.9	72.0	80.
56.7	127.3	15117.7	125.0	-65.8	-49.9	213.6	29.1	29.1	-1.8	377.3	329.9	99.9	99.9	79.0	82.
61.6	136.9	16456.9	100.0	-69.6	-49.9	210.5	21.2	21.2	-0.2	393.3	329.9	99.9	99.9	85.8	82.
67.6	144.7	19105.7	75.0	-67.9	-49.9	218.8	9.4	5.9	7.3	430.6	329.9	99.9	99.9	91.4	82.
74.4	153.0	20647.3	50.0	-60.6	-49.9	66.6	3.6	-3.3	-1.4	500.6	329.9	99.9	99.9	94.0	81.
81.3	167.6	25034.8	25.0	-53.2	-49.9	118.2	2.2	-2.0	1.0	631.6	329.9	99.9	99.9	91.8	83.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 240
LAKE CHARLES, LA

24 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	CEN PT DEG C	DIM DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR WTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	3.2	5.0	1016.4	22.2	21.7	100.0	5.1	-3.3	3.9	296.2	338.4	16.3	97.0	0.0	0.
0.5	4.5	146.9	1000.0	21.1	20.3	159.7	15.6	-5.1	13.7	296.3	335.8	15.2	95.2	0.4	332.
1.2	6.2	376.6	975.0	20.2	19.4	145.4	13.5	-3.4	13.0	297.4	335.8	14.7	95.0	0.9	337.
2.1	6.2	591.1	950.0	19.6	17.7	173.2	12.3	-1.9	12.1	297.8	333.4	13.5	94.6	1.6	343.
2.8	10.2	820.1	925.0	18.6	15.7	172.2	11.1	-1.1	11.0	298.0	330.4	12.3	94.3	2.1	345.
3.7	12.1	1023.9	900.0	16.0	12.3	192.7	9.0	2.0	8.8	299.3	326.3	10.1	78.9	2.0	348.
4.6	14.2	1292.7	875.0	16.2	2.1	201.8	10.8	4.0	10.0	301.3	315.6	5.1	38.6	3.0	354.
5.4	16.1	1540.0	850.0	15.9	0.6	192.2	10.5	2.2	10.3	303.4	316.7	4.7	35.8	3.6	357.
6.4	18.3	1792.9	825.0	14.2	5.8	190.1	9.5	1.7	9.4	304.5	324.2	7.0	37.0	4.1	359.
7.4	20.4	2052.1	800.0	12.3	-0.7	182.3	9.6	1.4	9.5	304.9	318.3	4.7	41.6	4.7	0.
8.3	22.5	2317.9	775.0	12.2	-17.9	189.3	12.5	2.0	12.3	307.1	311.6	1.5	13.0	5.3	0.
9.3	24.9	2592.4	750.0	13.9	-41.4	196.4	15.3	4.8	14.5	311.6	312.1	0.1	1.0	6.1	2.
10.3	27.2	2877.2	725.0	13.4	-41.7	216.5	15.5	6.7	11.7	314.2	314.7	0.1	1.0	7.0	5.
11.4	29.4	3170.9	700.0	11.2	-37.1	236.7	16.2	13.2	9.3	314.9	315.9	0.3	2.4	7.7	10.
12.4	32.0	3472.8	675.0	9.3	-24.0	239.5	17.1	14.7	8.7	316.2	318.8	0.6	7.5	8.4	16.
13.5	34.5	3786.3	650.0	7.2	-18.1	236.6	15.5	13.0	8.6	317.3	321.9	1.4	14.4	9.3	20.
14.6	36.6	4105.1	625.0	4.8	-15.1	232.8	15.6	12.4	9.4	318.2	324.2	1.9	21.9	10.1	23.
15.5	38.6	4436.3	600.0	2.1	-15.4	235.0	14.5	12.5	7.5	318.8	325.4	2.1	28.5	10.9	26.
16.7	42.1	4777.8	575.0	-1.1	-12.2	253.6	12.9	12.3	3.6	319.0	327.2	2.6	42.7	11.6	29.
17.0	44.6	5130.7	550.0	-4.1	-9.6	253.9	12.9	12.4	3.6	319.6	330.1	3.4	65.7	12.3	32.
18.2	47.9	5495.7	525.0	-7.5	-8.5	247.4	10.8	10.1	3.7	319.8	331.6	3.8	92.4	13.0	35.
19.5	50.7	5873.6	500.0	-11.1	-12.4	247.3	12.7	11.7	4.9	319.8	328.8	2.9	87.5	13.7	37.
20.8	52.6	6245.6	475.0	-13.2	-20.4	257.8	14.2	13.9	3.0	321.7	325.1	1.0	34.5	14.6	39.
21.6	56.6	6675.6	450.0	-15.6	-28.1	262.3	18.5	18.4	2.5	323.5	326.9	1.0	45.8	15.4	43.
23.0	60.0	7103.6	425.0	-19.0	-28.5	265.1	17.5	17.9	0.6	324.6	327.5	0.8	42.6	17.1	47.
24.1	66.5	7532.2	400.0	-22.7	-29.6	270.7	19.2	19.2	-0.2	325.6	328.4	0.8	52.7	18.6	51.
25.0	70.6	8022.3	375.0	-26.5	-29.5	275.0	19.7	19.6	-2.0	326.6	329.6	0.9	75.3	19.9	54.
26.6	74.5	8517.0	350.0	-30.2	-33.0	278.0	23.7	23.6	-1.6	328.0	329.9	0.6	62.6	21.6	58.
28.1	78.7	9041.1	325.0	-32.8	-41.1	273.5	28.1	26.1	-1.6	330.0	331.2	0.3	47.2	24.0	62.
29.6	82.8	9597.2	300.0	-37.6	-51.3	272.7	28.8	26.7	-1.4	332.3	332.7	0.1	22.0	26.5	65.
31.6	87.0	10191.1	275.0	-42.7	-59.9	270.1	29.3	29.3	-0.1	333.4	333.9	99.9	99.9	28.7	68.
33.7	92.4	10826.3	250.0	-47.5	-69.9	267.8	29.4	29.4	1.1	335.5	334.9	99.9	99.9	32.9	70.
35.9	97.4	11517.0	225.0	-52.7	-99.9	261.6	31.2	30.9	4.5	337.6	335.9	99.9	99.9	37.1	72.
42.3	98.0	12247.1	200.0	-58.3	-99.9	254.2	28.7	27.6	7.4	340.5	334.5	99.9	99.9	41.5	73.
45.0	104.3	13155.0	175.0	-64.1	-99.9	261.3	29.4	29.4	4.7	343.0	339.9	99.9	99.9	46.2	73.
48.3	110.6	14247.9	150.0	-61.2	-99.9	262.1	28.4	28.1	3.8	344.7	339.9	99.9	99.9	51.8	74.
52.0	118.0	15186.7	125.0	-65.4	-99.9	259.7	18.6	18.3	3.3	347.5	339.9	99.9	99.9	57.5	75.
54.4	126.3	16512.4	100.0	-69.6	-99.9	268.5	19.4	19.4	0.5	352.2	339.9	99.9	99.9	62.9	75.
61.7	136.3	18203.5	75.0	-72.3	-99.9	247.3	11.2	10.3	4.3	421.3	339.9	99.9	99.9	68.8	76.
70.0	142.3	23680.0	50.0	-60.8	-99.9	236.3	3.6	3.1	1.8	500.3	339.9	99.9	99.9	64.4	76.
83.4	150.7	25104.4	25.0	-53.0	-99.9	81.5	5.7	-3.7	-0.8	632.8	339.9	99.9	99.9	68.1	77.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 248
SHREVEPORT, LA24 APRIL 1975
515 GMT

TIME MIN	CATCT	WEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIP DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DEG K	E POT Y DEG K	MR RTO GM/KG	PH PCT	RANGE KM	AZ DEG
0.0	4.4	79.0	1004.4	22.0	17.6	190.0	4.6	0.0	4.5	296.5	329.8	12.7	76.0	0.0	0.
0.1	4.8	117.3	1000.0	21.9	17.6	191.3	7.7	1.5	7.6	296.8	330.7	13.0	77.7	0.2	5.
1.0	6.7	337.6	975.0	20.9	17.9	191.3	11.2	2.2	11.0	298.0	333.3	13.4	82.8	0.6	10.
1.9	8.9	562.5	950.0	19.2	17.4	193.2	17.5	4.0	17.0	298.5	333.6	13.3	89.5	1.3	11.
2.8	11.0	792.4	925.0	19.6	13.8	193.9	20.7	5.0	20.0	300.8	337.8	10.9	90.2	2.4	12.
3.9	13.3	1028.3	900.0	18.3	11.9	200.6	20.1	7.1	18.8	301.7	328.3	9.8	85.2	3.6	14.
5.0	15.5	1265.8	875.0	17.7	9.5	204.3	20.2	8.9	18.1	303.0	320.0	8.1	41.6	5.1	16.
6.1	17.9	1517.4	850.0	17.1	3.6	214.6	21.4	12.1	17.6	304.8	321.4	5.9	40.7	6.3	18.
7.0	20.3	1771.5	825.0	15.5	3.4	215.9	20.2	11.8	16.3	305.8	322.7	5.9	40.2	7.4	20.
7.9	22.6	2031.8	800.0	13.8	2.9	210.5	16.6	8.4	14.3	306.6	323.5	5.9	47.8	8.5	23.
9.1	25.2	2255.3	775.0	14.2	-9.3	212.3	18.7	10.3	15.7	309.4	316.8	2.5	18.9	9.6	24.
10.1	27.5	2575.2	750.0	13.0	-15.7	221.0	18.0	11.6	13.6	310.7	315.6	1.5	12.0	10.8	25.
11.2	30.2	2858.6	725.0	10.9	-17.3	233.7	17.0	13.7	10.1	311.4	315.9	1.4	12.0	11.2	27.
12.3	32.9	3149.9	700.0	9.5	-18.5	238.7	15.4	12.1	9.5	313.2	318.3	1.6	15.5	12.8	30.
13.4	35.5	3451.2	675.0	7.8	-1.2	248.5	16.2	16.4	7.8	315.1	310.5	5.2	15.9	13.9	32.
14.6	38.1	3761.3	650.0	5.4	-2.6	248.8	17.7	18.5	6.4	315.7	320.3	4.9	56.4	15.0	35.
15.9	40.8	4080.8	625.0	2.8	-4.5	256.4	15.5	15.1	3.6	316.2	329.5	4.4	58.5	16.3	38.
17.3	43.8	4405.8	600.0	-0.0	-8.7	256.5	18.5	19.0	4.3	316.5	326.7	3.3	58.0	17.1	41.
18.5	46.6	4745.6	575.0	-2.3	-9.6	261.2	21.6	21.3	3.3	317.6	327.6	3.2	57.9	18.2	43.
19.8	49.8	5101.1	550.0	-5.2	-6.7	260.2	23.9	23.5	4.1	318.5	331.3	4.2	86.5	19.7	47.
21.2	52.6	5465.1	525.0	-8.4	-9.5	259.8	26.7	26.3	4.7	318.7	329.6	3.5	92.0	21.5	50.
22.5	55.6	5841.6	500.0	-12.1	-17.8	260.9	26.4	26.1	4.2	318.5	324.6	1.9	63.1	23.2	52.
23.9	58.7	6231.5	475.0	-15.8	-28.8	258.0	25.7	25.1	5.3	318.5	321.0	0.8	32.3	25.4	54.
25.6	62.1	6637.3	450.0	-17.8	-33.6	257.9	28.2	27.6	5.9	320.9	322.6	0.5	23.5	27.9	57.
27.1	65.5	7023.9	425.0	-19.5	-41.2	260.7	23.9	23.4	3.9	324.4	324.8	0.2	12.5	30.1	59.
28.4	68.0	7510.8	400.0	-23.5	-48.3	260.6	24.5	23.6	4.0	324.4	325.1	0.2	12.6	32.2	60.
30.4	72.5	7840.0	375.0	-27.2	-47.1	262.0	21.2	21.0	3.0	325.6	326.1	0.1	12.9	34.3	62.
32.1	76.5	8573.3	350.0	-30.8	-46.3	251.4	22.5	21.3	7.2	327.2	327.9	0.2	20.2	36.4	62.
33.9	80.4	9195.2	325.0	-34.8	-51.7	255.1	24.3	23.5	6.3	328.7	329.1	0.1	15.7	38.9	63.
35.0	84.7	9845.3	300.0	-39.0	-49.8	250.5	32.4	31.9	5.9	330.3	330.8	0.1	30.4	42.4	64.
36.3	88.3	10375.4	275.0	-44.1	-57.9	260.3	31.8	31.3	5.4	331.4	330.9	9.9	99.9	46.4	64.
40.0	98.8	10771.7	250.0	-48.4	-99.9	261.3	38.3	37.8	5.8	333.8	333.8	9.9	99.9	51.9	67.
46.9	108.0	12200.5	225.0	-54.4	-99.9	257.1	40.7	39.6	9.1	335.1	335.1	9.9	99.9	58.5	64.
50.2	110.0	13027.8	200.0	-60.3	-99.9	252.8	38.7	35.1	10.9	337.3	337.3	9.9	99.9	65.8	64.
55.0	116.3	13586.1	150.0	-62.9	-99.9	257.7	28.5	28.9	6.3	336.2	336.2	9.9	99.9	71.7	70.
58.3	123.3	15112.6	125.0	-59.9	-99.9	263.2	34.7	34.4	4.1	366.9	366.9	9.9	99.9	78.5	71.
62.4	130.3	16463.9	100.0	-63.5	-99.9	264.9	24.5	24.4	2.2	380.1	380.1	9.9	99.9	87.0	72.
65.6	137.0	18170.7	75.0	-66.8	-99.9	266.1	24.0	24.0	1.7	394.8	394.8	9.9	99.9	94.4	73.
70.0	148.7	20667.7	50.0	-70.7	-99.9	268.6	23.8	22.3	8.3	424.7	424.7	9.9	99.9	99.9	73.
74.0	158.3	23076.5	25.0	-60.1	-99.9	267.9	4.7	-8.3	-4.6	502.8	502.8	9.9	99.9	105.1	73.
90.0	190.3	25076.5	25.0	-52.1	-99.9	290.6	3.3	2.8	-1.6	635.4	635.4	9.9	99.9	108.8	74.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 18 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN POLARIZED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 255
VICTORIA, TEX

24 APRIL 1975
515 GMT

TIME MIN	CHTCI	HEIGHT CM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	NR RTO CM/SEC	RM PCT	RANGE KM	AZ DEG
0.0	4.2	33.0	1009.0	24.0	21.9	170.0	7.7	-1.3	7.6	290.6	342.1	16.7	80.0	0.0	0.0
0.1	4.8	111.9	1000.0	23.9	22.3	99.0	99.9	99.9	99.9	299.6	344.4	17.2	90.4	999.9	99.0
0.8	6.3	33.0	975.0	22.9	21.6	99.0	99.9	99.9	99.9	300.2	345.2	17.1	94.7	999.9	99.0
1.5	8.6	50.0	950.0	20.0	20.1	99.0	99.9	99.9	99.9	300.4	342.2	15.0	95.0	999.9	99.0
2.1	10.6	791.0	925.0	19.5	18.7	170.0	19.5	-0.1	19.5	301.2	343.8	14.9	95.4	2.1	350.0
2.9	12.6	1020.3	900.0	18.5	17.7	180.0	19.2	1.5	19.2	302.5	340.9	14.4	95.3	2.9	350.0
3.6	14.8	1260.7	875.0	16.0	10.7	187.0	20.7	2.8	20.5	301.7	327.2	9.4	71.0	3.6	350.0
4.3	16.8	1517.3	850.0	17.5	2.6	184.0	22.6	1.6	22.6	305.3	320.9	5.5	37.0	4.3	350.0
5.2	16.2	1771.4	825.0	15.0	-6.4	182.0	20.3	0.9	20.3	305.6	314.4	3.0	21.9	5.2	350.0
5.9	21.3	2021.9	800.0	16.0	-38.0	182.0	18.0	2.3	18.7	308.2	308.6	0.2	1.3	5.9	350.0
6.4	23.6	2301.9	775.0	17.3	-39.3	195.4	19.0	5.2	19.1	312.6	313.6	0.2	1.0	6.4	350.0
7.6	25.0	2500.7	750.0	17.2	-39.4	201.0	18.5	6.6	17.3	315.3	315.9	0.2	1.0	7.6	350.0
8.6	28.3	2650.4	725.0	15.7	-40.3	198.7	16.3	5.2	15.5	316.7	317.3	0.2	1.0	8.6	350.0
9.4	30.7	3164.4	700.0	13.0	-41.5	197.4	16.8	5.0	16.0	317.8	318.3	0.1	1.0	9.4	350.0
10.5	32.2	3462.8	675.0	11.2	-43.0	203.6	15.3	6.1	14.0	318.2	318.6	0.1	1.0	10.5	350.0
11.5	35.7	3782.1	650.0	9.4	-24.4	216.0	11.6	6.0	9.4	319.6	322.5	0.9	7.0	11.5	350.0
12.4	38.3	4105.6	625.0	6.9	-17.8	225.3	9.9	7.0	6.9	320.5	325.5	1.5	15.2	12.4	350.0
13.4	40.9	4438.0	600.0	3.8	-14.7	238.4	7.7	6.6	4.0	320.7	327.2	2.0	24.4	13.4	350.0
14.7	45.7	4782.1	575.0	0.0	-13.0	245.3	8.5	7.7	3.6	320.3	328.1	2.0	24.4	14.7	350.0
15.9	46.6	5136.3	550.0	-3.4	-11.9	242.0	10.3	9.1	4.7	320.4	327.2	2.8	36.9	15.9	350.0
17.1	46.5	5502.2	525.0	-6.2	-10.6	250.1	9.8	9.2	3.3	321.1	327.6	2.0	44.1	17.1	350.0
18.4	52.3	5822.6	500.0	-7.9	-5.9	256.2	10.0	10.5	2.2	323.3	323.5	0.0	1.0	18.4	350.0
19.6	55.3	6278.9	475.0	-11.1	-5.0	256.9	13.0	12.6	2.9	324.1	324.3	0.0	1.0	19.6	350.0
21.7	58.5	6691.1	450.0	-14.0	-9.7	254.7	13.0	12.6	3.4	324.6	324.8	0.0	1.3	21.7	350.0
23.4	61.9	7120.5	425.0	-18.4	-28.2	265.1	13.6	13.6	1.2	325.4	328.4	0.9	41.0	23.4	350.0
24.0	65.3	7570.1	400.0	-21.9	-32.5	269.0	17.3	17.3	0.3	326.4	328.6	0.6	37.3	24.0	350.0
25.6	68.0	8041.7	375.0	-25.4	-27.7	265.7	20.1	20.1	1.5	328.1	331.7	1.0	60.5	25.6	350.0
27.2	72.3	8534.8	350.0	-29.4	-30.1	261.4	23.7	23.4	3.5	328.2	332.3	0.9	80.5	27.2	350.0
29.0	76.3	9033.2	325.0	-33.6	-43.4	263.9	24.9	24.0	2.7	330.3	331.2	0.2	36.3	29.0	350.0
30.9	80.4	9420.5	300.0	-37.4	-50.9	264.1	27.7	27.7	1.9	332.6	333.0	0.1	22.7	30.9	350.0
33.0	84.8	10215.2	275.0	-42.4	99.0	266.9	32.4	32.4	1.7	333.8	999.9	99.9	999.9	33.0	350.0
35.3	87.2	10922.0	250.0	-47.1	99.0	265.5	34.5	34.5	2.7	336.1	999.9	99.9	999.9	35.3	350.0
37.9	94.2	11541.1	225.0	-53.0	99.9	266.0	31.6	31.5	2.2	337.3	999.9	99.9	999.9	37.9	350.0
40.9	94.4	12290.4	200.0	-58.7	99.9	158.2	34.5	33.8	7.0	339.9	999.9	99.9	999.9	40.9	350.0
42.4	105.0	13117.6	175.0	-63.3	99.9	277.1	32.3	32.1	-0.0	340.5	999.9	99.9	999.9	42.4	350.0
47.1	111.3	14000.6	150.0	-61.2	99.9	252.9	31.7	30.3	9.3	340.7	999.9	99.9	999.9	47.1	350.0
51.3	116.3	15109.4	125.0	-65.4	99.9	261.2	23.9	23.7	3.7	378.6	999.9	99.9	999.9	51.3	350.0
54.2	127.0	16525.4	100.0	-70.0	99.5	252.1	18.7	17.8	5.7	352.5	999.9	99.9	999.9	54.2	350.0
62.2	136.7	18225.3	75.0	-71.1	99.3	283.9	3.7	3.6	-0.9	423.9	999.9	99.9	999.9	62.2	350.0
71.0	147.5	20680.4	50.0	-81.8	99.9	230.1	1.7	1.3	1.1	498.0	999.9	99.9	999.9	71.0	350.0
86.6	160.0	25105.7	25.0	-83.6	99.9	82.0	13.3	-13.2	-1.7	630.4	999.9	99.9	999.9	86.6	350.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 240
STEPHENSVILLE, TEX24 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
00.0	5.7	359.0	963.9	21.7	18.5	170.0	7.2	-1.3	7.1	299.9	337.1	14.1	82.0	0.0	0.
00.9	59.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
01.8	59.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
05.0	10.9	525.7	950.0	21.8	18.5	170.0	17.7	-2.9	17.4	301.3	337.3	14.3	81.3	0.4	35.0
1.3	13.3	758.0	925.0	21.1	18.6	181.5	20.7	0.5	20.7	302.9	342.4	14.8	85.6	1.3	35.4
2.1	15.6	956.0	900.0	20.1	18.2	190.1	22.5	4.0	22.2	304.2	344.0	14.8	89.1	2.4	35.4
3.0	18.0	1239.6	875.0	20.1	16.7	205.2	18.5	7.9	16.7	306.5	344.1	13.8	80.7	3.5	4.
3.9	20.4	1490.4	850.0	19.4	13.3	220.9	17.0	11.1	12.4	308.3	339.6	11.4	65.0	4.3	11.
4.9	22.8	1746.9	825.0	17.1	12.1	233.5	14.9	12.0	8.9	308.2	338.2	10.8	72.2	5.1	17.
5.3	25.3	2506.9	800.0	16.9	5.4	257.7	13.2	12.9	2.8	310.1	330.6	7.2	47.6	5.7	23.
6.8	27.8	2280.1	775.0	16.2	-4.8	281.1	15.0	14.8	-2.9	311.7	322.1	3.5	23.2	6.0	30.
7.7	30.4	2537.8	750.0	14.6	-8.2	269.7	16.8	16.8	0.0	314.7	321.1	2.7	19.8	6.4	37.
8.7	33.1	2443.1	725.0	12.9	-9.9	258.3	18.4	18.0	3.7	313.9	322.2	2.7	21.0	7.2	43.
9.3	35.7	3136.4	700.0	10.3	-11.3	248.3	21.6	20.1	0.0	314.2	321.3	2.3	20.5	8.1	44.
10.7	38.4	3437.9	675.0	8.0	-15.4	242.8	23.0	20.5	10.5	315.5	321.0	1.7	16.6	9.6	50.
11.7	41.1	3748.3	650.0	6.1	-19.3	238.6	22.1	18.9	11.5	316.0	320.1	1.3	14.0	10.9	51.
12.9	44.0	4067.7	625.0	3.3	-20.6	236.8	22.5	18.8	12.3	316.4	320.2	1.2	15.2	12.5	51.
14.0	46.9	4397.3	500.0	1.4	-30.0	237.7	20.7	17.5	11.1	317.8	319.6	0.5	7.4	12.9	52.
15.1	49.9	4738.4	575.0	-0.8	-35.3	239.4	19.8	17.0	10.1	319.0	323.2	0.3	5.2	15.1	53.
16.4	52.8	5091.1	550.0	-3.8	-41.2	236.9	18.9	15.9	10.3	319.6	320.2	0.2	3.5	16.9	57.
17.7	55.8	5456.0	525.0	-7.2	-40.2	242.5	19.8	17.5	9.1	319.8	320.5	0.2	5.1	18.2	54.
18.9	59.1	5833.6	500.0	-10.5	-40.2	251.1	19.8	18.7	6.4	320.2	321.0	0.2	6.6	19.6	54.
20.3	62.3	6226.2	475.0	-13.9	-38.4	249.8	19.3	18.1	6.7	320.7	321.8	0.3	10.4	21.0	54.
21.6	65.6	6634.1	450.0	-17.6	-41.1	248.7	22.0	20.5	6.0	321.1	321.9	0.2	10.7	22.7	57.
22.9	68.9	7058.7	425.0	-21.3	-43.7	256.3	24.3	23.6	5.7	321.7	322.3	0.2	11.1	24.5	58.
24.5	72.4	7503.7	400.0	-24.2	-47.8	254.2	25.7	24.8	7.0	323.4	323.9	0.1	9.2	26.9	60.
26.1	76.1	7970.8	375.0	-27.5	-50.1	251.9	29.3	27.8	9.1	325.1	325.5	0.1	9.5	29.4	61.
27.7	80.0	8464.0	350.0	-30.9	-52.4	257.7	26.9	26.2	5.7	327.1	327.4	0.1	9.9	31.9	62.
29.7	84.0	8985.0	325.0	-35.6	-55.9	255.1	27.6	26.7	7.1	327.5	327.7	0.1	10.3	35.2	63.
31.5	87.8	9537.4	300.0	-39.9	-59.9	254.0	36.2	34.8	10.0	329.1	993.9	99.9	99.9	38.4	64.
33.8	92.4	10125.2	275.0	-45.1	-69.9	262.7	27.9	27.7	3.5	330.0	993.9	99.9	99.9	42.7	64.
36.1	96.8	10756.0	250.0	-49.5	-69.9	256.3	31.2	30.3	7.4	332.4	993.9	99.9	99.9	47.6	67.
38.7	101.8	11436.6	225.0	-54.9	-69.9	249.7	31.6	20.6	11.0	334.4	993.9	99.9	99.9	53.3	67.
41.7	107.2	12182.0	200.0	-59.1	-69.9	254.4	35.1	33.9	9.4	339.2	993.9	99.9	99.9	59.9	68.
44.9	112.8	13013.5	175.0	-60.7	-69.9	260.8	38.6	38.1	6.1	345.8	993.9	99.9	99.9	66.4	69.
48.6	119.3	13975.9	150.0	-60.1	-69.9	254.5	43.64	42.0	11.7	366.5	993.9	99.9	99.9	75.9	70.
53.5	126.0	15108.8	125.0	-61.4	-69.9	256.0	29.18	28.3	7.0	363.9	993.9	99.9	99.9	86.3	71.
58.3	133.7	16475.6	100.0	-69.0	-69.9	263.9	13.18	13.0	1.4	364.4	993.9	99.9	99.9	92.2	71.
64.6	141.7	18179.9	75.0	-69.9	-69.9	238.4	9.5	9.1	5.0	426.4	993.9	99.9	99.9	96.9	71.
73.4	150.3	20670.0	50.0	-58.9	-69.9	233.4	2.4	1.9	1.4	504.8	993.9	99.9	99.9	101.1	70.
99.0	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 261
DEL RIO, TEX
24 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPH	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.9	318.0	971.2	26.3	16.5	110.0	6.7	-6.3	2.3	303.7	337.0	12.3	95.0	0.0	0.
99.9	55.9	1000.0	971.2	26.3	16.5	110.0	99.9	99.9	99.9	99.9	337.0	99.9	99.9	99.9	99.9
99.9	55.5	95.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	10.3	508.9	950.0	25.6	15.8	132.7	17.8	-13.1	12.1	304.2	337.4	12.0	54.5	0.5	328.
1.6	13.2	743.5	925.0	24.4	14.8	142.2	18.7	-11.4	14.7	305.8	337.4	11.5	55.1	1.4	313.
2.2	15.6	583.5	900.0	24.0	12.4	151.7	17.0	-8.1	15.0	307.6	335.8	10.1	48.4	2.1	316.
3.0	18.1	1232.0	875.0	23.3	9.9	154.3	14.0	-4.0	14.2	309.2	334.0	8.8	42.7	2.8	323.
3.8	20.5	1482.6	850.0	21.9	10.2	174.7	13.6	-1.3	13.6	310.4	336.5	9.3	47.3	3.4	324.
4.6	23.0	1741.0	825.0	20.2	10.0	182.8	11.5	0.6	11.5	311.2	337.8	9.4	51.8	3.9	333.
5.3	25.0	2004.3	800.0	15.4	1.1	177.5	10.7	-0.5	10.7	312.5	328.1	5.3	30.0	4.4	334.
6.2	28.3	2278.5	775.0	18.2	3.2	191.1	10.0	1.9	9.9	314.3	332.8	6.3	37.2	4.9	339.
7.1	31.1	2558.9	750.0	16.7	1.1	195.8	9.7	3.3	9.1	315.5	331.9	5.5	34.8	5.4	342.
8.0	33.8	2846.8	725.0	14.7	-1.5	213.3	9.3	5.1	7.8	316.2	330.5	4.8	32.9	5.7	346.
8.9	36.4	3142.4	700.0	12.6	-6.6	231.5	10.5	8.2	6.5	317.2	327.1	3.3	25.5	6.0	350.
9.9	39.4	3446.3	675.0	10.2	-8.4	236.5	12.3	10.2	6.8	317.5	326.8	3.0	26.0	6.3	356.
10.9	42.0	3758.5	650.0	7.2	-10.6	232.4	13.1	10.4	8.0	317.4	325.6	2.6	27.0	6.7	1.
11.9	45.0	4076.3	625.0	4.2	-11.7	232.8	13.4	10.7	8.1	317.5	325.4	2.5	30.3	7.3	0.
12.9	48.1	4408.9	600.0	1.2	-13.2	235.9	13.6	11.7	6.8	317.8	325.0	2.3	33.2	7.5	11.
13.9	51.3	4746.6	575.0	-2.2	-14.9	246.6	15.2	14.0	6.1	317.7	324.3	2.1	36.9	8.4	15.
15.0	54.3	5101.1	550.0	-5.0	-18.4	256.0	17.6	17.1	4.3	318.3	322.8	1.4	28.5	9.0	21.
16.1	57.3	5465.0	525.0	-7.7	-22.8	264.0	18.4	18.3	1.9	319.3	321.1	1.2	28.6	9.7	27.
17.5	60.7	5843.2	500.0	-9.4	-24.9	269.1	21.5	21.5	0.3	321.7	325.0	1.0	27.0	10.6	35.
18.8	64.1	6237.4	475.0	-12.5	-32.9	271.8	22.4	22.4	-0.7	322.5	324.3	0.5	16.2	11.6	42.
20.1	67.6	6647.9	450.0	-15.0	-36.0	271.6	20.4	20.4	-0.6	324.3	325.7	0.4	14.7	12.4	48.
21.3	71.0	7077.6	425.0	-17.9	-40.9	284.2	19.4	19.3	2.0	326.0	327.0	0.2	11.4	13.7	52.
22.6	74.7	7527.8	400.0	-21.5	-43.4	282.1	20.3	20.1	2.8	327.0	327.8	0.2	11.7	15.2	54.
23.9	78.7	7996.8	375.0	-25.4	-41.4	280.3	25.5	25.1	4.3	327.9	328.9	0.3	20.8	16.8	57.
25.2	82.7	8496.1	350.0	-30.0	-40.5	256.9	29.3	28.6	6.6	328.3	329.4	0.3	34.8	18.3	60.
26.7	86.7	9019.5	325.0	-34.0	-40.0	284.0	31.5	30.3	8.7	329.8	331.1	0.4	54.5	21.4	51.
28.8	90.2	9576.9	300.0	-37.6	-45.1	258.3	36.9	36.1	7.5	332.2	333.1	0.2	45.1	25.7	64.
30.9	95.6	10171.6	275.0	-42.2	99.9	254.1	32.8	31.5	9.0	334.2	334.9	99.9	99.9	30.2	66.
33.1	100.3	10809.5	250.0	-47.4	99.9	263.9	32.7	32.5	3.5	335.6	336.9	99.9	99.9	34.3	67.
35.4	105.5	11496.6	225.0	-51.6	99.9	272.9	33.5	33.5	-1.7	336.3	336.9	99.9	99.9	38.3	70.
37.9	111.0	12241.5	200.0	-60.2	99.9	271.4	31.7	31.7	-0.9	337.5	337.5	99.9	99.9	43.5	72.
40.5	117.0	13064.3	175.0	-64.6	99.9	274.1	45.1	45.0	-3.2	343.4	343.4	99.9	99.9	49.2	75.
43.3	123.7	14003.7	150.0	-64.8	99.9	254.7	30.7	29.0	8.1	358.6	359.9	99.9	99.9	54.8	76.
46.7	130.4	15114.1	125.0	-66.7	99.9	257.6	30.4	29.0	6.5	374.3	374.3	99.9	99.9	61.4	76.
51.1	138.3	16452.0	100.0	-70.2	99.9	255.1	26.7	20.0	5.3	392.1	392.1	99.9	99.9	68.1	76.
56.0	146.7	18159.6	75.0	-70.7	99.9	218.2	13.3	8.2	10.4	424.1	424.1	99.9	99.9	71.2	76.
63.3	156.0	20625.9	50.0	-55.5	99.9	217.1	8.3	5.0	6.6	503.3	503.3	99.9	99.9	74.1	75.
75.3	166.3	25666.0	25.0	-51.2	99.9	70.2	5.4	-5.1	-1.8	638.0	638.0	99.9	99.9	72.9	74.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 11
OF POOR QUALITY

STATION NO. 265
 MIDLAND, TEX

 24 APRIL 1975
 515 GMT

TIME MIN	CATCT	HEIGHT GPH	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	11.3	872.0	510.9	18.3	8.8	185.0	4.6	0.4	4.6	300.4	321.9	7.9	54.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	12.2	977.8	900.0	24.3	16.0	99.9	99.9	99.9	99.9	308.3	343.5	12.9	60.0	99.9	99.9
1.2	14.2	1224.4	875.0	28.6	14.7	99.9	99.9	99.9	99.9	309.0	342.5	12.1	60.8	99.9	99.9
2.2	16.2	1476.6	850.0	21.0	14.7	99.9	99.9	99.9	99.9	309.8	344.5	12.5	67.3	99.9	99.9
3.0	18.3	1734.9	825.0	19.1	12.2	99.9	99.9	99.9	99.9	310.3	340.9	10.9	64.1	99.9	99.9
4.0	20.4	1995.3	800.0	17.9	3.4	230.1	5.1	3.9	3.3	311.1	329.6	6.5	35.9	2.1	27.
5.9	22.5	2265.7	775.0	15.9	-6.6	250.7	4.5	4.3	1.5	311.4	320.5	3.0	20.6	2.3	30.
5.9	24.8	2546.6	750.0	13.5	-7.6	248.7	5.1	4.7	1.9	311.6	320.4	2.9	22.2	2.4	34.
6.7	27.0	2831.0	725.0	12.4	-5.5	234.3	10.1	8.2	5.9	313.5	324.1	3.5	28.1	2.8	36.
7.7	29.4	3124.5	700.0	11.0	-10.0	231.5	14.4	11.3	9.0	315.0	322.9	2.6	21.9	3.5	41.
8.7	31.7	3426.3	675.0	8.5	-12.0	231.7	16.2	12.7	10.1	315.5	322.5	2.3	22.0	4.5	43.
9.7	34.4	3736.7	650.0	5.8	-14.2	235.9	17.4	14.4	9.8	315.8	322.0	2.0	22.1	5.5	45.
10.7	36.7	4055.7	625.0	2.6	-16.4	243.3	18.1	16.2	8.1	315.7	321.1	1.7	22.9	6.5	47.
11.9	39.4	4394.1	600.0	-0.2	-18.2	253.5	19.3	18.5	5.5	316.1	321.0	1.5	24.2	7.8	51.
13.1	41.7	4722.9	575.0	-2.9	-20.4	253.4	21.3	20.7	6.1	316.8	321.0	1.3	24.3	9.1	51.
14.3	44.7	5073.3	550.0	-5.8	-22.9	255.4	23.3	22.5	5.9	317.3	320.9	1.1	24.4	10.7	57.
15.5	47.6	5435.5	525.0	-9.3	-25.2	259.1	25.5	22.1	4.3	317.3	320.4	0.9	26.1	12.3	60.
16.8	50.4	5818.5	500.0	-12.1	-28.7	264.2	22.1	22.0	2.2	318.3	320.7	0.7	23.4	13.9	63.
19.0	53.3	6201.9	475.0	-13.6	-32.5	265.8	22.6	22.6	1.6	321.1	322.9	0.5	18.5	15.4	65.
19.3	56.3	6610.5	450.0	-16.8	-35.0	268.1	22.7	22.6	0.7	322.2	323.7	0.4	18.7	17.2	67.
20.9	59.6	7037.3	425.0	-20.1	-37.7	268.8	23.6	21.6	0.5	323.2	324.4	0.3	18.9	19.2	70.
22.4	63.0	7463.0	400.0	-24.1	-41.0	265.6	24.8	21.6	0.5	323.6	324.6	0.3	19.2	21.3	72.
24.2	66.3	7950.7	375.0	-27.6	-43.9	262.3	28.7	28.5	3.9	325.0	325.7	0.2	19.4	24.1	73.
25.0	70.0	8442.8	350.0	-31.6	-47.1	260.0	31.3	30.8	5.4	326.1	326.7	0.2	19.7	27.1	74.
27.9	73.7	8963.0	325.0	-35.7	-50.5	260.1	30.5	30.0	5.2	327.4	327.8	0.1	20.0	30.5	75.
29.7	77.8	9514.1	300.0	-40.4	-59.9	258.0	33.3	32.6	6.9	328.4	329.9	99.9	99.9	34.2	75.
31.8	82.0	10100.5	275.0	-45.3	-69.9	258.6	34.7	34.0	6.9	329.6	330.9	99.9	99.9	38.6	75.
34.3	86.4	10728.9	250.0	-50.6	-79.9	254.9	35.7	35.5	3.5	330.6	331.9	99.9	99.9	43.8	76.
36.3	91.2	11408.7	225.0	-54.9	-89.9	254.9	35.8	35.7	3.1	334.3	334.3	99.9	99.9	49.3	77.
39.5	96.2	12155.1	200.0	-59.3	-99.9	256.5	36.3	35.3	8.5	338.3	338.3	99.9	99.9	54.8	77.
42.6	101.9	12987.3	175.0	-63.2	-99.9	257.3	42.8	42.8	2.0	350.6	350.6	99.9	99.9	62.5	78.
46.2	106.3	13951.0	150.0	-65.8	-99.9	254.9	29.9	28.8	7.8	367.2	367.2	99.9	99.9	69.8	79.
50.4	115.1	15078.5	125.0	-64.0	-99.9	259.9	38.3	36.0	13.1	379.2	379.2	99.9	99.9	78.0	78.
55.5	123.7	16437.1	100.0	-67.5	-99.9	259.8	26.5	24.9	0.1	397.4	397.4	99.9	99.9	87.3	78.
61.2	133.0	18164.1	75.0	-67.8	-99.9	253.1	14.6	14.0	4.2	430.7	430.7	99.9	99.9	92.9	76.
70.7	143.3	20658.6	50.0	-60.7	-99.9	237.1	4.9	4.1	2.7	500.5	500.5	99.9	99.9	56.6	76.
86.3	154.5	25128.3	25.0	-50.4	-99.9	31.1	4.3	-1.2	-1.9	639.9	639.9	99.9	99.9	97.0	76.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

 ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 304
MATTERAS, NC24 APRIL 1975
515 GMT

112 168. 0

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX FTO GM/KG	FM MCT	RANGE KM	AZ DG
0.0	3.9	4.0	1025.0	19.4	13.6	220.0	5.7	3.7	4.4	291.8	316.7	9.6	69.0	0.0	0.
0.8	5.8	216.8	1000.0	19.2	10.3	231.4	27.5	21.5	17.2	293.4	316.4	7.9	56.4	0.7	36.
1.5	8.3	433.9	975.0	17.2	8.7	228.2	15.3	11.4	10.2	293.5	316.8	7.3	57.1	1.6	47.
2.2	10.3	655.2	950.0	15.1	6.6	227.3	15.7	11.5	10.7	293.5	316.8	7.4	64.9	2.1	47.
2.9	12.5	890.7	925.0	13.2	4.7	228.1	26.4	19.6	17.6	293.8	316.1	7.7	74.2	3.1	47.
3.6	14.8	1110.6	900.0	11.1	7.0	229.2	16.5	14.0	12.1	293.9	316.6	7.0	75.9	4.1	47.
4.3	17.0	1345.2	875.0	9.1	5.0	176.0	19.4	-1.4	15.3	294.0	316.9	6.3	75.8	4.9	48.
5.1	19.5	1585.1	850.0	7.2	4.0	144.8	20.7	-11.9	16.9	294.4	310.7	6.0	60.4	5.1	30.
5.9	21.8	1830.5	825.0	6.3	-2.5	217.4	15.2	9.3	12.1	295.7	306.5	3.9	53.4	5.9	30.
6.7	24.1	2083.0	800.0	6.0	-7.3	228.8	12.6	9.5	8.3	297.9	305.9	2.8	37.8	6.4	32.
7.5	26.7	2342.1	775.0	4.2	-10.2	242.5	10.3	9.1	4.7	298.6	305.2	2.3	34.2	7.0	34.
8.4	29.2	2607.9	750.0	2.5	-8.3	250.0	9.3	8.8	3.2	299.6	307.6	2.7	44.8	7.4	36.
9.2	31.5	2881.6	725.0	1.9	-18.6	256.0	9.3	9.0	2.2	301.7	305.5	1.2	20.5	7.7	38.
10.1	34.6	3163.9	700.0	0.5	-15.4	261.3	10.2	10.1	1.5	303.3	308.2	1.6	28.9	8.1	40.
10.9	37.1	3454.4	675.0	-1.8	-15.9	265.0	11.4	11.4	1.0	303.8	308.8	1.6	33.2	8.5	43.
11.7	40.0	3753.4	650.0	-4.1	-13.4	271.3	12.2	11.2	-0.3	304.6	310.9	2.1	48.3	8.9	45.
12.6	42.6	4031.8	625.0	-5.6	-15.6	282.9	12.3	12.0	-2.7	306.2	310.3	1.3	32.8	9.3	47.
13.7	45.6	4381.2	600.0	-7.2	-26.0	283.6	12.9	12.5	-3.0	307.8	310.3	0.8	20.5	9.7	52.
14.6	48.5	4712.2	575.0	-8.5	-26.9	278.5	12.8	12.6	-1.9	310.1	312.6	0.8	22.3	10.3	55.
15.7	51.4	5055.8	550.0	-10.1	-13.0	287.4	16.5	15.6	-3.0	312.5	320.4	2.6	80.0	10.9	54.
16.8	54.6	5414.6	525.0	-11.1	-12.5	298.7	19.9	17.4	-9.5	315.4	324.0	2.8	89.3	11.6	63.
17.9	57.6	5788.2	500.0	-13.4	-15.3	301.7	20.1	17.1	-10.6	316.9	345.2	2.3	85.6	12.4	69.
19.0	60.9	6176.9	475.0	-16.0	-18.2	300.1	20.9	18.1	-10.5	318.4	324.5	1.9	83.2	13.2	73.
20.2	64.4	6588.2	450.0	-18.8	-21.4	298.7	20.1	17.6	-9.7	319.7	328.7	1.5	90.0	14.4	78.
21.5	67.7	7006.3	425.0	-21.4	-26.0	288.5	20.4	19.4	-8.5	321.7	325.3	1.1	66.1	15.7	81.
22.7	71.0	7450.6	400.0	-24.6	-30.4	280.9	21.1	20.7	-8.0	323.1	345.7	0.8	58.0	17.0	83.
24.1	74.7	7917.1	375.0	-28.4	-34.3	275.1	19.9	19.8	-1.8	324.0	325.9	0.6	56.9	18.7	85.
25.5	78.7	8407.8	350.0	-32.3	-38.2	275.9	20.1	20.0	-2.1	325.1	326.5	0.4	55.6	20.3	88.
26.8	82.5	8927.5	325.0	-37.1	-41.3	278.2	19.6	19.4	-2.8	326.2	999.9	99.9	99.9	21.7	91.
28.4	86.7	9473.3	300.0	-42.0	99.9	274.3	20.8	20.6	-3.0	326.2	999.9	99.9	99.9	24.1	97.
29.9	91.2	10055.8	275.0	-46.9	99.9	282.3	20.0	19.5	-4.2	327.2	999.9	99.9	99.9	25.4	98.
31.5	95.3	10681.0	250.0	-51.3	99.9	283.0	20.9	20.1	-6.9	327.8	999.9	99.9	99.9	28.1	8.
33.3	100.9	11357.9	225.0	-56.3	99.9	265.5	25.8	25.9	-18.7	334.2	999.9	99.9	99.9	31.6	71.
35.0	106.3	12054.8	200.0	-62.3	99.9	999.9	99.9	99.9	99.9	334.0	999.9	99.9	99.9	99.9	99.9
36.8	112.3	12909.7	175.0	-65.7	99.9	999.9	99.9	99.9	99.9	341.5	999.9	99.9	99.9	99.9	99.9
39.3	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9
45.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9
49.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9
50.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9
59.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9

* EV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * EV TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

METEOROLOGICAL

STATION NO. 311
ATHENS, GA24 APRIL 1975
600 GMT

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP DG C	DRY PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT V DG K	E PUT V DG K	MX RTO GM/KG	RM PCT	162 HANCE KM	14.0 AZ DG
0.3	6.9	246.0	992.6	17.7	14.4	160.0	4.6	-1.6	4.3	292.9	320.1	10.5	81.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	6.6	353.3	975.0	17.2	13.5	190.4	13.6	2.5	13.4	293.8	320.1	10.1	79.2	0.3	34.7
1.4	10.9	621.0	950.0	16.0	11.5	191.6	17.2	3.5	16.8	294.6	318.5	9.1	74.8	1.0	1.
2.1	13.3	647.9	925.0	15.7	9.2	202.3	17.5	6.7	16.2	296.5	317.7	7.9	65.0	1.9	9.
2.9	15.6	1086.6	900.0	14.9	8.6	211.3	15.1	7.6	12.9	297.9	317.1	7.6	66.0	2.5	14.
3.7	18.9	1318.4	875.0	12.9	6.8	219.5	13.9	8.9	10.7	298.2	317.6	7.1	66.4	3.2	19.
4.6	20.5	1561.4	850.0	10.7	6.6	221.5	14.4	9.6	10.8	298.3	317.6	7.3	75.9	3.8	23.
5.4	23.0	1809.6	825.0	8.2	5.9	225.3	15.4	11.0	10.8	298.2	317.5	7.1	85.2	4.6	26.
6.3	25.5	2063.5	800.0	7.0	-7.0	233.9	13.2	10.7	7.8	299.1	308.3	3.2	41.5	5.1	25.
7.3	28.1	2324.2	775.0	6.6	-5.5	246.1	10.0	9.2	-0.5	304.1	310.9	3.3	42.0	5.9	32.
9.2	30.9	2593.5	750.0	6.2	2.1	273.2	9.3	9.3	-2.6	304.8	321.1	6.0	75.0	6.2	36.
10.1	36.1	3156.1	700.0	3.2	1.3	288.6	12.7	12.1	-4.1	306.8	324.1	6.1	86.0	6.8	42.
11.2	35.3	3450.4	675.0	2.6	-7.0	293.2	11.1	10.2	-2.2	309.0	319.0	3.4	49.1	7.2	52.
12.2	41.8	3754.4	650.0	-0.4	-2.2	296.2	10.1	9.6	-3.3	310.5	322.8	4.2	79.7	8.3	56.
13.3	44.9	4067.4	625.0	-3.2	-5.2	287.1	11.1	10.6	-3.9	312.3	322.5	3.4	69.2	8.5	64.
14.4	47.9	4391.7	600.0	-3.6	-8.4	286.5	12.2	11.6	-5.1	313.6	322.6	2.9	67.9	9.1	64.
15.5	50.7	4726.9	575.0	-5.6	-10.7	293.4	12.8	11.8	-5.5	314.7	321.6	2.3	60.9	9.7	72.
16.7	53.9	5073.8	550.0	-6.1	-14.3	295.0	12.9	11.7	-5.5	314.6	321.3	2.4	79.4	10.4	75.
17.9	56.3	5433.2	525.0	-11.5	-14.4	292.9	13.1	12.1	-3.6	316.3	321.3	1.5	58.7	11.2	78.
19.0	60.3	5805.9	500.0	-13.8	-20.2	286.8	12.6	12.0	-3.6	319.2	322.2	0.9	36.3	12.0	80.
20.3	63.7	6194.5	475.0	-15.2	-26.8	286.0	13.1	12.6	-3.6	320.4	322.3	0.5	27.2	13.0	82.
21.7	67.0	6600.9	450.0	-18.2	-32.4	284.5	14.6	14.1	-3.7	322.4	322.5	0.0	2.0	14.4	84.
23.0	70.6	7025.7	425.0	-20.7	-37.9	283.4	20.1	19.0	-4.7	322.4	322.5	0.0	2.3	16.3	86.
24.6	74.3	7471.1	400.0	-23.9	-38.8	280.3	21.4	21.0	-3.8	323.8	323.9	0.0	2.7	18.3	88.
26.2	78.2	7935.1	375.0	-27.3	-40.1	280.9	24.9	24.4	-4.7	325.4	325.5	0.0	3.2	20.4	90.
27.9	82.0	8431.7	350.0	-31.5	-41.9	281.3	25.5	25.0	-5.9	326.1	326.2	0.0	3.6	22.4	92.
29.6	86.0	8951.5	325.0	-35.5	-43.9	285.7	26.4	25.4	-7.2	327.7	327.8	0.0	3.6	23.5	94.
31.5	90.4	9503.3	300.0	-40.4	-49.9	282.1	28.7	28.1	-8.0	328.4	328.4	0.0	99.9	26.6	96.
33.5	95.0	10093.6	275.0	-45.5	-59.9	287.9	26.9	25.6	-8.3	329.3	329.3	0.0	99.9	25.9	98.
35.8	99.8	10719.2	250.0	-49.9	-60.1	280.9	26.7	24.9	-9.6	331.2	331.2	0.0	99.9	33.4	96.
38.2	104.8	11401.0	225.0	-54.6	-69.9	283.9	33.8	30.9	-13.7	334.2	334.2	0.0	99.9	37.4	97.
40.7	110.2	12143.9	200.0	-59.9	-69.9	285.6	41.2	37.2	-17.8	338.0	338.0	0.0	99.9	42.8	100.
43.4	115.8	12973.5	175.0	-62.3	-69.9	289.9	32.7	30.7	-11.1	347.2	347.2	0.0	99.9	48.6	102.
46.9	122.3	13924.9	150.0	-61.7	-69.9	287.6	31.6	30.1	-9.5	363.9	363.9	0.0	99.9	56.1	102.
50.6	129.3	15053.8	125.0	-61.8	-69.9	282.1	28.1	27.4	-5.9	383.0	383.0	0.0	99.9	62.8	103.
54.8	137.3	16423.0	100.0	-65.8	-69.9	259.0	10.6	10.4	2.0	400.7	400.7	0.0	99.9	68.0	102.
58.4	144.7	18144.3	75.0	-68.0	-69.9	306.6	9.2	7.4	-5.5	430.3	430.3	0.0	99.9	70.9	102.
67.7	153.3	20624.1	50.0	-62.0	-69.9	315.8	6.5	4.5	-4.7	457.4	457.4	0.0	99.9	74.3	103.
81.1	162.7	25022.8	25.0	-52.5	-69.9	290.7	4.4	4.2	-1.6	634.3	634.3	0.0	99.9	75.9	104.

* P1 SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* P2 TIME MEANS TEMPERATURE OF TIME HAVE BEEN INTERPOLATED

** 8° SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC

24 APRIL 1975
515 GMT

163 190 0

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.4	275.0	989.6	18.9	13.3	200.0	7.2	2.5	6.8	298.2	319.9	9.8	70.0	0.0	C.
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	99.9
0.5	8.7	402.5	975.0	17.4	10.6	210.1	13.7	6.9	11.9	293.8	315.7	8.3	64.3	0.4	25.
1.0	11.0	623.7	950.0	15.4	10.5	211.5	15.2	7.9	13.0	294.0	316.0	8.4	72.2	0.5	30.
2.0	13.5	845.5	925.0	13.3	10.4	217.0	18.8	11.3	15.0	295.0	316.8	8.6	82.7	1.9	32.
2.9	15.9	1080.2	900.0	12.7	10.1	226.4	22.6	16.4	15.6	295.8	318.9	8.7	84.3	2.9	35.
3.4	18.3	1316.8	875.0	11.0	10.1	236.4	18.4	15.3	10.2	296.4	320.2	8.9	94.3	3.7	36.
4.6	20.8	1556.7	850.0	9.8	9.4	243.8	18.6	16.7	6.2	297.5	321.1	8.8	97.9	4.7	44.
5.5	23.4	1806.7	825.0	8.3	7.8	249.9	19.3	18.1	6.6	298.4	320.3	8.1	96.4	5.7	48.
6.5	26.0	2160.9	800.0	7.1	6.3	257.5	19.8	19.3	4.3	299.7	320.2	7.5	95.2	6.7	52.
7.5	28.9	2322.1	775.0	5.9	4.9	269.5	19.2	19.2	0.2	301.0	320.3	7.0	92.8	7.9	57.
8.5	31.6	2593.6	750.0	4.6	3.3	285.1	18.5	17.9	-4.8	302.4	320.5	6.5	91.0	8.7	62.
9.6	34.5	2866.5	725.0	2.7	1.7	301.3	17.7	15.1	-9.2	303.2	320.1	6.0	93.3	9.4	67.
10.5	37.2	3150.0	700.0	0.7	-0.1	307.9	15.5	12.3	-5.5	303.9	319.4	5.4	94.4	10.1	72.
11.8	40.2	3441.8	675.0	-0.9	-2.1	299.5	14.8	12.8	-7.3	305.3	319.2	4.9	91.4	10.8	77.
12.4	42.9	3742.3	650.0	-3.2	-3.8	298.7	16.2	14.2	-7.7	305.9	318.8	4.5	95.5	11.4	80.
13.9	46.0	4051.9	625.0	-3.9	-3.5	306.5	16.9	13.0	-10.8	308.4	317.3	3.0	64.7	12.2	83.
15.0	49.3	4373.7	600.0	-5.4	-15.3	319.5	16.7	9.5	-11.2	310.1	316.1	1.9	45.5	12.9	87.
16.2	52.1	4707.4	575.0	-5.9	-23.5	318.3	12.4	8.8	-8.6	313.1	316.4	1.0	23.4	13.5	90.
17.4	55.4	5057.5	550.0	-6.7	-28.3	318.7	13.7	9.0	-10.3	313.8	316.5	0.8	22.5	14.1	93.
18.6	58.6	5412.0	525.0	-11.9	-22.6	312.4	15.4	11.4	-10.4	314.3	316.1	1.2	40.4	15.0	96.
20.0	62.1	5783.7	500.0	-14.4	-17.7	293.5	16.5	15.1	-6.6	315.7	321.6	1.9	75.6	16.1	98.
21.5	65.6	6171.1	475.0	-17.1	-19.8	277.0	17.7	17.6	-2.2	317.0	322.3	1.7	79.0	17.6	98.
23.0	69.1	6575.1	450.0	-19.5	-23.4	269.3	18.4	18.4	0.2	318.8	323.0	1.3	70.3	18.3	98.
24.6	72.7	6967.7	425.0	-22.6	-27.8	266.3	19.5	19.4	1.3	320.0	323.1	0.9	62.3	21.0	97.
26.1	76.6	7439.6	400.0	-26.2	-28.6	265.1	22.2	22.1	1.9	320.9	324.0	0.9	60.6	22.8	97.
27.4	80.4	7803.0	375.0	-30.0	-34.7	267.1	22.0	22.0	1.1	321.9	323.8	0.5	63.3	25.0	95.
29.5	84.5	8230.6	350.0	-33.4	-39.3	285.7	24.3	23.4	-6.6	323.7	323.8	0.0	5.4	27.4	95.
31.6	88.6	8906.4	325.0	-37.7	-62.0	289.0	27.2	25.7	-8.8	326.6	324.7	0.0	5.4	30.6	97.
33.7	93.2	9453.3	300.0	-46.2	59.9	265.8	33.1	31.4	-5.8	325.3	999.9	99.9	999.9	33.6	98.
35.7	97.8	10037.5	275.0	-51.3	99.9	288.3	34.5	32.8	-10.8	326.8	999.9	99.9	999.9	37.4	98.
37.9	102.9	10664.3	250.0	-57.2	99.9	291.7	37.5	36.9	-13.9	330.9	999.9	99.9	999.9	41.4	98.
40.4	108.2	11339.0	225.0	-62.2	99.9	296.5	31.0	27.8	-13.9	336.3	999.9	99.9	999.9	53.4	102.
43.4	113.8	12076.0	200.0	-64.4	99.9	293.6	41.3	37.9	-16.5	343.7	999.9	99.9	999.9	60.1	103.
46.5	119.8	12894.2	175.0	-58.3	99.9	293.8	36.3	33.2	-14.7	349.6	999.9	99.9	999.9	68.8	108.
50.3	126.1	13856.3	150.0	-60.1	99.9	292.5	41.3	38.2	-15.8	360.3	999.9	99.9	999.9	76.2	108.
54.6	133.8	15000.7	125.0	-66.1	99.9	283.4	22.7	22.1	-5.3	400.1	999.9	99.9	999.9	84.4	106.
59.4	141.3	16368.1	100.0	-66.1	99.9	280.9	6.8	6.0	-1.3	432.6	999.9	99.9	999.9	99.4	107.
65.3	149.3	18104.9	75.0	-59.6	99.9	59.4	5.8	-5.0	-3.0	503.0	999.9	99.9	999.9	93.0	107.
73.9	158.0	20601.6	50.0	-52.6	99.9	111.8	6.5	-7.9	3.2	633.5	999.9	99.9	999.9	91.1	100.
87.0	167.0	25011.0	25.0	-52.6	99.9	111.8	6.5	-7.9	3.2	633.5	999.9	99.9	999.9	91.1	100.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DFG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

NATIONAL BUREAU OF

STATION NO. 327
NASHVILLE, TENN24 APRIL 1975
515 GMT

TIME MIN	CHTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SLC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.4	180.0	995.0	20.6	14.9	120.0	6.2	0.0	6.2	295.6	324.1	10.8	70.0	0.3	0.
0.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	7.0	356.2	975.0	20.7	14.7	158.7	19.4	6.2	18.4	297.4	326.3	10.9	68.8	0.5	11.
1.4	5.4	580.8	950.0	19.3	14.9	203.1	21.1	8.3	19.4	294.3	328.2	11.3	75.8	1.4	17.
2.2	11.6	809.9	925.0	17.2	14.7	216.4	23.3	12.3	21.0	294.5	329.0	11.5	85.3	2.4	21.
3.1	12.0	1043.7	900.0	15.7	15.0	222.6	23.3	15.7	17.1	294.3	331.2	12.0	95.6	3.4	26.
4.0	16.3	1263.2	875.0	14.3	13.5	230.5	24.8	19.2	15.8	300.2	330.3	11.2	94.9	5.1	32.
5.0	18.9	1528.3	850.0	12.9	10.3	237.4	23.7	20.0	12.8	300.9	327.3	9.7	88.1	6.4	34.
5.9	21.2	1778.7	825.0	10.3	9.6	243.6	22.3	19.6	10.6	300.7	325.6	9.2	95.2	7.5	40.
6.9	23.9	2034.5	800.0	8.1	7.9	248.8	21.1	19.1	12.7	300.9	323.7	8.4	98.1	8.9	43.
7.8	26.3	2296.7	775.0	8.5	-3.8	242.7	21.5	19.1	9.4	303.5	314.5	3.8	42.4	10.1	46.
8.8	29.1	2567.1	750.0	7.1	-11.0	237.6	21.1	17.8	11.3	304.6	311.2	2.2	26.2	11.3	47.
9.3	31.9	2845.1	725.0	5.9	-20.9	236.0	20.9	17.3	11.7	306.1	309.5	1.1	13.8	12.7	49.
10.9	34.9	3131.5	700.0	4.5	-21.9	237.7	19.5	16.5	10.4	307.5	315.5	1.9	12.8	13.7	49.
12.0	37.5	3427.1	675.0	3.2	-13.9	240.6	17.9	15.6	8.8	304.5	315.5	1.3	27.2	15.0	50.
13.1	40.4	3731.7	650.0	1.2	-18.9	243.8	18.2	16.4	8.1	310.5	314.7	1.3	20.5	16.3	51.
14.3	43.4	4066.0	625.0	-0.9	-10.9	248.3	15.0	13.5	6.5	311.7	319.6	2.7	46.5	17.3	52.
15.5	46.5	4371.2	600.0	-2.2	-40.6	258.6	16.4	16.1	3.2	313.5	313.9	0.1	2.2	18.6	53.
16.8	49.9	4707.0	575.0	-5.3	-40.5	272.7	16.4	16.4	-0.8	313.7	314.4	0.2	4.3	19.5	53.
18.1	52.9	5023.8	550.0	-8.5	-35.0	271.9	19.8	19.8	-0.7	314.0	315.2	3.4	9.7	20.6	57.
19.2	56.0	5412.2	525.0	-11.7	-32.4	268.9	21.6	21.6	0.0	314.3	316.0	0.5	15.9	21.9	54.
20.6	58.6	5783.3	500.0	-15.3	-26.3	270.7	23.1	23.1	-0.3	314.5	317.5	0.9	41.0	23.3	52.
21.8	61.0	6168.4	475.0	-18.4	-19.9	268.6	28.5	28.5	0.7	315.4	320.6	1.7	87.6	25.0	64.
23.0	64.6	6569.5	450.0	-21.9	-34.3	269.0	28.8	28.8	0.5	315.7	317.9	0.7	45.9	27.1	62.
24.4	70.3	6999.2	425.0	-23.6	-48.4	275.5	25.2	25.1	-2.4	318.7	319.3	0.2	12.6	28.1	67.
26.1	74.1	7430.6	400.0	-26.0	-43.5	273.5	31.1	31.0	-1.9	321.2	321.7	0.2	13.9	31.5	70.
27.8	78.2	7894.9	375.0	-29.0	-47.8	283.2	24.3	23.6	-5.5	323.2	321.7	0.1	14.2	34.1	72.
29.7	82.2	8384.7	350.0	-32.4	-50.4	274.5	29.6	29.5	-2.3	325.0	325.4	0.1	14.4	37.1	74.
31.4	86.4	8904.3	325.0	-35.6	-52.9	276.8	30.4	30.2	-3.6	327.0	327.9	0.1	14.9	40.1	76.
33.5	91.0	9455.8	300.0	-40.4	-52.9	277.0	32.5	32.3	-4.0	328.5	329.9	99.9	99.9	43.9	78.
35.3	95.7	10043.2	275.0	-45.1	99.9	281.7	28.3	27.6	-6.2	329.9	329.9	99.9	99.9	46.8	79.
38.0	107.7	10571.6	250.0	-50.8	99.9	231.7	34.7	32.0	-6.6	332.6	329.9	99.9	99.9	51.3	81.
40.6	106.0	11344.3	225.0	-56.7	99.9	282.4	28.6	28.0	-6.1	331.7	329.9	99.9	99.9	55.7	83.
43.6	111.8	12087.4	200.0	-60.9	99.9	288.2	25.6	24.3	-8.0	336.3	329.9	99.9	99.9	60.5	85.
46.5	117.6	12908.5	175.0	-65.1	99.9	295.9	30.6	29.7	-4.0	342.5	329.9	99.9	99.9	65.8	86.
50.3	124.3	13858.3	150.0	-59.9	99.9	272.8	30.3	30.3	-1.5	347.0	329.9	99.9	99.9	74.9	87.
54.3	131.0	15002.6	125.0	-60.0	99.9	272.9	25.2	25.2	0.9	366.4	329.9	99.9	99.9	83.3	89.
59.9	138.3	16379.0	100.0	-66.1	99.9	252.7	18.0	15.2	4.7	400.1	329.9	99.9	99.9	90.2	89.
64.3	145.3	18107.0	75.0	-67.9	99.9	282.6	10.7	10.4	-2.3	430.7	329.9	99.9	99.9	95.1	89.
75.3	152.7	20605.0	50.0	-59.7	99.9	227.2	0.6	0.5	0.4	502.9	329.9	99.9	99.9	98.8	89.
89.9	160.9	25035.8	25.0	-51.9	99.9	331.7	2.5	1.2	-2.2	636.4	329.9	99.9	99.9	98.7	89.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY FEW MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

* BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE
OF POOR QUALITY

STATION NO. 340

LITTLE ROCK, ARK

24 APRIL 1975

515 GMT

165 14. 0

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.4	103.4	1003.4	20.6	16.8	180.0	2.6	0.0	2.6	295.1	326.7	12.1	79.0	0.0	0
0.1	5.6	103.5	1000.0	20.6	17.4	190.4	1.6	1.6	8.2	295.5	323.4	12.6	81.6	0.1	5
0.8	7.9	327.9	975.0	20.0	18.3	194.4	3.6	3.6	13.9	297.1	333.2	13.8	90.1	0.5	11
1.6	10.2	522.7	950.0	19.7	17.8	203.4	7.9	7.9	18.3	299.0	335.1	13.7	89.1	1.2	14
2.2	12.3	782.3	925.0	17.6	15.6	208.8	10.1	10.1	18.4	299.6	331.2	12.2	87.7	2.1	20
3.0	14.6	1016.7	900.0	16.1	13.5	211.4	12.1	12.1	19.4	299.6	329.8	10.9	84.5	3.0	23
3.6	14.8	1256.4	875.0	15.0	11.5	214.7	11.7	11.7	16.9	300.7	327.2	9.8	79.4	3.9	24
4.5	14.3	1502.0	850.0	13.5	11.1	220.3	20.1	13.0	15.4	301.6	328.2	9.8	85.6	4.0	28
5.3	21.5	1753.5	825.0	12.5	9.6	224.2	20.8	14.5	14.9	303.0	328.1	9.2	83.0	6.7	37
6.3	24.4	2011.5	800.0	11.2	8.4	231.3	22.1	17.2	13.8	304.1	325.2	7.6	72.5	7.2	37
7.3	26.4	2276.8	775.0	10.3	6.3	230.3	24.3	18.7	15.5	305.8	324.8	6.7	66.0	9.5	34
8.2	29.0	2545.1	750.0	8.4	1.4	228.4	25.0	18.7	16.6	306.4	322.6	5.7	61.3	6.4	34
9.1	31.7	2822.3	725.0	8.3	-6.6	223.7	26.9	18.6	19.4	307.0	318.6	3.2	34.4	11.1	39
9.9	34.4	3118.3	700.0	7.0	-15.1	218.3	27.1	16.8	21.3	310.4	315.7	1.7	19.0	12.6	39
10.9	37.3	3416.3	675.0	5.7	-11.3	221.8	27.8	18.5	20.7	312.3	319.7	2.4	29.1	14.1	39
11.8	39.9	3724.4	650.0	4.2	-8.2	223.2	28.8	19.9	14.9	314.2	325.3	3.7	46.5	15.7	40
12.9	42.5	4042.4	625.0	1.9	-7.0	244.8	20.9	18.9	8.9	315.1	326.0	3.6	51.6	17.0	40
13.9	45.4	4370.7	600.0	-0.9	-3.9	248.7	21.0	19.6	7.6	315.7	330.1	4.8	60.3	18.2	47
15.1	48.5	4708.8	575.0	-6.1	-7.9	251.4	22.9	21.7	7.3	315.6	326.8	3.7	74.9	17.6	49
16.4	51.5	5058.1	550.0	-6.8	-13.9	254.4	24.4	23.5	6.6	316.3	323.8	2.4	56.9	21.2	48
17.6	54.7	5418.7	525.0	-9.4	-24.0	256.8	23.8	23.2	5.4	317.3	320.7	1.0	29.3	22.7	50
18.9	57.8	5798.3	500.0	-13.1	-24.0	255.1	26.4	25.5	6.8	317.2	320.8	1.1	39.1	24.5	52
20.4	61.1	6182.4	475.0	-16.8	-27.8	251.4	26.1	24.8	8.2	317.3	320.4	0.9	43.4	24.7	54
21.7	64.9	6597.9	450.0	-18.0	-61.4	251.4	20.6	19.6	6.6	320.5	320.6	0.0	1.0	28.4	55
23.1	68.2	7012.1	425.0	-21.4	-63.5	253.7	21.7	20.8	6.1	321.5	321.6	0.0	1.0	30.4	56
24.6	71.4	7455.4	400.0	-25.5	-63.3	253.4	22.5	22.5	2.6	321.8	321.3	0.0	1.5	32.1	57
26.1	75.8	7920.0	375.0	-29.0	-63.4	252.6	20.3	20.3	-0.9	323.2	323.3	0.0	2.0	33.9	58
28.0	80.1	8430.7	350.0	-32.3	-64.1	261.4	30.9	30.6	4.4	325.1	325.1	0.0	2.5	36.5	61
30.2	84.0	8923.1	325.0	-35.7	-65.2	262.4	21.8	21.8	0.1	327.3	327.4	0.0	3.1	38.6	63
32.5	88.4	9470.1	300.0	-40.5	-69.9	262.4	24.4	24.2	3.2	328.3	327.4	0.0	95.9	41.6	65
34.9	92.2	10045.5	275.0	-44.1	-69.9	273.3	19.2	19.1	-1.1	328.5	327.4	0.0	95.9	45.0	67
37.4	98.2	10692.3	250.0	-51.3	-69.9	267.4	25.5	25.4	1.1	329.7	329.9	0.0	95.9	48.6	69
40.4	103.4	11371.4	225.0	-55.6	-69.9	262.3	33.4	33.1	4.4	333.3	329.9	0.0	95.9	54.4	70
43.2	105.3	12112.2	200.0	-61.1	-69.9	263.8	34.1	33.9	3.7	336.0	329.9	0.0	95.9	61.0	71
46.0	115.4	12936.7	175.0	-61.7	-69.9	260.8	34.9	34.5	5.6	348.1	329.9	0.0	95.9	68.6	72
51.0	122.3	13890.1	150.0	-61.5	-69.9	267.7	33.5	33.5	1.3	364.1	329.9	0.0	95.9	75.6	73
55.7	125.7	15017.4	125.0	-62.9	-69.9	264.5	29.7	29.6	2.9	381.2	329.9	0.0	95.9	87.0	74
61.0	127.8	16375.6	100.0	-68.6	-69.9	261.9	25.2	25.2	3.6	395.1	329.9	0.0	95.9	94.9	75
67.7	146.0	18099.7	75.0	-68.2	-69.9	239.3	18.3	15.7	5.3	434.2	329.9	0.0	95.9	102.4	76
76.9	155.3	20582.7	50.0	-61.7	-69.9	80.1	1.8	-1.8	-0.3	458.3	329.9	0.0	95.9	105.1	74
91.3	165.0	24927.8	25.0	-54.7	-69.9	252.9	4.0	3.9	1.2	627.5	329.9	0.0	95.9	107.0	76

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 349
HONOLULU, HI24 APRIL 1975
600 GMT

TIME MIN	CATCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MAX RTD GM/AC	RH PCT	RANGE KM	AZ DG
0.0	8.4	438.0	958.3	20.6	17.0	190.0	7.7	1.3	7.6	249.1	333.2	12.9	80.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	9.1	513.5	950.0	20.8	17.9	197.3	13.4	4.0	12.8	300.2	336.6	13.7	83.2	0.4	1.7
1.1	11.1	744.4	925.0	15.3	17.7	157.4	15.9	4.8	15.2	340.9	338.0	14.0	90.4	1.0	1.7
2.3	13.5	980.2	900.0	17.2	16.8	207.9	21.7	10.2	19.2	301.0	337.0	13.5	97.4	2.3	2.6
3.2	15.7	1221.0	975.0	15.8	15.5	220.5	23.8	15.4	19.1	301.9	336.3	12.8	98.2	3.5	2.8
4.3	18.0	1467.6	850.0	14.7	14.4	229.4	26.6	20.4	17.2	303.2	336.3	12.3	98.1	5.1	3.7
5.3	20.4	1720.8	825.0	13.6	13.3	235.9	22.7	18.8	12.7	304.6	336.6	11.8	97.9	6.6	3.7
6.6	22.9	1580.0	800.0	11.6	11.2	240.7	21.7	18.9	10.6	304.9	333.9	10.6	97.6	8.1	4.1
7.9	25.3	2245.7	775.0	10.1	8.9	238.9	22.1	18.9	11.4	303.9	331.6	9.3	92.0	9.5	4.4
8.7	27.8	2518.2	750.0	8.4	7.0	240.5	19.9	16.3	9.6	305.8	330.3	8.4	90.8	10.7	4.4
9.6	30.4	2757.9	725.0	5.8	2.5	242.9	19.0	16.3	8.6	305.6	324.6	6.4	79.6	11.7	4.7
10.5	33.1	3384.5	700.0	4.0	-0.5	245.0	18.1	16.4	7.6	307.5	322.8	5.3	72.8	12.7	4.8
11.6	35.7	3380.2	675.0	2.5	-0.3	247.6	15.6	14.4	5.9	307.2	325.2	5.6	81.5	13.7	5.1
12.8	38.6	3694.6	650.0	0.5	-6.3	248.2	18.0	17.4	6.7	310.0	321.0	3.7	60.5	14.8	5.1
13.8	41.1	3994.9	625.0	-0.0	-29.4	255.4	18.0	17.4	4.5	312.5	314.3	0.5	8.8	15.9	5.3
15.0	44.1	4324.0	600.0	-3.2	-30.5	247.9	20.4	18.9	7.7	312.5	314.2	0.5	9.3	17.1	5.4
16.2	47.1	4656.3	575.0	-5.0	-36.9	241.7	20.7	18.2	9.8	314.1	315.1	0.3	6.1	18.6	5.4
17.5	50.2	5006.7	550.0	-7.8	-43.7	243.5	21.6	19.4	9.7	314.9	315.4	0.1	3.7	20.1	5.6
19.0	53.1	5366.7	525.0	-10.2	-47.9	244.6	20.7	18.7	8.9	315.1	316.5	0.1	2.8	22.2	5.7
20.5	56.1	5741.2	500.0	-11.9	-52.4	244.1	20.2	18.2	8.8	314.4	314.7	0.1	1.9	23.9	5.7
22.0	59.6	6131.0	475.0	-15.3	-47.4	239.3	21.2	18.2	10.8	316.9	319.3	0.1	4.5	25.7	5.7
23.4	63.0	6536.1	450.0	-18.8	-46.1	236.6	20.9	17.4	11.5	319.5	320.0	0.1	6.9	27.6	5.7
25.1	66.4	6959.0	425.0	-22.2	-48.3	238.0	21.6	18.3	11.4	320.4	320.8	0.1	7.2	29.8	5.7
26.8	70.1	7400.8	400.0	-26.4	-49.2	241.4	20.4	18.4	5.3	320.6	321.0	0.1	9.5	31.8	5.7
28.7	73.7	7813.6	375.0	-30.1	-52.1	247.8	22.3	20.6	8.4	321.7	322.0	0.1	9.6	34.4	5.7
30.7	77.8	8351.3	350.0	-33.3	-54.2	249.1	30.2	28.6	10.8	323.7	324.0	0.1	10.1	37.4	5.7
34.8	81.8	8867.6	325.0	-36.9	-58.3	248.5	30.9	28.7	11.3	327.5	325.8	0.0	8.9	41.3	5.7
37.2	86.0	9416.6	300.0	-41.1	99.9	248.5	30.9	28.7	11.3	327.5	325.8	0.0	8.9	41.3	5.7
39.7	90.7	10002.3	275.0	-45.6	99.9	249.5	30.0	28.1	10.5	325.1	325.9	99.9	99.9	49.5	6.1
42.6	95.7	10630.2	250.0	-50.8	99.9	256.3	29.7	28.8	7.1	330.6	329.9	99.9	99.9	54.1	6.2
45.4	100.7	11308.7	225.0	-55.7	99.9	257.6	32.8	32.0	7.0	333.1	329.9	99.9	99.9	58.7	6.3
48.3	106.5	12055.4	200.0	-57.8	99.9	274.5	30.3	30.3	-2.4	341.3	329.9	99.9	99.9	64.4	6.4
51.2	112.9	12886.7	175.0	-63.4	99.9	275.1	28.0	27.9	2.4	345.3	329.9	99.9	99.9	69.0	6.4
54.5	119.0	13332.6	150.0	-62.1	99.9	252.5	35.3	33.7	10.6	363.2	329.9	99.9	99.9	74.1	6.4
58.0	126.7	14965.3	125.0	-61.3	99.9	261.9	46.3	46.3	6.6	408.0	329.9	99.9	99.9	85.1	6.4
60.9	135.0	16349.7	100.0	-63.0	99.9	249.5	40.1	37.5	14.0	408.0	329.9	99.9	99.9	94.5	7.0
67.2	143.3	18100.0	75.0	-60.8	99.9	246.4	12.6	11.5	5.0	443.4	329.9	99.9	99.9	101.2	7.1
73.6	152.5	20070.4	50.0	-58.4	99.9	239.7	9.1	7.8	4.6	508.8	329.9	99.9	99.9	104.4	7.1
89.1	182.0	25020.7	25.0	-58.1	99.9	88.6	5.1	-3.8	-3.4	62.1	329.9	99.9	99.9	107.8	7.1

ORIGINAL PAGE
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS

STATION NO. 363
AMARILLO, TEX24 APRIL 1975
515 GMT

TIME MIN	CNCTY	WEIGHT GPM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	13.9	1095.0	683.7	15.0	-2.4	250.0	5.1	4.6	1.7	295.0	309.3	3.6	30.0	0.0	0.0
00.0	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	14.6	1180.0	875.0	20.6	-4.4	278.1	13.2	13.0	-1.9	305.6	315.0	3.2	18.2	0.4	0.4
1.1	16.6	1431.4	850.0	22.7	-5.4	277.2	14.0	15.8	-1.9	310.4	319.4	3.0	14.7	0.8	0.8
1.9	18.9	1689.8	825.0	21.1	-6.9	271.0	15.8	15.8	-0.3	311.2	319.6	2.8	14.6	1.6	0.8
2.8	20.9	1954.4	800.0	18.9	-8.0	260.5	16.4	16.4	1.0	311.6	319.6	2.6	15.3	2.4	0.8
3.6	4.2	2225.2	775.0	16.3	-8.3	260.2	15.2	15.2	2.6	311.7	319.4	2.6	17.7	3.2	0.8
4.5	25.5	2532.5	750.0	13.7	-9.8	254.7	15.1	15.6	4.0	311.7	319.4	2.4	18.5	4.0	0.8
5.4	27.7	2786.0	725.0	10.8	-11.0	252.0	16.0	15.2	5.0	311.6	318.6	2.3	20.3	4.8	0.8
6.2	30.1	3076.7	700.0	7.9	-12.2	248.3	16.3	15.1	6.0	311.5	318.1	2.1	22.6	5.6	0.8
7.3	32.7	3374.7	675.0	4.9	-13.4	239.8	14.7	12.7	7.4	311.4	317.6	2.0	25.0	6.5	0.8
8.5	35.3	3681.5	650.0	3.0	-15.6	246.4	17.3	15.9	6.9	312.6	318.0	1.7	23.9	7.6	0.8
9.4	37.6	3957.4	625.0	0.2	-17.8	252.5	18.1	17.2	5.4	312.8	317.6	1.5	24.3	8.6	0.8
10.4	40.3	4322.2	600.0	-3.0	-19.9	258.4	16.3	15.7	4.4	312.8	317.0	1.3	25.7	9.6	0.8
11.6	42.9	4657.7	575.0	-6.2	-21.8	254.3	15.7	15.1	4.2	312.9	316.6	1.2	27.6	10.7	0.8
12.6	45.8	5003.9	550.0	-8.4	-19.7	250.3	15.4	15.5	5.2	314.2	319.3	1.6	43.4	11.7	0.8
13.8	48.8	5343.5	525.0	-10.5	-22.2	253.3	15.7	15.0	4.5	316.0	319.9	1.2	37.3	12.8	0.8
15.0	51.5	5737.8	500.0	-12.4	-24.9	256.8	17.3	17.1	3.1	317.9	320.3	0.7	23.7	14.0	0.8
16.4	54.6	6128.6	475.0	-13.7	-30.5	265.1	21.2	21.2	1.8	320.9	322.2	0.3	12.5	15.6	0.8
17.6	57.6	6536.9	450.0	-17.2	-38.1	264.5	24.7	24.5	2.4	321.7	322.8	0.3	14.2	17.2	0.8
19.2	61.7	6962.1	425.0	-21.0	-35.7	264.3	26.6	26.4	2.6	322.1	323.5	0.4	25.1	19.7	0.8
20.6	64.4	7407.2	400.0	-24.5	-36.1	262.0	25.1	25.8	3.5	323.2	324.7	0.4	32.9	21.8	0.8
22.1	67.9	7873.6	375.0	-28.3	-40.3	261.7	27.8	27.5	4.0	324.1	325.2	0.3	30.3	24.3	0.8
23.9	71.5	8364.1	350.0	-32.9	-43.6	260.3	31.9	31.4	5.4	324.4	325.2	0.2	33.0	27.4	0.8
25.6	75.3	8880.9	325.0	-37.3	-47.1	263.4	30.4	30.2	3.5	325.2	325.8	0.2	35.0	30.5	0.8
27.5	79.7	9428.3	300.0	-42.2	-50.9	265.6	30.0	30.0	2.3	325.9	326.9	0.9	99.9	34.0	0.8
29.5	83.9	10012.0	275.0	-45.9	-54.9	264.7	29.4	29.3	2.7	326.2	326.9	99.9	99.9	37.5	0.8
31.8	88.3	10638.8	250.0	-51.6	-59.9	266.0	34.4	34.3	2.4	326.3	326.9	99.9	99.9	41.6	0.8
34.0	93.4	11316.1	225.0	-55.7	-64.9	265.6	30.0	29.9	2.3	333.1	333.1	99.9	99.9	47.1	0.8
36.4	98.6	12063.0	200.0	-59.7	-69.9	263.2	38.7	38.4	4.6	336.3	336.3	99.9	99.9	51.3	0.8
39.0	104.3	12844.0	175.0	-61.1	-74.9	264.4	29.4	29.3	2.9	336.2	336.2	99.9	99.9	56.2	0.8
42.2	111.0	13657.3	150.0	-57.7	-79.9	254.6	31.2	30.0	4.3	370.7	370.7	99.9	99.9	63.1	0.8
45.6	118.3	15044.1	125.0	-59.9	-84.9	247.8	31.2	28.9	11.8	388.6	388.6	99.9	99.9	70.1	0.8
5.1	127.0	16389.0	100.0	-59.5	-89.9	250.8	25.3	23.9	8.3	412.8	412.8	99.9	99.9	77.5	0.8
54.9	137.0	18161.6	75.0	-67.1	-94.9	265.7	11.8	11.8	0.9	432.3	432.3	99.9	99.9	84.8	0.8
62.5	148.0	20822.9	50.0	-59.3	-99.9	251.9	17.4	16.5	5.4	503.8	503.8	99.9	99.9	87.4	0.8
70.7	156.7	25131.2	25.0	-49.7	-99.9	307.6	5.7	4.5	-3.5	642.1	642.1	99.9	99.9	90.8	0.8

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 402
WALLOPS ISLAND, VA24 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.5	4.0	1010.6	13.3	10.5	999.9	99.9	99.9	99.9	285.9	306.0	7.8	83.0	999.9	999.9
0.6	5.3	169.5	1000.0	17.2	11.7	999.9	99.9	99.9	99.9	291.6	310.6	8.8	71.0	999.9	999.9
1.2	7.9	395.9	975.0	16.7	10.5	999.9	99.9	99.9	99.9	293.1	314.7	8.2	66.5	999.9	999.9
1.9	9.6	607.3	950.0	16.5	9.7	999.9	99.9	99.9	99.9	295.0	316.3	8.0	64.2	999.9	999.9
2.7	11.6	834.8	925.0	16.5	8.5	999.9	99.9	99.9	99.9	297.2	317.7	7.6	59.9	999.9	999.9
3.4	13.3	1067.6	900.0	14.8	6.9	999.9	99.9	99.9	99.9	297.7	316.6	7.0	59.4	999.9	999.9
4.2	15.3	1305.4	875.0	13.1	5.0	999.9	99.9	99.9	99.9	298.3	315.4	6.3	57.7	999.9	999.9
5.0	17.2	1588.6	850.0	11.5	3.9	999.9	99.9	99.9	99.9	299.0	315.4	6.0	59.4	999.9	999.9
5.4	20.2	1797.6	825.0	9.6	2.5	999.9	99.9	99.9	99.9	299.5	314.9	5.6	61.1	999.9	999.9
5.5	22.3	2022.4	800.0	7.6	0.3	999.9	99.9	99.9	99.9	299.9	313.7	4.9	59.7	999.9	999.9
7.4	24.6	2313.4	775.0	5.8	-2.7	999.9	99.9	99.9	99.9	300.5	312.1	4.1	54.5	999.9	999.9
8.1	26.7	2561.1	750.0	4.2	-5.5	999.9	99.9	99.9	99.9	301.5	311.3	3.4	49.2	999.9	999.9
9.0	29.2	2855.7	725.0	1.6	-7.2	999.9	99.9	99.9	99.9	301.6	310.5	3.1	51.7	999.9	999.9
9.8	31.7	3137.4	700.0	-1.0	-8.1	999.9	99.9	99.9	99.9	301.7	310.4	3.0	58.6	999.9	999.9
10.7	34.2	3426.5	675.0	-3.5	-10.3	999.9	99.9	99.9	99.9	302.0	310.2	2.8	64.0	999.9	999.9
11.7	36.7	3722.5	650.0	-6.0	-10.3	999.9	99.9	99.9	99.9	302.4	310.3	2.7	71.9	999.9	999.9
12.6	39.3	4023.3	625.0	-8.9	-11.3	999.9	99.9	99.9	99.9	302.6	310.2	2.6	82.2	999.9	999.9
13.7	41.9	4344.1	600.0	-11.3	-11.5	999.9	99.9	99.9	99.9	303.3	311.1	2.6	98.5	999.9	999.9
14.7	44.7	4655.6	575.0	-13.4	-13.7	999.9	99.9	99.9	99.9	304.5	311.4	2.3	98.1	999.9	999.9
15.7	47.6	5009.6	550.0	-11.3	-11.5	999.9	99.9	99.9	99.9	311.0	312.8	2.9	98.3	999.9	999.9
16.6	50.4	5366.7	525.0	-12.0	-13.5	999.9	99.9	99.9	99.9	314.3	322.2	2.6	88.6	999.9	999.9
17.9	53.4	5739.3	500.0	-13.7	-17.2	999.9	99.9	99.9	99.9	316.6	322.8	2.0	74.2	999.9	999.9
19.3	56.4	6127.2	475.0	-16.8	-18.9	999.9	99.9	99.9	99.9	317.3	323.0	1.8	83.6	999.9	999.9
20.1	58.5	6531.3	450.0	-19.7	-21.7	999.9	99.9	99.9	99.9	318.6	323.5	1.5	83.7	999.9	999.9
21.4	63.1	6953.4	425.0	-23.0	-24.2	999.9	99.9	99.9	99.9	319.6	323.7	1.3	90.4	999.9	999.9
22.7	68.4	7395.4	400.0	-26.0	-26.2	999.9	99.9	99.9	99.9	321.2	325.8	1.1	98.5	999.9	999.9
24.3	70.1	7859.7	375.0	-29.6	-32.3	999.9	99.9	99.9	99.9	322.4	324.7	0.7	77.8	999.9	999.9
26.0	73.8	8342.3	350.0	-33.5	-38.5	999.9	99.9	99.9	99.9	323.5	324.9	0.4	60.6	999.9	999.9
27.7	77.4	8864.0	325.0	-37.7	-45.5	999.9	99.9	99.9	99.9	324.6	325.3	0.2	43.8	999.9	999.9
29.8	82.0	9410.5	300.0	-42.3	-48.9	999.9	99.9	99.9	99.9	325.7	326.9	99.9	999.9	999.9	999.9
31.6	86.2	9993.0	275.0	-46.8	-50.9	999.9	99.9	99.9	99.9	327.4	327.9	99.9	999.9	999.9	999.9
33.6	91.0	10616.7	250.0	-52.0	-56.7	999.9	99.9	99.9	99.9	328.2	328.9	99.9	999.9	999.9	999.9
35.6	96.3	11301.2	225.0	-56.7	-56.7	999.9	99.9	99.9	99.9	331.7	331.7	99.9	999.9	999.9	999.9
37.9	101.3	12028.7	200.0	-61.9	-61.9	999.9	99.9	99.9	99.9	334.7	334.7	99.9	999.9	999.9	999.9
40.0	107.3	12945.7	175.0	-65.7	-65.7	999.9	99.9	99.9	99.9	341.6	341.6	99.9	999.9	999.9	999.9
42.7	113.8	13790.5	150.0	-60.7	-60.7	999.9	99.9	99.9	99.9	345.6	345.6	99.9	999.9	999.9	999.9
46.4	121.0	14926.4	125.0	-57.3	-57.3	999.9	99.9	99.9	99.9	391.2	391.2	99.9	999.9	999.9	999.9
50.7	129.3	16222.1	100.0	-62.1	-62.1	999.9	99.9	99.9	99.9	407.7	407.7	99.9	999.9	999.9	999.9
56.0	137.7	18052.8	75.0	-66.3	-66.3	999.9	99.9	99.9	99.9	434.0	434.0	99.9	999.9	999.9	999.9
64.1	146.0	20507.5	50.0	-59.1	-59.1	999.9	99.9	99.9	99.9	504.3	504.3	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 405
STERLING, VA
24 APRIL 1975
515 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	CIR DG	SPEED M/SEC	U CMBP M/SEC	V CMBP M/SEC	PQT T DG K	E PJT T DG K	MR RTO GM/EG	RM PCT	RANGE KM	AZ DG
0.0	5.7	65.0	1006.3	16.1	12.7	180.0	5.1	0.0	5.1	290.0	313.7	9.2	80.0	0.0	0.0
0.1	6.2	139.6	1000.0	16.2	13.0	196.2	16.0	4.5	15.3	290.7	315.1	9.4	80.9	0.4	4.0
0.6	6.6	355.3	975.0	17.7	12.7	199.7	16.0	5.4	15.1	290.2	318.1	9.1	69.4	0.5	3.0
1.2	10.9	577.2	950.0	16.2	10.3	215.9	17.5	10.3	14.2	290.8	316.8	8.3	67.6	1.1	3.0
1.4	12.4	607.0	925.0	14.7	9.2	224.3	20.7	14.9	14.3	290.4	316.6	7.9	69.4	1.7	3.0
2.3	15.7	1035.4	900.0	13.3	7.9	229.0	21.2	16.0	13.9	290.2	316.3	7.5	70.3	2.4	4.0
3.0	18.1	1272.0	875.0	11.3	7.1	233.4	21.5	17.4	12.7	290.5	316.0	7.2	75.1	3.3	4.0
3.6	20.6	1514.2	850.0	10.2	5.5	243.2	25.9	23.1	11.7	297.7	315.9	6.7	72.5	4.1	4.0
4.2	23.1	1741.9	825.0	8.1	4.4	249.7	27.4	25.3	9.5	298.0	315.4	6.4	77.3	5.1	5.0
4.9	25.7	2015.4	800.0	5.8	4.9	254.1	27.3	26.3	7.4	298.2	316.9	6.8	94.4	6.0	3.0
5.4	28.2	2274.8	775.0	3.7	3.5	261.2	25.4	25.3	3.9	298.6	316.1	6.4	98.5	7.0	3.0
6.3	31.3	2541.3	750.0	3.1	2.9	274.0	23.1	23.0	-1.6	300.7	318.2	6.3	98.4	8.0	4.0
7.3	33.3	2815.8	725.0	1.3	1.0	279.6	22.5	22.2	-3.8	301.6	317.5	5.7	98.7	9.1	6.0
8.6	36.3	3052.4	700.0	0.6	0.3	280.3	20.7	20.4	-3.7	303.8	319.6	5.6	98.0	10.0	7.0
9.6	39.4	3399.9	675.0	-1.1	-1.4	281.2	18.2	17.8	-3.5	305.1	319.8	5.1	97.8	11.6	7.0
10.7	42.0	3690.8	650.0	-2.5	-2.8	281.8	17.0	17.7	-3.5	306.7	320.5	4.8	97.6	12.6	7.0
11.9	45.3	4001.7	625.0	-4.1	-4.4	281.7	16.0	17.6	-3.7	308.4	321.3	4.4	97.4	13.7	7.0
13.1	48.1	4323.5	600.0	-5.5	-5.9	277.3	16.2	16.1	-2.1	310.3	322.5	4.1	97.2	14.9	8.0
14.4	51.0	4656.8	575.0	-7.2	-7.6	270.5	18.9	18.9	-0.2	312.0	323.2	3.8	96.9	16.4	8.0
15.7	54.3	5002.4	550.0	-9.6	-10.1	275.1	17.8	17.8	-1.6	313.1	322.9	3.2	96.5	17.7	8.0
17.0	57.3	5303.4	525.0	-11.9	-12.4	279.2	17.7	17.5	-2.8	314.4	323.1	2.8	95.9	19.0	8.0
18.5	60.7	5732.1	500.0	-15.0	-15.1	279.1	17.9	17.6	-2.8	314.9	317.2	1.3	95.0	20.3	8.0
20.0	64.1	6117.0	475.0	-18.0	-18.1	280.0	22.1	21.8	-3.4	315.7	317.4	0.5	95.1	22.1	8.0
21.7	67.7	6519.6	450.0	-21.0	-21.3	283.4	21.4	20.8	-5.0	316.8	318.0	0.3	95.1	24.5	8.0
23.5	71.1	6936.3	425.0	-24.1	-24.1	275.9	28.4	28.5	-3.0	318.1	319.6	0.4	95.1	27.0	8.0
25.4	75.3	7375.7	400.0	-26.1	-26.1	267.3	27.8	27.7	1.0	321.1	323.4	0.7	95.5	30.4	8.0
27.3	79.0	7827.7	375.0	-29.0	-29.7	268.9	34.7	34.7	0.7	322.4	324.1	0.5	95.0	35.0	8.0
30.4	82.8	8332.1	350.0	-33.8	-34.2	271.5	32.4	32.4	-0.8	323.1	323.9	0.2	95.0	40.1	8.0
33.0	87.0	8846.7	325.0	-38.1	-38.8	277.4	37.4	37.1	-4.8	324.0	324.1	0.0	95.0	45.0	8.0
36.2	91.6	9392.1	300.0	-42.9	-43.2	276.7	37.0	36.7	-4.1	324.9	999.9	99.9	999.9	50.2	5.0
39.5	96.2	9972.9	275.0	-47.7	-48.0	276.4	31.7	31.5	-3.5	326.5	999.9	99.9	999.9	55.7	5.0
42.7	101.3	10561.4	250.0	-52.0	-52.0	284.6	22.7	22.0	-5.7	326.7	999.9	99.9	999.9	62.4	5.0
46.0	106.3	11270.9	225.0	-57.4	-57.4	287.1	44.5	42.6	-13.1	330.6	999.9	99.9	999.9	70.3	5.0
49.4	111.9	12016.0	200.0	-63.0	-63.0	287.6	44.7	42.5	-13.6	333.1	999.9	99.9	999.9	75.4	5.0
51.6	117.3	12418.9	175.0	-67.7	-67.7	287.6	37.1	35.3	-11.3	338.3	999.9	99.9	999.9	85.1	5.0
54.9	124.3	13768.5	150.0	-69.3	-69.3	297.1	36.0	32.1	-16.4	368.0	999.9	99.9	999.9	97.7	5.0
58.9	98.3	65.0	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	997.9	99.9	999.9	999.9	99.9
59.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
59.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
59.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
59.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 025
MUNTINGTON, NVA20 APRIL 1975
515 GMT

TIME MIN	CHCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.1	260.0	925.1	15.6	10.6	180.0	2.6	0.0	2.6	291.1	312.5	0.2	72.0	0.0	0.
0.9	69.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.3	333.6	975.0	15.4	9.5	190.0	14.0	4.3	13.3	291.7	312.0	7.7	67.7	0.2	1.
1.0	10.5	550.3	950.0	15.3	9.4	204.8	15.5	6.5	14.1	293.8	314.5	7.8	67.7	0.5	14.
1.7	12.8	780.7	925.0	15.7	9.2	219.0	19.2	12.1	14.9	296.4	317.7	7.6	65.2	1.3	24.
2.6	15.2	1013.3	900.0	14.4	9.4	231.0	31.0	24.1	19.5	297.5	319.7	8.3	71.7	2.5	34.
3.3	17.5	1211.4	875.0	13.5	9.8	238.7	33.9	29.9	17.6	299.0	322.6	8.8	70.1	4.1	42.
4.2	20.0	1495.5	850.0	12.4	7.9	253.4	37.2	26.1	7.8	300.2	321.7	7.9	73.0	5.5	44.
5.1	22.3	1746.1	825.0	11.2	6.7	261.0	26.2	25.9	4.1	301.4	322.0	7.5	73.5	6.4	45.
6.0	24.9	2002.4	800.0	6.6	5.7	267.9	20.5	20.5	0.7	301.3	321.1	7.2	81.8	7.4	59.
6.9	27.3	2265.7	775.0	6.6	5.7	261.3	17.1	16.9	2.6	301.8	322.4	7.5	74.4	8.9	52.
7.4	30.1	2534.0	750.0	5.5	2.4	254.5	14.8	14.3	4.0	303.3	327.4	6.1	80.4	9.6	43.
8.4	32.7	2810.9	725.0	3.6	0.6	251.0	14.2	13.5	4.6	304.2	319.5	5.5	80.6	10.2	54.
9.4	35.3	3095.6	700.0	2.2	-0.2	251.3	13.2	12.7	4.3	305.6	321.0	5.4	84.6	11.0	64.
10.4	38.0	3388.2	675.0	-0.6	-0.9	256.9	15.3	14.9	3.5	305.6	320.8	5.3	97.6	11.7	45.
11.4	40.7	3690.4	650.0	-1.2	-3.5	216.2	17.4	17.3	1.2	308.2	321.5	4.6	84.8	12.8	46.
12.5	43.6	4002.0	625.0	-3.7	-11.1	267.3	17.8	17.8	0.9	308.5	316.4	2.6	56.2	13.9	68.
13.6	46.6	4323.4	600.0	-5.9	-18.4	267.9	13.9	13.9	0.5	309.5	314.2	1.5	36.9	14.0	49.
14.6	49.4	4655.2	575.0	-7.5	-23.7	266.5	13.3	13.3	0.8	310.1	313.2	1.0	27.5	15.7	70.
15.0	52.4	4998.1	550.0	-10.2	-22.5	277.1	13.4	13.3	-1.6	312.1	315.8	1.1	35.7	16.4	71.
17.0	55.4	5355.6	525.0	-12.8	-25.3	283.5	15.7	15.3	-3.7	313.1	316.1	0.9	34.2	17.4	73.
18.3	58.5	5725.5	500.0	-16.0	-25.6	283.1	18.4	17.0	-4.1	313.6	316.7	0.9	43.1	18.5	75.
19.6	61.9	6110.4	475.0	-18.6	-33.3	273.0	22.0	21.9	-1.4	314.9	316.6	0.5	26.1	19.0	77.
21.0	65.3	6510.4	450.0	-22.2	-36.0	273.5	24.4	24.4	-1.5	315.4	316.7	0.4	27.1	21.8	78.
22.5	68.7	6924.2	425.0	-24.3	-46.7	282.1	22.0	21.5	-4.6	317.8	318.3	0.1	11.4	23.4	90.
24.0	72.1	7308.4	400.0	-26.2	-48.5	278.4	25.9	25.7	-3.8	317.8	321.3	0.1	10.2	25.8	92.
25.5	76.3	7732.2	375.0	-29.8	-40.6	278.0	31.1	30.8	-4.1	322.1	323.2	0.2	33.8	26.4	93.
27.1	80.3	8119.8	350.0	-33.8	-37.1	282.2	31.6	30.9	-6.7	323.2	324.6	0.4	71.7	31.2	95.
28.7	83.9	8635.0	325.0	-38.2	-43.0	286.2	27.7	26.6	-7.7	324.0	325.3	0.3	49.9	33.9	96.
30.7	88.3	9181.1	300.0	-41.9	99.7	291.7	27.4	25.5	-10.2	326.3	999.9	99.9	99.9	36.0	98.
32.7	92.5	9655.6	275.0	-45.9	99.9	285.9	32.4	31.1	-6.9	328.8	999.9	99.9	99.9	40.3	90.
34.8	97.2	10292.3	250.0	-51.2	99.9	286.8	34.0	32.4	-9.9	329.9	999.9	99.9	99.9	44.2	92.
36.9	102.9	11268.9	225.0	-55.8	99.9	280.3	36.7	36.1	-6.6	333.0	999.9	99.9	99.9	48.2	93.
39.1	107.4	12307.3	200.0	-62.4	99.9	283.5	35.1	34.1	-8.2	334.0	999.9	99.9	99.9	53.0	93.
41.8	113.5	12826.2	175.0	-61.9	99.9	276.4	37.9	37.7	-4.2	347.7	999.9	99.9	99.9	59.3	94.
44.0	120.2	13793.6	150.0	-58.7	99.9	285.9	37.7	36.3	-10.3	349.0	999.9	99.9	99.9	66.5	95.
46.4	127.3	14942.3	125.0	-58.5	99.9	279.2	24.9	24.6	-4.0	384.0	999.9	99.9	99.9	73.9	96.
52.6	155.0	16335.0	100.0	-61.6	99.9	270.4	32.1	32.1	-6.2	438.8	999.9	99.9	99.9	75.2	95.
57.2	163.2	18093.9	75.0	-64.8	99.9	272.5	16.1	16.1	-0.7	437.1	999.9	99.9	99.9	84.3	96.
64.4	182.2	20003.0	50.0	-59.8	99.9	330.0	3.7	1.9	-3.2	502.7	999.9	99.9	99.9	87.6	96.
70.1	161.7	25044.5	25.0	-52.6	99.9	302.4	5.1	4.3	-2.7	502.7	999.9	99.9	99.9	88.1	97.

0 PV SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 0 PV TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 429
DAYTON, OHIO

24 APRIL 1975
515 GMT

TIME MIN	CHCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT V DG K	E POT V DG K	MR RTO GM/KG	SH PCT	RANGE KM	AZ DEG
0.0	7.5	290.0	970.2	15.0	15.0	200.0	5.1	1.7	4.2	292.3	319.2	10.4	89.0	0.0	0
0.0	9.0	99.0	1000.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
0.2	7.0	300.0	975.0	15.5	15.5	140.0	11.4	3.2	11.0	292.1	318.3	10.1	87.0	0.1	21
1.0	10.1	520.0	950.0	13.9	13.9	205.0	18.7	8.0	16.5	292.6	319.0	9.7	91.0	0.2	23
2.1	12.1	750.0	925.0	13.7	13.7	210.0	25.3	16.0	19.6	290.6	320.4	9.0	91.0	2.0	21
3.0	15.1	900.0	900.0	13.0	13.0	231.7	28.0	21.0	16.6	290.0	317.9	9.0	85.7	3.0	21
4.0	16.4	1222.9	875.0	12.2	12.2	236.5	27.9	23.3	15.4	297.7	321.4	8.9	86.4	5.0	42
5.0	18.7	1475.7	850.0	11.1	9.7	241.7	28.5	21.5	11.6	296.0	323.1	8.9	91.0	6.5	42
6.0	20.9	1715.0	825.0	9.8	6.8	241.7	21.4	18.0	10.1	300.1	323.7	8.7	93.5	7.0	42
7.0	23.2	1970.0	800.0	9.4	7.7	230.1	18.0	15.9	9.9	301.4	324.1	8.3	94.1	8.4	51
8.0	25.5	2272.0	775.0	7.6	6.7	237.3	15.1	12.7	9.2	303.0	325.0	8.0	93.0	9.4	51
9.0	27.8	2500.1	750.0	6.2	5.4	236.1	14.5	12.0	8.1	304.3	325.3	7.5	94.2	10.1	51
10.0	30.1	2731.1	725.0	3.0	2.8	230.1	14.3	11.3	7.4	304.3	322.4	6.5	94.3	10.9	51
11.0	32.8	3000.4	700.0	2.5	1.6	230.5	14.7	12.7	7.5	306.1	323.5	6.2	93.5	11.5	51
12.0	35.3	3300.7	675.0	1.0	0.0	237.9	15.6	13.3	6.3	307.5	323.0	5.7	97.1	12.1	51
13.0	37.7	3603.4	650.0	-1.0	-0.6	230.3	15.7	13.2	6.6	307.0	321.0	4.9	94.0	12.9	51
14.0	40.1	3975.7	625.0	-2.4	-3.1	230.4	14.3	11.9	7.9	310.3	324.6	4.9	94.5	13.5	51
15.0	42.9	4290.7	600.0	-3.4	-4.2	235.4	13.3	10.9	7.5	312.7	324.0	4.7	94.2	13.0	51
16.0	45.7	4635.5	575.0	-5.0	-6.7	237.2	12.2	10.3	6.6	313.6	325.7	4.0	93.4	14.4	51
17.0	48.0	4981.6	550.0	-7.3	-10.5	245.9	11.9	10.9	4.9	313.6	322.9	3.1	90.0	14.8	51
18.0	51.4	5300.0	525.0	-10.6	-12.0	250.0	13.6	12.9	4.5	316.0	325.1	2.9	89.7	15.3	51
19.0	54.4	5715.2	500.0	-13.0	-14.5	253.0	17.0	16.3	5.0	317.5	325.3	2.5	88.1	17.0	51
20.0	57.3	6104.7	475.0	-15.2	-17.0	253.7	21.1	20.2	5.9	319.4	326.1	2.1	86.2	16.3	51
21.0	60.4	6505.6	450.0	-20.0	-22.3	253.6	25.1	25.1	6.4	318.2	322.8	1.4	81.7	17.4	51
22.0	63.4	6931.0	425.0	-23.5	-26.3	250.5	20.0	25.5	5.2	319.0	322.5	1.0	77.2	19.0	51
23.0	67.0	7371.4	400.0	-26.9	-30.3	248.5	27.1	27.3	5.9	320.0	322.6	0.8	73.1	21.1	51
24.0	70.3	7823.9	375.0	-30.0	-34.6	250.3	24.2	25.0	6.1	320.0	322.7	0.5	69.3	24.6	51
25.0	73.9	8319.7	350.0	-34.5	-38.3	250.4	28.0	27.5	6.7	322.2	323.0	0.4	65.1	32.2	51
26.0	77.0	8813.2	325.0	-38.0	-43.1	240.2	33.7	30.8	13.6	323.7	324.0	0.2	62.0	37.4	51
27.0	81.7	9377.0	300.0	-42.5	-48.9	240.4	30.6	30.5	3.3	34.0	999.9	99.9	99.9	41.3	51
28.0	85.7	9950.3	275.0	-48.5	-54.9	270.3	32.4	32.1	-4.7	320.9	999.9	99.9	99.9	43.5	51
29.0	90.3	10574.0	250.0	-54.9	-60.9	270.1	35.1	34.2	-7.4	320.5	999.9	99.9	99.9	45.4	51
30.0	95.2	11230.0	225.0	-61.0	-67.0	292.2	40.6	37.6	-15.4	325.1	999.9	99.9	99.9	49.5	51
31.0	100.2	11902.3	200.0	-62.5	-68.9	287.3	51.9	49.4	-16.0	333.7	999.9	99.9	99.9	56.5	51
32.0	105.5	12625.3	175.0	-62.0	-68.9	280.6	19.7	10.8	-5.5	362.0	999.9	99.9	99.9	64.5	51
33.0	111.5	13700.6	150.0	-61.0	-68.9	265.6	20.9	20.9	5.1	365.1	999.9	99.9	99.9	68.1	51
34.0	98.2	99.0	125.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
35.0	98.3	99.0	100.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
36.0	99.0	99.0	75.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
37.0	99.0	50.0	50.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0
38.0	99.0	25.0	25.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

FINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 433
SALTM. ILL24 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE NM	AZ DG
0.0	5.3	175.0	990.8	16.7	15.6	270.0	1.5	1.5	0.0	292.1	321.3	11.3	93.0	109	152.0
99.0	95.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	6.5	312.6	975.0	17.0	13.1	335.8	12.3	5.0	-11.2	293.6	319.3	9.8	77.7	0.1	34.0
1.0	8.5	538.7	950.0	17.1	10.0	338.3	12.9	6.0	-11.5	295.7	317.5	8.2	62.9	0.3	175.0
1.7	10.5	732.4	925.0	16.5	8.8	322.1	13.9	8.5	-10.9	297.3	313.1	7.7	60.2	0.9	185.0
2.4	12.5	991.4	900.0	15.3	7.9	313.3	11.9	8.6	-8.1	298.3	318.5	7.5	61.3	1.5	182.0
3.1	14.7	1233.6	875.0	13.1	7.5	303.0	8.9	7.4	-4.8	298.4	318.7	7.5	68.8	1.3	135.0
3.7	16.6	1476.7	850.0	10.8	4.3	277.5	6.7	6.6	-0.9	298.5	320.6	8.2	64.9	2.2	135.0
4.4	18.9	1725.6	825.0	9.6	9.2	241.5	8.2	7.2	3.9	299.9	324.1	8.9	97.5	2.3	130.0
5.0	21.0	1981.6	800.0	9.2	8.8	228.7	13.4	10.1	8.8	302.2	326.7	9.0	97.4	2.4	122.0
5.8	23.4	2245.6	775.0	8.5	8.1	230.8	17.7	13.7	11.3	305.0	328.5	8.8	97.3	2.7	13.0
6.7	25.6	2516.8	750.0	6.8	6.4	238.6	19.2	15.7	11.1	305.5	327.8	7.6	96.8	4.0	85.0
7.5	28.0	2755.0	725.0	5.5	5.0	232.6	22.0	17.5	13.4	305.4	320.1	5.1	80.5	5.5	76.0
8.8	30.5	3080.7	700.0	2.1	-0.9	212.6	22.0	17.5	16.4	306.5	321.2	5.1	80.8	7.2	76.0
10.1	33.1	3371.7	675.0	0.2	-1.4	229.6	25.4	19.3	17.3	308.7	323.5	5.1	92.2	8.8	64.0
11.2	35.6	3676.2	650.0	-0.9	-2.0	230.6	27.3	21.1	17.0	307.1	318.2	2.3	53.9	10.4	65.0
12.1	37.9	3968.2	625.0	-4.9	-13.0	233.6	28.7	23.1	14.2	309.6	317.5	2.6	64.2	12.2	63.0
13.2	40.5	4309.3	600.0	-5.9	-11.6	238.8	27.3	23.4	12.5	311.2	319.2	2.6	70.8	13.6	61.0
14.1	42.2	4631.5	575.0	-7.8	-12.2	243.8	24.2	23.3	12.6	313.3	321.4	2.6	76.8	15.1	61.0
14.9	44.1	4926.5	550.0	-9.3	-12.6	246.9	32.2	23.6	11.9	314.8	318.7	1.2	39.6	17.9	63.0
16.3	49.1	5144.8	525.0	-11.4	-22.4	247.1	30.7	23.3	8.3	317.2	321.9	1.4	51.9	20.5	54.0
17.8	52.0	5718.2	500.0	-13.1	-20.3	254.4	31.0	20.9	5.5	319.6	323.4	1.2	45.4	22.4	61.0
18.3	51.0	6108.1	475.0	-14.9	-23.9	259.5	30.5	30.0	4.5	320.1	322.9	0.8	42.1	24.1	61.0
19.9	58.1	6514.8	450.0	-18.4	-28.1	260.9	28.3	28.5	5.7	321.3	323.1	0.5	34.0	25.9	57.0
20.9	61.6	6839.1	425.0	-21.6	-31.4	258.8	29.2	28.7	2.8	322.8	324.1	0.4	28.5	28.1	64.0
22.2	65.1	7382.8	400.0	-24.7	-34.8	264.2	28.0	27.8	-0.7	323.9	324.9	0.0	1.0	30.0	70.0
23.5	68.6	7846.9	375.0	-28.4	-68.1	271.4	27.4	27.4	-1.5	325.5	326.5	0.0	1.0	32.4	71.0
24.9	72.3	8340.4	350.0	-31.3	-70.0	273.5	25.3	25.2	99.9	328.2	328.2	0.0	99.9	99.9	99.9
26.2	76.3	8861.7	325.0	-35.1	-72.6	99.9	99.9	99.9	99.9	328.9	99.9	99.9	99.9	99.9	99.9
27.4	80.6	9413.3	300.0	-40.1	99.9	99.9	99.9	99.9	99.9	327.7	99.9	99.9	99.9	99.9	99.9
28.9	85.3	9900.2	275.0	-43.6	99.9	99.9	99.9	99.9	99.9	331.5	99.9	99.9	99.9	99.9	99.9
29.9	88.8	10427.9	250.0	-50.1	99.9	99.9	99.9	99.9	99.9	331.7	99.9	99.9	99.9	99.9	99.9
31.7	93.0	11374.3	225.0	-56.7	99.9	99.9	99.9	99.9	99.9	336.2	99.9	99.9	99.9	99.9	99.9
33.5	100.4	12041.1	200.0	-61.0	99.9	99.9	99.9	99.9	99.9	343.0	99.9	99.9	99.9	99.9	99.9
35.1	106.5	12863.9	175.0	-64.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 • BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 • BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 451
DODGE CITY, KAN

24 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ CC
0.0	13.4	761.0	914.4	16.7	-0.9	290.0	4.1	3.9	-1.4	257.9	308.9	3.9	30.0	0.0	0
99.9	59.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	14.8	925.1	900.0	23.2	9.0	204.2	6.9	2.8	6.3	306.6	329.1	6.1	40.5	0.3	13.0
1.3	17.0	1174.0	875.0	24.4	-4.6	236.6	9.0	7.5	5.0	309.5	318.9	3.1	14.3	0.4	8.0
2.0	19.4	1426.0	850.0	21.7	-6.5	237.1	10.6	8.9	5.8	309.3	317.6	2.8	14.5	0.5	7.0
2.7	21.7	1693.2	825.0	19.3	-7.3	231.6	12.8	10.0	6.0	309.4	317.5	2.7	10.7	1.3	6.0
3.4	24.1	1946.3	800.0	17.2	-8.9	229.5	15.0	10.6	9.1	309.8	317.2	2.4	15.9	1.9	6.0
4.4	26.4	2215.5	775.0	14.5	-10.1	226.1	15.6	11.2	10.8	309.7	316.7	2.3	17.2	2.7	5.0
5.1	29.3	2491.0	750.0	12.5	-11.6	229.3	16.6	12.6	10.8	310.4	315.8	2.1	17.3	3.6	5.0
6.2	31.7	2773.7	725.0	9.9	-13.0	230.7	17.0	13.1	10.7	310.5	316.5	1.9	18.5	4.5	5.0
7.0	34.3	3063.4	700.0	7.2	-15.1	231.7	18.5	13.0	10.2	310.7	315.9	1.7	18.7	5.4	5.0
8.1	36.3	3360.9	675.0	4.6	-15.7	231.1	19.8	11.5	9.3	311.0	316.2	1.7	21.1	6.3	5.0
9.1	39.3	3666.7	650.0	1.8	-17.8	237.0	19.9	11.6	7.6	311.2	315.8	1.5	21.6	7.2	5.0
10.0	42.4	3981.4	625.0	-0.8	-19.9	249.0	18.3	13.4	5.0	311.7	315.7	1.3	21.8	8.0	5.0
11.1	45.3	4305.8	600.0	-3.5	-21.1	266.3	14.6	14.6	0.9	312.1	315.9	1.2	24.2	8.9	5.0
12.2	48.4	4640.0	575.0	-6.8	-22.0	280.2	14.4	14.2	-2.6	312.1	315.8	1.1	28.6	9.6	6.0
13.3	51.3	4985.3	550.0	-9.2	-24.2	279.9	13.9	13.9	-1.4	313.3	316.5	1.0	28.3	10.3	6.0
14.4	54.4	5343.9	525.0	-11.3	-27.3	263.8	15.3	15.2	1.4	316.5	320.0	0.8	25.7	11.3	6.0
15.6	57.4	5717.0	500.0	-13.6	-29.3	253.7	16.3	15.6	4.6	316.5	320.0	0.8	25.7	12.3	6.0
16.8	60.7	6104.6	475.0	-16.9	-25.0	254.2	12.0	11.7	2.9	317.2	323.6	1.1	49.2	13.3	6.0
18.3	64.3	6509.3	450.0	-19.2	-29.0	263.8	12.8	12.7	1.6	319.2	321.8	0.8	41.2	14.1	6.0
19.3	67.7	6932.5	425.0	-22.2	-32.5	263.0	14.9	14.8	1.7	320.6	322.6	0.6	38.3	15.2	5.0
20.6	71.0	7374.7	400.0	-26.2	-36.9	262.7	15.6	15.5	2.0	320.9	322.2	0.4	35.6	16.3	7.0
22.2	75.0	7837.6	375.0	-30.6	-41.0	262.4	17.4	17.2	2.2	321.1	322.1	0.3	35.0	17.9	7.0
23.4	79.0	8323.5	350.0	-34.9	-45.4	260.0	16.8	16.5	2.9	321.6	322.2	0.2	33.1	19.5	7.0
25.5	82.8	8837.0	325.0	-38.0	-51.4	268.1	20.9	20.9	0.7	324.2	324.6	0.1	22.7	21.5	7.0
27.0	87.0	9382.9	300.0	-42.6	-59.9	271.1	22.4	22.4	-0.4	325.3	324.6	0.1	22.7	23.2	7.0
29.7	91.6	9965.0	275.0	-47.3	-69.9	273.6	26.2	26.1	-1.7	326.8	324.6	0.1	22.7	25.0	7.0
31.9	96.2	10590.4	250.0	-50.7	-79.9	273.6	27.1	26.9	2.5	326.8	324.6	0.1	22.7	26.9	7.0
34.2	100.8	11269.0	225.0	-53.8	-89.9	263.0	27.7	27.6	2.9	326.8	324.6	0.1	22.7	28.9	7.0
36.8	106.3	12012.8	200.0	-56.8	-99.9	243.0	23.9	21.4	10.7	328.1	324.6	0.1	22.7	30.9	7.0
39.9	112.3	12948.4	175.0	-59.7	-99.9	261.0	34.0	33.6	5.3	328.1	324.6	0.1	22.7	32.9	7.0
43.4	118.5	13818.4	150.0	-57.8	-99.9	240.8	33.1	28.6	12.2	328.1	324.6	0.1	22.7	34.9	7.0
47.4	125.5	14970.5	125.0	-57.6	-99.9	253.0	31.4	24.0	5.2	328.1	324.6	0.1	22.7	36.9	7.0
52.6	133.0	16370.0	100.0	-60.4	-99.9	241.6	21.9	19.3	10.4	411.1	324.6	0.1	22.7	38.9	7.0
58.7	140.3	18163.1	75.0	-63.7	-99.9	259.9	14.9	14.7	2.6	439.3	324.6	0.1	22.7	40.9	7.0
67.1	148.0	20693.8	50.0	-57.3	-99.9	216.0	5.5	3.2	4.4	568.4	324.6	0.1	22.7	42.9	7.0
80.6	155.7	25150.9	25.0	-51.1	-99.9	269.1	4.4	4.4	0.1	638.0	324.6	0.1	22.7	44.9	7.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 456
TOPERA, KAN24 APRIL 1975
520 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DFW PT CG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.6	268.0	974.0	22.8	18.3	280.0	10.3	10.1	-1.0	300.1	336.6	13.0	76.0	0.0	0
99.0	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	990
99.0	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	990
0.7	6.5	482.6	950.0	17.7	10.1	280.3	20.6	19.6	-6.5	296.3	318.2	8.2	60.7	0.7	150
1.4	10.6	710.7	925.0	17.1	7.8	291.0	22.9	21.3	-8.2	297.8	317.4	7.2	54.3	1.5	125
2.1	12.6	543.9	900.0	15.4	5.5	295.7	20.6	19.6	-8.9	298.3	315.6	6.3	51.5	2.4	121
2.9	14.7	1182.1	875.0	13.4	4.5	300.0	19.0	18.5	-9.5	298.5	315.1	6.0	54.6	3.3	117
3.8	16.5	1425.3	850.0	11.2	6.6	309.1	22.3	17.3	-14.0	298.8	318.6	7.3	74.0	4.6	121
4.4	19.1	1674.0	825.0	8.9	7.0	311.7	10.6	12.4	-11.0	290.1	319.9	7.7	87.6	5.3	127
4.8	21.2	1929.3	800.0	6.3	5.7	315.9	12.4	8.7	-8.7	298.8	318.5	7.2	96.1	5.6	124
5.2	23.5	2189.4	775.0	6.4	6.4	315.1	6.4	5.9	-6.0	301.7	323.1	7.8	100.4	5.8	124
5.7	25.8	2458.8	750.0	5.5	5.5	285.4	3.8	3.7	-1.0	303.5	324.5	7.6	100.8	6.0	124
6.0	28.3	2736.1	725.0	4.3	4.3	223.5	4.5	3.1	6.3	305.1	325.4	7.2	103.3	5.9	124
6.3	30.7	3022.0	700.0	3.4	3.4	206.1	7.1	3.1	6.3	307.1	326.9	7.0	103.8	6.0	123
6.6	33.3	3317.2	675.0	2.9	2.9	194.6	10.9	2.7	10.5	309.9	330.0	7.1	102.8	6.0	121
7.1	35.8	3624.9	650.0	4.0	3.7	185.5	14.3	1.4	14.2	314.5	336.9	7.7	98.3	5.9	114
7.4	38.4	3944.3	625.0	3.0	2.8	175.7	15.5	-0.1	15.5	316.9	339.1	7.6	98.6	5.7	114
8.3	41.0	4274.3	600.0	-1.0	-1.4	170.0	15.5	-1.1	15.8	315.7	332.8	5.8	96.6	5.2	177
9.3	43.8	4614.2	575.0	-2.0	-4.1	178.8	19.4	-0.4	19.4	318.3	333.1	4.9	85.7	5.1	94
10.0	46.7	4967.3	550.0	-3.9	-6.5	178.7	23.6	-0.5	23.6	320.0	333.1	4.3	82.4	5.1	97
11.6	45.6	5332.9	525.0	-8.5	-12.1	182.7	21.2	1.0	21.1	318.5	327.5	2.9	75.4	5.8	62
15.3	52.4	5709.0	500.0	-11.9*	99.9	191.2	21.3	4.1	20.9	318.6	999.9	99.9	99.9	99.9	99.9
17.4	55.4	6098.8	475.0	-15.8	-19.8	190.5	18.6	6.2	17.6	318.5	323.9	1.7	71.3	14.1	24
21.3	58.4	6504.2	450.0	-18.9	-22.9	211.9	23.4	12.4	19.9	319.7	324.0	1.3	69.9	15.4	24
23.2	61.9	6528.7	425.0	-21.0	-25.2	216.0	20.5	15.6	21.5	322.1	316.0	1.2	68.7	19.2	24
24.8	65.2	7373.8	400.0	-24.3	-28.6	213.0	25.8	18.3	19.6	323.5	326.6	0.9	67.0	21.9	31
26.3	68.6	7842.9	375.0	-25.9	-30.4	227.2	25.0	18.4	17.0	327.3	330.1	0.8	65.5	24.1	32
27.7	72.2	8338.0	350.0	-30.6	-35.2	229.7	25.2	19.9	16.6	327.4	329.3	0.5	63.7	26.1	33
29.3	76.2	8859.5	325.0	-35.7	-40.5	231.1	23.2	18.1	14.6	327.4	328.6	0.3	61.2	26.1	35
30.9	80.3	9409.0	300.0	-40.7	99.9	234.1	19.1	15.5	11.2	328.0	999.9	99.9	99.9	30.6	34
32.1	84.5	9994.9	275.0	-46.1	99.9	237.8	21.5	18.2	11.4	328.2	999.9	99.9	99.9	31.6	37
33.7	88.8	10621.9	250.0	-51.1	99.9	236.8	22.1	18.5	12.1	330.2	999.9	99.9	99.9	33.8	36
37.5	93.8	11298.1	225.0	-56.6	99.9	232.4	23.2	18.4	14.1	331.7	999.9	99.9	99.9	38.8	40
44.9	99.0	12034.7	200.0	-62.7	99.9	210.6	17.7	9.0	15.3	333.4	999.9	99.9	99.9	47.2	34
47.8	104.5	12845.7	175.0	-69.1	99.9	220.2	31.6	20.4	24.1	336.0	999.9	99.9	99.9	51.7	32
51.9	110.8	13762.3	150.0	-60.5	99.9	254.5	35.7	34.4	9.5	365.9	999.9	99.9	99.9	59.3	41
60.5	116.0	14915.6	125.0	-58.6	99.9	260.3	30.5	30.1	5.1	384.9	999.9	99.9	99.9	74.3	49
67.4	126.3	16312.1	100.0	-56.7	99.9	233.1	16.2	13.0	9.7	418.1	999.9	99.9	99.9	82.9	53
99.3	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9

ORIGINAL PAGE IS
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS

STATION NO. 490
PORT TOTTEN, N Y24 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTG GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.3	8.0	1018.0	93.0	91.1	999.9	99.9	99.9	99.9	496.1	999.9	999.9	93.0	999.9	99.9
0.5	5.7	181.9	1000.0	9.1	8.1	999.9	99.9	99.9	99.9	283.2	300.5	6.8	93.2	999.9	99.9
1.1	7.8	393.0	975.0	11.5	11.4	999.9	99.9	99.9	99.9	287.8	310.3	8.7	99.4	999.9	99.9
1.6	10.3	611.1	950.0	12.9	10.6	999.9	99.9	99.9	99.9	291.4	313.6	8.5	86.2	999.9	99.9
2.5	12.1	836.1	925.0	13.2	9.1	999.9	99.9	99.9	99.9	293.8	314.8	7.9	76.2	999.9	99.9
3.2	14.3	1066.4	900.0	11.9	7.8	999.9	99.9	99.9	99.9	294.7	315.5	7.4	75.9	999.9	99.9
4.0	16.5	1332.1	875.0	10.6	6.9	999.9	99.9	99.9	99.9	295.7	315.0	7.2	77.8	999.9	99.9
4.8	18.9	1543.4	850.0	9.4	4.3	999.9	99.9	99.9	99.9	296.8	313.5	6.2	70.7	999.9	99.9
5.7	20.9	1790.5	825.0	7.5	2.7	999.9	99.9	99.9	99.9	297.3	312.9	5.7	71.6	999.9	99.9
6.5	23.4	2047.4	800.0	5.3	0.7	999.9	99.9	99.9	99.9	297.5	311.4	5.0	71.9	999.9	99.9
7.4	25.7	2302.3	775.0	3.2	0.9	999.9	99.9	99.9	99.9	298.0	312.6	5.3	84.5	999.9	99.9
8.2	28.1	2557.4	750.0	1.2	0.5	999.9	99.9	99.9	99.9	298.5	313.2	5.3	95.2	999.9	99.9
9.2	30.7	2839.4	725.0	-0.9	-3.2	999.9	99.9	99.9	99.9	294.0	310.7	4.2	83.9	999.9	99.9
10.1	33.3	3119.1	700.0	-2.6	-4.8	999.9	99.9	99.9	99.9	300.1	311.1	3.8	84.4	999.9	99.9
11.1	35.8	3407.6	675.0	-3.4	-6.3	999.9	99.9	99.9	99.9	302.3	312.5	3.6	80.4	999.9	99.9
12.1	38.4	3705.2	650.0	-5.6	-8.3	999.9	99.9	99.9	99.9	303.0	312.2	3.2	81.5	999.9	99.9
13.1	40.9	4011.7	625.0	-7.8	-9.5	999.9	99.9	99.9	99.9	303.9	312.7	3.0	87.7	999.9	99.9
14.1	43.7	4328.8	600.0	-9.3	-10.8	999.9	99.9	99.9	99.9	305.7	314.1	2.8	90.2	999.9	99.9
15.2	46.5	4657.0	575.0	-11.5	-12.9	999.9	99.9	99.9	99.9	306.8	314.3	2.5	89.2	999.9	99.9
16.3	49.5	4996.9	550.0	-13.4	-14.8	999.9	99.9	99.9	99.9	308.4	315.1	2.2	89.2	999.9	99.9
17.4	52.1	5350.0	525.0	-15.4	-16.9	999.9	99.9	99.9	99.9	310.1	316.1	1.9	88.6	999.9	99.9
18.5	55.3	5717.2	500.0	-17.6	-18.9	999.9	99.9	99.9	99.9	311.7	317.1	1.7	89.4	999.9	99.9
19.7	58.4	6097.5	475.0	-20.1	-21.5	999.9	99.9	99.9	99.9	313.3	317.8	1.4	88.1	999.9	99.9
21.1	61.7	6498.5	450.0	-23.0	-24.4	999.9	99.9	99.9	99.9	314.5	318.3	1.2	87.4	999.9	99.9
22.4	65.1	6915.3	425.0	-25.8	-27.4	999.9	99.9	99.9	99.9	316.0	319.1	0.9	84.1	999.9	99.9
23.8	68.4	7352.7	400.0	-27.8	-29.8	999.9	99.9	99.9	99.9	318.9	321.6	0.8	82.1	999.9	99.9
25.1	71.8	7814.7	375.0	-30.3	-32.9	999.9	99.9	99.9	99.9	321.5	323.6	0.6	77.7	999.9	99.9
26.6	75.6	8302.2	350.0	-34.1	-37.2	999.9	99.9	99.9	99.9	322.8	324.4	0.4	73.2	999.9	99.9
28.2	79.6	8810.6	325.0	-38.4	-41.9	999.9	99.9	99.9	99.9	323.7	324.8	0.3	68.7	999.9	99.9
30.0	83.5	9361.1	300.0	-43.4	-49.9	999.9	99.9	99.9	99.9	324.2	324.9	99.9	999.9	999.9	99.9
31.6	87.3	9930.7	275.0	-48.8	-59.9	999.9	99.9	99.9	99.9	324.6	324.9	99.9	999.9	999.9	99.9
33.7	92.2	10557.7	250.0	-54.8	-69.9	999.9	99.9	99.9	99.9	324.9	324.9	99.9	999.9	999.9	99.9
35.7	96.8	11212.0	225.0	-61.1	-79.9	999.9	99.9	99.9	99.9	324.9	324.9	99.9	999.9	999.9	99.9
38.1	102.3	11943.0	200.0	-65.5	-99.9	999.9	99.9	99.9	99.9	324.1	324.1	99.9	999.9	999.9	99.9
41.1	107.9	12761.3	175.0	-55.8	-99.9	999.9	99.9	99.9	99.9	351.3	324.9	99.9	999.9	999.9	99.9
44.9	114.0	13719.0	150.0	-50.8	-99.9	999.9	99.9	99.9	99.9	367.1	324.9	99.9	999.9	999.9	99.9
49.4	120.8	14870.0	125.0	-58.1	-99.9	999.9	99.9	99.9	99.9	389.9	324.9	99.9	999.9	999.9	99.9
55.2	128.7	16271.5	100.0	-53.6	-99.9	999.9	99.9	99.9	99.9	412.5	324.9	99.9	999.9	999.9	99.9
58.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 510
ALBANY, N.Y.24 APRIL 1975
515 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

139 91. 1

TIME MIN	CATCY	WIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.2	86.0	1000.6	9.0	5.9	170.0	7.2	-1.3	7.1	282.2	297.1	5.8	81.0	0.2	0.
0.2	5.9	157.0	1000.0	9.2	9.2	2.9	6.5	-0.3	-6.5	282.4	999.9	99.9	99.9	0.2	347.
0.4	6.4	366.2	975.0	8.4	99.9	106.7	1.5	-1.4	0.4	283.7	999.9	99.9	99.9	0.2	343.
1.7	10.8	580.0	950.0	7.0	99.9	170.4	17.5	-2.9	17.2	284.3	999.9	99.9	99.9	1.5	344.
2.6	13.2	799.0	925.0	6.7	5.6	177.5	23.2	-1.0	23.2	287.0	303.2	6.2	93.0	2.6	346.
3.5	15.6	1025.4	900.0	7.7	4.9	194.7	15.8	4.0	15.2	290.2	306.4	6.1	82.9	3.7	353.
4.6	18.1	1252.1	875.0	8.0	5.1	210.5	16.5	8.4	14.2	293.0	309.9	6.3	81.5	4.5	362.
5.7	20.6	1407.0	850.0	5.9	4.2	215.4	17.1	9.9	14.0	293.2	309.6	6.1	86.7	5.4	366.
6.7	23.2	1741.0	825.0	4.1	3.1	215.3	17.9	10.3	14.6	293.7	309.4	5.8	92.5	6.4	11.
7.9	25.8	1991.0	800.0	2.4	1.8	213.9	18.6	10.4	15.5	294.5	309.3	5.5	95.4	7.3	15.
9.1	28.4	2247.3	775.0	0.8	0.2	213.1	20.3	11.1	17.0	295.3	309.1	5.0	95.4	8.9	11.
10.6	31.2	2511.9	750.0	0.0	-0.6	215.2	21.7	12.5	17.7	297.2	310.7	4.9	95.3	10.8	20.
12.4	34.1	2782.2	725.0	-1.2	-1.9	217.6	23.9	14.6	18.9	298.7	311.7	4.6	95.5	13.0	23.
13.8	36.9	3061.9	700.0	-2.4	-3.0	221.9	25.2	16.8	18.7	300.4	312.8	4.4	95.3	15.2	26.
15.0	39.7	3350.1	675.0	-4.1	-4.7	226.4	23.3	16.9	16.1	301.6	313.0	4.0	95.1	16.4	27.
16.2	42.5	3647.4	650.0	-5.7	-6.5	235.2	24.0	19.7	13.7	302.9	313.4	3.6	94.6	18.4	28.
17.4	45.5	3954.2	625.0	-7.7	-8.3	245.0	24.0	21.7	10.1	304.1	313.6	3.3	95.7	20.0	30.
19.2	48.7	4270.6	600.0	-10.4	-11.4	244.6	26.8	24.2	11.5	304.4	312.2	2.7	92.3	22.1	31.
20.9	51.5	4537.2	575.0	-13.6	-14.7	247.7	27.9	25.8	10.6	304.3	310.7	2.1	91.1	24.7	32.
22.5	54.3	4812.3	550.0	-17.1	-18.4	251.5	29.0	27.5	9.2	304.0	303.0	1.6	89.5	27.1	42.
24.2	56.0	5092.0	525.0	-17.0	-18.3	256.9	23.4	22.8	5.3	308.1	313.4	1.7	89.4	29.3	45.
25.9	61.4	5647.2	500.0	-18.7	-20.3	254.9	27.7	26.7	7.2	310.3	315.1	1.5	87.0	31.4	47.
27.4	65.0	6027.8	475.0	-21.4	-23.2	256.1	20.9	20.3	5.0	311.6	315.6	1.2	84.8	34.0	49.
29.6	68.4	6426.2	450.0	-22.2	-24.3	263.1	19.5	19.3	2.3	315.5	317.3	1.2	82.9	35.9	51.
31.3	71.9	6845.0	425.0	-24.5	-26.7	266.1	19.4	19.3	1.3	317.6	320.9	1.0	81.8	37.9	53.
33.3	75.7	7284.0	400.0	-27.8	-30.2	273.3	17.9	17.9	-1.0	318.9	321.5	0.8	76.4	39.2	55.
35.1	79.7	7744.7	375.0	-31.2	-34.0	267.7	20.7	20.7	0.4	320.3	324.3	0.6	75.7	41.3	56.
37.1	83.7	8230.4	350.0	-34.7	-38.0	258.0	26.7	26.2	5.5	321.9	324.4	0.4	71.3	43.6	58.
39.2	87.7	8744.2	325.0	-38.7	-42.4	261.7	28.0	27.7	4.0	323.3	324.3	0.3	67.5	46.6	60.
41.4	92.2	9288.2	300.0	-43.8	-49.3	256.4	28.7	27.9	6.7	323.6	999.9	99.9	99.9	50.2	61.
43.7	96.8	9866.3	275.0	-49.0	-59.9	263.7	26.3	26.1	2.9	324.3	999.9	99.9	99.9	53.5	62.
46.2	101.6	10483.7	250.0	-54.9	-69.9	261.7	34.8	34.4	5.0	324.5	999.9	99.9	99.9	56.1	64.
48.8	107.0	11147.2	225.0	-61.1	-79.9	264.1	34.5	34.4	3.6	324.5	999.9	99.9	99.9	62.8	65.
51.4	112.2	11870.5	200.0	-65.3	-99.9	270.3	41.7	41.2	-0.2	329.3	999.9	99.9	99.9	64.1	67.
54.9	118.0	12691.2	175.0	-61.1	-99.9	278.4	40.1	39.7	-5.9	349.2	959.9	99.9	99.9	75.0	70.
58.0	125.0	13662.4	150.0	-55.1	-99.9	277.7	44.6	44.2	-13.7	375.2	999.9	99.9	99.9	82.5	74.
63.6	132.0	14616.2	125.0	-56.9	-99.9	310.4	20.9	15.9	-13.7	375.2	999.9	99.9	99.9	89.2	76.
70.4	140.0	16224.3	100.0	-58.3	-99.9	289.3	21.9	20.6	-7.2	415.2	999.9	99.9	99.9	97.0	79.
99.9	99.9	99.9	75.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE
OF POOR QUALITY

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 520
PITTSBURGH, PA

24 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
00	00	359.0	971.3	13.6	9.6	210.0	6.2	3.1	5.4	290.2	310.5	7.8	77.0	0.0	0.
00.9	00.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
01.9	01.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
02.9	02.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
03.9	03.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
04.9	04.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
05.9	05.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
06.9	06.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
07.9	07.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
08.9	08.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
09.9	09.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
10.9	10.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
11.9	11.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
12.9	12.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
13.9	13.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
14.9	14.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
15.9	15.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
16.9	16.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
17.9	17.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
18.9	18.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
19.9	19.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
20.9	20.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
21.9	21.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
22.9	22.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
23.9	23.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
24.9	24.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
25.9	25.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
26.9	26.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
27.9	27.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
28.9	28.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
29.9	29.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
30.9	30.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
31.9	31.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
32.9	32.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
33.9	33.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
34.9	34.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
35.9	35.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
36.9	36.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
37.9	37.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
38.9	38.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
39.9	39.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
40.9	40.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
41.9	41.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
42.9	42.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
43.9	43.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
44.9	44.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
45.9	45.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
46.9	46.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
47.9	47.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
48.9	48.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
49.9	49.9	50.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
50.9	50.9	50.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

METEOROLOGICAL DATA

STATION NO. 528
BUFFALO, N. Y.24 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GPH	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WIND GM/KG	RM PCT	RANGE KM	AZ DG
0.1	5.9	218.0	983.4	11.7	10.6	200.0	7.7	2.6	7.2	287.3	308.4	8.2	93.0	0.0	3.0
00.9	59.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.4	200.4	975.0	13.1	9.8	213.5	13.3	7.1	11.2	285.4	309.7	7.8	80.3	0.4	2.0
0.9	6.5	502.3	950.0	11.0	9.7	218.3	15.0	8.5	12.4	285.4	310.1	8.0	91.5	0.7	3.1
1.4	10.5	730.8	925.0	9.7	8.9	221.3	19.6	12.9	14.7	290.2	310.4	7.7	93.0	1.4	3.4
2.3	12.4	958.4	900.0	8.7	7.9	234.1	23.9	13.3	14.0	291.5	311.1	7.5	94.5	2.4	3.4
3.0	14.5	1191.8	875.0	8.1	7.3	243.9	26.3	23.6	11.5	293.1	312.7	7.4	94.9	3.4	4.5
3.6	1.5	1431.5	850.0	7.7	7.1	253.1	25.0	23.0	7.3	295.2	315.2	7.5	95.6	4.3	5.7
4.4	18.7	1677.8	825.0	6.9	6.3	262.4	23.5	22.3	3.1	296.9	316.6	7.3	95.8	5.3	5.7
5.2	20.2	1930.9	800.0	5.8	5.1	266.7	22.7	22.6	1.3	298.2	317.1	6.9	95.7	6.3	6.1
5.9	23.0	2197.5	775.0	4.4	3.7	263.8	19.9	15.8	2.1	299.4	317.2	6.5	95.4	7.1	6.4
6.3	25.3	2457.3	750.0	2.4	1.7	266.4	19.5	15.5	1.2	300.0	316.0	5.8	95.1	8.2	7.1
7.4	27.5	2730.7	725.0	-0.0	-0.9	270.1	21.5	21.5	-0.0	300.1	314.0	5.0	93.6	9.2	6.7
8.7	30.0	3011.4	700.0	-0.5	-5.7	274.9	23.5	23.4	-2.0	302.3	312.6	3.6	67.8	10.4	7.4
9.6	32.6	3303.2	675.0	0.0	-19.3	280.4	25.5	25.1	-4.6	305.8	309.6	1.2	21.7	11.5	7.2
10.6	35.1	3604.5	650.0	-1.3	-25.6	276.1	26.0	25.9	-2.8	307.0	310.0	1.0	18.7	13.1	7.2
11.6	37.6	3915.2	625.0	-4.2	-25.4	276.7	23.7	23.6	-2.8	307.8	310.2	0.8	17.2	14.4	7.2
12.5	40.2	4235.4	600.0	-6.5	-27.8	277.4	20.9	20.7	-2.7	308.6	310.7	0.6	16.5	15.6	8.1
13.5	42.9	4564.5	575.0	-8.8	-30.2	275.3	20.4	20.3	-1.9	309.7	311.5	0.5	15.7	16.8	8.2
14.5	45.0	4908.9	550.0	-11.9	-30.4	275.1	20.9	20.8	-1.9	309.9	311.9	0.5	14.1	18.1	8.2
15.8	48.6	5263.3	525.0	-14.2	-36.3	275.1	23.3	23.2	-2.1	311.3	312.5	0.2	13.5	19.6	8.4
17.0	51.4	5632.0	500.0	-16.0	-40.0	271.6	27.1	27.1	-0.8	313.5	314.3	0.2	10.5	21.4	8.5
19.4	54.6	6016.3	475.0	-18.7	-42.3	271.3	28.1	28.1	-0.6	314.8	315.5	0.2	10.4	23.7	8.5
19.7	57.5	6417.2	450.0	-21.8	-40.3	271.8	29.3	29.2	-0.9	315.8	316.3	0.1	8.7	26.1	8.7
21.1	60.9	6934.7	425.0	-25.6	-40.9	277.5	21.3	21.1	-2.8	315.2	309.9	92.9	99.9	24.1	4.7
22.6	64.4	7271.0	400.0	-29.5	-40.9	274.4	22.1	22.1	-1.7	315.6	99.9	99.9	99.9	30.0	4.7
24.2	67.8	7722.1	375.0	-33.1	-40.9	272.7	24.6	24.6	-1.1	317.8	99.9	99.9	99.9	32.3	4.7
25.8	71.3	8238.8	350.0	-36.8	-40.9	285.2	28.5	27.5	-7.5	315.1	99.9	99.9	99.9	34.6	4.7
27.4	75.3	8720.9	325.0	-38.8	-40.9	300.6	33.0	28.4	-16.8	323.2	99.9	99.9	99.9	37.2	4.7
28.9	79.4	9264.8	300.0	-43.6	-40.9	301.2	39.3	33.6	-20.4	324.0	99.9	99.9	99.9	40.2	4.7
30.6	83.6	9843.5	275.0	-48.6	-40.9	296.1	45.8	41.2	-20.1	324.8	99.9	99.9	99.9	44.0	4.7
33.0	88.2	10465.0	250.0	-51.8	-40.9	292.0	60.5	56.1	-22.6	325.0	99.9	99.9	99.9	51.6	4.7
34.7	93.3	11144.5	225.0	-55.5	-40.9	297.8	47.8	42.3	-22.2	333.5	99.9	99.9	99.9	57.1	10.2
36.7	98.5	11844.9	200.0	-61.2	-40.9	289.0	35.0	33.1	-11.4	335.9	99.9	99.9	99.9	61.5	11.1
39.5	104.3	12706.6	175.0	-56.3	-40.9	275.0	32.1	38.9	-3.4	353.8	99.9	99.9	99.9	68.4	10.2
43.3	110.8	13696.8	150.0	-58.8	-40.9	282.2	26.7	28.1	-5.6	368.8	99.9	99.9	99.9	74.5	10.2
47.5	119.3	14842.0	125.0	-55.3	-40.9	275.4	30.0	29.9	-2.8	394.2	99.9	99.9	99.9	81.4	10.2
52.5	127.0	16263.3	100.0	-55.5	-40.9	281.7	27.0	28.4	-5.5	420.5	99.9	99.9	99.9	89.0	10.2
58.0	137.0	18070.2	75.0	-60.4	-40.9	280.6	14.5	14.2	-2.7	440.2	99.9	99.9	99.9	93.3	10.2
66.5	146.3	20628.2	50.0	-55.4	-40.9	280.3	3.4	3.4	-0.6	512.9	99.9	99.9	99.9	96.5	10.2
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 532
PEORIA, ILL

24 APRIL 1975
515 GMT

TIME MIN	CATCT	HEIGHT GPH	PRES MB	TEMP DEG C	CEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MK RTO GM/KG	RM PCT	RANGE KM	AZ DEG
0.0	6.0	200.0	982.9	14.4	13.8	240.0	1.6	1.4	0.8	290.3	316.4	10.1	96.0	0.0	0.
9.9	9.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.7	268.7	975.0	15.1	14.3	237.9	3.6	3.1	1.9	291.8	320.2	11.0	98.3	0.1	33.
0.9	8.8	489.4	950.0	15.2	13.3	237.5	5.1	4.3	1.9	293.9	320.7	10.2	98.9	0.2	54.
1.6	10.9	716.1	925.0	16.0	12.0	236.5	6.3	6.1	1.5	296.7	317.4	7.7	62.4	0.5	59.
2.4	13.0	949.5	900.0	16.9	10.9	231.7	7.4	7.4	1.5	299.6	314.8	5.4	40.5	0.9	71.
3.1	15.2	1189.1	875.0	15.4	1.6	289.7	7.4	7.0	2.5	300.5	314.2	4.9	39.1	1.0	72.
3.8	17.4	1434.0	850.0	13.6	0.7	281.2	6.4	6.2	1.2	301.1	314.4	4.7	41.2	1.3	87.
4.6	19.3	1694.8	825.0	11.9	-0.2	290.1	5.3	5.0	1.8	301.8	314.8	4.6	43.2	1.6	93.
5.4	22.0	1941.6	800.0	10.2	-0.8	305.2	4.2	3.4	2.4	302.7	315.6	4.5	46.3	1.8	93.
6.2	24.5	2205.0	775.0	8.2	-0.4	312.4	4.5	3.3	3.1	303.2	316.5	4.7	53.4	2.0	77.
7.1	26.7	2474.9	750.0	5.9	0.7	319.5	5.7	3.7	4.4	303.7	318.9	5.4	69.2	2.2	121.
8.1	29.5	2752.1	725.0	4.7	-7.0	318.4	7.2	4.8	5.4	305.0	314.1	3.1	42.4	2.5	177.
9.1	32.0	3037.1	700.0	2.9	-17.1	315.9	10.1	7.1	7.3	305.8	313.2	1.4	21.2	2.9	111.
10.1	34.7	3331.0	675.0	1.5	-18.4	313.2	13.7	9.7	9.7	307.5	311.7	1.3	21.0	3.6	117.
11.2	37.2	3632.3	650.0	-1.3	-18.6	313.5	16.0	11.6	11.0	307.6	311.9	1.4	25.5	4.5	124.
12.2	40.1	3944.0	625.0	-4.1	-18.8	308.6	19.6	15.3	12.2	307.9	312.2	1.4	30.7	5.6	123.
13.4	42.9	4244.7	600.0	-6.3	-21.1	301.4	22.5	19.2	11.7	308.9	312.7	1.2	29.7	7.1	123.
14.5	45.9	4596.1	575.0	-8.1	-21.3	296.6	21.2	14.9	9.5	310.4	311.1	0.2	5.2	8.6	127.
15.7	49.0	4940.1	550.0	-10.1	-26.3	286.3	23.9	23.0	6.7	312.1	312.2	0.0	1.0	10.1	121.
16.9	52.0	5294.6	525.0	-12.8	-28.0	280.7	25.1	24.7	4.7	313.0	313.1	0.0	1.0	11.7	115.
18.0	54.3	5604.6	500.0	-15.5	-29.7	277.8	25.3	25.1	3.4	314.2	314.2	0.0	1.0	13.5	114.
19.3	56.6	5911.8	475.7	-17.8	-31.2	275.6	27.5	27.4	2.7	315.9	316.0	0.0	1.0	15.4	113.
20.6	62.1	6454.4	450.0	-19.8	-31.8	272.9	28.0	27.9	1.4	318.3	314.4	0.0	1.1	17.4	111.
22.0	65.3	6766.6	425.0	-22.7	-33.3	276.5	29.6	29.4	3.3	319.9	321.8	0.5	37.5	19.7	174.
23.2	69.5	7314.3	400.7	-26.0	-28.4	267.2	30.9	30.9	1.5	321.2	324.3	0.9	60.3	22.1	174.
24.8	73.3	7782.2	375.0	-29.8	-31.6	257.0	32.1	31.3	7.2	322.2	324.7	0.7	83.7	24.7	174.
26.5	77.7	8270.6	350.0	-33.4	-36.0	248.2	32.0	29.7	11.9	323.7	325.4	0.5	77.5	27.3	171.
28.9	81.9	8787.0	325.0	-37.2	-41.2	244.1	32.3	29.1	14.0	325.3	326.5	0.3	65.7	29.9	97.
29.9	86.4	9334.3	300.0	-42.2	99.9	243.1	31.1	27.7	14.1	325.9	999.9	99.9	99.9	32.6	91.
31.7	91.4	9916.3	275.0	-47.1	99.9	243.1	33.1	29.5	14.6	327.0	999.9	99.9	99.9	35.9	91.
31.5	96.5	10534.9	250.0	-52.3	99.9	242.7	31.8	26.3	14.6	328.3	999.9	99.9	99.9	38.3	89.
35.4	102.0	11212.8	225.0	-57.7	99.9	243.3	32.1	29.1	13.4	330.0	999.9	99.9	99.9	42.3	87.
37.5	106.2	11943.6	200.0	-64.8	99.9	243.1	36.8	34.4	13.1	330.2	999.9	99.9	99.9	46.3	85.
39.9	114.5	12751.3	175.0	-67.3	99.9	242.8	29.7	28.4	8.6	338.9	999.9	99.9	99.9	51.3	83.
42.4	121.5	13689.3	150.0	-62.6	99.9	240.5	19.3	30.3	0.3	362.3	999.9	99.9	99.9	56.4	82.
46.2	129.0	14825.7	125.0	-57.4	99.9	246.0	34.2	34.0	3.6	391.1	999.9	99.9	99.9	65.3	75.
53.5	137.0	16245.3	100.0	-56.1	99.9	240.2	17.6	15.2	8.7	415.5	999.9	99.9	99.9	76.4	74.
56.4	144.7	18031.2	75.0	-66.3	99.9	318.5	2.8	1.9	2.1	433.9	973.9	99.9	99.9	73.5	74.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 553
OWAMA, AEB24 APRIL 1975
600 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DRY PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T DG K	E POT T DG K	W R TO CM/KG	RM PCT	RANGE KM	24. 9	47 DG
0.0	7.7	400.0	961.6	12.7	10.6	70.0	2.6	-2.4	-0.9	290.2	312.0	8.4	87.0	0.0	0.0	0.0
95.9	95.9	95.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	8.7	502.4	950.0	13.0	11.3	99.9	99.9	99.9	99.9	291.5	314.7	8.9	89.2	99.9	99.9	99.9
1.1	10.7	726.4	925.0	11.2	10.0	99.9	99.9	99.9	99.9	291.9	313.9	8.4	92.4	99.9	99.9	99.9
1.9	12.9	955.0	900.0	9.6	8.6	99.9	99.9	99.9	99.9	292.4	313.1	7.8	93.8	99.9	99.9	99.9
2.7	15.1	1188.8	875.0	8.8	7.3	25.1	5.4	-2.3	-4.9	293.9	314.4	7.7	94.1	99.9	99.9	99.9
3.5	17.2	1424.6	850.0	9.5	-8.7	330.2	5.2	2.6	-4.5	296.4	303.2	2.4	26.8	99.9	99.9	99.9
4.4	19.5	1679.1	825.0	11.8	-8.7	340.3	3.4	1.1	-3.2	301.4	309.6	2.8	26.7	99.9	99.9	99.9
5.4	21.7	1935.5	800.0	10.0	-5.3	356.0	3.8	0.3	-3.8	302.2	311.6	3.2	33.6	99.9	99.9	99.9
6.4	24.1	2193.6	775.0	8.9	-12.7	347.5	5.7	1.2	-5.6	303.6	309.2	1.8	20.1	99.9	99.9	99.9
7.4	26.3	2469.0	750.0	7.1	-14.8	346.1	7.3	1.7	-7.1	304.5	309.5	1.6	19.2	99.9	99.9	99.9
8.4	28.9	2746.3	725.0	4.8	-16.2	338.8	7.4	2.7	-6.9	305.9	309.5	1.5	20.0	99.9	99.9	99.9
9.6	31.4	3031.2	700.0	2.7	-14.5	321.3	5.5	3.4	-6.3	305.7	311.1	1.8	26.9	99.9	99.9	99.9
10.7	34.1	3324.2	675.0	0.5	-13.4	274.1	5.7	5.6	-0.9	306.5	312.4	1.9	33.1	99.9	99.9	99.9
11.4	36.6	3620.0	650.0	-1.7	-14.4	270.4	7.4	7.4	-0.1	307.3	313.2	1.9	37.1	99.9	99.9	99.9
12.9	39.3	3934.5	625.0	-4.8	-14.1	248.4	8.0	8.0	0.2	307.2	313.5	2.0	47.7	99.9	99.9	99.9
14.0	42.3	4250.1	600.0	-7.7	-15.1	252.1	8.7	9.8	2.7	307.4	313.4	2.0	55.1	99.9	99.9	99.9
15.1	44.9	4586.0	575.0	-10.2	-15.8	251.2	10.3	9.8	3.3	308.3	314.2	1.9	63.3	99.9	99.9	99.9
16.2	47.9	4926.9	550.0	-13.0	-15.6	254.6	11.3	10.9	3.0	308.9	315.2	2.1	81.1	99.9	99.9	99.9
17.5	50.8	5279.9	525.0	-15.8	-17.7	259.2	11.2	10.8	2.9	309.6	315.1	1.8	85.3	99.9	99.9	99.9
18.8	53.9	5645.8	500.0	-18.6	-34.3	248.3	14.0	13.0	5.2	310.4	312.0	0.5	27.6	99.9	99.9	99.9
20.3	57.0	6029.9	475.0	-17.2	-20.9	240.0	16.9	14.6	4.5	316.8	319.0	0.7	31.8	99.9	99.9	99.9
21.7	60.4	6433.9	450.0	-19.4	-33.4	254.0	18.3	17.6	5.0	318.3	323.0	0.5	28.5	99.9	99.9	99.9
23.1	63.4	6854.9	425.0	-23.4	-32.4	252.5	18.5	17.6	5.5	318.7	323.7	0.6	42.3	99.9	99.9	99.9
24.4	67.3	7294.7	400.0	-27.6	-33.7	248.3	18.7	17.4	6.8	319.2	321.0	0.5	55.2	99.9	99.9	99.9
25.9	70.9	7756.3	375.0	-31.0	-40.8	249.3	19.8	14.5	7.0	320.5	321.6	0.3	37.1	99.9	99.9	99.9
27.5	74.8	8241.5	350.0	-35.0	-43.3	252.1	20.6	14.8	6.4	321.4	322.3	0.2	42.4	99.9	99.9	99.9
29.1	79.0	8751.8	325.0	-39.1	-40.3	236.7	22.9	17.6	11.9	322.8	323.9	0.9	99.9	99.9	99.9	99.9
30.8	83.2	9297.7	300.0	-43.4	-49.9	229.5	26.1	19.9	17.0	324.2	324.9	99.9	99.9	99.9	99.9	99.9
32.5	87.6	9876.5	275.0	-47.2	-49.9	218.1	35.3	21.8	27.8	326.8	326.8	99.9	99.9	99.9	99.9	99.9
34.4	92.4	10501.3	250.0	-52.9	-49.9	213.7	44.0	24.0	36.9	327.4	327.4	99.9	99.9	99.9	99.9	99.9
37.0	97.4	11172.4	225.0	-58.8	-49.9	208.5	48.7	23.2	42.8	328.5	328.5	99.9	99.9	99.9	99.9	99.9
39.0	103.3	11903.7	200.0	-62.5	-49.9	227.6	43.6	33.7	30.8	333.8	333.8	99.9	99.9	99.9	99.9	99.9
41.8	108.3	12727.2	175.0	-63.1	-49.9	249.0	43.3	40.4	15.5	345.8	345.8	99.9	99.9	99.9	99.9	99.9
45.6	115.8	13690.1	150.0	-58.3	-49.9	261.9	36.7	35.4	5.3	369.7	369.7	99.9	99.9	99.9	99.9	99.9
49.8	123.5	14634.4	125.0	-57.6	-49.9	255.0	36.4	35.1	9.4	390.7	390.7	99.9	99.9	99.9	99.9	99.9
55.8	136.3	16254.0	100.0	-53.6	-49.9	242.2	26.7	21.9	11.5	424.2	424.2	99.9	99.9	99.9	99.9	99.9
62.0	141.3	18765.3	75.0	-59.9	-49.9	150.6	13.4	-6.6	11.7	447.4	447.4	99.9	99.9	99.9	99.9	99.9
70.8	151.5	20607.2	50.0	-57.9	-49.9	243.5	2.4	2.2	1.1	507.2	507.2	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE
 OF POOR QUALITY

STATION NO. 562
NORTH PLATTE, NEB

24 APRIL 1975
515 GMT

141 39. 0

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DFT PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCY	RANGE KM	AZ DG
0.0	14.3	847.0	910.9	10.0	7.3	110.0	4.1	-3.9	1.4	291.7	310.4	7.1	83.0	0.0	0.
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	15.2	948.4	900.0	11.7	7.2	120.6	8.4	-7.2	4.3	294.5	313.6	7.1	74.1	0.2	310.
1.3	17.5	1124.8	875.0	13.8	5.3	127.3	11.9	-9.5	7.2	299.0	316.6	6.4	56.6	0.7	315.
1.9	20.0	1429.0	850.0	13.1	5.2	136.6	11.6	-8.0	8.5	300.7	318.8	6.5	58.6	1.3	307.
2.5	22.2	1679.5	825.0	11.3	4.1	143.0	9.0	-5.4	7.2	301.4	318.7	6.2	61.0	1.7	310.
3.4	25.9	1936.1	800.0	9.7	1.5	143.8	5.3	-3.1	4.2	302.2	317.2	5.3	56.7	2.2	313.
4.2	27.2	2199.3	775.0	8.0	0.2	134.7	2.1	-1.5	1.5	303.1	317.3	5.0	57.6	2.2	314.
5.1	29.9	2469.2	750.0	6.1	-1.5	144.1	2.7	-1.9	-1.9	303.8	316.9	4.6	58.0	2.2	312.
5.9	32.6	2746.2	725.0	4.1	-4.3	5.9	4.1	-0.4	-4.1	304.5	315.6	3.9	54.4	2.2	317.
6.7	35.3	3030.6	700.0	1.8	-8.5	335.7	5.6	2.3	-5.1	304.9	314.7	3.4	54.1	2.1	313.
7.6	37.8	3322.9	675.0	-0.1	-8.7	310.9	8.3	6.4	-5.5	305.9	314.6	2.9	52.4	1.7	216.
8.6	40.5	3624.0	650.0	-2.6	-10.0	293.7	10.7	9.8	-4.3	306.3	314.5	2.7	56.7	1.1	254.
9.6	43.3	3933.8	625.0	-5.3	-10.0	278.2	11.8	11.7	-1.7	306.7	315.2	2.9	69.4	0.4	310.
10.6	46.2	4252.8	600.0	-8.1	-13.1	262.7	16.3	13.9	-3.6	307.0	314.0	2.3	67.2	0.6	54.
11.7	49.3	4582.1	575.0	-10.6	-17.2	263.6	17.1	16.6	-4.0	307.7	313.0	1.7	58.0	1.6	94.
12.7	52.1	4922.8	550.0	-13.0	-20.1	261.1	17.0	16.7	-3.3	308.8	313.2	1.4	55.3	2.7	77.
13.6	55.2	5275.6	525.0	-15.7	-23.8	274.3	15.8	15.7	-1.7	309.6	313.0	1.1	49.9	3.7	74.
14.9	58.4	5643.0	500.0	-16.8	-30.1	259.4	13.9	13.6	2.6	312.6	314.6	0.6	30.4	4.7	96.
16.0	61.6	6024.7	475.0	-19.1	-28.9	241.4	14.4	12.7	6.8	314.4	316.8	0.7	41.3	5.4	77.
17.2	65.2	6427.0	450.0	-22.3	-30.3	228.9	15.8	11.9	10.4	315.3	317.6	0.7	47.6	6.4	70.
18.4	68.4	6845.3	425.0	-24.6	-36.8	222.9	16.4	11.2	12.0	317.5	318.5	0.3	25.1	7.4	80.
20.1	72.0	7282.8	400.0	-26.0	-41.5	224.8	17.4	12.3	12.4	317.5	318.4	0.2	27.9	8.5	74.
21.1	75.9	7741.2	375.0	-32.6	-54.9	230.4	15.4	11.9	9.7	319.3	319.6	0.1	9.1	9.8	71.
22.7	79.7	8231.3	350.0	-36.5	-56.1	231.3	15.4	12.0	9.6	319.4	319.6	0.1	11.0	11.0	64.
24.2	83.7	8731.4	325.0	-41.6	-56.1	234.2	17.2	14.8	8.8	319.4	319.9	99.9	99.9	12.5	67.
26.0	87.8	9268.9	300.0	-46.3	-59.9	238.5	17.3	14.7	5.0	320.0	319.9	99.9	99.9	14.4	66.
28.0	92.3	9840.5	275.0	-51.5	-59.9	238.1	18.5	15.7	9.8	320.6	319.9	99.9	99.9	16.5	65.
30.2	97.0	10455.1	250.0	-54.6	-59.9	253.8	15.8	15.2	6.4	324.9	319.9	99.9	99.9	18.9	65.
32.3	101.8	11121.6	225.0	-59.9	-59.9	246.6	13.7	12.5	5.4	326.7	319.9	99.9	99.9	20.5	64.
34.8	107.3	11837.6	200.0	-59.1	-59.9	234.2	19.5	15.8	11.4	339.2	319.9	99.9	99.9	23.1	63.
37.9	113.0	12690.1	175.0	-59.6	-59.9	246.7	24.6	22.8	9.8	351.7	319.9	99.9	99.9	27.4	63.
41.7	119.3	13657.7	150.0	-57.8	-59.9	249.9	25.6	24.0	8.9	370.5	319.9	99.9	99.9	33.1	64.
46.1	126.3	14812.9	125.0	-55.0	-59.9	245.1	19.2	17.4	8.1	395.4	319.9	99.9	99.9	38.9	65.
51.3	134.3	16232.3	100.0	-56.8	-59.9	232.4	16.6	13.2	10.1	418.1	319.9	99.9	99.9	45.1	64.
57.9	141.0	18043.9	75.0	-60.7	-59.9	240.4	16.6	14.4	8.2	445.6	319.9	99.9	99.9	52.0	64.
67.1	150.0	20590.7	50.0	-56.4	-59.9	176.4	5.8	-0.4	5.8	510.8	319.9	99.9	99.9	56.4	63.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 606
PORTLAND, ME24 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.6	20.0	1020.7	6.1	3.4	180.0	5.7	0.0	5.7	278.2	290.5	4.8	83.0	0.0	3.
0.6	6.3	189.1	1009.0	9.6	-2.6	210.5	11.1	5.6	5.6	283.1	291.6	3.2	42.4	0.3	15.
1.3	8.6	399.6	975.0	10.7	-10.6	208.4	12.9	7.1	11.3	286.2	291.1	1.8	21.2	0.8	25.
2.0	10.8	615.8	950.0	9.9	-10.1	196.1	13.8	3.8	13.3	287.5	292.7	1.9	23.7	1.4	24.
2.7	12.2	836.4	925.0	8.1	-10.7	191.3	14.2	2.8	13.9	287.6	293.2	1.9	26.1	2.0	21.
3.5	15.5	1361.8	900.0	6.5	-9.9	190.0	13.6	2.4	13.4	289.5	294.1	2.0	29.7	2.7	14.
4.4	17.3	1291.9	875.0	4.6	-11.3	185.6	11.8	1.2	11.8	288.8	294.0	1.8	30.4	3.3	16.
5.1	20.3	1527.3	850.0	2.7	-9.2	177.9	9.9	-0.4	9.9	289.3	295.6	2.2	41.0	3.5	14.
5.4	22.8	1764.0	825.0	0.7	-9.3	180.4	8.7	0.1	8.7	289.6	295.1	2.3	46.8	4.2	13.
6.7	25.3	2014.3	800.0	-1.2	-14.9	187.5	8.8	1.2	8.8	290.1	294.5	1.5	34.5	4.6	12.
7.6	27.9	2266.5	775.0	-2.9	-24.7	192.3	10.5	2.2	10.3	290.8	292.8	0.7	16.6	5.1	12.
8.5	30.6	2526.0	750.0	-3.5	-26.3	208.4	11.6	5.5	10.2	292.9	294.7	0.6	15.0	5.7	12.
9.4	33.2	2793.4	725.0	-4.4	-27.5	225.2	12.3	8.7	8.7	294.7	296.4	0.5	14.5	6.4	15.
10.4	35.9	3069.0	700.0	-5.8	-29.5	235.5	12.4	10.2	7.0	296.1	297.8	0.5	14.5	6.9	14.
11.3	38.4	3353.2	675.0	-7.5	-21.2	235.4	11.6	10.0	5.9	297.4	300.6	1.0	32.3	7.5	24.
12.3	41.4	3645.8	650.0	-9.8	-23.0	239.0	9.4	8.1	4.9	298.0	300.9	0.5	33.0	8.0	25.
13.1	44.5	3946.9	625.0	-12.7	-19.3	246.5	8.4	7.7	3.4	298.1	302.1	1.3	58.0	8.5	27.
14.4	47.5	4259.0	600.0	-11.5	-11.8	273.3	11.5	11.5	-0.7	303.1	315.7	2.6	97.8	8.8	30.
15.4	50.5	4584.5	575.0	-13.5	-13.8	276.9	13.6	13.5	-1.2	304.4	311.3	2.3	97.6	9.1	34.
16.5	53.6	4921.4	550.0	-15.8	-16.2	276.2	14.5	14.4	-1.6	305.5	311.4	2.0	97.2	9.6	33.
17.4	56.7	5270.8	525.0	-18.1	-18.5	275.5	17.3	17.2	-1.7	306.6	312.0	1.7	96.9	10.1	44.
18.6	60.0	5633.6	500.0	-20.8	-21.4	275.2	20.2	20.1	-1.8	307.9	312.1	1.4	94.2	10.7	47.
19.0	63.4	6011.1	475.0	-23.6	-24.4	275.8	21.9	21.9	-1.1	308.9	312.4	1.1	92.5	12.2	54.
21.2	66.7	6404.1	450.0	-26.3	-27.5	270.8	22.3	22.3	-0.3	310.2	313.1	0.9	89.7	13.4	56.
22.5	70.3	6815.5	425.0	-29.0	-30.5	265.5	23.6	23.6	0.2	311.9	314.2	0.7	86.2	15.1	62.
23.0	74.3	7246.1	400.0	-32.3	-34.0	276.9	27.3	27.1	-3.3	313.0	314.8	0.5	84.2	17.7	66.
25.4	78.0	7695.7	375.0	-34.3	-35.8	294.3	26.5	24.1	-10.9	316.2	317.3	0.5	83.6	19.0	77.
24.8	81.8	8179.3	350.0	-37.8	-39.7	303.1	24.7	20.7	-13.5	317.7	318.9	0.3	82.3	20.5	75.
28.4	86.0	8685.5	325.0	-41.8	-39.9	294.3	27.5	25.1	-11.3	319.1	319.9	99.9	99.9	22.4	80.
30.5	90.5	9224.0	300.0	-45.9	-39.9	285.9	30.7	29.6	-8.4	320.7	319.9	99.9	99.9	25.4	84.
32.4	95.3	9797.0	275.0	-50.9	-39.9	276.7	34.5	34.1	-5.2	321.5	319.9	99.9	99.9	28.5	88.
34.4	100.0	10411.5	250.0	-55.1	-39.9	266.2	39.0	37.8	-9.6	324.2	319.9	99.9	99.9	33.4	92.
37.1	105.2	11075.0	225.0	-61.3	-39.9	285.7	44.0	42.4	-11.9	324.6	319.9	99.9	99.9	38.7	91.
39.5	110.8	11797.4	200.0	-65.0	-39.9	287.0	53.8	51.5	-15.7	329.9	319.9	99.9	99.9	46.4	91.
42.0	116.8	12625.5	175.0	-60.9	-39.9	302.9	21.9	18.4	-11.9	349.5	319.9	99.9	99.9	51.2	95.
45.4	123.4	13592.5	150.0	-57.9	-39.9	299.0	28.1	21.1	-11.7	370.4	319.9	99.9	99.9	56.7	97.
49.5	131.0	14766.2	125.0	-56.4	-39.9	296.2	26.0	23.3	-11.5	392.9	319.9	99.9	99.9	61.8	99.
55.3	138.8	16165.0	100.0	-56.9	-39.9	307.0	14.2	14.3	-11.2	417.9	319.9	99.9	99.9	69.2	132.
63.1	146.7	17983.8	75.0	-57.6	-39.9	292.5	16.9	15.7	-6.5	452.1	319.9	99.9	99.9	76.2	103.
73.8	155.3	20505.8	50.0	-56.0	-39.9	97.5	2.8	-2.8	0.4	511.6	319.9	99.9	99.9	81.4	135.
99.9	99.9	99.9	25.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

° PT SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° RV TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 °° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 637
FLINT, MICH

26 APRIL 1975
615 GMT

TIME MIN	CNCT	WEIGHT GPM	PRES MB	TEMP DG C	ELEV DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/RC	RM PCT	RANGE KM	AZ DG
0.0	6.3	236.0	979.2	14.2	12.2	290.0	3.1	2.9	-1.1	290.3	314.1	9.2	88.0	0.0	0
00.9	96.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.4	272.3	975.0	13.3	11.6	293.4	6.0	5.5	-2.4	269.7	312.7	8.9	89.1	0.1	4.0
0.9	6.7	490.6	950.0	11.3	9.6	293.9	8.5	7.8	-3.4	269.7	310.7	8.1	90.4	0.4	11.0
1.7	10.6	713.3	925.0	10.1	8.7	273.8	7.2	7.1	-0.5	260.6	310.8	7.7	91.4	0.7	11.0
2.6	12.7	641.6	900.0	10.1	8.8	245.5	9.4	8.5	3.9	292.9	310.0	8.0	92.0	1.1	9.0
3.4	14.9	1176.4	875.0	10.1	8.8	246.8	13.0	11.9	9.1	295.4	317.2	8.2	91.7	1.6	8.0
4.4	16.9	1419.1	750.0	9.4	8.1	254.0	15.6	15.0	4.3	297.1	319.7	8.0	91.5	2.4	4.0
5.2	15.1	1655.5	75.0	7.9	6.3	250.1	17.1	16.6	4.1	297.9	317.7	7.3	89.0	3.2	8.0
6.0	21.3	1619.3	600.0	7.0	5.5	259.1	17.1	16.7	3.5	299.6	319.1	7.1	90.2	4.1	7.0
6.9	23.3	2180.2	775.0	5.3	3.9	262.5	16.8	16.7	1.9	300.3	318.4	6.6	90.9	4.9	7.0
7.8	25.3	2457.8	750.0	3.4	2.1	263.9	17.5	17.4	1.9	301.0	317.6	6.0	91.0	5.8	8.0
8.7	27.9	2722.4	725.0	1.8	0.5	263.7	17.0	16.9	1.9	302.2	317.6	5.5	90.3	6.8	4.0
9.5	30.3	3095.0	700.0	-0.3	-1.5	265.9	17.3	17.3	1.2	302.6	316.7	4.9	91.0	7.9	5.0
11.0	32.8	3295.6	675.0	-1.7	-2.9	272.2	16.9	16.9	-0.6	304.3	317.4	4.6	91.4	9.1	4.0
12.2	35.3	3594.5	650.0	-4.9	-6.9	273.8	16.8	16.8	-1.1	303.9	314.1	3.5	86.5	10.2	4.0
13.4	37.8	3902.1	625.0	-6.9	-10.7	278.7	16.9	16.7	-2.5	304.9	312.9	2.7	74.7	11.5	8.0
14.6	40.3	4250.6	600.0	-7.5	-18.1	277.9	16.2	16.0	-2.2	307.6	312.4	1.5	42.2	12.6	8.0
16.0	42.9	4550.9	575.0	-9.3	-18.3	271.4	12.8	12.8	-0.3	309.3	314.2	1.6	47.7	13.9	8.0
17.4	45.6	4853.0	550.0	-12.0	-18.9	276.0	13.2	13.1	-1.4	310.0	314.8	1.6	56.2	14.9	8.0
18.4	48.8	5266.9	525.0	-15.3	-21.0	277.6	14.4	14.3	-1.9	310.1	314.4	1.4	61.8	15.6	8.0
19.8	51.6	5614.7	500.0	-17.2	-22.0	281.6	13.9	13.6	-2.8	312.2	316.3	1.3	65.8	16.9	8.0
20.9	54.6	5957.1	475.0	-20.2	-25.1	287.9	15.8	15.0	-4.9	313.0	316.4	1.0	64.9	17.4	8.0
22.2	57.7	6395.7	450.0	-22.6	-27.5	273.9	19.1	19.1	-1.3	314.9	317.8	0.9	64.2	19.1	8.0
23.6	61.0	6812.7	425.0	-25.7	-29.8	255.6	21.6	20.9	-5.4	316.1	316.6	0.7	68.1	20.3	8.0
25.0	64.4	7250.5	400.0	-28.4	-32.1	256.1	26.9	26.1	6.5	318.1	320.2	0.6	64.8	22.7	8.0
26.4	67.9	7709.7	375.0	-31.8	-36.7	245.9	27.1	24.7	11.1	319.4	320.9	0.4	61.4	25.0	8.0
28.0	71.3	8193.0	350.0	-35.8	-40.5	241.4	29.2	25.6	15.0	320.5	321.6	0.3	61.6	27.5	8.0
29.3	74.4	8703.4	325.0	-40.5	-49.9	247.5	35.5	37.8	13.6	320.8	320.8	99.9	99.9	30.4	9.0
31.6	76.5	9233.5	300.0	-45.1	-49.9	255.9	41.0	39.8	10.0	321.8	320.9	99.9	99.9	34.2	8.0
33.6	77.7	9816.7	275.0	-49.5	-49.9	255.8	47.6	42.2	11.6	323.6	323.6	99.9	99.9	40.0	8.0
35.9	86.2	12435.6	250.0	-55.1	-49.9	252.6	54.4	51.9	16.3	324.2	324.2	99.9	99.9	47.0	8.0
38.3	93.2	11181.2	225.0	-59.5	-49.9	259.8	63.2	62.2	11.2	327.3	327.3	99.9	99.9	55.0	8.0
40.4	94.5	11831.3	200.0	-64.0	-49.9	267.1	69.7	69.8	3.5	331.4	331.4	99.9	99.9	62.8	8.0
42.8	104.3	12657.6	175.0	-59.7	-49.9	281.2	50.5	49.5	-0.9	351.4	351.4	99.9	99.9	72.3	8.0
46.1	110.8	13620.1	150.0	-56.7	-49.9	279.6	29.1	27.7	-4.7	372.4	372.4	99.9	99.9	78.4	8.0
50.6	114.3	14777.6	125.0	-54.9	-49.9	267.8	35.3	35.3	1.3	395.7	395.7	99.9	99.9	86.0	8.0
54.1	127.0	16195.6	100.0	-58.6	-49.9	271.1	24.1	24.1	-0.5	414.5	414.5	99.9	99.9	95.3	8.0
62.5	137.3	17589.6	75.0	-63.1	-49.9	264.9	14.3	13.8	-2.7	440.6	440.6	99.9	99.9	101.0	8.0
72.0	147.5	20518.3	50.0	-58.5	-49.9	99.9	99.9	99.9	99.9	505.6	505.6	99.9	99.9	99.9	99.9
90.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TIME MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 645
GREEN BAY, WIS

20 APRIL 1975
515 GMT

TIME MIN	CNTCT	WIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CUMP M/SEC	V CL4P M/SEC	POT 7 DG K	E POT 7 DG K	MR MTO GM/KG	RM PCT	RANGE KM	A7 CG
00	002	213.0	682.4	10.0	6.0	340.0	4.1	1.4	-3.9	285.4	300.9	6.0	74.0	0.0	0
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	0.9	272.9	975.0	9.6	5.9	4.8	8.8	-0.7	-8.0	285.6	301.2	6.0	72.6	0.1	100
1.1	11.2	488.1	950.0	7.7	4.7	3.2	10.1	-0.6	-10.1	285.7	300.5	5.6	81.3	0.5	111
2.1	13.9	707.6	925.0	6.1	4.8	342.1	7.6	2.3	-7.3	286.3	301.2	5.2	81.3	1.0	112
2.9	16.3	932.4	900.0	5.7	5.1	310.9	5.3	4.0	-3.5	286.2	304.3	6.1	95.6	1.3	113
3.9	19.0	1167.0	875.0	4.5	3.9	299.2	6.5	5.6	-3.2	289.2	304.6	5.8	95.4	1.5	114
4.9	21.6	1397.4	857.0	4.2	2.9	320.7	6.3	4.0	-4.9	291.2	306.2	5.6	91.8	1.5	115
5.9	24.2	1643.2	825.0	6.3	-0.3	260.8	5.2	5.1	-1.3	295.8	309.4	4.5	64.6	2.2	116
6.7	26.9	1895.4	803.0	4.9	0.1	270.9	7.9	7.9	-0.1	297.0	310.3	4.6	70.7	2.3	117
7.7	29.6	2114.3	775.0	4.3	0.0	287.4	11.1	10.6	-3.3	299.0	312.9	5.0	73.9	2.7	118
8.7	32.4	2421.1	750.0	3.7	-10.0	276.2	12.4	12.6	-1.6	300.9	309.1	2.4	36.9	3.4	119
9.7	35.3	2695.6	725.0	2.3	-15.0	275.7	13.4	12.4	-1.2	302.2	307.1	1.6	26.4	4.1	120
10.9	38.1	2977.8	700.0	0.0	-13.4	276.4	13.4	13.3	-2.2	302.7	306.5	1.9	25.6	4.5	121
11.9	41.7	3257.4	675.0	-2.7	-13.5	276.7	13.6	13.6	-1.5	302.9	308.8	2.0	42.9	5.7	122
13.1	44.1	3565.8	650.0	-4.6	-19.4	275.4	14.2	14.1	-1.3	303.9	307.7	1.2	29.7	6.4	123
14.3	47.3	3873.4	625.0	-6.9	-23.3	276.3	16.0	15.9	-1.7	304.7	307.7	0.9	25.9	7.4	124
15.4	50.4	4193.8	600.0	-9.0	-25.5	275.7	15.9	15.8	-1.6	305.7	307.1	0.4	13.3	8.7	125
16.7	53.6	4519.2	575.0	-10.6	-26.5	276.7	17.0	16.7	-3.2	307.6	307.7	0.0	1.0	9.3	126
18.0	56.7	4833.7	550.0	-12.8	-28.4	276.6	18.0	17.1	-5.4	308.6	309.0	0.0	1.4	11.3	127
19.3	60.3	5212.2	525.0	-16.1	-31.9	276.1	18.3	17.4	-5.7	309.6	307.5	0.1	7.1	12.9	128
20.6	63.9	5577.4	500.0	-16.3	-34.7	276.1	18.2	17.4	-5.4	309.5	310.0	0.1	4.2	13.7	129
22.0	67.3	5956.2	475.0	-22.8	-41.7	276.3	19.8	19.7	-2.5	309.7	310.4	0.2	15.9	15.7	130
23.5	70.9	6345.8	450.0	-24.2	-46.1	277.4	19.8	19.7	-2.5	310.3	310.8	0.1	13.2	17.4	131
25.0	74.7	6760.4	425.0	-25.9	-46.4	276.2	21.3	21.2	-1.6	310.7	311.2	0.1	17.1	18.1	132
26.5	78.4	7183.7	400.0	-32.8	-51.4	276.7	24.9	24.8	-2.9	312.2	312.5	0.1	13.2	21.1	133
28.2	82.7	7640.8	375.0	-36.3	-54.5	276.0	26.1	26.0	-1.9	313.5	313.7	0.1	13.2	23.4	134
30.1	87.2	8115.9	350.0	-39.5	-59.9	275.6	28.3	28.1	-2.7	315.5	309.9	99.9	99.9	26.9	135
32.2	91.6	8616.9	325.0	-42.6	-59.9	273.5	28.5	28.5	-1.7	317.9	309.9	99.9	99.9	30.3	136
34.2	96.2	9136.9	300.0	-45.7	-59.9	270.9	31.2	31.1	-0.5	321.0	309.9	99.9	99.9	32.9	137
36.4	101.3	9732.5	275.0	-49.1	-59.9	269.1	33.7	33.7	0.6	324.1	309.9	99.9	99.9	37.9	138
38.6	106.3	10351.5	250.0	-54.1	-59.9	268.5	32.2	31.7	5.3	325.7	309.9	99.9	99.9	42.5	139
41.1	111.3	11020.2	225.0	-59.0	-59.9	256.4	35.6	34.3	9.5	328.1	309.9	99.9	99.9	47.2	140
44.0	117.9	11757.3	200.0	-59.2	-59.9	247.2	31.4	40.3	9.2	339.1	309.9	99.9	99.9	53.5	141
47.1	124.3	12595.3	175.0	-59.7	-59.9	246.8	41.4	41.2	3.8	351.4	309.9	99.9	99.9	61.1	142
50.6	130.8	13261.8	150.0	-56.5	-59.9	276.9	37.4	37.4	-0.6	369.4	309.9	99.9	99.9	69.1	143
54.4	137.8	14725.8	125.0	-53.9	-59.9	267.9	25.5	25.4	1.0	397.4	309.9	99.9	99.9	76.4	144
58.9	144.5	16159.3	100.0	-54.4	-59.9	243.5	18.2	18.1	2.0	422.3	309.9	99.9	99.9	84.1	145
63.3	151.7	17978.7	75.0	-50.8	-59.9	253.9	13.8	13.2	3.8	447.6	309.9	99.9	99.9	92.6	146
74.2	159.0	23534.9	50.0	-57.0	-59.9	237.1	5.0	4.2	2.7	507.1	309.9	99.9	99.9	96.0	147
88.9	166.3	24974.0	25.0	-52.6	-59.9	99.9	99.9	99.9	99.9	634.2	309.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 D G

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 654
MURON, S D

26 APRIL 1975
515 GMT

TIME MIN	CATY	WEIGHT GPH	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT V DEG K	E POT V DEG K	MX RTO CM/SEC	RN PCT	RANGE KM	AZ DEG
0.4	9.4	302.0	944.4	8.7	5.8	69.0	4.1	-3.6	-2.9	285.8	301.4	6.8	81.0	0.0	0.0
9.3	50.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	45.5	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	10.5	510.8	950.0	8.2	6.9	68.0	7.2	-6.6	-2.9	286.4	303.5	6.6	91.5	0.2	252.0
1.4	12.9	730.6	925.0	6.4	6.0	68.2	6.7	-6.3	-2.5	286.6	303.1	6.4	97.3	0.6	250.0
2.2	15.3	962.2	900.0	6.7	5.9	101.2	1.5	-1.5	0.3	289.3	306.3	6.5	94.3	0.8	250.0
3.0	17.7	1193.1	875.0	6.7	6.4	150.9	1.4	-0.6	1.3	289.4	305.3	6.0	97.8	0.6	254.0
3.9	20.3	1430.3	850.0	5.7	-30.6	201.2	3.4	1.2	3.2	296.3	297.6	6.4	4.4	0.7	263.0
4.7	22.7	1677.5	825.0	6.7	-10.9	232.0	4.1	3.2	2.5	298.1	304.3	2.0	23.8	0.6	276.0
5.6	25.7	1931.4	800.0	7.4	-6.2	241.7	4.9	4.3	2.3	298.4	308.0	3.0	37.5	0.4	296.0
6.5	27.8	2191.4	775.0	5.3	-5.4	254.0	3.9	4.8	1.0	299.9	309.4	3.3	45.8	0.3	329.0
7.4	30.6	2459.8	750.0	3.5	-11.8	277.3	4.8	4.7	-0.6	300.7	304.8	2.1	31.5	0.3	5.0
8.4	33.3	2732.9	725.0	1.0	-16.6	284.6	7.8	7.6	-2.0	301.6	306.0	1.4	24.1	0.4	60.0
9.4	35.9	3010.7	700.0	-0.4	-16.4	284.0	9.5	9.2	-2.3	302.2	306.9	1.5	28.6	0.9	45.0
10.3	38.8	3304.2	675.0	-2.6	-17.7	278.6	9.9	9.0	-1.5	302.7	307.1	1.4	30.7	1.5	92.0
11.4	41.5	3602.2	650.0	-4.8	-22.1	272.2	10.8	10.8	-0.4	303.6	306.8	1.0	24.4	2.1	33.0
12.5	44.6	3879.3	625.0	-7.4	-18.3	268.0	10.9	10.9	0.2	304.1	305.4	1.4	39.0	2.9	92.0
13.5	47.5	4225.9	600.0	-9.4	-40.5	267.7	11.3	11.3	0.5	305.2	305.9	0.2	6.5	3.5	91.0
14.7	50.6	4553.5	575.0	-11.5	-38.4	270.4	13.2	13.2	-0.1	306.5	307.3	0.2	8.0	4.4	91.0
15.8	53.4	4852.2	550.0	-14.2	-38.0	271.9	14.8	14.8	-0.5	307.2	308.1	0.3	11.2	5.3	91.0
16.9	56.6	5243.4	525.0	-16.8	-41.0	270.9	15.4	15.4	-0.2	308.2	308.6	0.2	10.2	6.3	91.0
18.3	60.9	5607.1	500.0	-20.2	-39.0	269.6	16.0	16.0	0.1	308.3	309.2	0.3	16.8	7.6	91.0
19.4	63.9	5985.3	475.0	-22.6	-32.4	262.7	19.9	19.7	2.5	310.0	311.7	0.5	40.1	9.0	90.0
21.0	68.8	6780.0	450.0	-25.4	-34.7	261.8	20.9	20.7	3.0	311.3	313.0	0.4	41.7	10.7	92.0
22.6	70.3	6791.9	425.0	-28.9	-38.4	266.0	19.4	19.3	1.1	311.9	313.6	0.3	39.2	12.6	84.0
24.0	73.9	7222.7	400.0	-31.9	-40.3	267.6	18.9	18.9	0.8	313.6	315.2	0.2	33.3	14.1	86.0
25.7	77.7	7675.6	375.0	-35.4	-45.9	259.3	19.6	19.3	3.6	314.6	315.2	0.2	99.9	18.3	86.0
27.4	81.5	8182.3	350.0	-39.0	-49.9	247.6	23.0	21.3	7.8	316.1	316.9	0.9	99.9	20.8	93.0
29.3	85.6	8655.6	325.0	-42.9	-59.9	241.5	24.3	21.4	11.6	317.6	317.6	0.9	99.9	23.9	91.0
31.5	90.0	9191.2	300.0	-47.2	-67.2	245.9	24.2	22.1	9.9	318.9	318.9	0.9	99.9	27.4	78.0
33.4	94.7	9761.2	275.0	-51.8	-69.9	243.4	16.9	24.1	12.1	320.2	320.2	0.9	99.9	30.9	77.0
36.2	99.4	10372.4	250.0	-56.7	-67.2	247.3	26.5	24.4	10.2	321.8	321.8	0.9	99.9	35.1	76.0
38.5	104.3	11036.5	22.0	-60.0	-69.9	252.8	26.2	25.0	7.7	326.6	326.6	0.9	99.9	39.5	74.0
41.0	110.0	11775.6	2.0	-59.2	-69.9	252.1	25.0	22.0	7.3	339.1	339.1	0.9	99.9	44.1	75.0
44.4	115.6	12619.2	1.0	-55.6	-69.9	253.1	24.7	23.7	7.2	350.2	350.2	0.9	99.9	48.4	75.0
48.8	122.0	13601.7	150.0	-55.9	-69.9	250.5	22.5	21.2	7.5	373.8	373.8	0.9	99.9	55.4	74.0
53.3	129.3	14761.5	125.0	-55.6	-69.9	244.5	22.4	20.3	9.7	38.0	38.0	0.9	99.9	62.3	73.0
58.6	134.6	16185.6	100.0	-55.8	-69.9	245.2	23.4	21.7	10.0	420.0	420.0	0.9	99.9	72.7	73.0
65.9	144.7	18031.9	75.0	-55.7	-69.9	248.2	27.2	25.3	10.1	450.1	450.1	0.9	99.9	79.3	73.0
76.2	154.0	20616.1	50.0	-54.4	-69.9	123.3	3.2	-2.7	1.8	515.2	515.2	0.9	99.9	80.2	71.0
91.4	163.5	25093.2	24.0	-52.1	-69.9	107.9	7.5	-7.1	3.3	635.1	635.1	0.9	99.9		

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 655
ST CLOUD, MINN24 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT G/M	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KN	AZ DG
0.0	5.5	316.0	974.9	7.9	6.5	40.0	3.1	-2.0	-2.4	283.9	300.0	6.3	91.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.8	6.6	528.8	950.0	5.3	5.1	31.7	6.8	-3.5	-5.9	283.3	298.2	5.8	98.7	0.3	21.9
1.6	10.6	746.7	925.0	4.5	4.2	34.9	4.4	-2.5	-3.6	284.7	259.2	5.6	97.9	0.5	21.3
2.5	12.7	969.7	900.0	3.2	2.8	55.0	5.4	-4.4	-3.1	285.5	249.1	5.2	97.5	0.3	21.7
3.3	14.9	1157.7	875.0	3.0	2.5	61.7	5.9	-5.2	-2.8	287.6	301.4	5.3	96.6	1.0	22.3
4.2	17.0	1432.7	850.0	2.1	1.6	42.0	5.9	-3.9	-4.4	289.0	302.5	5.1	96.4	1.4	22.6
5.0	19.3	1673.9	825.0	1.7	-3.4	334.6	4.1	1.8	-3.7	290.9	300.8	3.6	68.9	1.6	22.2
6.0	21.5	1721.8	800.0	0.4	-14.6	315.6	5.6	3.9	-4.0	291.9	298.0	2.2	42.1	1.6	21.1
6.8	23.8	2175.8	775.0	0.9	-32.5	316.9	5.5	3.7	-4.0	294.8	295.4	0.3	6.1	1.7	20.2
7.9	26.1	2440.0	750.0	2.5	-32.1	307.2	5.9	4.7	-3.6	299.3	300.5	0.3	5.6	1.9	12.2
8.9	28.4	2713.0	725.0	0.6	-33.1	300.2	6.4	5.5	-3.3	300.2	301.2	0.3	5.8	2.0	12.3
9.9	31.4	2993.3	700.0	-1.7	-24.1	253.3	7.7	7.0	-3.0	300.7	303.1	0.8	16.0	2.2	17.1
10.9	33.7	3251.7	675.0	-3.0	-29.8	291.1	9.2	8.5	-3.3	302.3	303.8	0.5	10.5	2.5	10.3
12.0	36.3	3575.5	650.0	-5.0	-22.7	288.3	10.6	10.0	-3.3	303.4	306.4	0.9	23.4	3.0	15.2
13.0	39.0	3946.2	625.0	-7.6	-22.4	282.3	10.6	10.4	-2.3	303.6	307.5	1.0	29.2	3.5	14.5
14.1	41.6	4203.0	600.0	-9.4	-26.8	278.4	11.6	11.5	-1.8	305.3	307.5	0.7	22.7	4.0	11.7
15.3	44.5	4510.1	575.0	-12.0	-32.2	282.1	13.8	13.5	-2.9	306.0	307.4	0.4	18.6	4.4	11.1
16.4	47.5	4859.6	550.0	-14.4	-36.4	276.3	14.8	14.8	-1.6	307.0	308.0	0.3	13.4	5.6	12.6
17.6	50.5	5219.2	525.0	-17.5	-40.4	999.9	99.9	99.9	99.9	307.4	308.1	0.2	11.4	999.9	99.9
18.9	53.6	5582.4	500.0	-20.4	-44.8	999.9	99.9	99.9	99.9	308.2	308.7	0.1	9.1	999.9	99.9
99.9	99.9	99.9	475.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	450.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	425.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	400.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	375.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 5 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 662
RAPID-CITY, S D
26 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	WIND GM/KG	RM PCT	RANGE FM	AZ DG
0.0	15.4	966.0	899.8	7.8	6.7	150.0	3.6	-1.8	3.1	290.5	308.6	6.9	93.0	9.0	2.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.8	17.6	1196.8	875.0	6.6	6.1	152.5	5.1	-2.3	4.5	291.6	309.5	6.8	96.1	0.2	33.1
1.8	20.2	1434.8	850.0	5.7	5.3	182.2	6.8	0.3	6.8	293.0	312.6	6.6	96.8	0.6	33.9
2.7	22.6	1679.7	825.0	5.5	3.8	216.1	9.4	5.6	7.6	295.2	311.7	6.1	99.0	0.5	35.7
3.4	25.2	1931.0	800.0	3.9	2.7	235.1	8.8	7.2	5.0	296.0	312.0	5.8	92.2	1.2	12.
4.5	27.6	2185.9	775.0	2.1	1.4	252.5	12.0	11.5	3.6	296.8	311.8	5.5	95.1	1.7	30.
5.5	30.3	2453.7	750.0	2.2	-5.1	245.6	15.7	14.3	6.5	299.5	309.5	3.5	58.4	2.4	48.
5.3	33.1	2727.1	725.0	1.1	-7.4	235.5	18.4	15.2	10.4	301.0	309.8	3.0	52.9	3.2	49.
7.1	35.7	3082.6	700.0	-0.8	-8.9	233.9	20.1	16.2	11.8	301.9	310.1	2.8	54.3	4.1	49.
7.9	38.4	3298.5	675.0	-2.2	-12.6	233.6	20.1	16.2	11.9	303.4	309.9	2.2	44.7	5.1	50.
8.4	41.2	3596.9	650.0	-5.1	-12.1	228.8	18.0	14.3	10.9	303.5	310.4	2.3	57.6	6.2	51.
10.0	44.1	3903.8	625.0	-7.7	-10.4	228.9	15.3	11.5	10.1	304.0	312.2	2.8	80.9	7.3	51.
11.3	47.1	4220.3	600.0	-9.9	-14.9	226.8	15.2	11.1	10.4	304.9	311.0	2.0	66.9	8.4	50.
12.4	50.1	4547.7	575.0	-11.8	-16.6	220.7	14.0	9.1	10.6	306.4	311.9	1.8	67.3	9.5	50.
13.6	53.1	4866.1	550.0	-14.7	-19.4	218.2	12.0	7.4	9.4	306.8	311.4	1.5	67.3	10.4	47.
14.7	56.1	5236.8	525.0	-17.3	-18.5	223.0	14.2	9.7	10.4	307.7	313.0	1.7	90.9	11.2	48.
16.1	59.5	5600.5	500.0	-20.3	-22.0	224.0	16.9	11.7	12.1	308.4	312.5	1.3	85.7	12.5	48.
17.5	63.3	5978.4	475.0	-23.4	-25.6	227.6	19.4	14.3	13.1	309.1	312.2	1.0	82.3	13.9	47.
18.6	66.2	6371.9	450.0	-26.3	-29.3	229.1	19.2	14.5	12.6	310.2	312.6	0.7	75.9	15.4	47.
19.0	69.3	6782.2	425.0	-29.9	-33.6	229.3	19.2	14.3	12.7	310.7	312.4	0.5	69.8	16.9	46.
21.3	73.4	7211.1	400.0	-33.6	-37.6	231.9	21.0	16.5	12.9	311.3	312.5	0.4	67.2	18.5	46.
22.7	77.4	7660.0	375.0	-37.8	-41.9	229.0	21.1	15.9	13.8	311.5	312.4	0.3	65.1	20.3	48.
24.4	81.3	8131.1	350.0	-42.0	-45.0	233.0	19.3	15.4	11.6	312.0	99.9	99.9	99.9	22.1	48.
26.1	85.6	8628.2	325.0	-46.4	-49.9	236.4	18.3	15.3	10.1	312.8	99.9	99.9	99.9	24.1	48.
28.2	89.8	9155.9	300.0	-49.8	-53.9	241.4	23.7	20.8	11.3	315.2	99.9	99.9	99.9	26.8	50.
30.3	94.8	9720.1	275.0	-54.0	-58.0	242.8	28.2	25.1	12.9	317.1	99.9	99.9	99.9	30.0	51.
32.4	99.6	10330.4	250.0	-58.8	-62.8	240.7	26.7	23.3	13.0	324.7	99.9	99.9	99.9	33.5	52.
34.8	104.8	10959.1	225.0	-67.8	-71.8	223.9	16.7	11.6	12.1	329.9	99.9	99.9	99.9	36.7	53.
37.4	110.4	11737.7	200.0	-61.0	-65.0	229.2	23.8	18.0	15.5	336.2	99.9	99.9	99.9	39.6	51.
40.5	116.5	12573.3	175.0	-59.3	-63.3	247.5	26.7	24.7	10.2	352.0	99.9	99.9	99.9	44.5	53.
44.2	123.3	13541.4	150.0	-58.1	-62.1	256.3	23.4	22.7	5.5	369.9	99.9	99.9	99.9	50.0	55.
49.7	130.5	14656.8	125.0	-55.2	-59.2	253.7	15.6	15.0	4.4	395.1	99.9	99.9	99.9	55.7	57.
53.8	138.0	16125.1	100.0	-53.4	-57.4	253.8	18.4	14.9	10.9	424.6	99.9	99.9	99.9	60.8	57.
60.2	145.3	17968.1	75.0	-56.3	-60.3	216.5	16.1	9.6	13.0	455.0	99.9	99.9	99.9	66.7	57.
69.1	153.3	20539.8	50.0	-55.7	-59.7	199.9	4.9	1.7	4.6	512.3	99.9	99.9	99.9	72.2	57.
83.7	181.0	24589.9	25.0	-52.7	-56.7	131.2	1.4	-1.0	0.9	633.0	99.9	99.9	99.9	73.5	57.

* BY SPOLED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEVE MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

24 APRIL 1975
526 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP CG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.0	180.0	998.0	20.3	14.7	190.0	5.2	0.9	5.1	295.0	322.8	10.6	70.0	0.0	0.
02.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
06.6	8.0	311.1	975.0	18.8	13.8	204.7	17.9	7.5	16.3	295.5	322.5	10.3	72.7	0.4	18.
1.4	10.1	604.2	950.0	17.7	12.7	204.6	19.2	8.0	17.4	290.4	322.4	9.8	72.8	1.2	23.
2.3	12.2	812.2	925.0	16.5	8.8	204.3	21.8	9.0	19.9	297.2	318.1	7.7	60.5	2.3	23.
3.1	14.5	1025.0	930.0	14.2	12.7	209.2	19.6	9.6	17.1	297.6	325.1	10.4	90.7	3.4	24.
4.0	16.5	1303.0	875.0	12.8	12.5	219.6	18.4	11.7	14.2	298.5	326.4	10.5	98.0	4.3	27.
4.9	18.9	1546.5	850.0	11.3	11.2	222.2	20.7	11.9	15.3	299.3	325.9	9.9	99.7	5.4	28.
5.8	21.1	1756.3	825.0	10.9	10.1	222.3	15.5	10.4	11.5	301.3	327.2	9.5	95.6	6.4	32.
6.9	23.5	2053.5	800.0	10.3	4.5	223.1	14.0	9.6	10.2	303.0	321.5	6.6	67.2	7.3	33.
7.9	25.8	2317.2	775.0	8.3	5.3	227.0	14.6	10.7	10.0	304.7	323.8	7.2	81.5	8.1	34.
8.9	28.2	2587.8	750.0	6.6	4.8	232.1	15.6	12.5	9.7	306.7	324.9	7.2	88.1	9.0	35.
9.9	30.8	2865.6	725.0	4.4	3.3	232.2	17.2	13.6	10.5	305.1	324.1	6.7	92.4	10.0	37.
10.9	33.4	3151.6	700.0	4.3	-10.8	240.4	16.9	14.7	8.3	307.5	314.8	2.4	32.4	10.9	
12.0	35.9	3437.1	675.0	3.6	-10.0	256.5	18.5	18.0	4.3	310.1	318.1	2.7	36.3	12.0	4..
13.1	38.7	3752.6	650.0	1.7	-3.8	265.1	19.1	19.1	0.3	311.5	324.6	4.4	66.5	13.0	4..
14.5	41.3	4067.9	625.0	-0.6	-5.6	271.7	17.9	17.9	-0.5	312.3	324.4	4.1	69.0	14.0	5..
15.8	44.2	4393.2	600.0	-2.9	-9.0	262.0	17.0	16.8	2.4	313.2	323.0	3.2	62.6	15.2	53.
17.3	47.1	4729.2	575.0	-4.7	-19.2	266.7	16.1	16.1	0.9	314.6	319.3	1.5	31.2	16.4	55.
18.5	50.2	5077.1	550.0	-7.8	-20.7	275.0	19.2	19.1	-1.7	315.0	319.3	1.3	34.3	17.5	58.
19.9	53.1	5436.8	525.0	-11.2	-20.7	284.2	18.4	17.8	-4.5	315.1	319.6	1.4	45.0	19.4	61.
21.2	56.1	5804.8	500.0	-14.9	-21.5	281.6	19.3	18.9	-3.9	315.0	319.4	1.4	56.6	19.8	64.
22.5	59.6	6184.5	475.0	-17.6	-41.9	280.1	19.4	19.1	-3.4	315.2	316.9	0.2	9.8	21.1	67.
23.7	63.0	6597.5	450.0	-20.2	-43.7	281.3	17.8	17.5	-3.5	317.9	319.5	0.2	10.0	22.2	62.
25.3	66.4	7019.6	425.0	-23.2	-45.9	279.7	20.4	20.1	-3.4	319.2	319.8	0.1	10.3	23.7	71.
26.9	70.1	7461.2	400.0	-24.9	-47.1	278.0	23.0	22.8	-3.2	322.6	323.1	0.1	10.5	25.9	73.
28.7	73.8	7927.8	375.0	-27.9	-49.3	275.5	22.3	22.2	-2.1	325.6	325.0	0.1	10.8	27.7	75.
30.6	78.0	8419.4	350.0	-31.7	-52.1	269.6	24.9	24.9	0.2	325.9	326.2	0.1	11.1	30.5	77.
32.3	82.0	8938.7	325.0	-36.0	-55.3	270.3	24.9	24.9	-0.1	326.9	327.2	0.1	11.5	32.9	79.
34.0	86.4	9488.6	300.0	-41.1	99.9	273.0	24.9	24.9	-1.3	327.5	999.9	99.9	999.9	35.3	72.
35.8	91.2	10074.0	275.0	-45.6	99.9	274.4	24.5	24.5	-1.9	328.2	999.9	99.9	999.9	37.9	82.
37.9	96.2	10702.0	250.0	-51.1	99.9	279.2	22.1	21.8	-3.6	330.2	999.9	99.9	999.9	40.6	81.
40.2	101.4	11380.0	225.0	-55.9	99.9	282.7	37.1	36.2	-8.1	332.9	999.9	99.9	999.9	44.3	83.
42.6	107.5	12121.0	200.0	-60.9	99.9	280.2	43.4	42.8	-7.7	336.3	999.9	99.9	999.9	50.1	85.
45.5	113.7	12945.1	175.0	-61.3	99.9	280.0	37.5	37.0	-6.5	340.7	999.9	99.9	999.9	56.9	87.
48.5	120.7	13909.9	150.0	-60.5	99.9	271.3	31.0	31.0	-0.7	365.8	999.9	99.9	999.9	63.1	88.
52.1	128.7	15032.5	125.0	-64.5	99.9	278.0	30.8	30.5	-4.3	378.2	999.9	99.9	999.9	70.2	89.
56.3	137.0	16385.3	100.0	-67.1	99.9	264.3	22.1	22.0	-2.2	398.1	999.9	99.9	999.9	76.6	93.
61.9	146.0	19110.5	75.0	-64.6	99.9	355.5	4.4	0.3	-4.4	437.5	999.9	99.9	999.9	80.5	89.
69.5	155.7	20591.2	50.0	-61.9	99.9	297.4	2.7	2.4	-1.2	497.6	999.9	99.9	999.9	82.5	89.
92.1	165.7	24985.8	25.0	-52.6	99.9	50.8	0.9	-0.7	-0.6	633.7	999.9	99.9	999.9	83.6	91.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 11
OF POOR QUALITY

STATION NO. 22002
FT. SILL, OKLA

24 APRIL 1975
612 GMT

TIME MIN	CNCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CNMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCY	RANGE KM	AZ DG
0.0	8.9	362.0	964.4	20.4	19.1	180.0	4.5	0.0	4.5	298.6	336.8	14.6	92.0	0.0	0
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	10.0	492.5	950.0	20.2	18.4	172.2	11.6	-1.6	11.5	299.6	337.1	14.2	89.3	0.3	316
1.2	12.1	723.7	925.0	19.6	18.0	181.6	18.2	0.5	18.2	301.2	339.0	14.2	90.5	0.6	349
2.0	14.3	960.7	900.0	19.7	17.7	196.7	22.5	0.5	21.6	303.7	342.2	14.3	96.2	1.0	359
2.8	16.4	1204.8	875.0	20.5	15.8	212.4	23.2	12.6	19.6	308.9	342.6	13.1	74.5	1.0	9
3.7	18.8	1455.5	850.0	19.5	13.7	217.1	24.4	12.6	19.5	308.9	340.4	11.7	69.2	4.1	17
4.6	21.0	1712.1	825.0	17.2	13.3	224.4	21.8	16.7	17.0	308.4	340.9	11.8	77.9	5.4	22
5.5	23.4	1975.5	800.0	16.8	9.1	237.8	17.8	15.1	9.5	310.3	336.0	9.1	60.4	6.3	26
6.4	25.7	2245.6	775.0	15.0	0.9	243.6	15.2	13.6	6.7	310.7	326.4	5.4	39.0	7.1	31
7.3	28.1	2522.1	750.0	13.7	-13.7	245.5	16.5	15.0	6.8	311.6	317.2	1.8	13.6	7.8	35
8.3	30.7	2816.1	725.0	11.0	-14.2	245.5	18.0	16.4	7.5	311.8	317.2	1.8	15.5	8.7	34
9.3	33.3	3057.1	700.0	8.2	-15.5	244.5	19.0	17.2	8.2	311.8	316.9	1.6	16.8	9.7	41
10.3	35.8	3395.7	675.0	5.5	-16.8	243.5	19.4	17.4	8.6	312.0	316.8	1.5	18.1	10.8	44
11.3	38.4	3702.5	650.0	2.5	-17.2	243.0	19.1	17.1	8.7	312.0	316.8	1.5	21.6	11.9	46
12.3	41.0	4017.6	625.0	-0.7	-18.3	243.5	19.9	17.8	8.9	311.9	316.4	1.4	24.7	13.0	47
13.3	43.9	4341.9	600.0	-3.5	-20.9	255.1	20.7	20.0	5.3	312.2	310.0	1.2	24.8	14.2	49
14.4	46.8	4678.5	575.0	-6.6	-26.6	261.9	25.0	24.7	3.6	315.9	318.8	0.9	17.0	15.5	52
15.6	49.9	5027.7	550.0	-9.5	-25.0	260.4	25.4	25.1	4.1	316.4	319.0	0.8	18.4	17.1	55
16.8	52.6	5388.7	525.0	-10.2	-28.2	258.4	26.2	25.7	5.3	316.2	318.6	0.7	21.2	18.7	57
18.1	55.6	5742.5	500.0	-12.5	-38.2	258.6	26.7	26.7	5.3	316.2	318.6	0.7	21.2	18.7	57
19.5	58.8	6144.6	475.0	-12.6	-41.8	265.6	27.0	26.9	2.1	322.3	319.9	0.3	10.3	20.7	59
20.9	62.1	6564.4	450.0	-16.3	-44.1	999.9	97.9	99.9	99.9	322.7	323.4	0.2	6.5	22.7	61
00.9	65.0	69.9	425.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	65.9	99.9	400.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	375.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

Intentionally Left Blank

ORIGINAL PAGE IS

Sounding Data**24 April 1975****1200 GMT**

RECEIVED PACIFIC

STATION NO. 208
CHARLESTON, SC

24 APRIL 1975
1152 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP CG C	DEW PT CG C	CIR DG	SPED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.2	12.0	1022.0	19.4	13.3	190.0	3.2	0.0	3.4	292.0	316.7	9.5	66.0	0.0	0.
0.6	5.8	200.5	1000.0	19.0	12.1	200.0	12.8	4.4	12.0	293.3	316.8	8.9	64.4	0.3	17.
1.2	7.8	417.8	975.0	17.7	10.8	201.9	12.1	4.5	11.2	294.1	316.3	8.4	63.8	0.7	14.
1.9	10.1	639.5	950.0	15.9	9.5	200.6	13.0	4.6	12.1	294.4	315.4	7.9	65.9	1.2	20.
2.4	12.1	665.7	925.0	13.9	9.0	200.7	12.4	4.4	11.6	294.6	315.5	7.6	72.4	1.7	20.
3.2	14.4	1096.4	900.0	11.8	8.7	206.9	11.1	5.0	9.9	294.7	315.9	7.9	81.5	2.2	21.
3.9	16.4	1322.5	875.0	12.3	-2.7	222.8	9.3	6.3	6.8	297.1	307.5	3.7	36.5	2.6	23.
4.6	18.6	1571.2	850.0	12.1	-10.5	222.0	6.5	5.2	5.2	299.1	305.1	2.0	19.5	2.9	26.
5.3	20.8	1824.5	825.0	10.7	-3.3	250.4	5.4	5.1	1.8	300.4	310.8	3.6	37.4	3.1	28.
6.1	23.2	2075.9	800.0	8.1	-0.6	253.5	6.6	6.3	1.9	300.4	313.4	4.6	54.2	3.3	32.
6.9	25.5	2341.3	775.0	6.1	-2.8	252.2	6.5	6.5	0.9	300.5	312.4	4.6	52.8	3.6	35.
7.6	27.8	2605.4	750.0	5.8	-21.0	276.0	5.6	5.6	-0.6	302.9	306.0	1.0	12.0	3.8	39.
8.4	30.3	2886.5	725.0	4.3	0.9	290.5	5.4	5.1	-1.9	305.0	321.0	5.7	78.3	3.9	42.
9.4	32.9	3171.9	700.0	3.0	-0.5	299.3	6.4	5.6	-3.1	306.5	321.6	5.3	77.7	4.0	47.
10.3	35.5	3466.2	675.0	1.3	-1.9	300.7	6.5	5.6	-3.3	307.7	322.0	4.9	78.9	4.1	52.
11.2	39.0	3765.1	650.0	-0.5	-3.5	255.0	6.3	5.5	-3.1	308.9	322.2	4.5	80.0	4.2	56.
12.2	40.6	4082.3	625.0	-2.4	-6.0	295.4	7.8	7.1	-3.4	310.2	321.8	3.9	75.8	4.4	61.
13.0	43.3	4406.0	600.0	-4.0	-9.0	296.9	9.3	8.3	-4.2	311.9	321.6	3.2	67.9	4.7	65.
14.0	46.3	4741.0	575.0	-5.8	-11.9	305.7	10.3	8.4	-6.0	313.5	321.7	2.7	62.3	5.1	70.
15.0	49.3	5087.7	550.0	-8.6	-17.0	303.7	11.6	9.6	-6.4	314.0	319.8	1.8	50.7	5.4	76.
16.0	52.0	5446.8	525.0	-11.0	-21.5	293.2	13.9	12.7	-5.5	315.4	319.6	1.3	41.3	6.0	81.
17.0	55.1	5819.7	500.0	-14.0	-26.7	291.8	16.5	15.3	-6.1	316.0	318.9	0.9	33.0	6.9	85.
18.3	58.1	6207.6	475.0	-15.7	-39.0	287.4	14.9	14.2	-4.5	318.5	319.5	0.3	12.7	8.0	87.
19.7	61.6	6618.6	450.0	-17.3	-39.1	284.5	13.7	12.4	-5.7	321.5	322.5	0.3	12.9	9.1	91.
21.1	65.0	7042.1	425.0	-20.6	-41.5	298.1	13.6	12.0	-6.4	322.5	323.4	0.2	13.3	10.1	94.
22.7	68.4	7495.5	400.0	-24.1	-44.1	289.5	17.3	16.3	-5.8	323.6	324.3	0.2	13.7	11.4	96.
24.3	72.0	7953.1	375.0	-27.6	-46.7	251.4	17.7	16.5	-6.5	325.0	325.5	0.1	14.1	13.2	98.
25.9	75.7	8445.6	350.0	-31.8	-49.9	291.6	20.0	18.6	-7.4	325.8	326.2	0.1	14.6	14.9	107.
27.6	79.7	8964.7	325.0	-36.3	-53.4	255.1	19.9	18.0	-8.4	326.5	326.8	0.1	15.1	16.9	101.
29.7	83.8	9514.9	300.0	-40.5	-59.9	294.4	16.5	15.0	-6.8	328.3	329.9	99.9	99.9	19.2	103.
32.1	88.0	10101.6	275.0	-44.9	-67.4	293.8	19.6	17.9	-7.9	330.2	330.2	99.9	99.9	21.8	104.
34.8	92.8	10723.2	250.0	-49.6	-69.9	292.7	21.9	20.2	-8.5	332.3	332.3	99.9	99.9	25.1	175.
37.5	97.6	11415.2	225.0	-54.5	-69.9	297.6	25.4	22.5	-11.8	335.1	335.1	99.9	99.9	28.6	106.
40.6	102.8	12169.1	200.0	-60.1	-69.9	302.3	29.7	25.1	-15.9	337.6	337.6	99.9	99.9	33.7	108.
43.9	108.8	12988.5	175.0	-62.3	-69.9	290.8	36.0	33.7	-12.8	347.1	347.1	99.9	99.9	39.9	110.
47.9	115.2	13947.2	150.0	-59.0	-69.9	293.6	29.3	26.8	-11.7	368.5	368.5	99.9	99.9	47.1	111.
52.4	122.3	15088.3	125.0	-60.7	-69.9	297.4	22.4	21.3	-6.7	385.0	385.0	99.9	99.9	54.4	111.
57.6	130.0	16499.6	100.0	-67.4	-69.9	279.3	13.0	12.8	-2.1	397.6	397.6	99.9	99.9	60.5	111.
63.7	138.7	18143.4	75.0	-70.2	-69.9	266.1	13.7	13.7	0.9	425.8	425.8	99.9	99.9	65.5	109.
71.7	147.3	20644.3	50.0	-61.6	-69.9	359.5	6.5	0.1	-6.5	498.5	498.5	99.9	99.9	69.3	111.
84.6	157.0	25053.3	25.0	-50.7	-69.9	314.8	4.5	3.2	-3.2	638.9	638.9	99.9	99.9	70.0	112.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.0	0.0	1020.9	18.4	14.5	120.0	3.6	-3.1	1.6	291.2	317.7	10.2	78.0	0.7	0.
0.8	5.5	186.2	1000.0	19.3	12.9	123.6	12.6	-10.5	7.0	293.7	318.4	9.4	66.6	0.4	301.
1.7	7.4	404.2	975.0	18.9	12.2	132.6	11.8	-8.7	8.0	295.4	319.8	9.2	65.3	1.0	306.
2.5	5.5	626.6	950.0	16.6	11.1	137.1	11.5	-7.8	6.4	295.4	318.8	8.8	69.0	1.6	309.
3.4	11.3	853.8	925.0	15.3	9.4	142.5	8.9	-5.4	7.1	296.0	317.6	8.1	67.9	2.2	312.
4.4	13.5	1086.0	900.0	14.8	4.0	123.0	2.9	-2.4	1.6	297.5	313.1	5.7	48.6	2.5	313.
5.3	15.5	1324.4	875.0	14.9	-2.4	73.6	4.6	-4.4	-1.3	299.7	310.3	3.7	30.9	2.7	311.
6.1	17.6	1565.0	850.0	13.6	-0.6	69.0	5.0	-4.7	-1.8	301.0	313.2	4.3	37.5	2.8	306.
7.2	19.9	1819.6	825.0	12.1	-3.0	104.2	4.4	-4.3	1.1	301.9	312.6	3.7	34.6	3.0	302.
8.2	25.0	2076.2	800.0	10.2	-8.6	110.3	3.6	-3.2	1.2	302.4	308.6	2.5	25.3	3.3	301.
9.3	29.4	2340.1	775.0	10.7	-19.3	36.6	1.7	-1.0	-1.3	305.4	308.7	1.1	10.3	3.4	301.
10.5	28.8	2612.7	750.0	10.1	-21.4	17.7	2.3	-0.7	-2.2	307.7	310.6	0.9	8.9	3.3	297.
11.6	29.2	2893.5	725.0	6.8	-22.0	346.6	0.8	0.2	-0.8	309.2	312.1	0.9	9.2	3.3	294.
12.7	31.9	3182.3	700.0	6.5	-21.9	7.1	1.8	-0.2	-1.8	309.8	312.9	0.9	10.9	3.3	295.
13.9	34.5	3480.1	675.0	5.8	-20.5	16.5	4.4	-1.3	-4.3	312.3	315.9	1.1	13.0	3.2	292.
15.1	37.0	3787.4	650.0	3.4	-15.9	17.6	6.0	-1.8	-5.7	313.0	316.4	1.7	22.8	3.2	284.
16.3	35.6	4104.4	625.0	1.4	-17.0	19.1	5.7	-1.9	-5.4	314.2	316.4	1.6	23.9	3.3	277.
17.8	45.4	4432.3	600.0	0.5	-12.8	5.0	8.4	-0.7	-8.4	317.0	323.4	2.4	36.4	3.4	267.
19.3	48.4	4772.5	575.0	-2.2	-10.0	355.5	10.8	0.9	-10.7	317.8	327.4	3.1	54.5	3.6	253.
20.7	48.4	5124.5	550.0	-4.5	-12.5	345.6	11.4	2.8	-11.1	319.1	327.4	2.7	53.4	3.8	238.
22.2	51.3	5489.1	525.0	-7.3	-15.6	338.0	12.2	4.6	-11.2	315.9	326.8	2.2	51.0	4.2	224.
23.6	58.4	5867.3	500.0	-10.6	-14.6	335.1	11.6	4.9	-10.5	320.3	328.2	2.5	72.6	4.7	212.
25.2	57.4	6260.3	475.0	-13.1	-20.6	319.7	10.4	6.7	-7.9	321.9	327.0	1.6	53.2	5.2	203.
26.8	60.9	6570.2	450.0	-15.7	-29.5	303.1	11.6	9.7	-6.4	323.5	326.1	0.7	29.4	5.7	192.
28.4	64.3	7059.3	425.0	-16.4	-36.4	258.5	12.2	10.7	-5.8	325.4	326.8	0.4	18.7	6.1	182.
30.2	67.7	7550.3	400.0	-20.4	-41.4	290.7	13.9	13.0	-4.5	328.5	328.4	0.2	13.2	6.7	171.
31.9	71.3	8024.8	375.0	-23.8	-45.3	292.6	14.7	13.6	-5.7	330.1	330.7	0.2	11.6	7.6	161.
33.9	75.2	8525.0	350.0	-27.5	-43.0	257.3	14.8	13.2	-6.8	331.6	332.5	0.2	21.3	8.9	153.
35.9	79.3	9051.2	325.0	-32.1	-42.2	300.8	17.2	14.8	-8.8	332.4	333.4	0.3	35.4	10.5	144.
38.0	83.4	9612.9	300.0	-36.7	-45.2	298.5	18.2	15.9	-8.8	333.5	334.3	0.2	40.5	12.6	143.
40.3	87.8	10208.8	275.0	-41.9	-49.9	305.2	17.9	14.6	-10.3	334.6	334.9	99.9	99.9	15.0	139.
42.8	92.8	10846.2	250.0	-47.5	-49.9	304.9	21.5	17.6	-14.3	335.5	335.9	99.9	99.9	17.8	137.
45.5	97.8	11534.0	225.0	-52.8	-49.9	301.8	24.2	20.6	-12.8	337.6	337.6	99.9	99.9	21.4	135.
48.4	103.3	12284.6	200.0	-58.5	-49.9	305.2	27.8	22.7	-16.0	340.1	340.1	99.9	99.9	26.1	133.
51.5	105.5	13112.2	175.0	-64.1	-49.9	301.7	26.8	22.8	-14.1	344.2	344.2	99.9	99.9	31.3	131.
55.0	115.8	14065.1	150.0	-60.1	-49.9	301.5	22.4	19.1	-11.7	366.6	366.6	99.9	99.9	36.0	110.
59.1	123.3	15190.8	125.0	-64.6	-49.9	258.2	20.0	17.6	-9.4	378.0	378.0	99.9	99.9	41.0	128.
63.9	131.7	16443.1	100.0	-65.4	-49.9	278.4	11.3	11.2	-1.6	393.7	393.7	99.9	99.9	44.9	126.
69.5	140.3	18224.9	75.0	-73.5	-49.9	260.9	9.0	8.8	-1.7	418.9	418.9	99.9	99.9	47.8	125.
77.4	149.7	20670.2	50.0	-61.1	-49.9	8.0	4.9	-0.7	-4.8	499.6	499.6	99.9	99.9	50.5	126.
90.2	159.3	25089.2	25.0	-52.8	-49.9	60.5	4.5	-3.9	-2.2	633.4	633.4	99.9	99.9	50.5	131.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 213
WAYCROSS, GA24 APRIL 1975
1115 GMT

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT Y DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	3.2	44.0	1016.6	15.6	15.0	60.0	1.6	-1.4	-0.8	298.8	315.9	10.6	96.0	0.0	0.
0.4	4.7	144.5	1000.0	16.5	14.3	99.9	99.9	99.9	99.9	291.0	317.6	10.3	87.1	999.9	999.
1.2	6.5	400.8	975.0	17.4	12.9	99.9	99.9	99.9	99.9	294.0	319.3	9.7	74.8	999.9	999.
1.9	9.4	622.7	950.0	16.3	9.1	186.3	11.9	1.3	11.9	294.8	315.3	7.7	62.6	1.2	359.
2.7	11.6	845.3	925.0	14.9	9.6	189.8	11.0	1.9	10.2	295.6	317.5	8.2	70.7	1.8	2.
3.5	14.2	1081.3	900.0	14.4	7.3	183.2	8.2	0.5	8.2	297.3	316.8	7.2	62.4	2.2	3.
4.2	16.5	1319.1	875.0	12.9	8.7	184.7	3.9	0.4	3.8	298.3	320.2	8.1	75.7	2.5	3.
5.1	19.1	1562.5	850.0	11.5	8.3	221.3	4.6	3.0	3.5	299.3	321.3	8.1	80.4	2.7	5.
6.0	21.6	1811.8	825.0	9.6	9.1	265.2	5.6	5.6	6.1	299.9	323.8	8.8	96.3	2.8	9.
6.8	24.3	2367.5	800.0	10.1	-25.6	269.8	4.1	4.1	0.0	302.0	304.1	0.7	6.7	2.9	14.
7.7	26.8	2370.7	775.0	9.2	-44.3	271.7	0.7	0.7	-0.0	303.7	304.0	0.1	1.0	2.9	16.
8.5	29.7	2601.3	750.0	8.5	-3.6	23.7	1.9	-0.8	-1.7	306.2	316.1	3.4	36.4	2.9	16.
9.4	32.5	2891.2	725.0	6.7	-3.0	10.6	3.7	-0.7	-3.7	307.3	319.7	4.2	50.0	2.7	15.
10.3	35.4	3162.6	700.0	4.6	-3.0	352.9	5.5	0.7	-5.5	308.2	321.0	4.4	57.7	2.5	15.
11.4	38.2	3464.0	675.0	2.2	-1.8	340.6	6.4	2.1	-6.1	308.7	323.2	5.0	75.1	2.1	22.
12.4	41.9	3768.3	650.0	1.1	-2.8	330.5	7.4	3.6	-6.4	310.8	324.9	4.8	75.6	1.9	31.
13.4	44.1	4022.9	625.0	-1.3	-4.7	329.6	8.7	4.4	-7.5	311.6	324.3	4.3	77.1	1.7	40.
14.5	47.4	4404.1	600.0	-2.6	-7.4	322.4	8.5	5.2	-6.8	313.5	324.6	3.7	69.6	1.7	66.
15.6	50.6	4744.7	575.0	-4.6	-7.8	305.7	7.6	6.2	-4.4	315.1	326.3	3.7	78.2	1.9	81.
16.8	53.9	5044.3	550.0	-6.0	-13.1	297.3	8.5	7.6	-3.9	317.2	325.2	2.5	57.3	2.4	83.
17.9	57.1	5456.6	525.0	-9.3	-15.3	257.1	9.1	8.1	-4.1	317.5	324.5	2.2	61.5	2.9	95.
19.1	60.7	5832.2	500.0	-11.8	-18.6	292.8	10.8	9.9	-4.2	318.8	324.4	1.8	57.0	3.4	99.
20.4	64.4	6221.9	475.0	-14.1	-19.1	286.5	12.6	11.9	-4.0	320.7	326.5	1.6	65.5	4.5	126.
21.6	68.0	6632.5	450.0	-16.6	-23.5	295.7	13.5	12.1	-5.8	322.4	325.7	1.0	42.0	5.4	102.
22.9	71.3	7060.3	425.0	-19.4	-29.3	255.0	16.4	14.8	-6.9	324.1	326.8	0.8	40.7	6.6	135.
24.4	74.3	7507.9	400.0	-22.9	-31.5	290.4	18.5	17.3	-6.4	325.2	327.6	0.7	45.3	9.1	109.
26.0	80.1	7977.7	375.0	-26.6	-33.7	289.2	20.9	19.7	-6.9	326.3	328.4	0.6	51.1	9.9	177.
27.7	84.5	8472.2	350.0	-30.6	-40.7	299.7	19.7	17.1	-9.7	327.5	328.6	0.3	32.1	12.0	104.
29.5	89.0	8934.1	325.0	-34.8	-44.9	300.0	24.7	21.4	-12.3	328.7	329.5	0.2	34.4	14.3	110.
31.3	94.0	9448.2	300.0	-38.7	-53.7	294.8	24.1	21.9	-10.1	330.7	331.0	0.1	18.7	17.1	111.
33.3	99.0	10140.6	275.0	-43.2	-59.9	296.2	23.3	20.9	-10.3	332.6	339.9	99.9	99.9	16.8	112.
35.8	104.4	10776.6	250.0	-47.6	-69.9	299.3	28.1	24.5	-12.7	335.3	339.9	99.9	99.9	23.5	113.
38.1	110.2	11461.9	225.0	-53.1	-99.3	293.9	30.6	28.0	-12.4	337.2	339.9	99.9	99.9	27.6	113.
40.9	116.3	12212.0	200.0	-59.5	-99.9	289.9	35.0	32.9	-11.9	338.6	339.9	99.9	99.9	31.0	113.
43.9	123.7	13036.9	175.0	-64.8	-99.3	291.4	34.4	32.1	-12.6	343.0	339.9	99.9	99.9	34.6	113.
47.5	130.0	13997.4	150.0	-69.9	-99.9	290.0	29.2	27.5	-10.0	366.9	339.9	99.9	99.9	45.6	113.
51.7	137.3	15127.4	125.0	-63.8	-99.9	286.8	26.5	25.4	-7.6	379.5	339.9	99.9	99.9	52.1	112.
56.5	144.5	16481.2	100.0	-67.2	-99.9	280.3	13.7	13.4	-2.4	397.9	339.9	99.9	99.9	58.0	111.
62.2	152.0	18191.2	75.0	-70.1	-99.9	308.3	8.7	6.8	-5.4	427.9	339.9	99.9	99.9	62.8	110.
70.6	160.0	20657.8	50.0	-59.9	-59.9	27.1	5.9	-2.7	-5.2	502.3	339.9	99.9	99.9	65.8	112.
83.0	167.8	25002.7	25.0	-50.7	-50.9	358.9	1.2	0.0	-1.2	639.4	339.9	99.9	99.9	66.2	114.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 220
APALACHICOLA, FLA

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.6	11.0	1020.3	20.4	16.7	140.0	5.2	1.3	4.0	293.7	328.4	13.5	90.0	0.0	0.
0.6	4.3	105.2	1000.0	20.1	17.4	175.2	16.7	1.4	15.6	295.0	327.8	12.6	84.4	0.2	334.
1.2	2.6	403.9	975.0	19.5	11.8	140.9	15.4	0.2	15.8	296.0	320.0	9.0	61.3	0.9	352.
1.9	10.8	627.3	950.0	16.3	12.5	185.0	12.5	1.9	12.3	257.1	325.7	9.0	68.6	1.4	376.
2.6	13.2	856.1	925.0	17.7	12.1	194.3	7.1	1.8	6.5	298.7	328.6	9.7	69.8	1.8	1.
3.4	15.5	1090.2	900.0	15.7	13.0	203.9	5.6	2.4	5.3	299.1	327.2	10.5	83.9	2.1	2.
4.2	18.0	1329.1	875.0	13.9	13.2	221.7	6.8	4.5	5.0	299.6	329.0	11.0	95.7	2.4	7.
4.9	20.4	1572.6	850.0	11.9	11.6	224.6	7.2	5.0	5.1	300.0	327.4	10.2	97.8	2.6	10.
5.7	22.9	1822.7	825.0	8.0	-79.6	221.5	5.3	5.0	1.7	297.2	300.0	1.0	10.6	2.9	15.
6.4	25.4	2075.7	800.0	12.3	-3.4	300.7	3.3	2.8	-1.7	304.8	315.8	3.8	33.8	2.9	12.
7.3	27.9	2345.0	775.0	10.7	-0.6	347.5	1.7	0.4	-1.7	305.9	319.6	4.7	45.5	2.4	21.
8.1	30.7	2618.1	750.0	10.2	-7.6	371.3	2.2	-2.2	0.3	308.0	310.7	2.9	27.7	2.7	20.
8.9	33.4	2895.0	725.0	8.2	-7.3	112.0	3.0	-2.8	1.1	308.8	317.9	3.1	32.7	2.7	16.
9.7	36.0	3167.4	700.0	6.2	-11.6	111.6	1.5	-1.4	0.6	309.6	316.5	2.2	26.6	2.7	14.
10.7	38.9	3444.3	675.0	4.7	-44.3	333.0	1.3	0.6	-1.1	310.9	311.4	0.2	2.1	2.7	13.
11.5	41.5	3700.9	650.0	3.0	-10.9	339.6	4.0	1.4	-3.7	312.7	320.7	2.6	35.6	2.6	14.
12.5	44.3	4107.7	625.0	1.3	-12.9	332.6	8.3	3.8	-7.4	314.2	323.3	2.3	33.8	2.4	14.
13.5	47.6	4434.9	600.0	-1.1	-12.3	328.6	11.3	5.9	-9.7	315.1	322.8	2.5	42.2	2.0	36.
14.5	50.6	4773.0	575.0	-3.5	-12.2	326.7	11.8	6.5	-9.9	316.2	325.3	2.6	50.8	1.8	57.
15.6	53.6	5123.0	550.0	-6.2	-11.5	325.5	13.7	7.7	-11.3	317.0	326.0	2.9	66.2	2.0	77.
16.7	56.7	5495.4	525.0	-8.8	-13.9	323.9	14.4	8.5	-11.7	318.2	326.0	2.5	66.4	2.5	99.
17.9	60.0	5811.8	500.0	-11.5	-16.5	311.3	13.1	9.8	-8.6	319.2	325.9	2.1	66.4	3.3	110.
19.1	63.4	6234.1	475.0	-13.7	-20.1	301.4	13.2	11.2	-8.9	321.2	326.5	1.6	58.3	4.3	113.
20.5	66.9	6622.9	450.0	-16.7	-22.9	300.6	13.3	11.5	-8.8	322.4	326.8	1.4	58.9	5.4	115.
21.8	70.4	7030.3	425.0	-19.8	-26.0	293.3	13.7	12.6	-8.4	323.6	327.3	1.1	57.9	6.4	115.
23.3	74.3	7537.1	400.0	-23.3	-31.2	294.3	15.5	14.2	-6.4	324.7	327.2	0.7	48.0	7.7	114.
24.9	78.3	8007.9	375.0	-25.8	-34.0	305.2	16.4	13.4	-5.5	327.4	329.4	0.6	46.0	9.3	115.
26.6	81.8	8524.3	350.0	-29.4	-40.0	307.6	16.0	12.7	-5.8	329.0	330.2	0.3	34.6	10.9	117.
28.3	85.9	9029.0	325.0	-33.5	-43.8	304.3	17.7	14.6	-10.0	330.4	331.3	0.2	34.4	12.6	119.
30.4	90.4	9566.1	300.0	-37.6	-53.2	305.8	18.4	15.0	-10.8	332.3	332.6	0.1	17.5	14.8	119.
32.5	95.1	10180.0	275.0	-42.4	-59.9	301.7	20.1	17.1	-10.5	333.2	333.6	99.9	99.9	17.1	120.
34.5	99.8	10818.1	250.0	-47.5	-69.9	302.3	22.6	19.1	-12.1	335.4	335.9	99.9	99.9	19.9	120.
36.8	105.1	11505.1	225.0	-53.4	-79.9	296.6	26.7	25.7	-12.9	336.7	336.9	99.9	99.9	23.3	120.
39.4	110.6	12253.3	200.0	-59.0	-89.9	295.2	27.2	24.6	-11.6	339.3	339.9	99.9	99.9	27.3	120.
42.1	116.3	13080.3	175.0	-64.3	-99.9	291.5	27.4	25.5	-10.0	343.6	343.9	99.9	99.9	32.0	119.
45.4	123.0	14037.3	150.0	-60.5	-99.9	300.2	22.7	19.6	-11.4	345.8	345.9	99.9	99.9	37.0	118.
49.4	130.3	15163.6	125.0	-65.1	-99.9	298.3	23.0	20.2	-10.9	377.1	377.1	99.9	99.9	42.0	118.
54.1	136.0	16507.1	100.0	-70.2	-99.9	304.2	14.7	12.2	-8.3	392.1	392.1	99.9	99.9	47.5	118.
59.4	145.8	18204.9	75.0	-71.5	-99.9	296.6	7.0	6.3	-3.1	423.1	423.1	99.9	99.9	50.7	118.
67.4	154.7	20671.9	50.0	-60.2	-99.9	358.0	5.6	0.2	-5.6	501.8	501.8	99.9	99.9	52.7	120.
74.9	164.0	24115.6	25.0	-52.1	-99.9	143.9	2.7	-1.6	2.2	634.9	634.9	99.9	99.9	52.5	122.

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
• BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 226

CENTERVILLE, ALA

24 APRIL 1975

1115 GMT

164 17. 0

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	PR RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.1	140.0	1002.5	17.1	15.4	180.0	2.0	0.0	2.6	291.5	320.1	11.1	90.0	0.0	0.
0.1	6.3	1000.0	1000.0	16.8	15.2	180.4	2.1	0.2	2.1	291.4	319.7	11.0	90.4	0.1	352.
1.1	6.2	377.3	975.0	15.9	14.6	195.8	6.7	1.8	6.5	292.6	321.5	10.8	91.5	0.5	1.
2.0	11.3	598.2	950.0	15.0	13.8	200.0	11.6	4.0	10.9	293.8	321.3	10.5	92.2	1.0	6.
3.0	13.5	624.6	925.0	14.7	11.4	200.3	14.7	6.5	13.1	295.8	320.0	9.2	90.3	1.7	16.
3.9	15.8	1057.0	900.0	15.0	11.9	205.7	16.1	7.0	14.5	298.3	324.5	5.8	91.4	2.6	15.
4.8	18.3	1295.7	875.0	14.0	7.3	217.0	13.5	8.1	10.4	299.3	319.5	7.4	91.4	3.4	22.
5.6	20.8	1540.2	850.0	13.3	4.6	221.6	15.2	10.1	11.4	301.0	318.3	6.3	55.3	4.2	25.
6.4	23.4	1791.5	825.0	12.8	3.9	222.1	15.9	10.8	11.6	303.0	320.2	6.2	54.5	5.0	29.
7.7	25.9	2045.7	800.0	11.8	3.3	223.0	13.5	9.3	5.8	304.6	321.7	6.1	55.9	5.9	30.
8.8	28.7	2314.8	775.0	10.0	2.9	231.8	13.2	10.4	8.2	305.4	322.5	6.1	60.7	6.7	33.
9.9	31.4	2506.6	750.0	6.7	-14.3	240.1	14.4	12.5	7.2	306.3	311.5	1.7	18.3	7.4	35.
11.0	34.2	2666.5	725.0	6.4	-31.1	249.9	16.0	15.0	5.5	308.7	310.1	0.4	4.2	8.4	36.
12.1	36.9	3155.3	700.0	6.9	-45.7	245.8	16.2	14.8	6.6	310.1	310.5	0.1	1.0	9.4	42.
13.2	39.4	3432.9	675.0	5.2	-15.3	245.1	17.2	16.1	6.1	311.7	317.1	1.7	21.0	10.4	44.
14.3	42.5	3755.3	650.0	2.4	-17.5	259.2	18.3	18.0	3.4	311.8	315.5	1.5	21.3	11.4	47.
15.5	45.5	4074.7	625.0	-0.2	-13.5	265.5	20.8	20.8	1.6	312.5	319.2	2.2	35.9	12.6	51.
16.7	48.0	4400.0	600.0	-2.9	-9.8	265.6	20.4	20.4	1.6	313.1	322.4	3.0	59.0	13.9	55.
17.9	51.6	4735.7	575.0	-5.5	-9.9	265.0	16.3	16.3	1.4	313.9	323.4	3.1	71.3	15.1	54.
19.1	54.9	5082.2	550.0	-7.6	-11.5	265.1	12.0	11.9	1.0	315.4	324.3	2.9	73.7	16.0	54.
20.4	58.0	5443.9	525.0	-10.0	-15.5	265.2	10.1	10.0	-1.1	316.1	323.0	2.2	66.1	16.8	61.
21.8	61.4	5819.0	500.0	-11.4	-15.9	268.9	11.1	10.5	-3.6	316.9	323.9	2.2	81.6	17.3	63.
23.2	65.0	6206.1	475.0	-16.9	-18.4	283.1	16.6	16.1	-3.8	317.3	323.9	1.9	87.8	18.1	65.
24.5	68.4	6609.8	450.0	-20.3	-25.6	287.0	16.1	15.4	-4.7	317.8	321.4	1.1	63.6	19.2	68.
26.2	71.8	7031.8	425.0	-22.1	-43.2	280.2	14.1	13.9	-2.5	320.7	321.8	0.3	20.5	20.4	70.
28.2	75.7	7475.9	400.0	-24.5	-35.0	277.8	19.2	19.1	-2.6	323.1	324.7	0.5	34.7	22.1	72.
29.9	79.8	7942.7	375.0	-26.1	-62.6	270.0	22.2	22.1	-2.7	324.4	324.5	0.0	2.2	24.1	75.
31.4	83.7	8434.0	350.0	-32.1	-45.8	270.3	26.5	26.5	-0.1	325.4	326.0	0.2	24.3	26.4	76.
33.2	87.8	8932.1	325.0	-36.5	-38.3	266.7	27.6	27.6	1.6	326.4	327.9	0.4	63.2	29.1	77.
35.3	92.4	9502.6	300.0	-40.6	99.9	272.3	32.3	32.3	-1.3	328.1	999.9	99.9	99.9	32.6	79.
37.5	97.0	10059.5	275.0	-45.9	59.9	282.8	28.1	27.4	-6.2	328.7	999.9	99.9	99.9	36.4	81.
39.8	101.8	10716.9	250.0	-50.5	99.9	280.8	32.6	32.0	-6.1	331.0	999.9	99.9	99.9	40.5	83.
42.7	107.3	11397.1	225.0	-54.9	99.9	280.5	41.2	40.5	-7.5	334.4	999.9	99.9	99.9	46.6	85.
45.6	112.8	12141.5	200.0	-60.0	59.9	268.9	41.2	41.1	6.8	337.7	999.9	99.9	99.9	53.1	87.
48.0	118.9	12975.1	175.0	-58.6	59.9	274.2	40.5	40.4	-2.0	353.2	999.9	99.9	99.9	61.9	87.
51.1	125.8	13944.2	150.0	-60.2	99.9	274.1	24.7	24.6	-1.8	366.4	999.9	99.9	99.9	68.4	90.
54.5	133.3	15065.8	125.0	-63.7	99.9	282.1	32.1	31.4	-4.7	379.8	999.9	99.9	99.9	76.4	90.
58.5	140.3	16422.9	100.0	-69.9	99.9	273.2	23.7	23.6	-1.3	392.6	999.9	99.9	99.9	84.1	90.
62.5	146.3	18140.7	75.0	-65.9	99.9	263.9	14.1	14.0	1.5	434.9	999.9	99.9	99.9	90.5	90.
70.6	157.0	20415.4	50.0	-62.0	99.9	305.1	5.0	4.1	-2.9	467.3	999.9	99.9	99.9	93.4	91.
93.7	168.0	25048.9	25.0	-49.9	99.9	28.3	6.1	-2.9	-5.4	641.2	999.9	99.9	99.9	94.3	93.

0 PT SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 PT TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 00 BV SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 1
 OF POOR QUALITY

STATION NO. 232
MOCKTOWN, LA

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP OC C	DEW PT OC C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MR RTO GM/NG	RM PCT	RANGE KM	AZ DG
00.0	5.0	1.0	1017.3	21.4	20.9	150.0	4.1	-2.1	3.6	255.2	335.2	15.5	97.0	0.0	0.
0.5	6.3	150.7	1000.0	22.0	21.2	105.1	12.0	-3.3	12.3	297.3	339.1	16.1	95.0	0.3	335.
1.3	6.5	371.5	975.0	21.2	20.4	172.2	12.4	-1.7	12.2	280.6	339.6	15.7	94.6	0.9	342.
2.2	10.6	597.0	950.0	19.7	18.8	177.0	12.3	-0.6	12.3	299.1	337.4	14.5	94.4	1.6	349.
3.1	12.8	826.9	925.0	17.7	16.8	176.5	12.3	-0.8	12.3	259.2	333.9	13.1	94.2	2.2	351.
3.9	15.1	1061.5	900.0	16.7	11.6	183.0	10.7	0.6	10.7	302.2	329.0	9.9	65.0	2.9	354.
4.8	17.3	1301.4	875.0	18.5	0.7	101.5	9.0	3.3	8.4	303.6	316.7	4.6	30.2	3.3	356.
5.9	15.7	1251.0	850.0	17.0	1.9	100.8	9.8	1.8	5.7	304.6	319.4	5.2	36.3	3.6	359.
6.8	21.9	1604.8	825.0	15.1	3.7	202.4	9.3	3.5	8.8	305.4	322.6	6.1	40.2	4.3	361.
7.7	24.4	2064.8	800.0	13.5	0.4	210.2	11.0	5.5	9.5	306.2	320.5	5.0	41.0	4.6	364.
8.7	26.7	2311.4	775.0	12.6	-11.2	217.6	9.3	5.7	7.4	307.6	314.1	2.1	18.1	5.4	367.
9.7	29.3	2606.1	750.0	12.5	-17.7	233.5	6.6	5.3	3.9	310.3	314.4	1.3	10.7	5.8	370.
10.8	31.9	2890.0	725.0	13.0	-21.9	250.5	3.5	3.4	0.8	313.8	314.2	0.1	1.0	6.0	373.
11.9	34.6	3132.1	700.0	10.6	-24.0	265.3	3.2	3.0	-0.9	314.3	316.9	0.8	6.9	6.0	376.
12.9	37.0	3404.1	675.0	8.1	-21.9	254.3	3.1	2.8	-1.3	314.2	318.0	1.0	9.8	6.0	379.
14.0	39.8	3793.9	650.0	5.6	-23.5	282.5	3.2	3.1	-1.1	315.4	318.3	0.9	10.1	5.9	382.
15.2	42.2	4112.7	625.0	2.7	-18.9	283.1	4.6	4.5	-1.0	315.7	320.2	1.4	18.8	6.0	385.
16.4	45.1	4441.1	600.0	-0.2	-13.6	296.4	6.1	5.5	-2.5	316.1	323.1	2.2	35.7	6.0	388.
17.7	48.1	4780.5	575.0	-2.6	-12.2	285.0	6.6	6.4	-1.7	317.3	325.4	2.6	47.4	6.1	391.
18.9	50.9	5131.9	550.0	-4.9	-13.4	282.3	7.7	7.5	-1.6	318.6	326.3	2.5	51.1	6.2	394.
20.3	54.0	5455.7	525.0	-6.0	-15.0	290.0	8.1	7.6	-2.8	315.1	326.3	2.3	56.6	6.5	397.
21.6	56.5	5872.9	500.0	-11.0	-15.3	283.5	8.0	6.3	-2.0	319.8	327.2	2.3	70.6	6.7	400.
23.0	60.1	6266.1	475.0	-12.3	-35.6	274.9	10.6	10.5	-0.9	322.1	324.1	0.4	12.7	7.2	403.
24.5	63.6	6670.9	450.0	-15.6	-27.6	281.5	14.4	14.4	-2.9	323.7	326.7	0.9	34.8	8.0	406.
26.0	66.9	7103.5	425.0	-18.6	-30.0	283.9	15.0	14.5	-3.6	325.2	327.8	0.7	35.6	9.0	409.
27.7	70.4	7553.6	400.0	-21.7	-29.0	280.4	14.5	14.3	-2.6	326.2	329.6	0.8	48.9	10.2	412.
29.1	74.0	8027.0	375.0	-25.6	-33.5	280.2	15.9	15.7	-2.8	327.7	330.5	0.8	63.1	11.4	415.
31.2	78.0	8523.7	350.0	-29.4	-38.2	277.0	19.5	19.4	-2.4	329.0	330.5	0.4	41.7	13.2	418.
33.0	81.8	9050.0	325.0	-32.6	99.9	285.2	21.1	20.7	-4.5	331.8	999.9	99.9	99.9	15.3	421.
34.9	85.9	9604.1	300.0	-36.8	99.9	279.0	22.8	22.5	-3.6	333.9	999.9	99.9	99.9	17.6	424.
37.1	90.4	10204.3	275.0	-42.4	99.9	276.1	23.9	23.6	-3.6	333.9	999.9	99.9	99.9	20.6	427.
39.3	95.2	10641.1	250.0	-47.8	99.9	281.3	27.1	26.4	-2.3	335.1	999.9	99.9	99.9	24.0	430.
41.8	100.2	11226.9	225.0	-52.7	99.9	273.1	28.8	28.7	-1.5	337.7	999.9	99.9	99.9	28.1	433.
44.4	105.5	12286.5	200.0	-58.3	99.9	268.9	35.0	34.8	3.1	340.5	999.9	99.9	99.9	32.6	436.
47.3	111.3	13109.3	175.0	-64.5	99.9	263.3	29.2	29.2	2.3	343.5	999.9	99.9	99.9	38.2	439.
50.7	117.7	14050.8	150.0	-60.4	99.9	275.3	27.4	27.2	-2.5	346.1	999.9	99.9	99.9	43.9	442.
54.7	125.0	15187.3	125.0	-63.9	99.9	276.5	21.7	21.5	-2.5	349.2	999.9	99.9	99.9	50.7	445.
59.7	133.0	16532.3	100.0	-70.4	99.9	276.9	17.8	17.5	-3.1	351.7	999.9	99.9	99.9	57.0	448.
65.4	141.0	18222.5	75.0	-78.2	99.9	268.4	8.8	8.8	0.7	425.7	999.9	99.9	99.9	61.2	451.
73.7	146.7	20684.9	50.0	-61.4	99.9	337.5	4.6	1.8	-4.2	424.9	999.9	99.9	99.9	62.5	454.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	94.9	999.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS24 APRIL 1975
1115 GMT

TIME MIN	CHCT	WEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V CCM M/SEC	POT T DEG K	E POT T DEG K	MA RTD CM/KG	RM PCT	RANGE NM	AZ DEG
0.0	4.6	100.0	1000.0	21.7	19.6	100.0	3.3	0.0	3.3	296.5	334.2	14.5	82.0	0.0	0.
0.0	4.7	136.8	1000.0	21.6	19.7	100.0	5.4	0.6	5.4	296.7	336.7	14.6	89.1	0.1	0.
0.8	6.5	355.1	575.0	20.4	19.1	193.8	8.8	2.1	2.1	297.8	335.6	14.4	91.1	0.3	4.
1.5	8.5	595.8	950.0	19.0	17.8	203.3	11.5	4.6	10.6	298.3	336.3	13.7	92.9	0.9	12.
2.3	10.5	805.2	925.0	17.3	16.3	207.9	14.8	6.9	13.1	298.7	335.3	12.7	93.3	1.4	19.
3.1	12.6	1033.3	900.0	15.6	14.7	210.3	16.7	9.4	15.4	299.2	330.5	11.8	94.0	2.1	25.
3.8	14.8	1222.7	875.0	14.2	13.1	215.1	18.9	10.8	15.4	300.0	329.3	10.9	93.4	2.9	22.
4.6	16.7	1527.5	850.0	12.4	11.4	216.6	17.9	10.7	14.4	300.5	327.5	10.0	93.1	3.8	29.
5.4	19.1	1777.8	825.0	11.0	9.9	215.7	16.5	10.8	15.0	301.4	326.9	9.4	93.3	4.6	29.
6.1	21.4	2034.5	800.0	9.4	5.9	213.6	19.2	12.0	15.0	302.2	323.4	7.7	82.6	5.4	10.
6.8	23.6	2297.0	775.0	8.8	-34.6	224.6	17.9	12.6	12.7	303.3	304.3	0.3	3.0	6.1	32.
7.5	25.8	2571.0	750.0	14.2	-21.2	227.3	16.2	11.9	11.0	312.1	315.2	0.9	7.0	6.9	34.
8.5	28.1	2855.7	725.0	12.3	-18.3	231.5	15.5	12.1	9.6	313.1	317.1	1.2	10.2	7.4	15.
9.4	30.8	3146.1	700.0	9.9	-17.2	239.9	17.2	14.9	6.6	313.6	318.1	1.4	13.0	8.6	37.
10.3	32.3	3438.7	675.0	7.4	-16.2	241.9	18.9	15.7	6.9	314.2	319.2	1.6	16.7	9.5	40.
11.3	35.5	3737.7	650.0	4.5	-15.2	245.2	19.3	17.5	6.1	314.3	320.0	1.8	22.2	10.6	42.
12.4	38.4	4075.6	625.0	1.8	-16.5	251.8	19.9	18.8	6.2	314.7	320.0	1.7	24.1	11.7	45.
13.2	41.1	4432.8	600.0	-1.1	-13.6	257.4	20.0	20.3	4.5	315.1	322.1	2.2	37.8	12.6	47.
14.4	43.9	4740.5	575.0	-4.4	-13.7	267.6	21.4	21.4	6.9	315.1	322.3	2.3	48.1	13.8	51.
15.5	46.9	5099.2	550.0	-6.9	-12.0	277.1	21.5	21.4	-2.7	316.3	324.8	2.8	66.4	14.9	54.
16.8	49.9	5451.3	525.0	-9.2	-15.0	280.1	22.0	21.7	-3.9	317.7	324.8	2.3	62.6	16.2	59.
19.1	52.8	5827.1	500.0	-12.1	-16.7	278.4	21.2	20.9	-3.1	319.6	325.1	2.1	64.0	17.5	62.
19.3	55.3	6218.1	475.0	-14.5	-18.8	274.4	20.4	20.6	-1.6	320.2	326.0	1.8	69.6	18.7	65.
20.4	59.1	6595.6	450.0	-17.5	-21.5	273.1	20.6	20.6	-1.1	321.3	326.3	1.5	70.9	20.0	67.
21.7	62.6	7051.6	425.0	-20.5	-24.7	270.0	20.2	20.2	-0.0	322.6	326.9	1.2	66.9	21.4	69.
22.9	65.9	7457.8	400.0	-23.5	-27.5	263.8	24.7	24.5	2.7	324.5	327.9	1.0	69.1	23.0	70.
24.5	68.7	7906.4	375.0	-27.1	-31.6	264.9	25.8	25.7	2.3	325.7	328.2	0.7	65.6	25.2	71.
26.1	71.3	8459.3	350.0	-31.5	-41.2	260.2	25.1	25.0	1.8	326.2	328.8	0.4	55.6	27.7	73.
27.8	74.6	8975.6	325.0	-35.6	-45.9	265.9	25.1	20.4	3.5	327.6	329.7	0.3	56.1	30.0	73.
29.6	81.5	9531.1	300.0	-40.1	59.9	260.5	21.0	20.7	3.5	328.8	999.3	99.9	99.9	32.4	74.
31.4	85.9	10117.7	275.0	-45.6	99.9	267.0	26.2	26.2	1.4	329.1	999.9	99.9	99.9	34.5	74.
33.7	90.8	10745.2	250.0	-51.0	59.9	267.4	33.6	33.6	1.6	330.3	999.9	99.9	99.9	36.9	75.
36.2	95.7	11426.4	225.0	-54.6	59.9	262.9	41.0	40.7	5.1	334.9	999.9	99.9	99.9	44.5	77.
39.0	101.3	12172.2	200.0	-55.1	59.9	261.8	42.3	42.1	4.5	339.2	999.9	99.9	99.9	51.3	78.
42.1	107.3	13007.4	175.0	-59.6	59.9	262.7	34.6	34.3	4.4	351.6	999.9	99.9	99.9	56.3	79.
45.8	112.6	13974.9	150.0	-59.2	99.9	999.9	99.9	99.9	99.9	368.2	999.9	99.9	99.9	99.9	99.9
50.1	121.3	15104.0	125.0	-62.9	99.9	271.8	25.4	25.4	-0.8	381.1	999.9	99.9	99.9	72.4	80.
55.3	129.7	16458.9	100.0	-69.2	99.9	272.0	20.4	20.4	-0.7	344.0	999.9	99.9	99.9	79.4	81.
61.7	135.0	18174.3	75.0	-68.1	99.9	264.6	7.8	7.8	0.7	430.2	999.9	99.9	99.9	85.4	82.
70.2	149.8	20643.0	50.0	-55.8	59.9	224.7	3.0	2.1	2.1	502.5	999.9	99.9	99.9	88.9	82.
83.1	168.3	23072.8	25.0	-49.8	99.9	275.4	7.1	7.1	-0.7	641.5	999.9	99.9	99.9	99.2	83.

ORIGINAL PAGE 1
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

24 APRIL 1975
1115 GMT

TIME MIN	CATCY	HEIGHT GPH	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T OG K	E POT T OG K	MR RTO CM/KG	RM PCT	RANGE KM	AZ DEG
0.0	3.7	3.0	1010.4	21.7	21.2	170.0	6.2	-1.1	6.1	295.8	336.8	15.9	97.0	0.0	0.
0.3	4.7	129.6	1000.0	21.0	20.2	177.3	11.2	-0.1	11.2	296.2	335.5	15.1	95.1	0.3	2.
0.6	6.3	349.6	975.0	20.5	19.7	181.1	10.4	0.2	10.4	297.8	336.9	15.0	95.2	0.6	1.
1.0	8.2	574.4	950.0	19.2	18.4	192.2	11.7	2.3	11.5	298.6	335.9	14.2	95.2	1.1	3.
2.6	10.1	803.6	925.0	16.7	16.2	208.7	12.5	6.0	10.9	297.5	320.9	8.7	67.6	1.7	6.
3.4	11.8	1037.0	900.0	16.8	4.0	216.2	12.4	7.3	10.9	301.7	317.7	5.7	37.5	2.3	16.
4.2	12.6	1276.3	875.0	17.0	8.1	213.0	12.2	6.6	10.2	302.5	323.9	7.0	55.6	2.9	20.
5.1	15.7	1526.3	850.0	16.1	-1.5	205.3	11.0	4.7	9.9	303.6	315.5	4.2	31.0	3.4	21.
6.0	17.8	1778.0	825.0	14.3	-1.0	211.5	12.5	4.6	10.7	304.3	316.7	4.3	35.0	4.0	22.
6.9	19.8	2036.0	800.0	12.7	-2.7	207.1	16.2	7.4	14.4	305.2	316.5	3.9	34.0	4.9	23.
7.9	21.8	2303.4	775.0	10.6	-6.2	209.3	17.2	7.3	15.5	305.6	314.7	3.1	30.0	5.9	23.
8.8	24.0	2576.6	750.0	12.3	-42.6	213.5	17.4	9.6	14.5	310.0	310.4	0.1	1.0	6.8	24.
9.7	26.3	2868.6	725.0	12.5	-32.7	222.6	17.8	12.0	13.1	313.2	314.4	0.3	2.7	7.7	24.
10.6	28.4	3153.6	700.0	10.6	-22.2	227.2	18.6	13.7	12.7	316.3	317.4	0.9	8.1	8.7	24.
11.7	30.7	3455.2	675.0	8.8	-19.5	227.6	17.7	13.0	11.9	315.6	319.5	1.2	11.6	9.8	31.
12.9	33.2	3745.7	650.0	6.3	-15.2	226.3	15.4	11.7	10.9	316.3	322.1	1.8	19.7	10.9	32.
14.1	35.5	4088.0	625.0	4.5	-16.5	236.1	13.8	11.5	7.7	317.8	323.2	1.7	19.7	11.9	34.
15.2	38.3	4416.7	600.0	2.1	-14.4	241.0	11.0	9.6	5.3	318.8	325.4	2.1	28.2	12.9	36.
16.4	40.5	4756.4	575.0	-1.3	-11.9	250.3	9.0	8.5	3.8	318.8	327.2	2.7	44.1	13.3	37.
17.6	43.1	5110.6	550.0	-4.5	-11.4	256.2	10.0	9.7	2.4	319.1	328.1	2.9	54.5	13.8	39.
18.9	45.9	5474.7	525.0	-8.3	-10.8	256.0	10.0	9.7	2.4	318.9	328.8	3.2	81.9	14.4	41.
20.1	48.8	5851.8	500.0	-11.3	-15.0	254.9	11.1	10.7	2.1	319.5	326.6	2.2	69.4	15.1	42.
21.4	51.5	6243.1	475.0	-14.5	-18.1	261.3	9.7	9.6	1.5	320.2	326.4	1.9	74.3	15.6	44.
22.4	54.3	6632.8	450.0	-17.0	-28.0	254.7	13.2	12.8	3.5	321.9	324.8	0.8	37.0	16.5	46.
24.3	57.3	7077.9	425.0	-20.1	-29.0	252.6	14.9	14.2	4.6	323.3	326.1	0.8	45.0	17.6	48.
25.7	60.7	7523.9	400.0	-23.0	-30.3	255.5	17.0	16.5	4.3	324.1	326.7	0.8	54.6	18.9	49.
27.3	64.1	7992.4	375.0	-27.4	-31.0	264.5	19.8	19.7	1.9	325.3	327.5	0.6	58.5	20.4	52.
29.0	67.6	8485.1	350.0	-30.4	-43.0	265.2	22.9	22.8	1.9	327.6	327.5	0.2	27.7	22.4	55.
30.8	71.2	9008.2	325.0	-34.7	-41.2	276.6	22.0	21.8	-2.5	327.6	330.0	0.3	51.1	24.3	54.
32.4	75.3	9515.7	300.0	-39.1	-44.4	272.7	26.5	24.5	-1.3	336.2	331.1	0.2	54.9	26.1	61.
34.4	79.6	10122.8	275.0	-43.5	99.9	271.0	34.4	34.4	-0.7	332.3	340.9	99.9	99.9	25.3	65.
36.4	84.0	10761.0	250.0	-48.0	99.9	265.2	37.1	37.0	3.1	334.8	999.9	99.9	99.9	33.6	69.
38.6	88.8	11473.1	225.0	-54.0	99.9	271.5	37.2	37.2	-0.9	335.7	999.9	99.9	99.9	38.0	70.
41.1	94.2	12225.9	200.0	-59.0	99.9	277.7	36.3	36.0	-4.4	339.3	999.9	99.9	99.9	43.5	74.
43.9	99.8	13055.9	175.0	-61.8	99.9	270.1	31.4	31.4	-0.8	347.9	999.9	99.9	99.9	48.8	76.
47.4	106.3	14003.7	150.0	-60.6	99.9	245.5	32.9	32.8	2.8	365.4	999.9	99.9	99.9	54.6	77.
51.2	114.0	15131.6	125.0	-64.1	99.9	283.2	27.1	21.9	2.6	378.9	999.9	99.9	99.9	61.2	78.
54.1	122.7	16478.4	100.0	-70.0	99.9	261.4	20.9	20.5	3.1	392.4	999.9	99.9	99.9	68.0	79.
62.4	133.9	18175.3	75.0	-87.8	99.9	258.4	10.8	10.6	2.2	430.8	999.9	99.9	99.9	73.1	79.
70.9	143.7	20667.9	50.0	-60.3	99.9	43.9	2.7	-1.9	-1.9	501.5	999.9	99.9	99.9	75.1	80.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0.2V SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0.2V TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

0.0 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 248
SMREVEPORT, LA24 APRIL 1975
1115 GMT

157 160 0

TIME MIN	CNTCT	WEIGHT GPM	PRES HB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.4	79.0	1003.4	19.4	17.2	180.0	5.2	0.0	5.2	253.9	320.1	12.4	87.0	0.0	0.
0.1	4.6	109.4	1000.0	19.6	17.6	189.7	8.0	1.4	7.9	294.5	327.7	12.8	88.3	0.1	2.
0.4	6.4	327.3	975.0	16.2	17.5	156.0	13.1	3.6	12.6	296.3	331.2	13.4	92.2	0.5	11.
1.9	6.5	551.1	950.0	18.2	16.8	200.4	17.4	6.0	16.3	257.4	331.1	12.8	91.7	1.4	15.
2.8	16.5	780.2	925.0	17.7	14.6	209.9	19.8	9.9	1.1	296.0	329.3	11.4	81.8	2.5	15.
3.8	12.5	1015.5	900.0	18.9	10.2	217.1	22.1	13.3	17.6	302.2	320.3	8.8	57.5	3.7	24.
4.8	14.7	1257.5	875.0	18.3	8.4	226.3	20.4	14.7	14.1	303.8	325.9	8.0	52.9	5.0	24.
5.9	16.6	1505.6	850.0	16.8	7.9	229.3	21.7	16.2	14.5	308.9	327.0	6.0	55.7	6.2	31.
7.0	18.9	1759.2	825.0	15.0	1.0	223.0	18.3	12.5	13.4	305.1	319.3	5.0	34.5	7.5	31.
8.0	21.0	2019.0	800.0	13.9	-1.4	236.7	20.2	16.9	11.1	306.5	319.0	4.2	34.8	8.7	37.
9.1	23.3	2286.6	775.0	14.0	-12.0	252.4	17.8	17.0	5.4	309.1	315.2	2.0	15.3	9.9	41.
10.1	25.5	2562.2	750.0	12.2	-7.7	261.5	13.9	13.2	2.0	310.3	319.1	2.9	24.4	10.6	44.
11.2	27.8	2845.2	725.0	10.7	-11.7	275.7	10.6	10.7	-1.1	311.5	313.2	2.2	19.4	11.2	47.
12.3	30.3	3136.2	700.0	8.7	-14.3	280.1	11.3	11.1	-2.0	312.4	318.0	1.8	16.0	11.6	49.
13.5	32.9	3435.6	675.0	6.7	-21.0	283.5	11.4	11.3	1.3	313.2	316.7	1.1	11.8	12.1	50.
14.9	35.4	3744.3	650.0	4.7	-24.3	280.4	12.9	12.7	2.1	314.4	317.1	0.8	11.0	13.0	54.
16.0	38.0	4061.8	625.0	2.1	-26.9	263.1	15.6	15.5	1.9	314.9	317.2	0.7	9.5	13.9	56.
17.3	40.5	4390.6	600.0	0.0	-16.0	253.4	19.5	19.1	3.6	314.4	323.2	1.6	28.9	15.2	54.
18.7	43.3	4729.2	575.0	-3.5	-14.5	257.4	18.6	18.2	4.1	315.2	323.0	2.2	42.0	16.8	56.
20.2	46.1	5078.7	550.0	-6.5	-16.6	255.6	20.3	19.6	5.0	317.5	322.5	1.9	44.5	17.4	58.
21.6	48.1	5440.2	525.0	-9.5	-21.8	252.2	20.9	19.9	6.4	317.1	321.2	1.3	36.0	20.2	63.
23.0	51.9	5815.0	500.0	-12.4	-22.5	251.9	20.6	19.6	6.4	318.0	322.1	1.3	42.8	21.4	63.
24.5	53.7	6204.1	475.0	-14.5	-43.2	254.4	18.7	17.5	4.9	320.0	320.6	0.2	6.6	23.5	64.
26.1	56.1	6612.1	450.0	-17.3	-47.6	255.7	19.3	18.7	4.9	321.4	321.9	0.1	5.1	25.2	64.
27.7	61.4	7017.6	425.0	-20.5	-49.5	265.1	21.4	21.4	1.8	322.7	323.0	0.1	5.4	27.2	64.
29.5	64.9	7483.5	400.0	-23.5	-51.2	260.5	20.6	20.3	3.4	324.4	324.7	0.1	5.7	29.2	67.
31.2	68.3	7951.5	375.0	-27.5	-53.7	262.4	21.2	21.1	2.8	325.2	325.4	0.1	6.2	31.5	64.
33.2	71.8	8443.9	350.0	-31.6	-56.3	265.9	24.1	24.0	1.7	326.1	326.3	0.1	6.6	34.2	64.
35.1	75.8	8964.0	325.0	-36.0	-59.2	267.7	22.5	22.4	0.7	327.0	327.2	0.0	7.1	36.6	71.
36.9	80.0	9514.8	300.0	-40.3	90.9	268.4	23.4	23.4	0.7	328.6	999.9	99.9	99.9	39.0	72.
38.8	84.2	10101.9	275.0	-45.2	90.9	269.2	27.3	27.3	0.4	328.8	999.9	99.9	99.9	41.7	73.
40.8	88.6	10731.4	250.0	-50.0	90.9	263.9	30.2	30.1	3.2	331.7	999.9	99.9	99.9	45.2	74.
42.8	93.0	11413.1	225.0	-54.6	99.9	263.2	27.1	27.0	3.2	336.8	999.9	99.9	99.9	48.6	75.
44.9	98.8	12158.4	200.0	-59.5	99.9	271.0	34.9	34.9	-0.6	336.6	999.9	99.9	99.9	52.0	76.
47.4	104.5	12991.5	175.0	-60.4	90.9	272.4	35.3	35.2	-1.5	350.3	999.9	99.9	99.9	57.3	77.
50.3	111.0	13853.0	150.0	-58.8	99.9	264.9	30.6	30.5	2.7	368.8	999.9	99.9	99.9	62.7	78.
52.3	118.0	15025.2	125.0	-62.5	99.9	265.4	33.2	33.1	2.7	381.8	999.9	99.9	99.9	67.9	79.
54.9	126.3	16444.6	100.0	-68.2	99.9	262.9	25.0	24.8	3.1	390.1	999.9	99.9	99.9	73.5	79.
57.5	136.0	18108.8	75.0	-66.5	99.9	267.9	19.9	15.9	0.6	430.6	999.9	99.9	99.9	78.5	74.
70.9	145.7	20688.2	50.0	-58.0	0.9	250.6	7.2	6.8	2.4	508.6	999.9	99.9	99.9	82.5	80.
84.7	156.1	25139.1	25.0	-50.9	54.9	288.6	5.2	4.9	-1.6	638.9	999.9	99.9	99.9	82.9	82.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 255
VICTORIA, TEX

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GM	PRES MB	TEMP DG C	CFW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ UG
0.0	4.1	33.0	1007.3	23.9	21.2	170.0	6.7	-1.2	6.6	298.6	340.4	16.0	85.0	0.0	0
0.2	4.7	96.9	1009.0	23.3	21.6	999.9	99.9	99.9	99.9	298.7	341.8	16.5	90.1	999.9	99.9
1.0	6.5	318.4	975.0	21.8	21.0	999.9	99.9	99.9	99.9	299.3	342.1	16.4	95.7	999.9	99.9
1.8	8.6	544.2	950.0	20.0	19.3	176.6	10.4	-0.4	16.4	299.5	339.0	15.0	95.4	1.4	34.9
2.6	10.6	774.6	925.0	19.6	18.6	185.5	19.6	2.2	19.5	300.6	324.9	7.0	58.0	2.1	35.5
3.3	12.8	1011.2	900.0	21.6	3.0	185.2	20.6	1.8	20.5	304.5	320.2	5.5	30.8	3.1	35.5
4.2	15.0	1254.8	875.0	20.1	6.7	181.9	22.5	0.7	22.5	305.7	325.4	7.0	41.5	4.2	36.0
4.9	17.1	1503.9	850.0	18.1	3.2	181.6	22.2	0.6	22.2	305.9	322.2	5.7	37.0	5.3	0
5.0	15.5	1758.8	825.0	16.3	1.0	182.2	19.8	0.8	19.8	306.5	320.9	5.0	35.5	6.4	0
6.8	21.5	2013.6	800.0	15.4	-17.4	190.0	20.1	3.5	15.8	307.8	313.4	1.8	13.9	7.5	1
7.5	24.0	2288.6	775.0	16.8	-39.7	200.8	17.8	6.3	16.7	311.5	312.4	0.2	1.0	8.4	3
8.5	26.2	2566.8	750.0	15.7	-40.3	204.6	13.9	5.8	12.7	313.7	314.2	0.1	1.0	9.2	5
9.4	28.7	2853.4	725.0	14.9	-40.8	207.1	10.9	4.9	9.7	315.8	316.3	0.1	1.0	9.8	6
10.3	31.3	3148.6	700.0	13.0	-41.9	225.4	7.8	5.6	5.5	316.9	317.4	0.1	1.0	10.3	7
11.3	33.9	3452.3	675.0	10.8	-43.3	244.0	6.0	5.4	2.6	317.8	318.2	0.1	1.0	10.5	9
12.4	36.3	3764.9	650.0	8.2	-19.5	222.4	5.6	5.3	1.7	318.4	322.6	1.3	12.4	16.7	11
13.4	39.1	4096.7	625.0	5.1	-13.1	244.4	7.6	6.8	3.3	318.6	325.7	2.2	25.1	16.9	13
14.5	41.7	4418.3	600.0	2.2	-12.7	242.6	8.3	7.4	3.8	319.0	326.5	2.4	31.7	11.3	15
15.6	44.6	4759.7	575.0	-1.5	-13.1	249.9	8.6	8.0	2.9	318.6	326.2	2.4	40.7	11.7	17
16.4	47.6	5111.9	550.0	-4.4	-20.1	263.4	10.2	10.1	1.2	319.0	323.6	1.4	28.1	12.0	19
18.0	50.3	5478.5	525.0	-7.2	-21.1	274.2	12.7	12.7	-0.9	319.9	324.3	1.3	31.7	12.3	23
19.4	53.6	5854.7	500.0	-10.0	-21.5	269.4	13.1	13.1	0.1	320.9	323.2	0.7	18.9	12.6	24
20.6	56.6	6248.7	475.0	-12.1	-28.8	280.5	14.5	14.3	2.4	323.1	325.6	0.7	23.3	13.2	31
21.9	60.0	6654.3	450.0	-15.7	-32.5	256.3	15.8	15.4	3.8	323.6	325.5	0.5	21.8	14.1	35
23.3	63.4	7088.1	425.0	-18.8	-35.9	255.3	16.3	15.7	4.1	324.9	326.4	0.4	20.7	15.2	38
24.7	66.8	7538.4	400.0	-21.9	-39.7	263.4	20.2	20.0	2.3	328.5	327.1	0.2	5.4	16.3	41
26.3	70.5	8008.9	375.0	-25.2	-40.0	273.5	24.1	24.0	-1.5	328.2	327.3	0.3	23.6	17.8	47
27.9	74.3	8536.2	350.0	-28.5	-42.3	275.0	28.6	28.5	-2.5	330.3	331.3	0.3	24.9	19.6	52
29.5	78.3	9033.7	325.0	-32.2	-48.3	271.6	31.1	31.1	-0.9	332.2	332.7	0.1	18.3	22.0	57
31.4	82.5	9593.3	300.0	-36.8	-50.6	271.9	32.8	32.8	-1.1	333.4	333.9	0.1	22.2	25.1	62
33.5	86.8	10189.1	275.0	-41.9	59.9	269.3	29.4	29.4	0.4	334.5	999.9	99.9	999.9	28.5	68
35.5	91.6	10827.5	250.0	-47.2	99.9	267.9	27.9	29.9	1.1	335.9	999.9	99.9	999.9	32.0	99
37.8	96.8	11515.1	225.0	-53.4	99.9	267.8	30.5	30.5	1.2	336.6	999.9	99.9	999.9	35.7	76
40.2	102.2	12263.0	200.0	-59.2	99.9	286.1	36.7	35.3	-10.2	339.0	999.9	99.9	999.9	39.7	73
43.0	108.3	13085.9	175.0	-64.3	99.9	283.9	41.5	38.0	-16.8	343.9	999.9	99.9	999.9	45.5	78
45.8	115.0	14032.9	150.0	-65.0	99.9	261.6	31.7	31.4	4.6	354.1	999.9	99.9	999.9	50.5	41
49.3	122.3	15149.7	125.0	-65.6	99.9	271.0	23.1	21.1	-0.4	378.1	999.9	99.9	999.9	57.3	41
53.9	131.0	16486.2	100.0	-71.3	99.9	254.7	23.3	22.5	6.1	390.0	999.9	99.9	999.9	62.5	81
59.5	141.0	18189.0	75.0	-67.5	99.9	228.7	11.6	8.7	7.6	431.4	999.9	99.9	999.9	67.2	87
67.2	151.7	20682.6	50.0	-57.6	99.9	317.9	4.1	2.8	-3.1	507.8	999.9	99.9	999.9	69.8	81
79.4	164.0	25104.0	25.0	-50.4	99.9	90.7	6.4	-6.4	0.1	639.7	999.9	99.9	999.9	66.7	82

* BY SLEEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 260
STEPHENVILLE, TEX

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP CG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.9	399.0	963.8	19.0	17.8	180.0	6.2	0.0	6.2	257.1	332.4	13.5	93.0	0.0	0
0.9	9.9	59.9	1000.0	59.9	59.9	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	9.9	59.9	975.0	59.9	59.9	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
11.0	523.5	523.5	950.0	19.5	18.1	189.0	14.3	2.5	14.1	298.9	336.0	14.1	92.7	0.4	2
1.1	11.5	753.9	925.0	18.7	17.6	193.5	21.0	4.9	20.5	300.3	337.1	13.9	93.6	1.0	7
1.8	15.8	945.8	900.0	20.8	19.9	201.2	23.8	8.6	22.2	308.2	338.0	8.6	51.1	2.0	12
2.8	18.2	1233.9	875.0	21.2	19.2	207.6	17.7	8.2	15.7	308.9	330.4	6.4	46.4	3.2	17
3.7	20.7	1484.7	850.0	20.1	17.9	219.8	14.4	9.2	11.1	308.3	330.6	7.9	45.3	4.0	20
4.5	23.2	1741.8	825.0	19.4	-0.2	232.6	9.9	7.9	6.0	308.7	323.2	4.6	26.7	4.6	24
5.5	25.7	2005.4	800.0	17.4	-2.3	226.5	9.3	6.8	6.4	310.3	322.5	4.2	26.6	5.1	25
6.4	28.3	2275.3	775.0	15.1	-0.0	224.8	9.0	6.3	6.4	310.7	325.2	4.9	35.5	5.6	28
7.3	31.0	2551.9	750.0	13.4	0.2	251.1	6.0	7.6	3.6	311.8	327.1	5.2	40.4	5.9	30
8.1	33.8	2836.3	725.0	11.7	-0.5	262.0	8.5	8.4	1.2	316.6	320.5	2.6	21.0	6.2	33
9.1	36.4	3128.4	700.0	10.2	-43.7	252.9	9.6	5.1	2.8	313.8	314.2	0.1	1.0	6.5	37
10.0	39.3	3425.5	675.0	8.8	-44.5	239.4	12.1	10.4	6.1	315.5	315.8	0.1	1.0	7.1	39
11.0	42.0	3719.7	650.0	6.1	-46.2	238.3	12.6	10.7	6.6	315.8	316.2	0.1	1.0	7.7	40
11.9	45.0	4058.7	625.0	3.0	-48.1	240.4	14.1	12.2	6.9	315.9	316.2	0.1	1.0	8.5	42
12.9	47.0	4397.6	600.0	0.4	-49.7	245.5	16.4	14.9	6.8	316.5	316.8	0.1	1.0	9.3	44
14.0	50.9	4726.7	575.0	-2.8	-46.8	249.2	17.1	16.0	6.1	316.7	317.1	0.1	1.0	10.4	46
15.1	54.1	5076.5	550.0	-6.2	-34.8	248.4	18.5	17.2	6.8	316.7	317.9	0.4	8.2	11.4	45
16.3	57.3	5428.0	525.0	-9.8	-33.1	255.8	18.9	18.4	4.6	316.7	318.2	0.4	12.7	12.7	51
17.5	60.6	5812.3	500.0	-12.8	-44.7	255.1	19.6	18.9	5.0	317.4	317.9	0.1	1.0	14.0	54
18.8	64.0	6201.0	475.0	-16.1	-57.5	252.7	19.8	18.9	5.9	318.0	318.1	0.0	1.4	15.4	55
20.3	67.3	6608.1	450.0	-16.4	-60.3	260.4	18.9	18.6	3.2	322.6	322.7	0.0	1.0	17.1	56
21.7	70.8	7034.8	425.0	-20.3	-62.8	254.0	20.0	19.7	3.8	322.9	323.0	0.0	1.0	18.5	57
23.3	74.5	7480.2	400.0	-24.3	-65.4	265.0	20.7	20.6	1.8	323.4	323.4	0.0	1.0	20.3	61
24.7	78.3	7947.0	375.0	-28.1	-67.9	265.0	23.1	23.0	2.0	324.3	324.4	0.0	1.0	22.1	64
26.5	82.2	8438.6	350.0	-31.6	-70.2	266.3	26.8	26.7	1.7	326.1	326.1	0.0	1.0	24.8	66
28.3	86.2	8958.1	325.0	-35.9	-73.0	266.3	28.5	28.5	1.9	327.2	327.2	0.0	1.0	27.3	67
30.1	90.0	9405.3	300.0	-40.3	-75.9	266.6	30.7	30.4	4.0	328.5	328.5	99.9	99.9	30.3	70
32.1	95.2	10056.4	275.0	-45.4	-79.9	265.6	32.2	32.1	2.5	329.5	329.5	99.9	99.9	34.2	71
34.4	99.8	10725.8	250.0	-50.0	-83.9	266.7	33.7	33.7	2.0	331.7	331.7	99.9	99.9	38.7	73
37.0	104.8	11407.4	225.0	-54.4	-89.9	266.9	35.0	34.8	2.0	335.1	335.1	99.9	99.9	44.1	75
39.9	110.4	12153.5	200.0	-59.1	-99.9	270.0	44.8	44.8	0.0	338.3	338.3	99.9	99.9	51.1	76
43.0	116.3	12982.2	175.0	-62.3	-99.3	275.5	40.6	40.4	-1.9	347.1	347.1	99.9	99.9	59.8	76
46.5	122.8	13936.2	150.0	-61.7	-99.9	253.8	39.4	36.9	10.7	363.8	363.8	99.9	99.9	67.3	80
51.2	130.0	15066.9	125.0	-60.0	-99.9	267.3	31.7	31.7	1.5	380.3	380.3	99.9	99.9	77.9	90
55.5	137.3	16445.8	100.0	-67.7	-99.9	238.5	17.2	14.7	9.0	398.9	398.9	99.9	99.9	81.2	74
61.3	145.0	18166.9	75.0	-69.2	-99.3	256.7	14.8	14.4	3.4	427.8	427.8	99.9	99.9	89.8	74
70.0	153.3	20670.8	50.0	-58.4	-99.9	253	5.1	-0.2	-5.1	508.0	508.0	99.9	99.9	91.9	70
83.3	162.3	25124.0	25.0	-51.1	-99.9	345.3	4.5	1.1	-4.4	638.0	638.0	99.9	99.9	93.3	81

ORIGINAL PAGE
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 5 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIO, TEX

26 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CGMP M/SEC	V CGMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	P.8	314.0	971.4	21.7	18.7	110.0	5.2	-4.9	1.9	299.2	336.5	14.1	82.0	0.0	0.
99.9	55.3	99.9	1000.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	90.3	99.9	975.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.8	10.7	506.0	950.0	20.6	19.1	136.6	11.8	-6.1	8.6	300.1	339.2	14.8	91.3	0.4	30.0
1.6	13.1	739.8	925.0	19.4	18.7	158.1	12.3	-4.6	11.4	301.1	340.5	14.9	95.8	1.0	31.0
2.5	15.2	575.0	900.0	17.7	17.1	174.3	13.0	-1.3	12.9	301.6	338.4	13.8	95.9	1.6	31.0
3.4	18.0	1217.3	875.0	19.6	13.9	192.7	11.8	2.6	11.5	305.7	337.3	11.5	65.5	2.2	34.7
4.2	20.5	1467.5	850.0	19.9	10.8	185.0	13.1	1.1	13.1	306.3	335.3	9.7	56.0	2.8	34.6
5.2	23.0	1725.4	825.0	20.3	8.9	178.5	11.7	-0.3	11.7	311.2	336.1	6.7	48.0	3.4	35.0
6.2	25.5	1991.0	800.0	19.8	2.4	177.0	12.8	0.7	12.8	313.0	330.0	5.8	32.2	4.2	35.0
7.3	28.2	2254.0	775.0	19.3	-5.9	180.5	12.3	0.1	12.3	315.0	324.8	3.2	17.8	5.1	35.2
8.3	31.0	2544.8	750.0	17.5	-0.6	203.2	10.4	4.1	9.5	316.2	330.9	4.9	29.1	5.7	35.4
9.4	33.8	2833.3	725.0	15.7	-5.3	226.6	10.5	7.6	7.2	317.1	328.1	3.6	23.2	6.2	35.8
10.5	36.3	3129.6	700.0	13.3	-10.2	241.6	11.0	9.7	5.2	317.6	325.5	2.5	18.4	6.6	3.
11.6	38.2	3433.7	675.0	10.8	-14.8	249.4	11.4	10.7	4.0	317.9	323.7	1.8	15.0	6.9	9.
12.6	41.9	3746.4	650.0	8.1	-15.2	250.3	11.4	10.7	3.8	318.4	324.2	1.8	17.4	7.3	13.
13.9	44.9	4067.7	625.0	4.9	-14.7	247.6	11.1	10.2	4.2	318.3	324.6	2.0	22.5	7.9	15.
15.2	48.0	4358.8	600.0	2.2	-14.2	247.4	11.3	10.4	4.3	318.9	325.6	2.1	28.4	8.5	23.
16.3	51.0	4740.1	575.0	-1.7	-16.1	246.0	11.4	10.4	4.6	319.2	324.2	1.9	34.2	9.0	27.
17.4	54.1	5091.8	550.0	-4.9	-17.2	243.2	13.6	12.2	6.1	319.5	324.3	1.8	37.3	9.6	29.
18.5	57.3	5456.3	525.0	-7.3	-19.4	252.5	16.2	15.5	4.9	319.8	325.3	1.7	40.7	10.5	32.
19.6	60.6	5834.0	500.0	-11.0	-19.9	257.3	17.2	16.8	3.8	319.8	324.9	1.6	47.5	11.5	37.
21.1	64.0	6225.1	475.0	-14.3	-29.0	257.0	16.1	15.6	3.6	320.4	322.8	0.7	27.4	12.5	41.
22.8	67.5	6635.7	450.0	-15.0	-48.5	254.3	13.3	12.8	3.6	324.3	324.7	0.1	3.9	13.7	45.
24.2	70.9	7025.2	425.0	-18.0	-52.6	254.7	13.8	13.4	3.6	325.8	326.1	0.1	3.0	14.8	47.
26.0	74.7	7514.7	400.0	-22.0	-50.5	261.2	15.3	15.2	2.3	326.3	326.7	0.1	5.5	16.0	50.
27.7	78.7	7980.4	375.0	-25.5	-36.4	263.4	19.7	19.6	2.3	327.2	329.4	0.4	35.1	17.5	53.
29.5	82.6	8483.6	350.0	-25.2	-43.0	268.0	26.5	26.5	0.9	329.4	330.3	0.2	26.0	18.6	57.
31.3	86.6	9008.0	325.0	-33.6	-38.2	267.3	30.4	30.4	1.5	330.3	331.8	0.4	63.2	22.5	61.
33.4	91.2	9565.3	300.0	-37.8	-42.5	269.1	33.4	33.4	0.5	332.1	333.2	0.3	61.0	24.2	65.
35.7	95.7	10159.2	275.0	-42.6	-49.9	269.7	33.7	33.5	3.7	333.5	334.6	0.9	99.9	30.4	68.
38.1	100.5	10756.2	250.0	-47.5	-59.9	261.0	33.7	33.3	5.3	335.4	336.9	0.9	99.9	34.9	70.
40.3	105.6	11483.1	225.0	-53.3	-69.9	268.2	38.7	39.6	1.2	336.9	338.9	0.9	99.9	40.1	72.
43.3	111.2	12229.9	200.0	-60.1	-69.9	270.3	40.7	40.7	-0.2	337.6	339.9	0.9	99.9	46.1	74.
46.3	117.0	13051.9	175.0	-66.0	-69.9	274.9	50.6	50.4	-4.2	341.0	343.9	0.9	99.9	53.4	77.
49.5	122.9	13985.9	150.0	-65.8	-69.9	264.3	40.1	39.9	4.0	350.7	352.9	0.9	99.9	62.0	80.
53.5	131.3	15100.3	125.0	-65.8	-69.9	261.6	33.9	33.6	5.0	375.8	378.9	0.9	99.9	69.4	79.
58.3	138.7	16453.3	100.0	-69.1	-69.9	255.2	17.6	17.0	4.5	394.2	399.9	0.9	99.9	76.2	80.
64.2	147.0	18147.7	75.0	-70.9	-69.9	235.2	18.0	14.8	10.3	424.3	432.9	0.9	99.9	81.6	79.
72.4	156.5	20629.7	50.0	-58.6	-59.9	24.3	4.0	-1.7	-3.7	505.5	509.9	0.9	99.9	85.4	76.
99.9	99.9	59.9	25.0	99.9	99.9	99.9	99.9	99.9	59.9	99.9	99.9	99.9	99.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 306
HATTERAS, NC
24 APRIL 1975
1115 GMT

157 21.0 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEV PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCNP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	3.9	4.0	1023.7	19.8	13.7	220.0	6.2	4.0	4.7	292.3	317.6	9.7	58.0	0.7	0.
0.7	5.3	206.3	1300.0	19.8	10.9	213.1	15.4	8.4	12.9	294.1	315.9	8.2	56.6	0.7	32.
1.4	6.0	423.7	575.0	17.6	9.3	212.6	17.5	9.5	14.9	292.9	314.0	7.6	58.2	1.3	33.
2.2	10.2	645.3	950.0	15.5	8.5	209.9	16.2	8.1	14.0	293.9	313.5	7.4	62.7	2.2	32.
2.9	12.4	811.0	925.0	13.3	8.3	212.3	17.2	9.2	14.6	293.9	313.8	7.5	71.8	2.9	32.
3.6	14.8	1101.0	900.0	11.3	7.9	214.9	16.3	9.3	13.4	294.2	314.0	7.4	74.7	3.6	32.
4.3	16.9	1336.0	875.0	9.4	7.1	216.5	16.2	9.6	13.0	294.5	313.9	7.3	85.2	4.2	32.
5.1	19.4	1576.3	850.0	8.2	6.1	224.1	14.3	10.0	10.3	295.3	307.9	4.6	56.9	5.0	33.
6.0	21.6	1822.6	825.0	7.8	6.2	240.3	14.2	12.4	7.0	297.3	305.6	2.9	36.7	5.7	31.
6.8	24.2	2075.7	800.0	6.1	8.9	257.6	12.9	12.6	2.8	298.0	305.1	2.4	33.1	6.2	39.
7.6	26.3	2335.2	775.0	4.8	9.7	264.0	12.7	12.6	1.3	298.3	306.2	2.4	34.1	6.7	43.
8.3	29.1	2602.0	750.0	3.6	3.5	264.8	12.3	12.2	1.1	301.7	312.2	3.9	59.7	7.2	47.
9.4	31.8	2876.6	725.0	1.7	5.4	266.0	11.8	11.8	0.8	301.0	311.9	3.5	59.4	7.8	50.
10.2	34.4	3155.1	700.0	0.5	0.5	285.1	11.6	11.2	-3.0	303.8	319.9	5.7	100.7	8.2	52.
11.2	37.3	3450.6	675.0	-1.3	-1.3	302.2	13.1	11.1	-7.0	304.9	319.7	5.2	104.1	8.5	57.
12.1	35.8	3751.3	650.0	-2.9	-3.7	298.4	12.7	11.2	-6.0	306.3	319.2	4.5	95.0	8.8	61.
13.1	42.5	4021.5	625.0	-4.8	-6.3	289.5	11.0	11.0	-3.9	307.5	318.7	3.8	85.0	9.3	64.
14.2	45.4	4381.9	600.0	-6.9	-6.9	285.7	10.5	10.1	-2.8	308.5	319.7	3.0	101.8	9.9	67.
15.3	48.4	4714.0	575.0	-7.4	-11.0	282.6	11.0	10.4	-3.5	311.7	323.5	2.9	75.5	10.4	70.
16.3	51.3	5055.2	550.0	-9.2	-16.6	292.8	13.0	11.9	-5.0	313.4	319.3	1.9	54.5	10.9	72.
17.4	54.5	5417.9	525.0	-11.3	-18.4	292.1	15.8	14.7	-6.0	315.0	320.4	1.7	55.6	11.7	75.
18.5	57.4	5790.8	500.0	-13.7	-18.5	289.3	16.6	15.7	-5.5	316.5	322.2	1.8	66.5	12.6	78.
19.7	60.7	6179.1	475.0	-16.3	-20.6	285.1	16.8	16.2	-4.4	317.9	323.0	1.6	69.2	13.6	81.
21.0	64.3	6583.9	450.0	-19.4	-23.5	279.0	19.5	19.3	-3.1	319.0	323.1	1.3	69.4	14.9	82.
22.3	67.6	7006.3	425.0	-22.7	-27.1	275.9	18.0	17.9	-1.9	320.0	323.2	1.0	66.9	16.4	84.
23.7	71.0	7447.9	400.0	-26.3	-31.2	277.6	21.0	20.8	-2.8	320.9	323.2	0.7	62.5	17.9	87.
25.0	74.8	7911.0	375.0	-29.5	99.9	290.7	18.3	17.1	-6.5	322.5	993.9	99.9	99.9	19.5	89.
26.3	78.8	8400.2	350.0	-33.2	99.9	295.6	19.0	16.5	-9.4	324.0	999.9	99.9	99.9	20.7	94.
27.8	82.7	8917.1	325.0	-36.9	99.9	299.6	21.0	18.2	-10.4	325.9	999.9	99.9	99.9	22.3	91.
29.3	86.8	9464.8	300.0	-41.6	99.9	298.0	23.3	20.8	-11.0	326.7	993.9	99.9	99.9	24.0	93.
31.0	91.4	10049.6	275.0	-45.8	99.9	299.7	24.3	21.1	-12.0	328.8	999.9	99.9	99.9	26.2	95.
32.7	95.0	10678.3	250.0	-50.6	99.9	298.6	28.1	24.7	-13.4	330.9	999.9	99.9	99.9	28.2	97.
34.7	101.3	11356.9	225.0	-56.0	99.9	301.1	27.6	23.6	-14.3	332.7	999.9	99.9	99.9	31.6	100.
36.7	106.4	12098.4	200.0	-60.5	99.9	307.0	23.2	18.5	-14.0	337.0	953.9	99.9	99.9	34.4	102.
38.7	112.0	12922.0	175.0	-63.2	99.9	308.8	32.0	24.9	-20.0	345.6	993.9	99.9	99.9	37.2	104.
41.2	118.3	13873.8	150.0	-61.3	99.9	291.9	35.0	32.4	-13.0	364.6	999.9	99.9	99.9	42.1	106.
44.5	125.3	15021.1	125.0	-58.6	99.9	293.2	37.3	34.3	-14.7	369.0	973.9	99.9	99.9	49.7	107.
48.3	133.0	16409.7	100.0	-62.3	99.9	311	9.2	10.5	-9.2	407.3	999.9	99.9	99.9	55.6	107.
52.6	140.7	18157.8	75.0	-66.3	99.9	302.9	14.9	12.5	-8.1	434.0	999.9	99.9	99.9	58.2	109.
59.0	149.0	20071.1	50.0	-58.6	99.9	346.9	11.1	2.1	-10.9	504.9	999.9	99.9	99.9	62.1	110.
67.8	157.3	25123.0	25.1	-50.6	99.9	75.3	6.3	-6.1	-1.6	636.7	999.9	99.9	99.9	62.0	112.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 311
ATMENS, GA24 APRIL 1975
1115 GMT

TIME MIN	CATCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MR RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.6	246.0	992.2	14.1	12.7	200.0	2.6	0.9	2.4	285.1	313.1	9.3	91.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
0.5	8.2	294.2	975.0	15.1	13.3	203.0	14.8	5.6	13.6	291.6	317.3	9.9	85.2	0.3	17.
1.2	10.5	615.0	950.0	15.4	11.8	212.9	16.3	8.9	13.7	294.1	318.3	9.2	78.7	1.0	23.
2.0	12.6	841.3	925.0	14.5	8.4	222.7	13.4	9.1	9.8	295.1	315.3	7.5	67.1	1.7	30.
2.8	15.7	1072.4	900.0	12.9	8.6	229.3	13.8	10.4	9.0	295.8	316.9	7.9	75.5	2.3	35.
3.7	17.3	1309.4	875.0	11.3	8.8	228.2	13.6	10.1	9.1	296.6	318.5	8.2	64.5	3.0	38.
4.5	15.8	1551.2	850.0	9.1	7.9	231.4	10.4	12.8	10.2	296.7	318.0	7.9	92.4	3.7	40.
5.3	22.0	1754.9	825.0	7.8	6.8	236.6	17.2	14.4	9.5	297.9	318.3	7.6	93.7	4.5	43.
6.2	24.6	2052.5	800.0	10.1	-15.6	239.7	14.5	12.5	7.3	302.1	306.6	1.5	15.2	5.3	45.
7.0	27.0	2315.5	775.0	8.5	-8.8	241.0	10.3	9.0	5.0	303.4	312.0	3.0	32.8	6.0	46.
8.1	29.6	2585.5	750.0	5.5	-0.1	241.0	9.5	8.3	4.6	303.2	317.6	5.1	67.2	6.5	48.
9.1	32.2	2862.3	725.0	3.7	-4.0	242.7	10.6	9.4	4.9	305.0	315.4	4.0	57.4	7.1	47.
10.1	35.0	3147.0	700.0	2.8	-5.8	251.1	10.6	10.0	3.4	305.0	316.4	3.5	53.1	7.7	51.
11.1	37.4	3442.1	675.0	3.6	-6.4	269.0	10.1	10.1	0.2	310.1	320.5	3.5	48.0	8.3	52.
12.2	40.3	3747.9	650.0	1.9	-6.1	278.2	9.8	9.7	-1.4	311.6	322.7	3.7	55.3	8.7	50.
13.3	43.0	4063.0	625.0	-0.7	-10.2	270.3	9.7	9.7	-0.0	312.0	323.6	2.8	46.2	9.2	56.
14.5	46.0	4387.7	600.0	-3.5	-10.2	267.2	11.2	11.1	0.5	312.4	321.3	2.9	59.4	9.8	60.
15.6	49.0	4722.4	575.0	-6.2	-20.1	272.9	13.8	13.8	-0.9	312.8	317.1	1.3	32.1	10.6	62.
17.7	51.9	5069.6	550.0	-8.0	-26.4	282.2	16.4	15.6	-5.1	314.6	317.3	0.8	21.1	11.6	67.
18.5	55.0	5428.6	525.0	-11.6	-24.3	286.4	16.3	15.6	-4.6	314.5	317.8	1.0	34.0	12.3	71.
20.0	58.0	5800.2	500.0	-15.1	-24.0	289.9	16.1	15.2	-5.5	314.7	319.2	1.1	46.4	13.3	75.
21.5	61.3	6185.3	475.0	-18.9	-23.9	285.7	17.4	15.8	-4.7	314.7	318.4	1.2	64.6	15.2	78.
23.1	64.6	6596.5	450.0	-15.8	-44.1	286.7	18.0	17.2	-5.2	318.3	313.9	0.2	9.3	16.7	82.
24.7	68.0	7004.3	425.0	-22.6	-45.9	291.1	17.1	16.0	-6.2	320.0	323.5	0.1	9.8	18.2	87.
26.3	71.4	7451.7	400.0	-24.8	-47.4	286.5	20.0	19.2	-5.7	323.7	323.2	0.1	10.0	19.7	87.
28.0	75.2	7918.2	375.0	-27.9	-49.5	284.0	21.2	20.6	-5.1	324.6	325.0	0.1	10.3	21.9	87.
29.9	79.2	8410.4	350.0	-31.6	-52.4	283.9	21.7	21.1	-4.2	326.1	326.4	0.1	10.7	24.4	87.
32.1	83.0	8930.2	325.0	-35.6	-55.3	279.3	25.9	25.5	-4.2	327.5	327.7	0.1	11.1	27.4	90.
34.2	87.0	9482.8	300.0	-39.6	-58.3	284.0	28.8	27.9	-7.0	329.4	329.6	0.0	11.5	30.4	91.
36.3	91.8	10072.0	275.0	-44.3	-61.3	286.0	30.6	29.4	-8.4	331.1	329.9	99.9	99.9	34.7	91.
38.7	96.6	10703.4	250.0	-49.5	-64.9	285.6	21.0	20.2	-5.6	332.6	329.9	99.9	99.9	38.2	98.
41.2	101.0	11365.8	225.0	-54.5	-69.9	296.5	26.2	23.5	-11.7	335.0	329.9	99.9	99.9	41.6	98.
43.8	104.3	12131.1	200.0	-59.5	-69.9	305.4	26.1	21.3	-15.1	338.5	329.9	99.9	99.9	45.7	92.
47.0	112.0	12962.1	175.0	-60.1	-69.9	283.9	29.1	27.3	-6.7	350.7	329.9	99.9	99.9	51.6	100.
50.3	118.3	13916.8	150.0	-62.1	-69.9	282.9	36.9	30.0	-8.3	363.1	329.9	99.9	99.9	58.1	100.
54.8	125.3	15055.8	125.0	-60.3	-69.9	279.2	29.7	29.4	-4.7	382.8	329.9	99.9	99.9	65.9	100.
59.5	132.7	16435.2	100.0	-65.2	-69.9	281.9	11.8	11.6	-2.4	401.8	329.9	99.9	99.9	71.3	100.
65.5	140.3	18157.5	75.0	-67.6	-69.9	275.3	13.6	13.6	-1.2	431.3	329.9	99.9	99.9	76.5	100.
73.7	148.0	20489.0	50.0	-60.8	-69.9	343.0	4.3	1.2	-4.1	500.2	329.9	99.9	99.9	80.7	101.
99.9	58.8	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 317
GREENSBORO, NC

24 APRIL 1975
1120 GMT

TIME MIN	CNTCT	HEIGHT CM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V CCOMP M/SEC	POT V DEG K	E POT T DEG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DEG
0.0	6.8	275.0	968.6	16.7	14.5	210.0	4.7	2.3	4.1	292.2	319.7	10.6	87.0	0.0	C.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	4.2	393.0	975.0	15.7	12.2	221.7	9.0	6.3	6.7	292.2	316.2	9.2	90.2	0.2	37.
1.6	10.7	613.2	950.0	13.3	11.8	226.7	14.2	10.6	6.3	291.9	315.9	9.2	90.2	0.9	44.
2.5	13.2	837.5	925.0	11.7	11.0	234.1	18.8	15.2	11.0	292.5	316.0	9.0	95.4	1.8	47.
3.6	15.7	1066.9	900.0	10.5	9.3	238.2	23.4	19.3	12.3	293.4	315.8	8.5	95.3	3.2	51.
4.7	18.2	1301.7	875.0	10.1	9.2	243.1	28.4	21.5	10.9	295.3	317.6	8.4	94.1	4.7	54.
5.7	20.7	1543.2	850.0	10.0	6.7	243.7	21.3	19.1	9.5	297.6	317.4	7.3	79.8	6.1	57.
6.7	23.3	1791.4	825.0	8.6	6.4	239.9	19.8	17.1	9.9	298.7	318.7	7.4	85.9	7.3	57.
7.6	25.3	2045.9	800.0	7.7	5.6	240.3	14.6	12.7	7.3	300.3	320.0	7.2	86.4	8.3	54.
8.6	26.8	2307.4	775.0	6.3	4.8	247.7	11.3	10.4	4.3	301.5	320.8	7.0	90.0	9.1	58.
9.6	31.7	2576.5	750.0	5.2	4.0	265.6	10.4	10.3	0.8	303.1	322.1	6.8	92.2	9.6	59.
10.7	34.6	2851.1	725.0	3.8	2.0	271.5	10.1	10.1	-0.3	304.5	321.8	6.1	88.1	10.2	61.
11.9	37.3	3118.1	700.0	2.2	-0.8	258.0	12.1	11.9	2.5	305.6	320.3	5.2	80.6	10.9	63.
13.0	40.3	3431.5	675.0	0.7	-2.4	249.2	9.5	8.8	3.4	307.1	320.8	4.8	79.2	11.7	64.
14.1	43.3	3733.6	650.0	-1.5	-6.8	244.4	9.6	8.6	4.1	307.7	318.2	3.6	67.5	12.2	64.
15.2	46.4	4045.4	625.0	-3.0	-13.9	255.3	13.0	12.6	3.1	309.3	315.7	2.1	42.4	13.0	64.
16.3	49.6	4368.0	600.0	-4.6	-18.8	264.2	15.0	14.9	1.5	310.9	315.5	1.4	31.4	13.9	65.
17.4	52.5	4701.4	575.0	-6.9	-26.1	265.5	15.6	15.6	0.1	312.0	315.0	1.0	24.0	14.9	67.
18.7	55.3	5046.4	550.0	-9.7	-38.3	275.2	17.7	17.6	-1.6	312.6	313.5	0.3	7.6	16.0	69.
20.0	59.1	5402.8	525.0	-13.2	-34.1	280.4	18.2	17.9	-3.3	312.5	313.9	0.4	15.4	17.3	71.
21.6	62.7	5772.1	500.0	-16.0	-56.1	285.3	21.0	20.2	-5.5	313.5	313.6	0.0	1.7	18.3	74.
23.2	66.1	6157.3	475.0	-17.2	-60.8	285.5	22.0	21.6	-4.0	316.7	316.8	0.0	1.0	20.7	77.
24.6	69.8	6500.6	450.0	-19.6	-62.4	286.1	20.1	19.3	-5.6	318.6	318.6	0.0	1.0	23.4	79.
26.0	73.3	6821.8	425.0	-21.9	-63.9	288.1	21.9	20.8	-6.8	320.9	321.0	0.0	1.0	25.8	81.
27.3	77.3	7127.5	400.0	-25.3	-66.1	288.9	21.4	20.3	-7.0	322.1	322.1	0.0	1.0	28.5	83.
28.4	81.0	7451.9	375.0	-29.3	-57.2	294.0	20.8	19.0	-8.5	324.3	324.9	0.1	4.4	27.1	85.
30.3	85.1	8380.4	350.0	-32.9	-47.3	293.0	17.7	16.3	-6.9	324.3	324.9	0.1	22.0	28.6	86.
32.0	94.4	8898.8	325.0	-36.3	-47.2	294.5	20.7	18.8	-8.6	326.5	327.2	0.2	31.3	30.6	86.
33.7	98.3	9449.2	300.0	-40.4	99.9	303.2	18.9	15.9	-10.3	328.5	328.5	99.9	99.9	32.0	87.
35.8	98.9	10035.4	275.0	-45.9	99.9	297.0	21.4	19.1	-9.7	328.6	328.6	99.9	99.9	34.2	92.
37.9	103.6	10662.6	250.0	-51.4	99.9	298.7	28.2	24.9	-13.5	329.6	329.6	99.9	99.9	37.2	94.
40.1	109.1	11337.4	225.0	-57.4	99.9	297.7	28.6	25.3	-13.3	330.6	330.6	99.9	99.9	41.0	96.
42.9	115.0	12074.0	200.0	-61.9	99.9	287.2	31.7	30.3	-6.4	334.6	334.6	99.9	99.9	45.5	94.
45.9	121.0	12901.6	175.0	-58.8	99.9	293.7	35.5	32.6	-14.3	332.6	332.6	99.9	99.9	51.2	100.
49.1	127.4	13876.3	150.0	-58.0	99.9	289.3	34.5	32.6	-11.4	370.1	370.1	99.9	99.9	57.5	101.
52.9	135.3	15011.0	125.0	-62.8	99.9	287.8	20.5	19.5	-6.3	381.3	381.3	99.9	99.9	64.1	102.
57.7	142.3	16382.6	100.0	-63.6	99.9	275.0	24.5	24.4	-2.1	404.5	404.5	99.9	99.9	71.8	102.
63.4	150.3	18134.9	75.0	-65.4	99.9	276.9	9.6	9.6	-1.2	435.8	435.8	99.9	99.9	75.6	102.
71.9	159.5	20442.9	50.0	-58.8	99.9	24.2	5.6	-2.3	-5.1	505.1	505.1	99.9	99.9	78.8	103.
84.6	169.0	25377.8	25.0	-51.0	99.9	99.9	99.9	99.9	99.9	638.2	638.2	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 327
NASHVILLE, TENN24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GEN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T LG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGF KM	AZ DG
0.0	5.4	190.0	993.0	19.0	15.1	210.0	5.2	2.6	4.5	298.2	322.8	10.9	78.0	0.0	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0
3.4	6.7	337.5	975.0	18.3	15.4	99.9	99.9	99.9	99.9	295.1	324.9	11.4	82.9	99.9	99.9
1.1	6.8	560.1	950.0	16.5	15.0	99.9	99.9	99.9	99.9	295.5	325.3	11.4	90.9	99.9	99.9
1.8	10.7	787.4	925.0	14.9	13.9	99.9	99.9	99.9	99.9	296.0	324.7	10.9	93.6	99.9	99.9
2.7	12.7	1015.7	900.0	14.7	13.7	225.2	25.7	19.2	16.1	299.1	327.4	11.0	93.8	3.0	30
3.6	14.8	1258.9	875.0	14.9	12.7	226.7	25.1	18.3	17.2	300.7	329.4	10.7	86.9	4.4	36
4.4	16.8	1508.5	850.0	13.6	11.8	225.1	24.3	17.2	17.2	301.8	329.7	10.3	88.9	5.6	38
5.3	19.1	1755.7	825.0	11.5	9.9	230.5	21.4	14.5	13.6	302.0	327.5	9.4	90.3	6.4	38
6.2	21.1	2013.1	800.0	10.5	8.2	233.0	19.1	15.2	11.5	303.5	327.1	8.6	92.9	7.9	41
7.1	23.5	2277.5	775.0	8.7	7.6	238.4	19.4	15.8	11.2	304.3	327.8	8.5	92.9	8.8	41
8.0	25.8	2546.7	750.0	7.2	5.9	235.3	19.7	16.3	11.1	305.4	327.1	7.8	91.7	9.9	44
8.9	28.1	2827.4	725.0	5.6	4.2	235.8	19.9	16.4	11.2	306.5	326.8	7.2	91.3	10.9	45
9.8	30.6	3114.1	700.0	3.6	2.3	238.2	21.1	17.9	11.1	307.3	325.7	6.5	91.4	12.0	47
10.7	33.1	3408.6	675.0	1.0	-0.3	245.7	22.4	20.4	9.2	307.5	320.8	5.5	90.4	13.2	48
11.7	35.6	3711.9	650.0	-0.2	-5.6	251.2	22.6	25.2	8.6	309.3	320.8	3.9	67.0	14.4	50
12.8	38.2	4025.6	625.0	-0.9	-10.5	251.3	29.5	27.9	9.5	311.7	320.1	2.8	48.3	15.2	52
13.7	40.7	4350.9	600.0	-2.4	-8.4	250.6	28.4	24.9	8.8	313.7	324.0	3.4	63.4	19.1	54
15.1	43.4	4687.3	575.0	-5.3	-7.8	249.3	25.9	24.3	6.9	314.2	325.4	3.7	82.8	19.9	55
16.2	46.4	5035.3	550.0	-7.5	-12.0	255.3	24.9	24.1	6.0	315.5	324.1	2.8	70.7	21.5	57
17.5	49.3	5395.4	525.0	-10.4	-16.4	260.2	25.9	25.5	4.4	316.1	322.5	2.0	61.6	23.3	58
19.7	52.1	5749.3	500.0	-13.5	-23.3	265.4	28.3	28.1	3.4	316.6	323.4	1.2	43.4	25.1	60
20.1	55.2	6157.4	475.0	-16.9	-24.4	260.3	31.2	30.8	5.2	317.1	320.8	1.1	51.8	27.4	61
21.4	58.3	6563.0	450.0	-17.6	-31.1	255.3	28.0	27.5	5.2	321.1	321.2	0.0	1.0	29.8	62
22.8	61.6	6972.0	425.0	-21.2	-33.4	262.0	25.2	24.9	3.5	321.8	321.8	0.0	1.0	31.8	63
24.4	65.0	7431.7	400.0	-25.1	-35.9	259.4	26.6	26.2	4.9	322.3	325.3	0.0	1.0	34.9	64
26.1	68.4	7858.8	375.0	-27.4	-37.5	267.6	28.6	27.4	1.1	325.3	327.3	0.0	1.0	39.7	65
28.0	72.0	8391.7	350.0	-30.7	-39.6	272.0	27.4	27.4	-1.0	327.3	327.3	0.0	1.0	42.2	71
30.3	76.0	8913.2	325.0	-35.3	-42.7	271.8	27.3	27.3	-0.8	329.0	328.0	0.0	1.0	42.2	71
32.0	80.1	9455.4	300.0	-40.4	-49.9	273.7	23.5	23.4	-1.5	324.5	999.9	99.9	99.9	44.9	72
34.1	84.2	10055.2	275.0	-45.3	-59.9	272.9	21.8	21.8	-1.1	329.6	999.9	99.9	99.9	48.3	73
36.6	88.6	10680.6	250.0	-50.6	-69.9	272.4	25.5	25.5	-1.1	330.4	999.9	99.9	99.9	52.0	74
39.3	93.9	11358.3	225.0	-56.3	-79.9	282.9	21.2	20.6	-4.7	332.2	999.9	99.9	99.9	54.6	76
42.2	98.8	12092.1	200.0	-60.8	-89.9	277.7	24.3	24.1	-3.3	336.5	999.9	99.9	99.9	58.4	78
45.4	104.5	12915.6	175.0	-64.6	-99.9	275.7	32.5	32.4	-3.2	338.5	999.9	99.9	99.9	63.6	80
49.0	110.5	13878.3	150.0	-58.0	-99.9	265.9	35.5	35.4	-2.5	370.2	999.9	99.9	99.9	71.4	82
53.5	116.0	15029.0	125.0	-59.4	-99.9	287.4	28.9	27.6	-8.6	367.5	999.9	99.9	99.9	80.3	84
58.7	126.7	15802.8	100.0	-65.1	-99.9	270.5	27.6	27.5	-0.3	401.9	999.9	99.9	99.9	87.9	86
65.2	136.7	18160.8	75.0	-62.5	-99.9	278.6	12.6	12.5	-1.9	441.8	999.9	99.9	99.9	92.6	91
70.2	148.0	20657.1	50.0	-59.1	-99.9	287.5	4.3	4.1	-1.3	504.3	999.9	99.9	99.9	96.4	94
87.3	161.0	25093.5	25.0	-51.0	-99.9	67.3	10.5	-9.7	-4.0	638.0	999.9	99.9	99.9	96.9	95

ORIGINAL PAG.
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 340
LITTLE ROCK, ARK

24 APRIL 1975
1145 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MM	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX PTO CM/KG	RM PCT	RANGE M	AZ DG
0.0	5.9	79.0	1002.7	21.1	17.3	190.0	2.6	0.5	2.6	255.7	326.4	12.5	79.0	6.0	0.
0.1	6.1	102.5	1000.0	21.4	16.2	216.5	10.4	6.7	8.5	296.3	331.1	13.3	92.2	0.2	34.
0.8	6.6	322.3	975.0	20.3	16.6	216.6	11.2	7.0	9.8	297.5	334.0	14.0	65.7	0.4	36.
1.6	11.0	546.5	950.0	17.6	16.5	223.2	17.9	12.3	13.1	296.8	329.7	12.5	93.0	1.1	31.
2.4	12.6	775.1	925.0	16.7	15.4	228.6	23.4	17.5	15.5	298.3	329.7	12.0	52.1	3.1	42.
3.2	16.3	1038.5	900.0	14.8	13.6	232.0	24.4	19.3	15.1	298.3	327.5	11.0	52.4	2.3	45.
4.1	18.7	1248.8	875.0	18.0	4.3	240.2	25.7	22.3	12.8	303.3	320.1	6.0	40.2	4.5	44.
4.8	21.1	1450.6	850.0	17.0	4.4	243.6	27.6	24.7	12.2	304.7	322.2	6.2	43.3	5.6	51.
5.7	23.1	1750.5	825.0	14.8	9.3	243.5	23.6	21.1	10.5	305.4	330.2	9.0	55.8	7.0	54.
6.5	26.4	2010.6	800.0	12.9	9.4	245.1	18.6	16.9	7.8	306.1	332.0	9.4	79.7	8.1	45.
7.4	29.3	2277.2	775.0	11.4	4.4	256.0	16.1	15.6	3.9	307.0	326.2	6.8	62.0	6.0	50.
8.4	32.2	2550.7	750.0	9.9	-0.5	266.6	13.6	13.6	0.3	307.9	322.2	4.9	44.7	9.7	56.
9.2	35.1	2831.4	725.0	8.0	-7.2	275.4	13.6	13.6	-1.3	308.6	316.0	3.1	33.9	12.4	61.
10.3	38.3	3120.0	700.0	5.9	-13.4	280.3	15.7	15.5	-2.5	309.2	315.2	1.9	23.4	11.0	64.
11.4	40.8	3410.6	675.0	4.0	-19.9	275.5	19.6	18.6	-1.4	310.3	314.0	1.2	15.6	12.0	67.
12.5	43.9	3721.8	650.0	1.5	-15.1	265.7	22.7	22.6	1.7	310.9	316.6	1.8	27.8	13.2	68.
13.4	46.9	4037.3	625.0	1.8	-40.9	261.1	24.7	24.4	3.8	314.4	314.7	0.1	1.0	14.5	70.
14.3	50.1	4264.2	600.0	-1.2	-50.7	263.6	24.1	23.9	2.7	314.7	314.9	0.1	1.0	15.9	71.
15.3	53.1	4701.8	575.0	-3.6	-52.2	264.4	22.0	22.8	2.3	315.8	316.0	0.1	1.0	17.3	72.
16.4	56.3	5050.9	550.0	-6.3	-53.9	259.1	25.5	25.0	4.8	316.6	316.8	0.0	1.0	14.8	73.
17.7	59.9	5412.4	525.0	-8.9	-55.6	254.8	29.8	28.7	7.8	317.7	317.8	0.0	1.0	20.9	74.
19.1	63.3	5744.9	500.0	-11.4	-57.1	252.2	30.3	28.9	9.3	319.1	319.3	0.0	1.0	27.6	74.
20.5	66.9	6174.6	475.0	-14.6	-59.2	253.4	30.0	28.7	8.6	319.2	319.9	0.0	1.0	26.0	73.
21.8	70.5	6587.1	450.0	-17.1	-60.8	259.8	28.3	27.1	5.0	321.7	321.7	0.0	1.0	24.4	74.
23.1	74.2	7012.7	425.0	-20.8	-61.9	265.1	26.2	26.1	2.2	322.2	322.3	0.0	1.0	21.4	74.
24.6	78.1	7457.1	400.0	-25.0	-61.5	268.3	24.9	24.9	6.8	322.4	322.5	0.0	1.8	32.6	75.
26.0	82.2	7923.5	375.0	-28.9	-62.1	273.4	28.1	28.1	-1.7	323.3	323.4	0.0	2.4	35.1	76.
27.7	86.4	8412.0	350.0	-32.9	-63.2	273.3	27.4	27.3	-1.4	324.4	324.5	0.0	3.0	37.7	76.
29.5	91.3	8929.1	325.0	-37.0	-64.9	265.0	32.4	32.3	2.8	325.6	325.7	0.0	3.6	40.6	76.
31.5	95.5	9476.0	300.0	-41.3	99.9	267.2	29.2	29.2	1.4	327.2	327.2	99.9	99.9	44.7	76.
33.8	100.3	10062.9	275.0	-45.8	99.9	264.0	30.5	30.3	2.5	328.9	328.9	99.9	99.9	44.7	76.
35.9	105.6	10690.2	250.0	-51.1	99.9	270.0	32.3	32.3	0.0	330.1	330.1	99.9	99.9	52.2	76.
38.2	111.0	11347.4	225.0	-55.5	99.9	265.2	31.8	31.8	6.4	333.5	333.5	99.9	99.9	57.2	76.
40.8	116.5	12111.6	200.0	-59.5	99.9	264.9	39.4	39.6	3.5	335.6	335.6	99.9	99.9	62.8	76.
44.0	123.3	12942.7	175.0	-59.0	99.9	267.3	31.2	31.2	1.5	352.5	352.5	99.9	99.9	67.4	76.
47.4	130.0	13911.5	150.0	-59.1	99.9	256.1	33.1	32.1	8.0	368.2	368.2	99.9	99.9	75.7	76.
51.5	137.0	15043.1	125.0	-62.1	99.9	265.2	41.5	41.3	3.5	382.6	382.6	99.9	99.9	84.9	76.
56.4	142.8	16417.8	100.0	-63.7	99.9	259.7	19.8	19.5	3.5	404.7	404.7	99.9	99.9	93.5	76.
62.6	151.3	18173.7	75.0	-68.3	99.9	329.7	9.0	4.5	-7.7	434.0	434.0	99.9	99.9	97.0	76.
70.5	156.3	20675.3	50.0	-56.3	99.9	324.0	3.9	2.3	-3.1	510.9	510.9	99.9	99.9	101.4	76.
83.2	165.3	25144.7	25.0	-49.5	99.9	305.5	7.5	6.1	-4.4	642.9	642.9	99.9	99.9	102.9	76.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 349
MONETTE, MO24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTU GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.2	438.0	957.3	20.6	19.8	200.0	5.6	1.9	5.3	295.9	339.9	15.4	95.0	0.0	0.
0.9	6.9	55.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	9.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.9	504.4	950.0	20.0	17.9	208.1	10.0	4.7	8.8	299.3	335.8	13.8	88.7	0.3	14.
1.1	10.9	734.7	925.0	18.3	17.6	211.5	12.2	6.4	10.4	299.9	336.7	13.9	95.8	1.7	23.
1.9	13.2	970.0	900.0	16.7	16.5	220.2	14.8	9.6	11.3	300.4	335.7	13.3	92.0	1.4	23.
2.7	15.4	1210.6	875.0	15.6	15.4	227.8	16.8	12.4	11.3	301.7	335.9	12.7	94.9	2.1	35.
3.5	17.6	1437.2	850.0	14.9	14.7	235.1	18.1	14.9	10.4	303.4	337.1	12.5	98.7	2.9	35.
4.2	20.0	1710.3	825.0	14.0	13.8	244.3	19.4	17.5	8.4	305.0	339.0	12.1	94.4	3.7	44.
5.3	22.2	1970.8	800.0	13.2	13.0	250.4	18.8	17.7	6.3	306.8	339.5	11.9	94.5	4.5	44.
5.6	24.7	2239.1	775.0	11.7	11.4	247.6	21.5	19.8	6.2	307.8	339.4	11.0	98.3	5.2	52.
6.1	27.3	2512.5	750.0	9.8	9.6	246.6	20.5	18.8	8.1	308.6	336.8	10.1	98.7	5.9	53.
6.7	29.6	2754.4	725.0	7.9	7.7	245.5	19.7	17.9	8.2	309.3	335.1	9.2	98.6	6.5	54.
7.2	32.2	3047.5	700.0	5.3	5.0	245.4	19.2	17.5	6.0	309.4	331.9	7.9	94.0	7.1	54.
7.8	34.9	3380.1	675.0	3.8	3.7	246.9	19.5	18.0	7.7	310.9	332.1	7.4	92.8	7.7	56.
8.3	37.4	3697.3	650.0	2.8	2.6	248.3	20.6	19.2	7.6	313.1	333.8	7.2	98.6	8.3	57.
8.6	40.2	4005.0	625.0	1.3	1.1	248.0	21.5	19.9	8.1	314.8	334.2	6.6	94.4	8.7	54.
9.0	42.9	4312.4	600.0	-2.2	-2.5	246.2	22.3	20.4	9.0	314.3	330.0	5.3	97.9	9.2	54.
9.3	45.3	4671.0	575.0	-3.0	-3.0	244.1	22.6	20.3	9.9	317.1	333.1	5.3	100.7	9.6	59.
9.6	48.9	5022.2	550.0	-5.8	-6.0	242.4	22.9	20.3	10.6	317.8	331.3	4.5	98.5	10.1	53.
9.9	51.6	5325.3	525.0	-7.6	-8.5	241.8	23.5	20.7	11.1	319.7	331.5	3.8	93.5	10.4	53.
10.3	54.8	5766.6	500.0	-7.7	-7.8	242.9	24.2	21.5	11.0	324.2	337.4	4.2	98.9	11.0	54.
10.9	57.9	6157.9	475.0	-16.5	-17.8	246.1	25.4	21.3	10.3	317.8	324.1	2.0	89.7	11.9	54.
11.7	61.1	6557.5	450.0	-23.2	-37.7	251.9	27.9	26.6	6.7	314.0	315.2	0.3	25.4	13.2	66.
12.8	64.7	6903.2	425.0	-23.3	-42.0	260.5	30.8	30.4	5.1	315.1	319.9	0.2	16.4	15.1	62.
13.8	68.0	7421.7	400.0	-25.5	-34.4	243.6	31.4	31.2	3.5	321.9	323.6	0.5	42.8	16.8	62.
13.9	71.6	7877.0	375.0	-28.4	-36.8	259.7	30.7	30.2	5.5	323.9	325.5	0.4	45.6	19.0	67.
14.5	75.5	8377.2	350.0	-32.4	-38.0	255.1	29.1	28.6	5.5	325.1	326.5	0.4	56.9	21.7	74.
15.1	79.5	8898.2	325.0	-34.5	-40.2	269.7	31.1	31.1	0.2	329.1	330.3	0.3	51.5	24.5	76.
15.5	83.6	9452.7	300.0	-38.6	-45.0	273.6	31.0	31.0	-1.9	330.9	331.8	0.2	50.3	26.7	72.
20.7	87.8	10033.6	275.0	-44.1	-99.9	282.8	36.3	35.4	-8.0	331.4	999.9	99.9	99.9	28.9	74.
23.3	92.6	10676.4	250.0	-49.5	99.9	285.6	34.3	33.1	-9.2	332.5	999.9	99.9	99.9	34.0	75.
25.5	97.4	11357.8	225.0	-55.6	99.9	281.5	28.5	27.9	-5.7	333.3	999.9	99.9	99.9	37.4	82.
27.9	102.5	12096.0	200.0	-62.4	99.9	279.7	20.9	20.6	-3.5	333.9	999.9	99.9	99.9	40.8	83.
30.0	108.5	12906.6	175.0	-67.9	99.9	269.4	29.2	29.2	0.3	337.9	999.9	99.9	99.9	44.1	84.
33.6	115.0	13931.1	150.0	-69.1	99.9	244.8	31.6	28.6	13.5	360.5	999.9	99.9	99.9	50.3	83.
37.6	122.3	14982.6	125.0	-61.8	99.9	259.7	30.7	30.2	5.5	383.1	999.9	99.9	99.9	58.9	81.
42.9	130.0	16372.3	100.0	-60.7	99.9	263.9	30.3	30.1	3.2	410.5	999.9	99.9	99.9	68.9	81.
48.4	136.7	18133.3	75.0	-67.0	99.9	270.4	11.8	11.8	-0.1	432.8	999.9	99.9	99.9	72.0	83.
57.8	148.3	20632.9	50.0	-59.8	99.9	300.2	7.1	6.1	-3.6	502.6	999.9	99.9	99.9	76.1	82.
71.6	157.7	25052.1	25.0	-54.9	99.9	304.7	3.5	2.9	-2.0	627.1	999.9	99.9	99.9	78.7	84.

ORIGINAL PAGE
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 18 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX

24 APRIL 1975
1115 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MR PTO CM/RG	RM PCT	RANGE KM	AZ DG
0.0	14.6	1005.0	884.2	10.4	-4.8	310.0	3.1	2.4	-2.0	294.1	302.6	3.0	34.0	0.0	C.
00.0	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.0	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	15.4	1184.0	875.0	17.2	0.0	999.9	99.9	99.9	99.9	302.3	315.1	4.5	32.7	594.9	99.9
1.5	17.5	1431.9	850.0	18.6	-5.0	999.9	99.9	99.9	99.9	306.1	315.3	3.1	19.7	994.9	99.9
2.5	15.3	1687.1	825.0	17.7	-5.7	265.2	7.9	7.6	-2.1	307.8	318.8	3.0	19.7	1.1	122.
3.3	22.3	1548.9	800.0	16.0	-7.0	280.5	7.9	7.6	-2.1	308.6	317.0	2.8	19.4	1.5	114.
4.5	24.5	2217.3	775.0	14.2	-8.5	262.0	10.0	9.9	1.4	309.4	317.3	2.6	19.9	2.0	110.
5.5	26.7	2852.6	750.0	11.9	-10.3	260.4	14.2	14.0	2.4	305.8	316.9	2.3	20.1	2.7	102.
6.6	29.2	2774.7	725.0	9.4	-12.1	256.9	14.4	14.0	3.2	310.0	316.4	2.1	20.5	3.5	96.
7.5	31.8	3064.0	700.0	6.7	-13.2	253.0	14.2	13.6	4.1	310.1	316.2	2.0	22.6	4.4	92.
8.4	34.4	3360.9	675.0	4.0	-15.1	244.3	15.0	14.3	6.9	310.3	315.8	1.8	23.3	5.3	88.
9.0	36.9	3666.2	650.0	1.8	-16.1	242.9	18.3	16.3	8.3	311.2	316.4	1.7	24.9	6.4	83.
11.1	35.7	3980.7	625.0	-1.1	-17.3	240.3	18.3	17.0	6.7	311.4	316.3	1.6	27.9	7.7	80.
12.4	42.2	4304.7	600.0	-3.2	-23.5	248.5	19.8	18.5	7.3	312.5	315.6	1.0	19.0	9.2	79.
13.7	45.1	4640.6	575.0	-5.0	-25.1	245.3	21.6	19.6	9.0	314.2	317.0	0.9	18.7	10.8	77.
15.6	48.1	4989.0	550.0	-8.0	-27.5	246.2	22.1	20.7	7.9	314.6	317.0	0.7	19.0	12.4	75.
16.2	50.9	5347.2	525.0	-11.1	-30.0	247.2	19.8	18.2	7.7	315.1	317.1	0.6	19.2	13.9	75.
17.5	53.1	5719.4	500.0	-14.0	-33.1	245.4	19.1	17.4	6.8	316.0	317.6	0.5	18.6	15.4	74.
19.2	57.1	6107.8	475.0	-15.8	-34.4	242.8	22.0	19.6	10.1	318.5	319.9	0.4	18.3	17.3	73.
20.7	60.4	6513.0	450.0	-18.8	-35.1	247.1	25.1	23.1	9.4	316.7	321.1	0.4	21.9	19.6	72.
22.5	64.3	6935.8	425.0	-22.8	-37.6	247.0	28.6	26.3	11.2	319.8	321.0	0.3	24.2	22.4	71.
24.2	67.3	7378.0	400.0	-26.0	-37.5	251.0	31.9	30.1	10.4	321.2	322.5	0.4	32.9	25.5	71.
25.9	70.9	7841.6	375.0	-30.0	-36.2	252.1	32.6	31.0	10.0	321.3	323.5	0.5	54.2	29.3	71.
27.4	74.7	8320.6	350.0	-33.3	-38.2	254.1	32.4	31.1	8.9	323.3	325.3	0.4	40.7	32.8	71.
29.4	78.5	8846.0	325.0	-37.2	-44.6	253.3	33.6	32.2	9.6	325.3	326.2	0.2	45.7	37.2	71.
31.1	82.8	9393.4	300.0	-42.1	-59.9	253.9	28.7	27.6	8.0	326.1	999.9	99.9	999.9	41.9	72.
34.5	87.2	9976.4	275.0	-46.8	-59.9	258.2	30.6	27.8	7.9	327.4	999.9	99.9	999.9	47.4	72.
37.2	92.0	10602.3	250.0	-51.5	-59.9	258.9	41.74	40.9	8.0	329.6	999.9	99.9	999.9	52.4	73.
39.7	97.3	11281.0	225.0	-55.8	-59.9	260.2	27.3	27.3	4.7	333.0	999.9	99.9	999.9	57.4	73.
42.5	102.3	12023.3	200.0	-60.4	-59.9	263.9	44.28	44.0	4.7	337.1	999.9	99.9	999.9	63.0	74.
45.4	107.4	12450.8	175.0	-62.0	-59.9	257.3	33.78	32.9	7.4	347.6	999.9	99.9	999.9	70.2	75.
48.8	114.8	13815.0	150.0	-59.5	-59.9	260.8	23.48	23.1	3.7	367.6	999.9	99.9	999.9	75.6	75.
50.3	120.3	14946.0	125.0	-64.0	-59.9	262.3	23.58	21.5	9.4	379.1	999.9	99.9	999.9	81.2	75.
52.4	130.7	16310.2	100.0	-62.7	-59.9	253.1	33.08	31.6	9.6	406.0	999.9	99.9	999.9	91.8	75.
55.4	140.3	18090.9	75.0	-62.9	-59.9	244.7	9.08	8.1	3.9	441.0	999.9	99.9	999.9	99.8	75.
75.0	121.0	20615.1	50.0	-57.3	-59.9	252.8	15.98	15.2	4.7	508.4	999.9	99.9	999.9	104.5	75.
99.9	48.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

0 PT SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10. DEG

0 PT TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 402
WALLOPS ISLAND, VA

24 APRIL 1975
1100 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DI4 DG	SPEED M/SEC	U COMP M/SEC	V CCHP M/SEC	POT V DG K	E POT T DG K	MX RTD CM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.3	4.0	1018.3	13.9	11.4	999.9	99.9	99.9	99.9	260.7	308.1	8.4	85.0	999.9	999.9
0.5	5.6	159.0	1000.0	17.7	13.3	999.9	99.9	99.9	99.9	292.1	317.3	9.7	75.6	999.9	999.9
1.3	7.4	375.5	975.0	16.5	12.1	999.9	99.9	99.9	99.9	293.0	316.9	9.1	74.9	999.9	999.9
1.9	5.9	536.4	950.0	14.7	11.4	999.9	99.9	99.9	99.9	293.3	316.9	9.0	60.4	999.9	999.9
2.5	11.7	622.1	925.0	14.0	10.2	999.9	99.9	99.9	99.9	294.9	317.4	8.5	77.6	999.9	999.9
3.6	13.2	1053.5	900.0	13.8	10.1	999.9	99.9	99.9	99.9	296.9	320.1	8.7	78.5	999.9	999.9
4.2	14.0	1291.1	875.0	13.0	10.1	999.9	99.9	99.9	99.9	298.5	322.4	8.9	82.1	999.9	999.9
5.1	14.3	1535.0	850.0	11.9	7.5	999.9	99.9	99.9	99.9	299.6	320.6	7.7	74.6	999.9	999.9
5.9	20.5	1784.6	825.0	5.8	6.8	999.9	99.9	99.9	99.9	300.0	320.7	7.6	81.7	999.9	999.9
6.8	22.7	2036.7	800.0	7.6	6.4	999.9	99.9	99.9	99.9	300.2	321.0	7.6	92.5	999.9	999.9
7.6	25.1	2301.0	775.0	5.7	4.8	999.9	99.9	99.9	99.9	300.9	323.1	7.0	93.4	999.9	999.9
8.5	27.4	2569.3	750.0	2.2	3.1	999.9	99.9	99.9	99.9	302.0	319.8	6.4	92.2	999.9	999.9
9.4	30.7	2944.4	725.0	0.4	1.4	999.9	99.9	99.9	99.9	303.1	319.5	5.9	92.0	999.9	999.9
10.3	32.6	3129.1	700.0	0.4	-0.7	999.9	99.9	99.9	99.9	304.5	318.3	5.2	92.4	999.9	999.9
11.3	35.2	3419.5	675.0	-1.3	-2.4	999.9	99.9	99.9	99.9	304.8	318.4	4.8	91.9	999.9	999.9
12.4	37.7	3719.7	650.0	-3.4	-4.5	999.9	99.9	99.9	99.9	305.7	317.9	4.2	92.3	999.9	999.9
13.4	40.3	4029.7	625.0	-4.8	-5.9	999.9	99.9	99.9	99.9	307.5	319.1	4.0	92.4	999.9	999.9
14.5	42.9	4339.7	600.0	-6.9	-11.4	999.9	99.9	99.9	99.9	308.5	318.6	2.7	70.3	999.9	999.9
15.4	45.8	4649.9	575.0	-8.7	-16.4	999.9	99.9	99.9	99.9	310.0	315.7	1.8	53.8	999.9	999.9
16.6	49.3	5022.1	550.0	-12.9	-51.5	999.9	99.9	99.9	99.9	308.8	305.0	0.1	2.3	999.9	999.9
17.7	51.9	5376.1	525.0	-13.9	-41.7	999.9	99.9	99.9	99.9	311.7	312.4	0.2	7.4	999.9	999.9
19.3	54.3	5743.6	500.0	-15.5	-46.6	999.9	99.9	99.9	99.9	314.1	313.5	0.1	4.9	999.9	999.9
20.3	57.2	6111.3	475.0	-17.4	-47.7	999.9	99.9	99.9	99.9	316.3	316.7	0.1	5.1	999.9	999.9
21.7	61.3	6533.6	450.0	-20.5	-54.5	999.9	99.9	99.9	99.9	317.4	317.6	0.0	3.0	999.9	999.9
23.1	64.9	6955.7	425.0	-22.1	-50.3	999.9	99.9	99.9	99.9	320.6	320.9	0.1	9.5	999.9	999.9
24.6	69.2	7339.5	400.0	-25.2	-42.3	999.9	99.9	99.9	99.9	322.2	321.0	0.2	18.4	999.9	999.9
26.0	71.9	7853.7	375.0	-28.9	-50.6	999.9	99.9	99.9	99.9	323.3	323.7	0.1	10.2	999.9	999.9
27.5	75.4	8353.0	350.0	-33.2	-53.9	999.9	99.9	99.9	99.9	324.0	324.2	0.1	10.3	999.9	999.9
29.3	80.3	8869.1	325.0	-37.3	-55.5	999.9	99.9	99.9	99.9	325.2	325.4	0.1	12.9	999.9	999.9
31.1	84.2	9416.5	300.0	-40.7	99.9	999.9	99.9	99.9	99.9	326.0	326.9	99.9	999.9	999.9	999.9
33.0	88.9	10004.4	275.0	-45.9	99.9	999.9	99.9	99.9	99.9	326.8	326.9	99.9	999.9	999.9	999.9
35.3	93.6	10611.4	250.0	-51.0	99.9	999.9	99.9	99.9	99.9	330.3	330.9	99.9	999.9	999.9	999.9
37.5	98.5	11310.4	225.0	-55.2	99.9	999.9	99.9	99.9	99.9	334.0	334.0	99.9	999.9	999.9	999.9
40.1	104.0	12052.7	200.0	-60.4	99.9	999.9	99.9	99.9	99.9	337.1	337.1	99.9	999.9	999.9	999.9
42.6	110.2	12874.9	175.0	-66.0	92.9	999.9	99.9	99.9	99.9	341.1	341.1	99.9	999.9	999.9	999.9
45.6	116.3	13816.2	150.0	-57.4	99.9	999.9	99.9	99.9	99.9	367.2	367.2	99.9	999.9	999.9	999.9
50.0	123.8	14655.6	125.0	-57.4	99.9	999.9	99.9	99.9	99.9	391.0	391.0	99.9	999.9	999.9	999.9
54.9	121.7	15364.4	100.0	-61.1	99.9	999.9	99.9	99.9	99.9	409.7	409.7	99.9	999.9	999.9	999.9
60.7	130.0	16129.5	75.0	-63.8	96.9	999.9	99.9	99.9	99.9	439.1	439.1	99.9	999.9	999.9	999.9
68.7	149.3	20646.2	50.0	-57.6	99.9	999.9	99.9	99.9	99.9	507.8	507.8	99.9	999.9	999.9	999.9
79.9	158.0	25083.7	25.0	-52.2	99.9	999.9	99.9	99.9	99.9	632.6	632.6	99.9	999.9	999.9	999.9

ORIGINAL PAGE
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 405
STERLING, VA24 APRIL 1975
1115 GMT

TIME MIN	CATCY	WEIGHT GPH	PRES MB	TEMP DEG C	CEV PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DEG K	E POT Y DEG K	WX RTO CM/HG	RM PCT	RANGE NM	AZ DEG
0.0	5.5	95.0	1004.6	16.7	12.3	208.0	9.7	2.3	0.3	250.7	314.0	9.0	75.0	0.0	6.
0.3	5.0	124.3	1006.0	17.7	12.0	208.2	17.4	9.1	12.4	292.0	315.2	8.9	68.5	0.1	30.
1.3	8.3	343.9	975.0	16.7	11.3	216.3	16.3	9.2	13.5	293.1	316.0	8.7	70.5	0.9	30.
2.1	10.7	562.4	950.0	16.6	9.7	224.5	15.9	11.1	11.3	253.1	316.4	8.0	63.9	1.3	35.
3.0	13.0	780.4	925.0	15.8	0.2	236.1	13.8	11.5	7.7	296.5	316.4	7.4	60.3	2.3	39.
3.9	15.4	1022.7	900.0	14.2	7.1	250.0	12.7	12.3	3.2	297.1	316.2	7.1	62.3	3.2	45.
4.4	17.4	1259.6	875.0	13.2	7.1	258.6	13.2	13.2	0.1	298.5	318.2	7.3	60.4	3.8	54.
5.0	19.3	1503.1	850.0	11.4	7.1	275.4	16.4	16.0	-1.5	299.1	319.4	7.5	70.4	4.5	60.
5.8	20.3	1752.2	825.0	10.1	6.7	276.2	18.3	18.1	-2.6	300.2	323.8	7.5	70.6	5.3	66.
6.8	22.9	2007.8	800.0	8.0	4.8	275.6	18.0	14.4	-1.4	301.6	319.3	6.8	80.1	6.1	71.
7.4	25.3	2269.3	775.0	6.4	2.4	263.1	15.1	15.0	2.1	301.4	317.8	5.9	75.7	6.9	73.
8.0	27.9	2537.8	750.0	4.4	-1.0	255.7	14.3	13.8	3.5	302.0	315.5	4.8	67.9	7.9	73.
8.8	30.7	2813.4	725.0	2.7	0.0	257.3	14.9	14.6	3.3	303.1	318.0	5.3	84.7	8.7	74.
10.7	36.0	3056.4	700.0	0.3	-0.3	261.3	15.2	15.0	2.3	303.5	318.0	5.1	91.2	9.4	74.
11.7	38.0	3327.7	675.0	-1.6	-3.6	265.0	16.5	16.4	1.5	305.4	317.4	4.4	97.9	10.5	75.
12.8	39.4	3587.6	650.0	-3.6	-4.0	265.2	18.5	18.4	1.5	305.4	317.4	4.1	91.3	11.5	76.
14.6	44.5	3997.2	625.0	-4.4	-6.1	268.0	18.3	18.2	1.9	307.8	317.4	3.3	76.0	12.6	77.
15.7	47.5	4318.5	600.0	-5.7	-23.0	258.8	18.0	17.7	3.2	309.7	313.2	0.7	19.0	13.7	77.
16.7	50.5	4652.4	575.0	-7.8	-27.4	256.1	19.9	15.3	4.8	310.9	313.2	0.7	19.0	14.4	77.
17.9	53.6	4994.8	550.0	-10.6	-27.6	257.0	20.8	20.3	4.7	311.8	314.2	0.7	22.7	15.4	77.
19.1	56.6	5351.6	525.0	-12.3	-28.0	261.1	19.9	19.7	3.1	313.7	316.1	0.7	25.5	16.4	77.
20.5	60.0	5722.3	500.0	-15.1	-27.7	266.7	22.3	22.3	0.5	316.7	317.3	0.8	32.4	17.4	77.
21.7	63.4	6108.0	475.0	-17.5	-28.4	277.4	22.2	22.0	-2.9	318.3	319.9	0.8	38.2	21.1	77.
22.9	66.8	6511.8	450.0	-19.1	-28.0	288.8	23.4	21.2	-7.2	319.4	322.7	1.0	54.1	22.6	81.
24.3	70.3	6934.5	425.0	-22.3	-31.0	283.6	21.8	21.2	-5.1	320.5	322.8	0.6	41.6	24.2	92.
25.7	73.4	7379.9	400.0	-25.6	-36.3	280.2	20.6	19.6	-6.4	321.7	323.2	0.4	35.6	25.9	84.
27.1	77.7	7842.1	375.0	-29.3	-44.5	281.6	20.0	18.4	-7.4	322.7	323.4	0.2	21.2	27.5	86.
28.7	81.5	8330.6	350.0	-33.6	-48.4	280.3	21.2	21.1	-6.9	323.4	324.0	0.2	25.9	29.2	87.
30.4	85.6	8845.5	325.0	-34.5	-50.3	280.7	20.4	23.3	-6.1	323.6	324.0	0.1	27.1	31.3	84.
32.2	90.2	9390.2	300.0	-43.2	99.9	282.1	20.4	27.4	-6.0	324.5	999.9	99.9	999.9	34.3	90.
34.1	94.7	9969.6	275.0	-46.6	99.9	285.3	29.0	27.3	-4.6	324.7	999.9	99.9	999.9	37.2	91.
36.0	99.3	10599.0	250.0	-54.1	99.9	282.5	30.5	35.5	-14.9	325.6	999.9	99.9	999.9	40.7	93.
37.8	104.3	11260.0	225.0	-55.2	99.9	287.4	32.3	21.2	-11.0	325.9	999.9	99.9	999.9	44.5	95.
39.9	110.0	12003.7	200.0	-60.4	99.9	287.9	29.0	19.8	-6.4	327.1	999.9	99.9	999.9	47.0	96.
42.0	115.8	12823.0	175.0	-66.4	99.9	290.0	25.8	24.2	-8.8	330.3	999.9	99.9	999.9	51.0	97.
45.5	122.3	13762.0	150.0	-58.6	99.9	286.1	33.6	32.1	-6.5	339.1	999.9	99.9	999.9	55.4	98.
49.3	129.7	14917.1	125.0	-57.7	99.9	292.9	26.2	24.2	-10.2	330.5	999.9	99.9	999.9	62.1	99.
53.9	137.3	16326.0	100.0	-60.3	99.9	312.3	11.3	8.4	-7.6	411.2	999.9	99.9	999.9	69.3	100.
59.4	145.3	19048.6	75.0	-64.8	99.9	286.1	14.7	17.4	-5.2	437.1	999.9	99.9	999.9	73.1	101.
67.4	154.3	23626.4	50.0	-59.1	99.9	330.3	3.4	4.4	-3.1	506.0	999.9	99.9	999.9	77.0	103.
80.2	164.0	25064.1	25.0	-51.3	99.9	336.5	2.0	-1.8	-2.2	637.3	999.9	99.9	999.9	78.2	104.

ORIGINAL PAGE IS
OF POOR QUALITY

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 425
HUNTINGTON, WVA

24 APRIL 1975
1115 GMT

137 65. 0

TIME MIN	CNTCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/SEC	RH PCT	RANGE KM	AZ DG
0.0	7.7	246.0	983.1	17.2	11.7	180.0	3.2	0.0	3.2	292.9	316.1	8.8	70.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	8.5	316.9	975.0	17.3	11.2	205.9	16.1	7.0	14.5	293.7	316.5	8.6	67.4	0.3	14.
0.9	10.6	539.3	950.0	17.2	11.2	211.7	17.4	9.1	14.8	255.8	319.3	8.8	67.8	0.7	22.
1.7	12.9	766.6	925.0	15.8	10.7	223.5	23.6	16.2	17.1	298.6	320.1	8.8	71.8	1.7	31.
2.5	15.1	959.4	900.0	14.8	11.2	234.4	26.5	21.6	15.5	298.0	323.0	9.3	78.9	2.9	38.
3.3	17.3	1237.8	875.0	13.4	10.8	242.5	25.5	22.6	11.0	295.0	324.2	9.4	84.2	4.0	45.
4.1	19.8	1481.7	850.0	11.6	10.2	249.5	23.0	21.6	8.1	299.6	324.5	9.2	90.8	5.2	45.
4.9	22.1	1731.5	825.0	10.3	9.0	255.3	21.3	20.6	5.4	300.7	324.5	8.8	91.1	6.1	54.
5.7	24.3	1987.8	800.0	8.6	7.4	252.8	22.6	21.6	6.7	301.4	323.7	8.1	92.2	7.1	56.
6.5	26.8	2250.2	775.0	7.0	6.0	256.3	21.4	20.8	5.1	302.4	323.4	7.6	93.5	8.1	55.
7.4	29.3	2519.5	750.0	4.9	4.0	257.3	20.5	20.0	4.5	302.8	321.9	6.8	93.8	9.2	61.
8.4	32.3	2796.0	725.0	3.6	1.6	258.7	20.2	19.8	3.9	308.2	321.0	6.0	87.0	10.3	63.
9.3	34.6	3080.5	700.0	1.8	-0.5	257.1	21.3	20.7	4.7	305.1	321.7	5.4	97.3	12.7	66.
10.3	37.0	3373.1	675.0	-0.2	-0.6	255.6	21.2	20.5	5.3	306.1	321.7	5.4	97.3	12.7	66.
11.2	39.8	3674.5	650.0	-2.3	-2.8	253.0	20.3	19.4	5.9	306.9	320.8	4.8	96.4	13.9	64.
12.4	42.4	3985.7	625.0	-3.9	-4.4	249.6	20.0	18.8	7.0	308.6	321.5	4.4	96.1	15.2	67.
13.3	45.1	4307.3	600.0	-5.9	-6.9	248.3	21.3	19.8	7.9	307.8	321.1	3.8	92.2	16.3	57.
14.4	48.3	4638.6	575.0	-9.4	-20.4	250.4	21.9	20.6	7.3	309.1	313.2	1.3	40.2	17.7	67.
15.5	51.3	4980.6	550.0	-11.4	-23.3	252.9	23.6	22.0	6.5	310.6	314.1	1.1	36.6	19.3	67.
16.7	54.1	5336.1	525.0	-13.6	-19.8	260.9	27.2	26.8	4.3	312.2	317.0	1.5	59.2	21.1	64.
17.8	57.0	5700.5	500.0	-14.8	-17.8	271.7	24.7	24.7	-0.7	313.2	321.1	1.9	77.6	22.8	65.
19.0	60.3	6093.7	475.0	-16.9	-20.4	281.2	23.3	22.9	-4.5	317.2	321.1	1.5	71.4	24.3	71.
20.5	63.7	6497.7	450.0	-19.6	-23.9	280.5	24.3	23.9	-4.4	318.7	322.7	1.2	68.3	26.0	74.
21.7	66.4	6926.2	425.0	-22.3	-28.9	284.1	23.9	23.1	-3.6	320.5	323.3	0.8	54.7	27.7	75.
23.1	70.4	7353.4	400.0	-25.4	-32.5	281.2	21.7	20.2	-7.9	322.0	324.2	0.6	51.3	29.3	78.
24.5	73.7	7821.4	375.0	-29.0	-37.4	289.3	20.2	19.1	-6.7	323.2	324.6	0.4	43.6	30.8	79.
26.2	77.7	8318.2	350.0	-32.7	-43.4	279.5	22.5	22.2	-3.7	324.6	325.4	0.2	33.1	32.7	81.
27.9	81.5	8835.8	325.0	-36.9	-49.3	276.1	24.2	24.1	-2.6	325.7	326.2	0.1	25.9	35.1	82.
29.6	85.0	9384.0	300.0	-41.7	-55.9	270.6	27.3	27.1	-3.4	326.6	999.0	99.9	99.9	37.7	83.
31.6	89.9	9967.7	275.0	-46.4	-59.9	280.6	28.6	28.3	-5.3	328.1	999.0	99.9	99.9	40.9	84.
33.8	94.6	10593.7	250.0	-51.5	-59.9	282.8	35.3	32.5	-13.7	329.5	999.0	99.9	99.9	44.6	86.
36.2	99.4	11269.6	225.0	-55.5	-59.9	280.3	34.8	39.1	-7.1	331.9	999.0	99.9	99.9	49.5	88.
39.6	104.5	12007.4	200.0	-62.0	-59.9	280.9	37.9	37.3	-7.2	334.5	999.0	99.9	99.9	54.8	90.
41.0	110.3	12826.7	175.0	-64.5	-59.9	281.6	38.6	37.8	-7.4	336.6	999.0	99.9	99.9	59.4	91.
43.4	116.3	13782.0	150.0	-59.5	-59.9	284.6	29.4	28.5	-7.4	347.7	999.0	99.9	99.9	65.9	92.
47.0	123.5	14933.1	125.0	-59.6	-59.9	271.0	25.0	25.0	-0.5	387.1	999.0	99.9	99.9	70.7	92.
50.9	131.7	16323.2	100.0	-60.4	-59.9	272.8	26.1	26.0	-1.3	411.1	999.0	99.9	99.9	77.2	93.
56.2	139.7	18105.1	75.0	-63.5	-59.9	279.3	9.0	8.8	-1.5	439.8	999.0	99.9	99.9	79.7	93.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 424
DAYTON, OHIO

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T UG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.9	298.0	974.1	14.4	13.8	190.0	3.2	0.6	3.2	291.1	317.5	10.2	96.0	0.0	0.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.5	10.1	510.5	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
2.2	12.2	736.6	950.0	14.6	13.3	222.5	13.5	9.1	5.2	243.3	319.9	10.2	92.1	0.4	30.
3.0	14.3	969.3	925.0	14.3	12.1	233.5	17.1	13.8	10.2	245.2	320.8	9.7	87.4	1.1	42.
3.3	16.7	1207.3	900.0	15.2	7.9	241.7	16.6	14.6	7.2	248.1	318.4	7.5	61.8	1.9	48.
4.8	19.1	1400.4	875.0	13.1	6.3	252.9	15.1	14.5	4.5	258.3	317.0	6.9	63.7	2.6	54.
5.9	21.4	1699.1	850.0	11.0	6.1	263.0	15.6	15.5	1.9	268.6	317.7	7.0	71.9	3.4	60.
6.7	23.9	1954.9	825.0	9.6	3.2	272.1	15.0	15.0	-0.5	295.6	315.8	5.9	64.4	4.1	66.
7.4	26.2	2218.3	800.0	10.0	-2.6	264.1	15.7	15.6	1.6	302.3	313.7	4.0	41.2	4.3	69.
8.4	28.9	2488.8	775.0	8.8	-5.7	262.3	16.7	18.6	2.5	303.6	313.1	3.2	35.5	5.8	71.
9.2	31.1	2767.0	750.0	7.2	-7.4	261.3	21.4	21.1	3.2	304.8	313.4	2.9	34.4	6.7	73.
10.1	34.1	3053.6	725.0	5.9	-8.8	256.2	23.2	22.5	5.5	306.4	315.8	3.2	39.4	6.9	74.
11.1	36.6	3348.6	700.0	4.2	-5.1	253.9	23.2	22.3	6.4	307.7	318.7	3.7	50.6	9.2	74.
12.1	39.3	3655.4	675.0	2.4	-9.7	255.5	22.3	21.6	5.6	308.6	316.9	2.7	40.7	10.5	74.
13.2	41.9	3965.4	650.0	0.1	-13.3	259.4	19.8	19.4	3.4	309.4	315.9	2.1	35.6	11.7	74.
14.4	44.3	4289.2	625.0	-2.2	-13.3	267.5	17.7	17.7	0.8	310.1	316.9	2.2	42.4	12.8	75.
15.4	46.7	4622.2	600.0	-4.9	-12.6	274.3	18.4	18.3	-1.4	310.7	323.7	2.4	55.3	13.9	77.
16.4	49.7	4969.8	575.0	-6.6	-7.9	270.1	20.7	20.7	1.6	312.7	323.7	3.7	90.5	15.1	78.
17.5	52.6	5328.5	550.0	-8.6	-9.9	266.1	24.4	24.3	2.6	315.8	324.6	2.9	89.8	16.4	79.
18.6	55.9	5690.5	525.0	-10.8	-12.1	264.2	25.6	25.4	3.7	317.0	324.5	2.4	88.8	18.1	79.
19.0	58.3	6090.5	500.0	-13.4	-14.8	262.9	27.4	27.4	3.0	319.5	324.3	1.9	85.8	21.6	79.
20.0	60.6	6495.8	475.0	-16.2	-18.0	262.9	29.1	29.1	3.4	321.0	325.2	1.6	84.8	23.2	79.
21.3	63.3	6919.2	450.0	-19.0	-20.9	262.3	22.1	20.9	3.4	321.0	325.2	1.3	81.8	25.0	80.
22.7	66.4	7362.1	425.0	-21.9	-24.2	260.8	21.2	20.7	3.4	321.0	325.2	0.9	77.8	26.7	80.
24.3	70.0	7827.4	400.0	-25.6	-28.3	267.0	20.7	20.7	3.4	321.0	325.2	0.6	63.9	29.0	81.
25.8	73.5	8317.4	375.0	-29.0	-33.7	266.6	27.4	27.4	3.4	321.0	325.2	0.4	51.1	31.6	81.
27.6	77.3	8817.4	350.0	-32.7	-39.3	273.9	28.4	28.4	-1.9	324.7	326.0	0.4	49.6	34.6	81.
29.2	81.2	9334.5	325.0	-37.0	-43.7	272.7	33.6	33.6	-1.6	325.6	326.5	0.2	49.6	34.6	81.
31.0	85.5	9966.7	300.0	-41.8	-49.9	271.9	36.3	36.3	0.2	327.7	327.7	0.9	49.6	34.6	81.
33.0	89.2	10591.3	275.0	-46.6	-55.9	269.7	40.6	40.6	0.2	327.7	327.7	0.9	49.6	34.6	81.
35.2	93.0	11241.8	250.0	-52.2	-61.9	267.6	43.1	43.1	1.8	328.5	328.5	0.9	49.6	34.6	81.
37.5	96.9	11956.3	225.0	-58.0	-67.9	265.6	49.7	49.7	3.8	329.6	329.6	0.9	49.6	34.6	81.
40.0	100.8	12815.7	200.0	-63.9	-73.9	263.9	50.0	49.7	5.2	331.5	331.5	0.9	49.6	34.6	81.
43.0	105.6	13769.3	175.0	-63.7	-73.9	263.9	29.4	28.6	-7.1	344.9	344.9	0.9	49.6	34.6	81.
47.0	115.6	14920.4	150.0	-59.4	-69.9	275.4	30.6	30.6	-2.9	367.8	367.8	0.9	49.6	34.6	81.
51.6	130.3	16327.7	125.0	-56.9	-66.9	271.3	24.6	24.6	-0.6	391.9	391.9	0.9	49.6	34.6	81.
57.0	138.7	18111.0	100.0	-58.9	-69.9	269.0	29.6	29.6	0.5	414.0	414.0	0.9	49.6	34.6	81.
64.4	147.5	20441.9	75.0	-64.1	-75.9	272.1	9.8	9.8	-0.4	438.5	438.5	0.9	49.6	34.6	81.
99.0	99.9	99.9	25.0	-58.9	-69.9	301.2	1.4	1.2	-0.7	504.8	504.8	0.9	49.6	34.6	81.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 433
SALEM, ILL

24 APRIL 1975
1204 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	KX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.7	175.0	988.0	14.4	14.4	160.0	3.6	-1.2	3.4	289.9	316.9	10.5	100.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	6.8	287.5	975.0	15.0	13.2	89.9	9.8	-4.8	-0.0	291.6	317.2	9.9	88.8	0.2	35.9
1.0	8.9	508.3	950.0	15.8	10.8	84.6	7.7	-7.7	-0.7	294.4	317.2	8.6	72.2	0.3	29.0
1.7	10.9	735.1	925.0	15.1	9.6	4.5	4.0	-2.7	-2.9	295.8	317.7	8.2	69.8	0.5	24.0
2.4	13.2	967.2	900.0	14.2	8.6	358.3	6.8	6.7	-6.7	297.2	318.2	7.8	68.7	0.5	25.0
3.1	15.4	1205.2	875.0	13.3	6.8	349.1	11.7	2.2	-11.5	298.5	317.9	7.1	64.9	0.7	21.0
3.9	17.5	1448.8	850.0	12.0	5.4	358.2	13.1	1.3	-13.0	299.6	317.9	6.6	63.8	1.1	14.0
4.7	19.9	1699.3	825.0	10.0	4.3	348.6	12.5	2.5	-12.3	300.0	317.4	6.3	67.4	1.7	14.0
5.4	22.1	1951.7	800.0	8.4	4.6	332.3	9.3	4.3	-8.2	300.9	319.4	6.7	77.2	2.2	18.3
6.2	24.6	2215.8	775.0	6.7	4.2	285.5	8.0	7.7	-2.2	302.1	323.4	7.7	96.7	2.5	17.7
7.0	26.9	2445.0	750.0	5.5	5.2	259.0	12.8	12.6	2.4	303.5	324.1	7.4	97.7	2.6	16.4
8.2	29.4	2752.2	725.0	4.1	3.5	253.3	17.8	17.2	4.5	304.8	324.0	6.8	96.1	2.7	14.1
9.2	32.0	3047.4	700.0	2.6	2.1	253.9	20.7	19.8	5.7	306.2	324.4	6.4	96.5	3.4	12.4
10.1	34.7	3341.5	675.0	1.0	0.6	249.3	22.4	20.9	7.9	307.5	324.5	6.0	97.3	4.2	11.2
11.2	37.2	3644.7	650.0	-0.3	-0.6	247.1	28.9	23.0	10.4	309.4	325.7	5.6	97.5	5.4	9.0
12.1	39.9	3958.1	625.0	-2.0	-2.4	246.9	26.5	24.4	9.7	310.8	325.8	5.1	96.6	6.7	7.0
13.1	42.6	4291.6	600.0	-4.8	-4.8	246.8	28.5	26.2	11.2	311.0	320.1	3.0	67.8	8.2	8.0
14.1	45.5	4615.3	575.0	-7.1	-14.0	245.5	28.9	26.3	12.0	311.9	319.9	2.3	57.9	10.3	9.0
15.2	48.4	4961.0	550.0	-8.9	-10.4	247.0	28.0	26.7	11.3	313.7	317.8	1.9	54.6	11.7	41.0
16.2	51.1	5319.7	525.0	-11.4	-20.5	248.5	30.3	28.2	11.1	314.8	316.3	1.4	46.7	13.6	7.0
17.3	54.3	5692.5	500.0	-13.7	-29.4	248.7	30.0	27.9	10.9	316.4	316.7	0.7	25.7	15.5	7.0
18.5	57.3	6080.7	475.0	-15.7	-30.1	251.0	27.4	25.9	8.9	318.6	321.0	0.7	30.4	17.5	7.0
19.8	60.7	6487.2	450.0	-17.9	-23.0	255.0	24.5	27.5	7.4	320.8	325.2	1.3	64.6	19.7	7.0
21.2	64.1	6912.3	425.0	-21.0	-25.7	258.1	27.9	26.8	7.7	322.1	325.8	1.1	65.7	22.0	7.0
22.5	67.6	7357.7	400.0	-24.0	-27.9	253.2	28.5	25.3	7.6	323.8	327.1	1.0	69.9	24.1	7.0
23.8	71.0	7825.3	375.0	-27.7	-32.7	252.0	23.4	22.2	7.2	325.0	327.2	0.6	62.3	26.2	7.0
25.1	74.9	8317.9	350.0	-31.5	-30.0	255.6	23.9	23.1	5.9	326.3	328.0	0.5	63.8	27.4	7.0
26.7	78.0	8837.8	325.0	-35.8	-40.6	254.6	22.6	21.8	6.0	327.3	328.5	0.3	60.9	30.1	7.0
28.4	82.3	9384.8	300.0	-40.6	99.9	99.9	99.9	99.9	99.9	328.2	999.9	99.9	99.9	99.9	99.9
30.1	87.2	9975.5	275.0	-45.2	99.9	99.9	99.9	99.9	99.9	329.7	999.9	99.9	99.9	99.9	99.9
32.0	92.0	10603.1	250.0	-51.2	99.9	99.9	99.9	99.9	99.9	330.0	999.9	99.9	99.9	99.9	99.9
34.1	96.8	11278.4	225.0	-57.6	99.9	99.9	99.9	99.9	99.9	330.2	999.9	99.9	99.9	99.9	99.9
36.4	102.0	12011.4	200.0	-63.1	99.9	99.9	99.9	99.9	99.9	332.2	999.9	99.9	99.9	99.9	99.9
38.1	107.8	12829.0	175.0	-64.1	99.9	99.9	99.9	99.9	99.9	334.2	999.9	99.9	99.9	99.9	99.9
42.3	114.0	13792.7	150.0	-67.9	99.9	99.9	99.9	99.9	99.9	337.0	999.9	99.9	99.9	99.9	99.9
46.0	121.0	14937.0	125.0	-60.7	99.9	99.9	99.9	99.9	99.9	345.1	999.9	99.9	99.9	99.9	99.9
50.6	129.0	16332.7	100.0	-58.4	99.9	99.9	99.9	99.9	99.9	415.0	999.9	99.9	99.9	99.9	99.9
55.9	178.3	18110.1	75.0	-63.6	99.9	99.9	99.9	99.9	99.9	436.7	999.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE 1
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 451
GODGE CITY, KAN

24 APRIL 1975
1115 GMT

153 13. 0

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT Y CG K	E PUT Y DG K	MR RTO GN/KG	RM PCT	RANGE KM	AZ DG
0.0	12.6	791.0	915.3	14.4	12.8	30.0	7.2	-3.6	-6.2	296.3	323.3	10.2	90.0	0.0	0.0
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
01.9	96.3	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
02.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
03.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
04.9	15.1	934.0	900.0	14.1	10.6	42.6	9.6	-6.5	-7.1	297.2	321.2	9.0	70.4	0.3	212.0
05.9	17.3	1171.7	875.0	15.6	-11.3	29.2	7.2	-3.5	-6.3	300.3	305.8	1.8	14.6	0.7	216.0
06.9	19.9	1419.8	850.0	19.5	-18.8	6.0	6.3	-0.7	-6.3	306.7	310.0	1.0	6.3	1.0	211.0
07.9	22.2	1675.5	825.0	18.5	-38.6	342.6	7.8	2.3	-7.5	308.2	308.7	0.2	1.0	1.3	206.0
08.9	24.5	1937.5	800.0	16.4	-37.5	331.8	8.3	5.4	-7.3	308.6	309.3	0.2	1.3	1.7	191.0
09.9	27.1	2209.3	775.0	13.5	-30.9	324.9	8.8	5.1	-7.2	308.4	309.6	0.4	3.0	2.3	181.0
10.9	29.3	2479.6	750.0	11.1	-28.8	323.4	9.0	5.4	-7.2	308.7	310.3	0.5	4.3	2.5	174.0
11.9	32.6	2760.7	725.0	8.5	-25.2	318.4	7.7	5.4	-5.5	308.9	311.1	0.7	7.0	2.8	165.0
12.9	35.3	3049.1	700.0	5.9	-24.0	308.7	7.4	5.7	-4.6	309.1	311.7	0.8	9.4	3.2	164.0
13.9	38.3	3349.9	675.0	3.3	-25.1	292.5	6.7	6.2	-2.6	309.5	311.9	0.7	10.2	3.6	159.0
14.9	40.8	3649.6	650.0	1.1	-25.5	284.3	6.3	6.9	3.7	310.3	312.7	0.7	11.6	3.7	154.0
15.9	43.7	3943.2	625.0	-1.7	-24.1	241.3	7.8	6.9	3.7	310.6	313.4	0.9	16.0	3.7	146.0
16.9	46.5	4286.0	600.0	-4.8	-24.6	233.3	9.5	8.5	4.3	310.6	313.4	0.9	19.4	3.8	140.0
17.9	49.9	4618.9	575.0	-7.7	-24.0	250.7	13.1	12.4	4.3	311.1	314.2	1.0	25.6	4.0	131.0
18.9	52.7	4967.4	550.0	-10.0	-23.1	250.8	16.2	15.3	5.3	312.3	315.8	1.1	33.3	4.6	121.0
19.9	55.3	5320.8	525.0	-12.1	-38.2	246.7	17.5	16.0	6.9	313.9	314.8	0.3	9.3	5.5	110.0
20.9	59.1	5691.8	500.0	-15.0	-35.0	244.0	17.7	15.9	7.7	314.7	316.5	0.4	16.2	6.5	102.0
21.9	62.6	6077.4	475.0	-17.9	-43.0	249.4	19.6	14.5	7.0	315.8	316.5	0.2	8.9	7.6	90.0
22.9	65.9	6480.0	450.0	-20.2	-35.9	247.4	23.2	21.4	8.9	317.8	319.2	0.4	23.1	9.3	81.0
23.9	69.6	6907.2	425.0	-24.1	-34.7	245.6	25.9	23.6	10.7	318.1	319.7	0.5	37.0	11.3	84.0
24.9	73.2	7338.7	400.0	-28.5	-34.1	242.6	28.2	25.0	13.2	319.7	319.7	0.5	58.2	13.5	83.0
25.9	77.2	7767.9	375.0	-31.6	-35.8	246.4	30.0	27.5	12.0	319.7	321.4	0.5	66.0	15.4	80.0
26.9	81.3	8281.7	350.0	-35.9	-40.3	247.0	33.8	31.1	13.2	320.3	321.5	0.3	63.6	15.4	74.0
27.9	85.1	8792.2	325.0	-39.7	99.9	247.0	32.1	29.5	12.9	321.9	321.9	99.9	99.9	21.6	70.0
28.9	89.4	9338.2	300.0	-43.1	99.9	251.8	38.4	36.5	11.4	322.9	322.9	99.9	99.9	25.4	75.0
29.9	94.2	9911.7	275.0	-47.1	99.9	253.7	40.5	38.8	11.4	324.9	324.9	99.9	99.9	29.5	75.0
30.9	99.0	10532.9	250.0	-51.7	99.9	258.3	40.6	45.6	9.5	328.0	328.0	99.9	99.9	35.0	75.0
31.9	104.0	11257.1	225.0	-55.7	99.9	260.6	52.3	51.6	8.6	331.6	331.6	99.9	99.9	41.0	76.0
32.9	109.3	11947.4	200.0	-60.2	99.9	259.8	48.8	46.0	6.6	337.5	337.5	99.9	99.9	48.4	76.0
33.9	115.5	12777.3	175.0	-64.4	99.9	257.9	43.1	42.2	9.1	350.3	350.3	99.9	99.9	55.7	77.0
34.9	122.0	13744.7	150.0	-68.9	99.9	255.2	30.9	28.0	13.0	372.1	372.1	99.9	99.9	61.7	77.0
35.9	129.3	14900.0	125.0	-73.8	99.9	249.8	23.2	21.6	8.0	392.1	392.1	99.9	99.9	70.2	70.0
36.9	136.8	16303.1	100.0	-79.1	99.9	245.8	25.3	23.7	8.7	411.6	411.6	99.9	99.9	77.1	76.0
37.9	144.3	18097.9	75.0	-84.8	99.9	244.4	14.1	16.1	1.6	447.6	447.6	99.9	99.9	85.5	76.0
38.9	152.7	20636.8	50.0	-90.2	99.9	245.3	6.7	6.1	2.8	511.2	511.2	99.9	99.9	89.3	76.0
39.9	161.0	25103.6	25.0	-95.5	99.9	71.5	8.9	-4.5	-2.8	639.4	639.4	99.9	99.9	92.4	77.0

° PV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NC. 456
TOPEKA, KAN24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.7	268.0	975.5	16.1	13.9	100.0	5.2	-5.1	0.9	292.7	319.6	10.3	07.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	6.7	272.4	975.0	16.0	13.6	99.2	6.2	-6.2	1.0	292.6	319.0	1.01	85.4	0.0	34.0
0.7	9.0	451.2	950.0	15.3	10.7	99.9	13.3	-13.2	1.1	293.9	316.5	8.6	74.3	0.4	27.0
1.3	11.1	719.8	925.0	16.5	7.5	88.9	13.5	-13.5	-0.2	297.1	316.2	7.1	55.3	1.0	27.0
2.2	13.5	952.9	900.0	15.1	5.9	82.7	9.5	-9.4	-1.2	298.0	315.8	6.5	54.1	1.6	27.0
3.0	15.7	1191.2	875.0	14.0	5.3	92.4	6.6	-6.6	0.3	299.2	316.7	6.8	55.7	1.3	26.9
3.7	18.0	1435.2	850.0	12.8	5.1	118.2	1.1	-1.0	0.5	300.4	318.3	6.5	59.4	2.1	27.0
4.0	20.4	1695.0	825.0	12.2	3.5	281.6	4.6	4.5	-0.9	302.3	319.0	6.0	55.3	2.0	27.0
5.4	22.8	1943.6	800.0	10.6	4.2	275.8	7.4	7.3	-0.7	303.3	321.4	6.5	64.7	1.7	26.8
6.2	25.3	2207.3	775.0	8.0	5.4	280.2	8.9	8.8	-1.6	303.3	323.6	7.3	83.9	1.3	26.8
7.3	27.7	2477.7	750.0	6.1	5.1	301.0	10.9	9.3	-5.6	304.2	324.7	7.4	93.0	0.4	26.1
8.2	30.4	2755.3	725.0	4.3	1.6	283.6	14.7	14.3	-3.5	305.0	321.9	6.0	82.5	0.7	19.3
9.2	33.1	3040.8	700.0	3.0	-3.3	271.3	18.8	18.8	-0.4	306.4	318.8	4.3	63.3	1.2	12.0
10.2	35.7	3334.5	675.0	0.6	-5.4	283.4	17.3	16.8	-4.0	306.9	317.9	3.8	63.7	2.1	11.2
11.1	38.4	3636.7	650.0	-1.3	-10.5	285.1	18.6	18.0	-4.8	307.8	315.7	2.6	49.3	3.1	11.1
12.1	41.1	3947.9	625.0	-3.6	-14.6	280.0	20.9	20.5	-3.6	308.6	314.7	2.0	42.1	4.3	10.7
13.1	44.1	4265.0	600.0	-6.6	-16.7	275.9	21.8	21.7	-2.2	308.7	314.0	1.7	44.2	5.6	10.6
14.2	47.1	4599.7	575.0	-9.7	-18.4	274.9	22.3	22.3	-1.9	308.8	313.7	1.6	48.7	7.0	10.4
15.2	50.3	4940.9	550.0	-12.8	-19.6	274.5	21.7	21.6	-1.7	309.0	313.6	1.5	56.6	8.4	10.2
16.3	53.0	5284.5	525.0	-14.2	-21.4	263.2	22.6	22.4	-2.7	311.5	315.6	1.3	54.2	9.7	10.1
17.5	56.1	5655.1	500.0	-14.6	-23.7	250.4	27.4	25.8	9.2	315.3	319.0	1.1	45.6	11.4	9.7
18.7	59.5	6031.5	475.0	-17.4	-27.3	249.6	29.9	27.1	10.1	316.4	319.3	0.9	41.7	13.3	9.2
20.0	63.0	6454.5	450.0	-20.1	-35.0	249.4	28.4	26.6	10.0	318.0	319.5	0.4	25.0	15.3	8.9
21.4	66.4	6875.4	425.0	-23.5	-38.4	246.3	26.4	24.2	10.6	318.8	319.9	0.3	23.8	17.4	8.7
23.0	70.1	7316.5	400.0	-26.1	-42.2	250.5	27.8	26.2	9.3	321.0	321.8	0.2	20.1	19.9	8.4
24.5	73.9	7779.8	375.0	-30.1	-45.0	250.5	27.1	25.6	9.0	321.7	322.4	0.2	21.6	22.2	8.3
26.1	77.8	8267.2	350.0	-33.9	-47.7	247.4	26.9	24.8	10.3	322.9	323.5	0.1	23.2	25.3	8.1
28.1	81.8	8781.7	325.0	-38.4	-50.9	244.9	25.6	23.2	10.8	323.7	323.9	99.9	99.9	28.1	8.0
30.2	86.2	9326.5	300.0	-43.0	-59.9	241.2	26.8	23.5	12.9	324.8	324.8	99.9	99.9	31.3	7.8
32.2	90.8	9907.2	275.0	-47.8	-69.9	236.1	25.5	21.2	14.2	326.1	326.1	99.9	99.9	34.2	7.5
34.3	95.7	10529.7	250.0	-52.3	-79.9	241.1	25.5	25.8	14.2	328.3	328.3	99.9	99.9	37.7	7.2
36.7	100.9	11203.6	225.0	-57.3	-89.9	240.2	27.9	24.2	13.9	330.8	329.9	99.9	99.9	41.5	7.3
39.3	106.7	11940.4	200.0	-61.5	-99.9	233.9	29.5	23.8	17.4	335.3	329.9	99.9	99.9	46.2	7.2
41.9	112.8	12762.2	175.0	-64.5	-99.9	232.2	30.9	35.1	11.3	343.6	329.9	99.9	99.9	51.1	7.0
45.0	119.5	13718.8	150.0	-60.3	-99.9	253.1	31.5	30.1	9.1	366.2	329.9	99.9	99.9	58.3	7.1
48.2	127.3	14841.6	125.0	-59.0	-99.9	256.9	32.9	32.1	7.4	388.1	329.9	99.9	99.9	65.7	7.2
53.1	135.7	16287.8	100.0	-53.1	-99.9	254.1	17.6	18.9	5.4	425.1	329.9	99.9	99.9	72.3	7.2
59.0	144.7	18000.0	75.0	-42.7	-99.9	250.8	14.0	13.8	-2.6	441.6	329.9	99.9	99.9	76.1	7.3
67.1	155.5	20626.2	50.0	-37.0	-99.9	283.2	8.9	8.6	1.0	509.2	329.9	99.9	99.9	79.7	7.3
78.6	167.0	25087.6	25.0	-49.1	-99.9	32.8	3.1	-1.7	-2.6	643.6	329.9	99.9	99.9	81.2	7.4

ORIGINAL PAGE IS
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 486
PORT TOTTEN, N Y

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SFC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.6	8.0	1014.1	11.2	11.2	999.9	99.9	99.9	55.5	284.3	305.3	8.3	100.0	999.9	93.0
0.4	5.6	125.4	1009.0	11.0	10.8	999.9	99.9	99.9	59.9	285.3	306.1	8.2	98.3	999.9	93.0
1.1	7.6	337.3	975.0	12.2	11.9	999.7	99.9	99.9	99.9	286.6	311.9	9.1	98.5	999.9	99.9
2.0	5.9	554.5	950.0	14.0	8.9	999.9	99.9	99.9	99.9	292.4	312.5	7.6	71.5	999.9	99.9
2.7	11.7	741.3	925.0	12.6	7.8	999.9	99.9	99.9	99.9	293.1	312.2	7.2	72.7	999.9	99.9
3.6	13.9	1010.7	900.0	10.5	8.0	999.9	99.9	99.9	99.9	293.3	313.3	7.5	84.9	999.9	99.9
4.5	15.9	1244.8	875.0	8.5	7.4	999.9	99.9	99.9	99.9	293.5	313.3	7.4	93.1	999.9	99.9
5.2	16.1	1485.2	850.0	8.5	5.5	999.9	99.9	99.9	99.9	293.9	314.1	6.7	81.7	999.9	99.9
6.2	20.3	1731.8	825.0	6.7	4.3	999.9	99.9	99.9	99.9	294.5	313.7	6.3	84.8	999.9	99.9
7.1	22.5	1984.2	800.0	5.2	3.3	999.9	99.9	99.9	99.9	297.5	314.1	6.1	87.4	999.9	99.9
8.1	24.9	2243.1	775.0	3.4	0.3	999.9	99.9	99.9	99.9	298.1	312.1	5.1	79.9	999.9	99.9
8.9	27.0	2509.6	750.0	3.6	-2.7	999.9	99.9	99.9	99.9	301.3	313.2	4.2	62.2	999.9	99.9
9.3	29.5	2784.2	725.0	1.7	-5.0	999.9	99.9	99.9	99.9	31.7	312.2	3.6	61.0	999.9	99.9
10.8	32.0	3066.0	700.0	-0.6	-8.0	999.9	99.9	99.9	99.9	302.2	312.3	3.5	66.9	999.9	99.9
11.9	34.6	3356.5	675.0	-1.7	-11.0	999.9	99.9	99.9	99.9	304.1	311.4	2.4	48.8	999.9	99.9
13.1	36.9	3656.6	650.0	-2.3	-25.3	999.9	99.9	99.9	99.9	306.4	308.3	0.6	11.4	999.9	99.9
14.1	38.4	3966.3	625.0	-5.0	-26.7	999.9	99.9	99.9	99.9	308.8	309.0	0.7	16.3	999.9	99.9
15.3	42.1	4285.3	600.0	-7.6	-25.5	999.9	99.9	99.9	99.9	307.4	309.9	0.8	22.1	999.9	99.9
16.4	44.9	4615.2	575.0	-9.8	-31.4	999.9	99.9	99.9	99.9	308.6	310.2	0.5	15.2	999.9	99.9
17.6	47.7	4937.2	550.0	-11.5	-34.1	999.9	99.9	99.9	99.9	310.4	311.3	0.3	8.9	999.9	99.9
18.8	50.5	5311.9	525.0	-14.0	-35.8	999.9	99.9	99.9	99.9	311.5	312.3	0.2	5.2	999.9	99.9
20.1	53.4	5691.3	500.0	-15.3	-40.5	999.9	99.9	99.9	99.9	314.4	314.8	0.1	4.9	999.9	99.9
21.4	56.3	6066.9	475.0	-17.8	-47.9	999.9	99.9	99.9	99.9	315.9	316.3	0.1	5.1	999.9	99.9
22.7	59.4	6448.7	450.0	-21.2	-49.5	999.9	99.9	99.9	99.9	316.6	316.9	0.1	5.7	999.9	99.9
24.1	62.7	6887.4	425.0	-24.2	-50.1	999.9	99.9	99.9	99.9	318.0	318.3	0.1	7.0	999.9	99.9
25.5	65.9	7327.4	400.0	-27.1	-50.3	999.9	99.9	99.9	99.9	321.7	320.1	0.1	14.5	999.9	99.9
27.2	68.4	7789.7	375.0	-30.1	-48.5	999.9	99.9	99.9	99.9	321.7	322.2	0.1	17.0	999.9	99.9
28.7	72.9	8276.7	350.0	-34.5	-50.8	999.9	99.9	99.9	99.9	322.2	322.6	0.1	20.7	999.9	99.9
30.4	76.7	8789.9	325.0	-39.2	-53.2	999.9	99.9	99.9	99.9	322.5	322.8	0.1	99.9	999.9	99.9
32.2	80.6	9332.3	300.0	-44.4	-59.9	999.7	99.9	99.9	99.9	323.6	323.8	99.9	99.9	999.9	99.9
33.9	84.7	9908.6	275.0	-49.5	-59.9	999.9	99.9	99.9	99.9	324.8	324.8	99.9	99.9	999.9	99.9
36.1	89.3	10525.3	250.0	-54.7	-59.9	999.9	99.9	99.9	99.9	327.1	327.1	99.9	99.9	999.9	99.9
38.1	93.8	11192.3	225.0	-59.7	-59.9	999.9	99.9	99.9	99.9	330.0	330.0	99.9	99.9	999.9	99.9
41.0	98.8	11930.5	200.0	-58.6	-59.9	999.9	99.9	99.9	99.9	343.3	343.3	99.9	99.9	999.9	99.9
43.5	104.0	12758.6	175.0	-64.6	-59.9	999.9	99.9	99.9	99.9	343.3	343.3	99.9	99.9	999.9	99.9
46.4	110.2	13695.2	150.0	-60.3	-59.9	999.9	99.9	99.9	99.9	346.2	346.2	99.9	99.9	999.9	99.9
49.9	116.8	14349.4	125.0	-54.7	-59.9	999.9	99.9	99.9	99.9	348.9	348.9	99.9	99.9	999.9	99.9
54.2	125.0	16261.9	100.0	-58.0	-59.9	999.9	99.9	99.9	99.9	415.7	415.7	99.9	99.9	999.9	99.9
59.7	132.7	18064.8	75.0	-60.8	-59.9	999.9	99.9	99.9	99.9	445.6	445.6	99.9	99.9	999.9	99.9
67.0	143.3	21616.6	50.0	-56.0	-59.9	999.9	99.9	99.9	99.9	511.5	511.5	99.9	99.9	999.9	99.9
78.3	153.3	25077.1	25.0	-52.3	-59.9	999.9	99.9	99.9	99.9	638.9	638.9	99.9	99.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 518
ALBANY, N Y24 APRIL 1975
1115 GMT

TIME MIN	CNTCY	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	OIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.9	86.0	1002.9	8.0	6.5	170.3	5.2	-0.9	5.1	51.7	297.2	6.1	90.0	0.0	0.
0.3	6.0	109.9	1000.0	8.3	6.2	173.4	11.5	-1.3	11.4	282.3	297.6	6.0	90.5	0.2	340.
1.0	8.4	318.4	975.0	6.4	5.8	181.2	11.3	0.2	11.3	282.4	297.6	5.9	95.5	0.5	351.
1.6	10.7	533.3	950.0	9.4	8.0	217.0	9.9	6.0	7.9	287.7	308.2	7.1	90.9	1.0	3.
2.7	13.1	754.7	925.0	8.8	7.6	238.1	13.8	11.7	7.3	289.3	307.9	7.1	92.0	1.5	21.
3.4	15.5	981.6	900.0	7.6	6.9	256.0	15.2	14.7	3.7	290.3	308.5	6.9	94.5	2.0	33.
4.3	17.3	1213.9	875.0	7.7	6.9	271.2	17.8	17.8	-0.4	292.7	311.8	7.2	94.6	2.6	49.
5.1	20.4	1453.7	850.0	7.4	6.6	286.9	14.3	13.7	-0.2	294.9	314.2	7.2	94.8	3.2	60.
6.2	22.9	1699.4	825.0	6.0	5.2	298.1	14.2	14.0	-2.0	255.8	314.0	6.7	94.8	3.8	69.
7.1	25.5	1951.5	800.0	4.9	4.0	271.4	13.6	13.6	-0.3	297.2	314.6	6.4	94.0	4.6	73.
8.1	28.1	2210.1	775.0	3.3	2.3	272.6	12.3	12.3	-0.6	258.1	314.2	5.9	93.4	5.3	76.
8.9	30.3	2475.5	750.0	1.4	0.5	268.3	12.4	12.4	0.4	258.8	313.5	5.3	94.0	5.8	70.
9.0	33.6	2746.3	725.0	-0.3	-1.1	264.7	11.3	11.3	1.0	299.7	313.3	4.9	94.1	6.4	70.
10.7	36.2	3028.3	700.0	-2.1	-3.5	266.7	11.5	11.4	0.7	300.5	308.9	2.9	91.2	7.1	73.
11.7	39.2	3317.5	675.0	-2.2	-12.4	274.7	14.6	14.6	-1.2	303.5	310.1	2.2	46.0	7.9	80.
12.7	41.9	3616.4	650.0	-3.8	-27.7	280.0	18.3	18.0	-3.2	304.8	300.7	0.6	13.5	8.8	82.
13.4	44.9	3924.6	625.0	-6.0	-26.5	281.7	19.7	19.2	-4.0	305.6	307.9	0.7	18.0	10.0	84.
14.9	48.0	4242.8	600.0	-7.9	-30.6	282.6	20.8	20.3	-4.5	307.0	308.7	0.5	14.0	11.3	86.
16.2	50.9	4571.7	575.0	-10.4	-32.6	278.9	22.1	21.9	-3.1	307.8	309.2	0.4	14.2	13.0	88.
17.3	54.0	4912.4	550.0	-12.1	99.9	278.9	22.1	21.8	-3.4	309.8	99.9	99.9	99.9	14.4	89.
18.5	57.0	5266.9	525.0	-14.0	99.9	279.2	25.4	25.1	-4.1	311.6	99.9	99.9	99.9	16.0	90.
19.6	60.3	5615.5	500.0	-16.5	99.9	280.1	26.3	25.9	-4.6	312.9	99.9	99.9	99.9	18.0	91.
21.2	63.7	6019.2	475.0	-19.5	99.9	280.4	27.3	26.8	-4.9	313.8	99.9	99.9	99.9	20.1	92.
22.5	67.0	6418.6	450.0	-22.1	99.9	277.6	31.5	31.2	-4.2	315.5	99.9	99.9	99.9	22.5	93.
24.0	70.6	6836.9	425.0	-24.8	99.9	272.0	29.5	29.5	-1.0	317.2	99.9	99.9	99.9	25.4	93.
25.7	74.3	7274.8	400.0	-28.4	99.9	273.2	30.2	30.1	-1.7	318.1	99.9	99.9	99.9	28.3	92.
27.4	78.2	7734.2	375.0	-32.4	99.9	280.7	25.6	25.2	-4.9	318.8	99.9	99.9	99.9	31.2	93.
29.2	82.1	8214.1	350.0	-37.0	99.9	282.2	27.9	27.3	-4.9	318.9	99.9	99.9	99.9	33.4	94.
30.8	86.0	8723.9	325.0	-40.9	99.9	280.2	33.1	32.6	-5.9	320.3	99.9	99.9	99.9	36.7	95.
32.9	90.6	9262.5	300.0	-45.7	99.9	282.4	40.1	38.2	-5.0	321.0	99.9	99.9	99.9	41.3	95.
34.8	95.2	9935.7	275.0	-50.6	99.9	285.7	48.1	46.3	-13.0	322.0	99.9	99.9	99.9	46.3	96.
36.8	100.0	10450.8	250.0	-54.8	99.9	289.7	62.1	58.4	-21.0	324.7	99.9	99.9	99.9	52.8	96.
39.3	105.0	11211.1	225.0	-57.6	99.9	295.0	69.9	63.4	-29.6	330.3	99.9	99.9	99.9	62.1	100.
41.7	110.6	11863.4	200.0	-59.3	99.9	300.9	45.2	38.8	-23.2	338.9	99.9	99.9	99.9	70.8	102.
44.5	116.5	12690.8	175.0	-64.1	99.9	277.4	33.3	33.0	-13.0	344.2	99.9	99.9	99.9	76.5	103.
47.9	123.3	13647.4	150.0	-66.5	99.9	282.5	32.5	31.7	-7.1	372.7	99.9	99.9	99.9	83.6	103.
51.6	130.3	14811.9	125.0	-55.5	99.9	290.5	18.0	16.9	-6.3	394.5	99.9	99.9	99.9	91.2	103.
54.4	138.0	16233.3	100.0	-55.7	99.9	286.1	17.1	16.6	-4.2	420.0	99.9	99.9	99.9	97.0	103.
62.6	145.8	18050.6	75.0	-58.5	99.9	316.5	12.2	7.4	-0.9	450.4	99.9	99.9	99.9	101.7	104.
70.8	154.5	23625.1	50.0	-55.7	99.9	10.5	3.1	-0.6	-3.1	512.4	99.9	99.9	99.9	103.6	105.
82.5	183.7	25087.9	25.0	-51.2	99.9	49.1	3.7	-2.8	-2.4	637.8	99.9	99.9	99.9	104.9	106.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 520
PITTSBURGH, PA24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SFC	U COMP M/SEC	V CCNP M/SFC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	8.1	359.0	998.9	12.6	12.0	200.0	7.2	2.5	6.8	289.5	313.1	9.1	96.0	0.0	0.
0.0	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
0.5	9.9	524.8	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
1.3	11.7	749.0	925.0	12.3	11.6	206.7	14.1	6.4	12.6	290.9	314.5	9.1	95.8	0.3	2.1
2.2	13.9	979.0	900.0	12.3	11.6	226.1	12.7	9.1	8.8	293.1	317.7	9.4	95.8	0.3	3.1
2.3	15.9	1214.3	875.0	11.1	9.1	229.7	11.8	9.0	7.7	294.0	315.4	8.1	95.5	1.4	4.0
3.8	18.3	1455.5	850.0	10.2	8.8	235.1	15.4	10.9	10.8	295.5	317.3	8.2	90.7	2.0	4.2
4.7	20.5	1703.1	825.0	8.9	6.0	230.0	15.6	12.0	10.0	296.3	315.1	6.9	82.2	2.0	4.3
5.6	22.6	1957.6	800.0	8.6	5.9	238.2	19.7	16.8	10.4	298.6	317.9	7.1	83.1	3.4	4.6
6.5	25.1	2218.8	775.0	7.4	4.8	245.2	22.4	20.3	9.4	300.0	314.6	6.6	83.4	4.8	4.9
7.4	27.3	2480.9	750.0	5.8	4.2	254.7	24.6	23.8	6.5	300.9	319.4	6.7	85.2	6.1	5.4
8.3	29.9	2763.2	725.0	3.9	2.5	258.6	27.3	26.8	5.4	301.6	318.7	6.1	90.8	7.4	5.4
9.2	32.3	3045.2	700.0	2.0	0.9	262.5	28.6	28.4	3.7	302.4	319.3	5.7	92.2	8.9	6.2
10.2	35.0	3336.5	675.0	0.4	-0.5	263.2	30.3	30.1	3.6	303.6	318.6	5.3	93.7	10.4	6.5
11.2	37.4	3637.4	650.0	-1.4	-2.4	259.9	32.5	32.0	5.7	304.6	318.2	4.4	92.9	12.2	6.4
12.3	40.2	3947.6	625.0	-2.7	-4.0	257.9	34.0	33.3	7.1	306.5	319.3	4.4	90.7	14.1	5.4
13.3	42.8	4268.6	600.0	-4.8	-5.9	255.0	36.0	33.0	8.5	307.5	319.0	3.9	91.6	16.1	7.0
14.4	45.7	4600.8	575.0	-6.1	-7.2	253.4	33.6	32.2	9.6	309.5	320.6	3.7	92.2	18.4	7.1
15.5	48.6	4945.4	550.0	-8.1	-9.2	250.8	32.1	30.1	11.1	310.9	320.8	3.3	91.9	20.6	7.1
16.7	51.5	5303.7	525.0	-9.9	-11.0	247.5	29.7	27.5	11.4	312.7	321.9	3.0	91.6	22.7	7.1
17.8	54.6	5676.8	500.0	-11.3	-12.7	248.8	27.2	25.4	9.8	315.2	323.6	2.7	88.9	24.7	7.0
19.2	57.7	6055.0	475.0	-13.9	-15.5	252.4	27.6	26.3	8.3	316.3	323.5	2.3	87.5	26.5	7.0
20.3	61.0	6469.9	450.0	-16.4	-18.2	255.0	29.0	24.0	7.5	317.8	323.9	1.9	86.1	28.7	7.1
21.4	64.6	6893.7	425.0	-19.0	-20.8	255.5	31.6	30.6	7.9	319.5	324.8	1.6	85.3	30.9	7.1
23.0	67.9	7337.3	400.0	-21.9	-23.4	257.0	28.9	24.2	6.5	321.0	325.5	1.4	87.6	33.1	7.1
24.5	71.4	7803.2	375.0	-24.9	-26.6	262.0	30.3	30.0	4.2	322.7	326.3	1.1	85.3	35.7	7.2
25.9	75.3	8293.6	350.0	-28.7	-30.8	269.1	29.7	28.7	0.5	323.6	326.3	0.8	82.0	38.3	7.3
27.4	79.5	8810.7	325.0	-32.6	-36.5	276.1	29.9	29.7	-3.2	324.7	326.4	0.5	68.3	40.5	7.4
29.7	83.5	9358.3	300.0	-37.2	-41.9	277.3	31.1	30.9	-3.9	325.3	326.4	0.3	61.4	43.0	7.4
30.7	87.8	9940.9	275.0	-42.1	-49.9	280.2	30.7	30.2	-5.4	326.1	326.4	0.3	61.4	43.0	7.4
32.5	92.6	10564.1	250.0	-46.9	-54.6	280.4	34.9	34.3	-8.7	327.3	327.3	0.3	61.4	43.0	7.4
34.4	97.6	11215.0	225.0	-51.6	-59.9	283.6	36.8	35.7	-8.6	328.7	328.7	0.3	61.4	43.0	7.4
36.7	103.3	11967.0	200.0	-56.4	-63.4	289.5	44.1	41.6	-14.7	332.4	329.4	0.3	61.4	43.0	7.4
39.0	109.0	12745.0	175.0	-61.2	-68.9	293.5	44.3	41.4	-13.7	339.0	329.9	0.3	61.4	43.0	7.4
42.0	115.5	13750.5	150.0	-66.9	-74.9	293.1	44.0	41.4	-9.4	368.6	329.9	0.3	61.4	43.0	7.4
45.7	123.0	14808.5	125.0	-72.0	-80.9	291.0	44.0	41.4	-9.4	368.6	329.9	0.3	61.4	43.0	7.4
49.4	131.0	16293.4	100.0	-77.8	-86.4	293.0	44.0	41.4	-10.5	418.8	329.9	0.3	61.4	43.0	7.4
55.1	140.3	18088.1	75.0	-83.7	-93.7	307.5	44.0	41.4	-10.5	451.8	329.9	0.3	61.4	43.0	7.4
61.7	150.0	20612.9	50.0	-88.7	-99.3	343.7	3.0	0.8	-2.9	505.1	329.9	0.3	61.4	43.0	7.4
71.6	161.0	25021.7	25.0	-92.5	-99.9	38.7	3.1	-1.9	-2.4	633.9	329.9	0.3	61.4	43.0	7.4

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 528
BUFFALO, N. Y.24 APRIL 1975
1237 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	PH PCT	RANGE KM	AZ DG
0.0	6.1	218.0	982.7	11.1	11.1	230.0	6.8	5.2	4.4	286.8	308.5	8.5	100.0	0.0	0.
0.5	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.8	284.0	975.0	12.0	11.7	234.9	15.4	12.6	8.9	286.4	311.2	9.3	97.8	0.3	44.
1.1	8.5	502.2	950.0	12.2	11.9	238.9	17.7	15.1	9.1	290.8	314.9	9.3	97.9	1.0	56.
1.9	13.9	725.8	925.0	10.8	10.4	246.2	12.9	11.4	5.2	291.5	314.0	8.6	97.1	1.7	59.
2.9	12.9	954.4	900.0	9.8	9.4	252.9	13.2	12.6	7.9	292.7	314.4	8.2	97.0	2.5	63.
3.9	15.1	1168.4	875.0	8.6	7.0	260.1	14.3	14.1	2.5	293.7	312.9	7.2	89.2	3.3	56.
4.9	17.3	1428.2	850.0	7.6	5.0	263.9	17.9	17.8	1.9	294.9	312.3	6.4	83.4	4.2	70.
5.8	19.4	1674.2	825.0	6.4	3.2	260.6	15.8	15.6	2.6	296.1	312.1	5.9	80.0	5.1	72.
7.0	21.5	1926.5	800.0	5.1	2.8	256.9	15.0	14.6	3.4	297.3	313.4	5.9	85.0	6.2	73.
8.4	23.8	2185.1	775.0	2.9	1.3	253.7	15.4	14.7	4.3	297.7	312.7	5.4	89.0	7.4	74.
9.6	26.3	2450.1	750.0	1.1	-0.4	257.6	15.4	15.0	3.3	298.4	312.2	5.0	90.0	8.7	74.
10.9	28.5	2722.8	725.0	0.1	-1.1	249.8	17.9	16.8	6.2	300.2	313.9	4.9	91.7	9.9	74.
12.3	31.0	3003.8	700.0	-0.9	-1.8	244.0	16.3	14.6	7.1	302.1	315.7	4.8	93.3	11.4	73.
13.7	33.5	3293.8	675.0	-2.6	-3.5	245.8	17.9	16.8	6.2	303.3	315.9	4.4	93.2	12.7	72.
15.1	36.3	3593.0	650.0	-3.5	-4.5	256.2	17.4	15.9	4.1	305.5	317.7	4.2	92.6	14.3	73.
16.4	38.4	3902.9	625.0	-4.4	-5.7	251.0	15.2	14.4	4.9	308.0	319.7	4.0	90.6	15.5	73.
17.7	41.4	4223.3	600.0	-7.0	-8.5	250.6	14.6	13.8	4.9	308.4	318.4	3.4	88.8	16.6	72.
19.1	44.4	4554.6	575.0	-9.0	-10.8	251.8	15.7	14.9	4.9	309.8	318.6	2.9	86.8	17.9	72.
20.5	47.4	4857.9	550.0	-11.1	-13.1	248.6	16.3	14.8	7.0	311.2	319.9	2.5	84.7	19.3	72.
22.0	50.4	5254.1	525.0	-13.4	-15.7	244.4	17.3	15.6	7.5	312.6	319.2	2.1	82.7	20.8	71.
23.5	53.5	5623.6	500.0	-16.1	-19.8	247.0	17.8	16.4	7.0	313.5	319.0	1.7	80.0	22.4	71.
25.1	56.6	6008.3	475.0	-17.7	-21.7	240.6	18.6	17.3	6.8	315.0	319.5	1.4	77.1	24.1	71.
26.7	60.3	6405.2	450.0	-21.4	-24.8	246.5	19.3	17.7	7.7	316.4	320.1	1.1	74.2	25.9	71.
28.4	63.7	6828.1	425.0	-24.8	-28.4	252.8	22.8	21.8	6.7	317.3	320.0	0.8	69.0	27.8	70.
30.0	67.3	7265.6	400.0	-28.9	-35.9	258.9	25.2	24.8	4.9	317.4	318.9	0.4	50.4	30.2	71.
32.0	71.0	7724.2	375.0	-32.0	-40.2	271.0	26.3	25.3	-0.5	318.2	320.3	0.3	43.3	33.7	72.
33.7	75.3	8203.1	350.0	-34.3	-43.4	278.9	30.7	30.3	-5.3	322.4	323.2	0.2	39.1	35.9	74.
35.6	79.3	8725.8	325.0	-36.8	-46.2	278.9	44.8	44.2	-6.9	325.9	326.6	0.2	36.6	40.2	77.
37.5	83.8	9274.9	300.0	-41.2	-59.9	278.1	47.3	46.9	-6.7	327.3	329.9	99.9	99.9	45.6	79.
39.5	88.4	9859.6	275.0	-46.3	-64.9	280.4	42.9	42.2	-7.8	328.2	329.9	99.9	99.9	50.4	41.
41.5	93.8	10484.6	250.0	-51.8	-69.9	282.4	53.2	52.0	-11.4	329.1	329.9	99.9	99.9	56.2	43.
43.7	99.3	11159.5	225.0	-57.1	-75.1	286.0	58.9	55.9	-10.4	330.9	329.9	99.9	99.9	63.1	85.
46.2	105.0	11895.3	200.0	-62.5	-79.9	284.7	61.8	59.1	-15.5	333.7	329.9	99.9	99.9	71.1	87.
48.9	111.3	12713.9	175.0	-62.6	-80.9	283.9	43.8	42.5	-10.5	340.7	329.9	99.9	99.9	78.9	90.
52.0	118.0	13677.2	150.0	-58.3	-75.9	286.5	14.6	12.6	0.5	348.6	329.9	99.9	99.9	85.1	90.
55.5	125.4	14823.6	125.0	-58.5	-75.9	276.0	32.6	32.4	-3.4	352.7	329.9	99.9	99.9	90.0	90.
59.5	123.7	16252.6	100.0	-53.7	-79.9	319.7	16.0	10.3	-12.2	424.1	329.9	99.9	99.9	96.3	91.
64.9	141.7	18086.5	75.0	-57.5	-80.9	308.3	5.7	4.5	-3.6	452.3	329.9	99.9	99.9	100.2	93.
72.2	150.0	20631.7	50.0	-50.2	-80.9	352.9	5.4	0.7	-5.4	511.2	329.9	99.9	99.9	103.2	93.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 532
PEORIA, ILL

24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T DG K	POT T DG K	MR WTD CM/KG	RM PCT	RANGE KM	AZ °
0.0	6.2	200.0	984.2	13.9	12.8	200.0	3.1	1.1	2.9	289.0	314.1	9.5	93.0	104	22.0
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	59.9	99.9	99.9	99.9	999.9	99.9
0.2	6.9	279.5	975.0	14.0	13.2	238.6	13.5	11.5	7.0	290.6	316.0	9.6	94.5	0.2	31.0
0.8	5.2	455.4	950.0	14.2	13.2	237.0	12.9	10.9	6.9	293.0	319.3	10.1	93.5	0.3	31.0
1.3	11.3	725.1	925.0	13.9	12.6	242.4	9.3	4.7	2.4	294.8	321.1	10.0	91.8	0.9	5.0
2.5	12.6	950.6	900.0	13.5	10.8	251.4	4.4	4.1	1.4	296.0	320.9	9.1	84.1	1.1	5.0
3.1	15.8	1104.2	875.0	13.4	7.2	236.3	5.0	4.1	2.8	298.7	318.7	7.3	66.2	1.3	5.0
3.9	18.2	1438.1	850.0	12.4	4.4	211.9	4.2	2.2	3.6	300.0	317.0	6.2	58.0	1.5	5.0
4.7	20.6	1687.9	825.0	10.8	2.9	226.4	5.5	4.0	3.8	300.8	316.8	5.7	58.1	1.7	5.0
5.4	23.0	1943.0	800.0	9.2	0.7	254.0	6.7	6.5	1.9	301.7	315.9	5.0	55.1	1.9	5.0
6.0	25.3	2207.0	775.0	8.0	-2.0	267.0	8.1	8.1	0.4	302.9	315.1	4.3	49.1	2.2	5.0
6.9	28.0	2476.9	750.0	6.3	-2.3	279.8	6.6	6.7	-1.2	304.0	316.4	4.3	49.1	2.5	5.0
7.6	30.7	2754.2	725.0	4.9	-17.3	307.2	9.3	4.2	-2.2	305.0	309.6	1.5	30.0	2.7	5.0
8.4	33.4	3039.2	700.0	3.0	-27.9	334.4	6.4	3.0	-6.2	305.9	307.7	0.5	8.1	2.9	7.0
9.3	36.3	3322.1	675.0	0.7	-21.2	336.4	9.1	3.6	-8.4	306.5	309.8	1.0	17.5	2.9	7.0
10.0	38.9	3633.8	650.0	-1.7	-22.4	339.9	9.2	4.5	-8.0	307.2	310.2	1.0	18.7	3.0	9.0
10.7	41.5	3944.1	625.0	-4.8	-20.0	329.3	6.7	4.5	-7.9	307.1	311.0	1.2	25.2	3.2	9.0
11.5	44.4	4263.6	600.0	-7.8	-17.7	332.8	9.1	4.2	-6.1	307.3	312.2	1.6	45.1	3.4	10.0
12.2	47.5	4592.6	575.0	-11.1	-16.7	336.5	10.7	4.3	-9.8	307.2	312.7	1.8	63.5	3.7	11.0
13.0	50.6	4932.4	550.0	-13.5	-16.1	336.5	12.1	4.8	-11.1	308.3	314.3	2.0	80.6	4.1	11.0
13.9	52.8	5246.3	525.0	-13.5	-14.4	323.2	11.4	6.9	-5.2	312.4	319.7	2.4	92.8	4.6	11.0
15.0	54.9	5657.5	500.0	-14.7	-15.7	285.3	13.7	13.2	-5.6	315.4	324.5	2.3	91.9	5.3	11.0
16.1	60.4	6050.1	475.0	-16.2	-17.6	267.6	21.2	21.2	0.8	318.2	328.6	2.0	82.7	6.4	11.0
17.3	64.0	6450.4	450.0	-18.6	-20.5	255.4	25.1	24.4	6.2	320.0	325.3	1.6	84.0	7.9	12.0
18.4	67.6	6874.7	425.0	-21.6	-23.6	244.4	29.7	27.6	10.9	321.4	326.6	1.3	82.8	9.3	13.0
19.5	71.2	7319.8	400.0	-24.6	-27.5	246.0	34.8	32.3	13.1	323.1	326.6	1.0	77.0	11.3	14.0
20.8	75.2	7765.4	375.0	-28.2	-31.4	245.7	40.2	36.6	16.6	324.3	326.8	0.7	73.8	13.9	15.0
22.2	79.5	8276.3	350.0	-32.5	-35.6	245.0	41.5	37.6	17.6	324.9	326.7	0.5	73.6	17.2	15.0
23.6	84.7	8794.1	325.0	-36.8	-39.9	243.3	41.4	37.0	18.6	325.9	327.2	0.4	72.4	20.3	16.0
25.2	88.2	9342.1	300.0	-42.0	-44.0	240.0	41.4	35.9	20.7	326.2	328.9	0.4	69.9	24.1	17.0
26.8	92.2	9924.8	275.0	-47.0	-49.9	239.5	43.9	37.9	22.3	327.1	329.9	0.3	66.9	28.7	17.0
28.7	98.2	10548.3	250.0	-52.6	-54.9	238.5	44.7	38.1	23.4	327.9	329.9	0.3	64.9	32.9	17.0
30.4	103.6	11220.1	225.0	-58.4	-60.4	233.9	45.5	36.7	26.8	329.0	329.9	0.3	62.9	37.6	17.0
32.7	105.8	11948.5	200.0	-65.4	-67.4	230.7	46.1	35.7	29.2	329.2	329.9	0.3	60.9	43.5	17.0
35.0	116.0	12759.7	175.0	-63.9	-69.9	227.9	53.2	52.0	11.1	344.5	344.5	0.3	58.9	50.2	17.0
38.3	123.3	13711.6	150.0	-60.3	-69.9	221.9	49.4	49.3	-1.6	366.2	366.2	0.3	56.9	60.4	17.0
42.5	131.0	14856.7	125.0	-57.0	-69.9	202.5	38.5	38.2	4.8	391.8	391.8	0.3	54.9	70.0	17.0
47.4	139.3	16267.9	100.0	-57.5	-69.9	203.6	28.3	27.1	8.0	416.7	416.7	0.3	52.9	80.6	17.0
53.3	148.0	18047.3	75.0	-63.9	-69.9	220.3	7.8	5.0	5.0	439.0	439.0	0.3	50.9	84.8	17.0
60.8	157.5	20566.4	50.0	-59.7	-69.9	163.7	1.3	-0.4	1.2	502.8	502.8	0.3	48.9	85.7	17.0
71.7	167.5	24944.1	25.0	-53.5	-69.9	99.9	99.9	99.9	99.9	631.2	631.2	0.3	46.9	99.9	99.9

° BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 553
OMAHA, NEB24 APRIL 1975
1115 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE NM	AZ LG
0.0	7.5	400.0	961.6	11.1	9.5	50.0	4.2	-3.2	-2.7	288.5	308.7	7.8	90.0	0.0	0.
00.0	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
00.0	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
0.4	8.5	501.8	950.0	11.6	10.3	60.6	12.9	-11.9	-5.1	290.0	311.6	8.3	91.9	0.3	221.
1.2	10.6	725.0	925.0	10.5	9.3	65.9	8.9	-0.7	-3.7	291.1	312.1	8.0	92.0	0.7	236.
2.0	12.8	554.3	900.0	11.6	10.6	150.7	1.8	-0.7	1.6	294.7	316.4	9.0	93.5	0.3	247.
2.9	15.2	1190.6	875.0	11.3	5.5	183.7	2.5	0.2	2.5	296.4	314.3	6.6	88.9	0.9	247.
3.7	17.4	1437.7	850.0	12.1	-9.9	22.4	1.5	-1.3	-0.7	299.1	305.5	2.2	20.7	0.9	25.1
4.6	19.8	1683.0	825.0	11.4	-10.3	2.9	2.6	-0.1	-2.6	300.9	307.2	2.1	20.7	1.3	24.5
5.5	22.0	1939.1	800.0	10.1	-15.1	346.3	1.2	0.3	-1.2	302.1	306.6	1.5	15.3	1.0	24.1
6.5	24.6	2201.9	775.0	7.9	-15.7	19.4	3.1	-1.0	-2.9	302.5	307.0	1.5	16.9	1.1	23.1
7.5	27.0	2471.1	750.0	0	-12.1	0.6	4.8	-0.1	-4.8	303.3	309.3	2.0	25.4	1.3	22.1
8.4	29.6	2747.6	725.0	1.4	-11.0	348.9	4.9	0.9	-4.8	303.4	310.2	2.3	34.0	1.5	21.4
9.4	32.3	3030.9	700.0	0.8	-9.8	349.2	4.4	0.8	-4.3	303.7	311.4	2.6	44.9	1.6	21.0
10.4	35.1	3321.8	675.0	-1.8	-9.7	357.4	4.3	0.2	-4.3	303.9	312.0	2.7	54.9	1.7	20.6
11.5	37.8	3620.7	650.0	-4.3	-10.5	328.2	3.9	2.0	-3.3	304.4	312.2	2.6	61.7	2.1	20.4
12.6	40.6	3929.1	625.0	-6.1	-11.6	315.9	5.8	4.0	-4.2	305.7	313.2	2.5	65.0	2.2	19.4
13.7	43.5	4247.7	600.0	-8.0	-14.0	323.7	7.2	4.3	-5.8	307.1	313.7	2.2	61.7	2.5	19.1
14.8	46.6	4577.2	575.0	-10.6	-16.6	333.9	7.3	3.0	-6.6	307.8	313.4	1.8	61.2	2.9	18.6
16.1	49.8	4917.7	550.0	-13.0	-19.1	333.9	5.7	2.5	-5.1	306.8	313.5	1.5	60.2	3.4	17.7
17.3	52.9	5271.3	525.0	-14.5	-21.6	292.3	8.3	7.6	-3.1	311.1	315.2	1.3	54.6	3.7	17.1
18.4	56.0	5639.7	500.0	-16.5	-25.1	283.6	11.7	11.4	-2.8	312.9	316.2	1.0	47.4	4.1	16.1
19.3	59.4	6023.0	475.0	-19.9	-28.9	270.8	11.5	11.5	-0.2	313.4	316.7	1.0	60.6	4.6	15.2
21.4	63.1	6422.7	450.0	-22.3	-32.3	256.9	16.2	15.8	3.7	315.3	318.0	0.8	58.1	5.1	14.1
22.9	66.6	6840.6	425.0	-25.2	-32.4	262.0	41.0	20.8	2.9	316.7	318.6	0.6	49.0	6.1	13.1
24.5	70.4	7277.7	400.0	-28.9	-38.5	258.9	25.5	25.0	4.0	317.4	318.6	0.3	38.8	7.1	12.1
26.1	74.3	7736.1	375.0	-32.5	-43.7	250.5	25.5	25.1	4.7	318.5	318.5	0.0	2.8	10.4	10.5
28.1	78.5	8217.9	350.0	-36.5	-47.5	250.5	25.5	25.9	5.4	319.4	319.4	0.0	1.0	12.4	9.1
29.8	82.5	8727.3	325.0	-40.5	-50.9	251.3	29.4	27.9	9.4	320.9	320.9	99.9	99.9	15.5	9.1
31.7	86.9	9267.1	300.0	-45.3	-54.9	252.7	30.7	28.3	9.1	321.5	321.5	99.9	99.9	18.8	9.1
33.9	91.6	9841.8	275.0	-49.7	-59.3	250.2	32.9	30.9	11.1	323.2	323.2	99.9	99.9	22.8	8.7
36.1	96.5	10458.7	250.0	-54.2	-64.9	240.3	31.6	27.5	15.7	325.5	325.5	99.9	99.9	27.0	8.4
38.4	101.6	11129.6	225.0	-58.6	-69.9	235.6	36.6	30.2	20.7	321.8	321.8	99.9	99.9	31.4	8.0
41.3	107.4	11870.8	200.0	-59.8	-74.9	230.0	40.1	34.3	20.6	328.0	328.0	99.9	99.9	36.8	7.5
44.4	113.3	12708.4	175.0	-57.7	-69.9	255.2	31.3	30.3	8.0	334.7	334.7	99.9	99.9	43.8	7.5
47.9	119.7	13687.0	150.0	-57.2	-69.9	255.8	32.7	31.7	6.0	371.6	371.6	99.9	99.9	53.8	7.5
51.5	126.3	14827.3	125.0	-57.8	-69.9	250.8	28.9	27.3	9.5	390.3	390.3	99.9	99.9	58.0	7.5
56.7	136.3	16248.8	100.0	-55.5	-69.9	224.5	22.4	22.3	2.2	420.6	420.6	99.9	99.9	67.0	7.5
60.7	141.7	18068.1	75.0	-60.5	-69.9	226.4	9.8	7.1	6.7	440.1	440.1	99.9	99.9	73.7	7.5
64.9	149.7	20623.2	50.0	-54.4	-69.9	100	3.0	-0.1	-3.0	515.5	515.5	99.9	99.9	76.2	7.4
68.7	158.7	23105.9	25.0	-50.0	-69.9	321.5	4.9	3.1	-3.9	599.9	599.9	99.9	99.9	74.9	7.5

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 562
NORTH PLATTE, NEB
24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	M R TO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	12.8	847.0	913.0	2.3	6.8	360.0	2.6	0.0	-2.6	289.8	307.6	6.8	90.0	0.0	0.
0.0	90.9	99.9	1030.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	93.0
0.0	90.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	93.0
0.0	90.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	93.0
0.0	90.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	93.0
0.5	13.9	966.6	900.0	10.2	8.9	322.9	3.5	2.1	-2.8	293.1	314.1	6.0	91.5	0.1	14.0
1.2	16.0	1201.8	875.0	10.5	8.9	291.0	3.5	3.2	-1.2	295.8	317.9	6.2	89.6	0.2	15.2
2.0	16.4	1443.8	850.0	10.4	4.6	218.0	2.4	1.5	1.9	297.9	315.1	6.3	67.2	0.3	12.0
2.9	20.7	1692.0	825.0	6.7	4.0	226.0	3.3	2.4	2.3	298.6	315.6	6.2	72.1	0.3	10.1
3.7	23.0	1945.9	800.0	6.9	3.6	266.8	5.3	5.3	0.3	299.3	316.5	6.2	79.3	0.5	8.0
4.7	25.4	2207.0	775.0	6.0	1.9	285.8	6.6	8.3	-2.4	301.0	316.9	5.7	74.8	0.7	3.0
5.5	27.6	2475.5	750.0	4.7	0.1	292.1	7.8	7.2	-2.9	302.3	316.8	5.1	72.0	1.4	9.0
6.3	30.4	2731.4	725.0	3.1	-3.8	290.8	7.0	6.5	-2.5	303.4	316.9	4.0	60.6	1.7	11.0
7.2	33.1	3034.6	700.0	0.4	-6.2	285.5	5.3	4.8	-2.3	303.4	313.4	3.4	61.9	2.0	13.0
8.2	35.7	3325.3	675.0	-2.3	-6.5	299.3	4.5	3.9	-2.2	303.5	313.6	3.5	73.0	2.3	17.5
9.2	38.4	3623.6	650.0	-5.1	-6.3	289.0	3.4	3.3	-1.1	303.7	314.3	3.7	90.7	2.5	17.0
10.2	41.1	3930.6	625.0	-7.7	-6.3	285.2	4.0	4.0	0.3	304.0	313.6	3.3	95.9	2.7	13.0
11.6	43.9	4247.4	600.0	-9.6	-10.6	260.2	6.8	6.7	1.2	305.3	313.7	2.8	92.6	3.0	10.0
12.4	46.9	4574.6	575.0	-12.4	-13.6	257.3	10.1	9.8	2.2	305.7	312.7	2.3	90.5	3.5	7.0
13.6	50.2	4912.6	550.0	-15.2	-16.7	257.4	11.7	11.4	2.6	306.2	312.0	1.9	88.1	4.3	5.0
14.4	52.9	5253.1	525.0	-17.6	-19.2	259.6	11.7	11.5	2.1	307.5	312.4	1.6	87.1	4.9	3.0
15.7	55.9	5624.6	500.0	-20.8	-22.2	258.0	12.1	11.8	2.5	307.8	311.9	1.3	86.4	5.7	3.0
16.9	58.1	6003.7	475.0	-23.9	-25.8	255.5	13.6	13.1	3.4	308.5	311.6	1.0	84.7	6.4	9.0
18.3	62.6	6397.0	450.0	-26.6	-28.7	251.5	15.1	14.3	4.8	311.0	311.7	0.2	19.0	7.8	7.0
19.7	65.5	6808.9	425.0	-28.8	-30.0	251.0	18.1	15.8	8.2	312.1	313.5	0.4	45.2	9.1	5.0
21.4	68.6	7243.1	400.0	-31.9	-36.4	233.7	19.5	15.7	13.5	313.5	314.9	0.4	63.9	10.5	7.0
22.9	72.2	7692.3	375.0	-36.0	-39.4	235.0	18.9	15.5	10.8	313.9	315.0	0.3	70.7	12.4	7.0
24.4	77.0	8197.8	350.0	-39.4	-43.8	231.5	22.5	17.6	14.0	315.4	316.4	0.2	62.4	14.1	7.0
25.2	81.3	8671.2	325.0	-43.4	-49.9	229.3	24.0	18.2	15.6	316.9	316.9	99.9	99.9	16.5	7.0
28.0	84.1	9205.2	300.0	-47.9	-53.1	230.6	24.5	18.9	15.6	317.9	317.9	99.9	99.9	19.0	5.0
30.0	86.5	9772.8	275.0	-53.1	-59.9	227.7	25.0	18.5	14.9	318.7	318.7	99.9	99.9	21.9	5.0
32.1	84.2	10240.0	250.0	-57.5	-66.5	229.4	24.2	18.4	15.7	320.6	319.9	99.9	99.9	24.8	2.0
34.3	86.0	11035.4	225.0	-60.6	-69.9	235.3	25.0	20.6	14.3	325.6	319.9	99.9	99.9	28.0	2.0
37.2	104.3	11772.0	200.0	-57.6	-69.9	239.4	23.5	20.3	11.8	331.5	319.9	99.9	99.9	32.5	2.0
40.9	110.2	12626.0	175.0	-55.5	-69.9	232.4	23.7	22.6	7.2	338.3	319.9	99.9	99.9	37.4	2.0
44.7	116.3	13601.9	150.0	-54.3	-69.9	244.6	22.0	19.9	9.4	349.6	319.9	99.9	99.9	42.1	2.0
48.2	123.3	14747.0	125.0	-55.0	-69.9	246.3	17.0	15.6	6.8	368.1	319.9	99.9	99.9	47.9	2.0
52.2	131.3	16106.9	100.0	-55.8	-69.9	256.8	18.6	16.1	4.2	419.9	319.9	99.9	99.9	55.3	2.0
55.2	139.3	17949.6	75.0	-57.3	-69.9	244.0	13.7	12.3	6.0	452.5	319.9	99.9	99.9	62.2	2.0
72.4	147.7	20542.6	50.0	-52.0	-69.9	248.4	6.8	6.8	0.2	521.0	319.9	99.9	99.9	67.5	2.0
88.4	156.7	25072.3	25.0	-48.5	-69.9	32.0	2.4	-1.3	-2.0	645.6	319.9	99.9	99.9	66.6	2.0

° FV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° EV TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF FOUR QUALITY

STATION NO. 606
PORTLAND, ME24 APRIL 1975
1115 GMT

157 32.0

TIME MIN	CATCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MR RTO GM/KG	SM PCT	RANGE KM	AZ DG
0.0	4.0	20.0	1016.4	5.0	5.2	90.0	2.6	-2.6	0.0	278.2	251.9	5.5	97.0	0.0	0.
0.4	6.2	153.3	1000.0	5.3	4.0	148.7	14.5	-7.5	12.4	279.1	262.1	5.1	91.2	0.2	273.
0.8	6.6	367.0	975.0	4.1	1.0	154.9	15.3	-6.5	13.8	279.9	260.8	4.2	80.1	0.7	314.
2.1	10.8	576.9	950.0	3.0	-0.6	162.6	15.1	-4.5	14.4	280.7	250.8	3.9	77.2	1.5	377.
3.1	12.3	787.2	925.0	3.9	3.6	999.0	99.9	99.9	99.9	284.0	298.0	5.4	98.0	99.9	99.9
4.0	15.6	1010.6	900.0	4.5	4.5	399.0	99.9	99.9	95.7	286.9	302.3	5.9	100.3	99.9	99.9
4.9	14.7	1240.4	875.0	4.5	4.5	999.0	99.9	99.9	99.9	289.2	305.2	6.1	100.3	99.9	99.9
5.9	20.5	1474.7	850.0	3.3	3.3	999.0	99.9	99.9	99.9	290.4	305.6	5.7	100.1	99.9	99.9
6.4	22.9	1714.4	825.0	1.4	1.4	999.0	99.9	99.9	99.9	290.7	305.6	5.1	99.8	99.9	99.9
7.3	25.5	1916.0	800.0	0.2	0.2	999.0	99.9	99.9	99.9	292.0	305.2	4.9	99.7	99.9	99.9
8.7	24.0	2227.7	775.0	-0.3	-0.3	999.0	99.9	99.9	99.9	294.1	307.3	4.6	100.3	99.9	99.9
10.2	30.9	2482.5	750.0	-4.5	-2.5	999.0	99.9	99.9	99.9	294.4	306.0	4.2	100.0	99.9	99.9
11.3	33.6	2751.2	725.0	-3.8	-3.4	999.0	99.9	99.9	99.9	295.8	305.9	4.0	100.3	99.9	99.9
13.0	36.1	3028.2	700.0	-4.2	-4.2	999.0	99.9	99.9	99.9	298.4	309.7	4.0	100.2	99.9	99.9
14.4	39.1	3314.6	675.0	-5.2	-5.3	999.0	99.9	99.9	99.9	300.3	311.2	3.8	99.8	99.9	99.9
15.9	41.9	3612.7	650.0	-6.9	-7.1	999.0	99.9	99.9	99.9	301.6	311.6	3.5	98.3	99.9	99.9
17.4	44.9	3910.4	625.0	-8.4	-8.4	226.3	23.2	16.8	16.1	303.2	312.4	3.2	97.3	14.7	12.
19.1	47.0	4222.5	600.0	-10.2	-10.7	227.3	23.0	17.5	16.1	304.7	313.0	2.8	95.9	20.3	15.
20.7	50.5	4559.9	575.0	-11.6	-12.6	228.5	22.7	17.0	15.1	306.4	314.0	2.5	94.3	22.1	14.
22.3	53.7	4899.3	550.0	-13.7	-14.7	237.3	23.2	19.5	12.5	308.1	314.8	2.2	92.2	24.1	21.
24.0	56.7	5251.5	525.0	-16.0	-17.2	241.7	22.8	20.0	10.8	309.4	315.2	1.9	90.4	25.9	25.
25.4	60.0	5617.7	500.0	-18.3	-19.7	244.1	20.1	14.0	8.6	310.9	315.9	1.6	88.4	27.4	27.
27.0	63.4	5909.6	475.0	-20.7	-22.4	254.2	16.1	15.8	3.3	312.5	316.7	1.3	85.7	28.7	29.
28.8	66.8	6397.2	450.0	-23.6	-26.1	263.7	17.7	17.6	1.9	313.6	316.9	1.0	79.7	30.0	34.
30.4	70.4	6812.6	425.0	-26.9	-29.6	270.4	17.8	17.8	-0.1	314.6	317.2	0.8	77.0	31.0	35.
32.4	74.1	7247.0	400.0	-30.5	-33.6	271.8	19.7	19.7	-0.6	315.4	317.3	0.6	73.7	32.0	37.
34.3	78.2	7702.6	375.0	-34.1	-37.6	267.4	23.4	23.4	1.0	316.4	317.8	0.4	70.2	33.6	41.
36.3	82.0	8181.5	350.0	-38.2	-41.8	260.2	22.6	22.3	3.8	317.2	318.2	0.3	67.8	35.7	44.
38.3	86.2	8647.6	325.0	-42.6	-45.9	257.7	23.1	22.6	4.9	317.7	319.2	0.9	69.9	37.3	47.
40.1	90.6	9221.4	300.0	-47.7	-50.9	255.5	26.3	25.4	6.6	319.2	320.9	0.9	69.9	40.5	48.
42.3	95.3	9790.6	275.0	-52.3	-55.9	264.6	30.0	29.9	2.8	319.5	320.9	0.9	69.9	43.7	51.
44.3	100.2	10401.2	250.0	-55.9	-59.9	277.4	30.9	30.6	-4.2	323.0	323.9	0.9	69.9	46.7	54.
46.9	105.4	11045.7	225.0	-59.2	-62.9	291.4	37.1	33.9	-14.9	327.8	327.9	0.9	69.9	49.6	55.
50.1	111.0	11790.3	200.0	-61.9	-65.9	292.9	32.3	29.8	-12.6	334.8	334.8	0.9	69.9	53.0	58.
51.3	117.0	12633.9	175.0	-58.7	-62.9	289.5	29.9	28.2	-10.6	333.0	333.0	0.9	69.9	58.0	59.
57.5	124.0	1608.9	150.0	-55.6	-59.9	289.1	32.0	30.3	-10.5	374.7	374.7	0.9	69.9	63.9	74.
62.6	131.0	14770.6	125.0	-52.6	-59.9	292.9	22.5	20.7	-6.7	399.8	399.8	0.9	69.9	69.9	74.
69.7	139.8	16213.3	100.0	-55.4	-59.9	289.4	19.9	18.7	-6.8	420.6	420.6	0.9	69.9	76.4	81.
76.0	146.3	18034.3	75.0	-56.4	-59.9	313.5	13.3	9.6	-9.2	454.6	454.6	0.9	69.9	83.2	84.
83.6	154.3	20627.2	50.0	-55.2	-59.9	326.5	3.0	1.7	-2.5	513.6	513.6	0.9	69.9	86.3	96.
90.0	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	59.9	59.9	99.9	99.9	99.9	99.9

PT SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 BY TEMP MEANS TEMPERATURE AT TIME HAVE BEEN INTERPOLATED
 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 637
PLINT, MICH
24 APRIL 1975
1115 GMT

TIME MIN	CATCT	WEIGHT GEM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ G
0.0	7.3	236.0	979.7	10.6	7.9	360.0	3.6	0.0	-3.6	286.3	306.0	6.6	83.0	0.0	0.0
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.5	276.1	1750.0	9.8	7.5	99.9	99.9	99.9	99.9	295.8	303.1	6.7	85.6	99.9	99.9
1.0	6.6	491.3	950.0	9.8	6.1	99.9	99.9	99.9	99.9	225.7	301.8	6.2	90.6	99.9	99.9
1.9	10.6	711.0	925.0	6.7	7.5	312.2	6.3	4.7	-1.2	289.2	307.7	7.1	92.0	0.5	17.0
2.6	12.6	919.7	900.0	10.2	2.0	279.5	11.0	10.0	-1.8	293.0	314.3	8.0	92.5	0.6	1.1
3.6	14.7	1174.2	875.0	9.1	7.9	276.2	13.1	13.0	-1.4	294.2	314.7	7.7	92.0	1.3	12.0
4.6	16.7	1414.4	850.0	7.7	4.9	269.0	14.3	14.3	0.3	295.1	312.1	6.3	80.6	2.0	11.0
5.5	18.7	1650.3	825.0	6.8	2.4	269.0	14.3	14.3	0.3	295.1	311.6	5.5	73.7	2.9	1.4
6.5	21.0	1913.3	800.0	6.4	4.2	279.4	12.9	12.8	-1.9	296.8	316.6	6.5	85.8	3.0	1.0
7.4	23.3	2173.3	775.0	4.4	2.6	276.2	11.0	11.0	-1.7	295.3	315.8	6.0	85.6	4.3	1.1
8.6	25.6	2490.3	750.0	3.1	-0.1	276.5	10.6	10.5	-1.2	300.7	314.3	5.1	75.4	5.1	1.0
9.7	27.9	2714.4	725.0	1.2	-1.7	273.4	10.1	10.1	-0.6	301.4	314.6	4.7	86.8	5.7	1.0
10.6	30.3	2959.5	700.0	0.0	-6.6	270.4	10.8	10.8	-0.1	302.9	312.6	3.3	60.7	6.5	0.0
11.6	32.4	3207.2	675.0	-1.4	-8.0	268.5	9.5	9.5	0.2	304.4	313.6	3.1	60.9	7.1	0.0
13.0	35.3	3497.5	650.0	-2.3	-25.1	277.0	10.7	10.6	-1.3	306.6	310.6	1.3	26.4	7.9	0.0
14.2	37.8	3897.9	625.0	-4.0	-52.5	265.4	11.3	10.9	-1.0	307.9	308.0	0.0	1.0	8.5	0.0
15.4	40.4	4218.5	600.0	-6.3	-53.9	269.7	12.0	11.3	-4.0	308.8	308.9	0.0	1.0	9.4	0.0
16.7	43.3	4549.4	575.0	-9.0	-55.6	268.0	12.7	12.1	-3.9	309.4	309.5	0.0	1.0	10.4	0.0
19.1	47.5	4891.6	550.0	-11.5	-57.2	267.7	14.5	14.0	-3.4	310.4	310.5	0.0	1.0	11.4	0.0
19.4	48.4	5246.6	525.0	-14.0	-58.4	278.2	14.5	14.5	-2.1	311.5	311.6	0.0	1.0	12.5	0.0
20.7	51.5	5615.2	500.0	-16.1	-60.1	285.4	15.7	15.1	-4.2	313.4	313.5	0.0	1.0	13.7	0.0
22.0	54.6	6003.0	475.0	-18.2	-61.5	291.0	18.4	17.0	-6.8	315.4	315.5	0.0	1.0	15.1	0.0
23.5	57.5	6401.7	450.0	-21.0	-63.3	285.2	21.9	20.6	-7.2	316.7	316.9	0.0	1.0	16.9	0.0
25.0	60.9	6824.9	425.0	-24.2	-65.4	282.3	25.5	24.9	-5.4	317.9	317.9	0.0	1.0	18.0	0.0
26.6	64.4	7260.2	400.0	-27.5	-67.5	280.6	27.3	26.0	-4.7	319.2	319.3	0.0	1.0	21.9	0.0
28.3	67.4	7724.5	375.0	-29.9	-69.1	278.6	31.3	31.0	-5.0	323.9	323.9	0.0	1.0	24.9	0.0
31.2	71.3	8210.5	350.0	-33.1	-71.3	284.5	35.5	34.3	-5.0	323.9	323.9	0.0	1.0	24.9	0.0
32.1	74.3	8724.4	325.0	-37.5	-73.5	280.0	40.1	39.5	-7.0	327.0	327.0	0.0	1.0	32.2	0.0
33.9	76.3	9274.9	300.0	-41.4	-76.3	270.2	41.3	41.3	-0.2	327.0	327.0	0.0	1.0	32.2	0.0
36.0	83.6	9955.3	275.0	-44.5	-79.0	267.4	51.3	51.3	2.0	327.9	327.9	0.0	1.0	42.4	0.0
39.3	88.9	10484.9	250.0	-51.4	-84.9	265.4	53.3	53.1	5.2	329.6	329.6	0.0	1.0	42.4	0.0
40.9	93.2	11160.0	225.0	-57.5	-89.9	265.1	46.4	46.3	3.8	330.4	330.4	0.0	1.0	57.0	0.0
43.5	96.4	11842.0	200.0	-63.2	-99.3	272.2	54.7	54.6	-2.1	332.7	332.7	0.0	1.0	64.9	0.0
46.1	104.3	12711.8	175.0	-64.0	-99.9	282.3	43.0	42.9	-9.1	344.3	344.3	0.0	1.0	77.0	0.0
49.6	110.8	13679.5	150.0	-57.7	-99.9	281.5	28.6	28.6	-5.8	370.7	370.7	0.0	1.0	87.0	0.0
53.3	118.0	14634.1	125.0	-56.7	-99.9	268.4	30.0	30.0	0.6	392.3	392.3	0.0	1.0	86.4	0.0
57.9	126.7	16256.7	100.0	-56.8	-99.9	276.7	23.2	23.2	-0.3	418.0	418.0	0.0	1.0	94.2	0.0
60.1	137.0	18077.4	75.0	-56.6	-99.9	266.0	6.1	6.1	-0.1	422.2	422.2	0.0	1.0	101.5	0.0
71.8	149.5	20643.1	50.0	-55.9	-99.9	320.4	5.0	5.0	-4.0	422.2	422.2	0.0	1.0	105.9	0.0
83.2	161.4	25093.4	25.0	-51.6	-99.9	286.5	4.7	4.7	-1.3	636.6	636.6	0.0	1.0	105.9	0.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN A AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 645
GREEN BAY, WIS

2 APRIL 1975
115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DI K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	7.5	210.0	985.4	4.4	3.4	40.0	6.2	-4.0	-4.7	279.4	292.0	5.0	93.0	0.9	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	9.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	8.4	204.6	975.0	4.3	3.4	28.6	10.4	-4.4	-4.4	280.1	293.0	5.0	94.0	0.2	219.
1.2	10.5	507.7	950.0	2.6	2.2	30.1	8.5	-4.3	-7.4	280.4	293.6	4.7	96.9	0.5	210.
2.0	12.6	723.0	925.0	1.1	0.9	37.4	6.9	-4.2	-5.5	281.0	294.4	4.4	98.1	0.7	212.
2.9	15.2	943.2	900.0	0.0	-0.2	39.8	6.1	-3.9	-4.7	282.1	293.1	4.2	98.4	1.2	215.
3.9	17.4	1170.1	875.0	1.5	1.3	17.7	6.2	-1.9	-5.9	283.9	293.6	4.8	98.5	1.6	213.
4.9	19.9	1404.4	850.0	3.5	-4.0	22.8	5.0	-1.9	-4.6	290.3	293.9	3.3	50.0	2.2	208.
5.9	22.2	1647.5	825.0	4.5	-5.0	35.4	5.0	0.5	-5.0	293.7	302.6	3.2	50.0	2.2	208.
6.9	24.8	1897.8	800.0	3.6	-6.3	34.7	6.3	1.2	-6.2	295.4	303.9	3.0	48.2	2.5	203.
7.9	27.2	2155.5	775.0	3.1	-5.2	32.0	5.6	3.6	-4.1	297.6	307.1	3.3	54.1	2.7	194.
8.9	29.8	2420.5	750.0	1.3	-6.1	31.4	8.2	6.1	-5.4	298.4	307.7	3.3	58.0	2.9	191.
9.9	32.5	2697.6	725.0	1.7	-37.0	26.9	10.3	8.9	-5.1	301.3	302.5	0.4	6.3	3.2	191.
11.1	33	2975.1	700.0	-0.4	-30.9	28.4	9.7	9.1	-3.2	302.1	303.4	0.4	7.9	3.5	170.
12.1	37.9	3265.0	675.0	-4.5	-38.3	29.4	9.9	7.0	-4.1	304.0	304.7	0.2	4.0	3.9	162.
13.4	40.5	3524.5	650.0	-3.2	-38.6	29.8	11.4	10.4	-4.8	306.3	306.1	0.2	4.6	4.5	155.
14.5	43.4	3772.5	625.0	-5.2	-39.4	293.7	11.1	10.1	-4.4	306.5	307.2	0.2	4.8	5.1	149.
15.7	45.3	4192.4	600.0	-8.0	-36.7	293.3	10.9	10.0	-4.3	306.9	307.8	0.3	7.8	5.8	144.
16.9	46.4	4521.2	575.0	-10.8	-34.8	288.5	12.5	11.9	-4.0	307.3	308.5	0.3	11.8	6.5	140.
18.2	52.3	4861.2	550.0	-13.3	-47.2	289.8	13.0	17.3	-4.4	308.2	308.6	0.1	4.2	7.3	137.
19.5	55.4	5214.0	525.	-15.6	-55.5	285.0	13.2	15.8	-3.4	309.6	309.8	0.0	1.7	8.2	133.
20.8	58.5	5590.5	500.0	-17.6	-55.8	280.9	14.7	14.4	-2.8	311.6	311.7	0.0	2.0	9.1	137.
22.1	61.9	5963.0	475.0	-19.6	-56.3	279.7	17.5	17.2	-3.0	313.7	313.8	0.0	2.2	10.3	126.
23.8	65.3	6362.8	450.0	-22.3	-57.2	281.0	19.9	17.5	-3.8	315.2	315.3	0.0	2.5	11.9	122.
25.4	69.7	6779.7	425.0	-25.8	-59.5	281.6	22.7	22.2	-4.5	315.8	316.0	0.0	2.9	13.9	114.
27.0	72.3	7215.1	400.0	-28.5	-59.7	281.0	21.9	21.5	-4.2	317.8	317.9	0.0	3.2	16.0	117.
28.6	76.2	7675.1	375.0	-31.9	-61.2	274.5	26.2	25.9	-3.9	319.3	319.4	0.0	3.6	18.1	115.
30.3	80.1	8159.1	350.0	-35.5	-63.1	283.5	32.4	31.5	-7.2	322.4	320.8	0.0	4.0	21.1	111.
32.2	84.2	8773.5	325.0	-39.4	-69.9	260.5	39.6	36.9	-7.2	322.4	322.4	99.9	99.9	25.1	111.
34.0	88.4	9213.7	300.0	-43.8	-69.9	268.0	43.2	43.2	1.5	323.6	323.6	99.9	99.9	29.5	104.
36.0	93.2	9793.9	275.0	-47.5	-69.9	257.2	50.0	49.8	11.1	326.4	326.4	99.9	99.9	34.8	103.
39.2	97.8	10417.7	250.0	-52.0	-69.9	252.5	54.5	52.0	16.4	328.8	328.8	99.9	99.9	41.0	100.
40.9	103.0	11092.1	225.0	-57.0	-69.9	251.6	56.3	53.4	17.8	331.2	331.2	99.9	99.9	48.7	95.
43.2	108.9	11831.0	200.0	-62.0	-69.9	264.3	49.6	49.4	4.9	334.6	334.6	99.9	99.9	56.4	92.
46.2	115.0	12652.8	175.0	-66.6	-69.9	269.7	41.2	41.2	0.2	349.8	349.8	99.9	99.9	64.2	92.
49.9	121.7	13622.4	150.0	-75.8	-69.9	272.5	34.0	33.9	-1.5	374.0	374.0	99.9	99.9	71.9	92.
54.1	129.3	14792.4	125.0	-84.4	-69.9	264.1	25.6	25.5	2.6	396.6	396.6	99.9	99.9	78.2	92.
58.9	137.3	15226.5	100.0	-84.9	-69.9	259.1	25.3	24.8	4.8	421.7	421.7	99.9	99.9	85.6	91.
65.2	145.7	15065.3	75.0	-87.6	-69.9	273.5	25.5	25.5	-1.6	452.3	452.3	99.9	99.9	95.9	91.
73.7	155.0	20635.6	50.0	-85.1	-69.9	291.6	9.7	9.0	-3.6	513.1	513.1	99.9	99.9	101.2	91.
86.4	164.3	25112.2	25.0	-80.9	-69.9	340	3.9	-0.2	-3.6	638.9	638.9	99.9	99.9	101.7	91.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 654
MURON. S D26 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.9	302.0	964.8	6.7	5.0	360.0	0.0	0.0	0.0	283.5	288.2	5.7	89.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.4	10.9	515.4	950.0	7.2	6.2	112.5	8.8	-6.2	3.4	285.3	301.5	6.3	93.4	0.1	288.
1.0	13.3	730.1	925.0	7.2	5.1	117.6	7.0	-6.2	3.4	287.4	303.1	6.0	86.5	0.4	292.
1.7	1.6	564.4	900.0	5.6	4.3	111.1	4.3	-6.2	1.6	288.0	303.7	5.8	91.2	0.6	295.
2.4	18.9	1194.1	875.0	3.4	3.2	111.2	2.7	-2.5	1.0	289.1	302.7	5.5	98.4	0.7	273.
3.2	20.5	1429.6	850.0	3.0	3.6	272.1	5.0	5.0	-0.2	290.9	306.6	5.9	98.5	0.8	294.
4.0	22.9	1674.3	825.0	8.7	-1.3	267.5	12.5	12.5	0.5	298.3	310.2	4.2	49.7	0.4	325.
4.8	25.5	1928.7	800.0	7.5	-2.1	265.3	11.1	11.1	0.9	299.7	311.3	4.1	50.7	0.5	40.
5.7	28.0	2189.2	775.0	5.5	-3.1	255.5	8.9	8.6	2.2	303.2	311.3	3.9	54.0	1.0	65.
6.5	30.7	2456.8	750.0	4.2	-3.9	255.1	8.3	8.0	2.1	301.6	312.6	3.8	55.4	1.4	68.
7.4	33.4	2731.6	725.0	1.7	-5.5	258.4	7.8	7.6	1.6	301.8	311.9	3.5	58.9	1.9	69.
8.3	36.0	3013.3	700.0	-0.4	-8.3	268.0	8.1	8.1	0.3	302.4	310.9	2.9	55.2	2.2	71.
9.2	38.9	3303.2	675.0	-2.5	-11.6	276.7	9.7	9.6	-1.1	303.1	310.0	2.3	49.8	2.7	76.
10.1	41.6	3601.2	650.0	-5.3	-13.0	280.6	10.5	10.3	-1.9	303.2	309.3	2.1	52.2	3.2	79.
11.0	44.5	3907.8	625.0	-8.0	-14.1	284.1	11.2	10.9	-2.7	303.9	309.7	2.1	61.6	3.9	83.
12.0	47.5	4223.6	600.0	-10.8	-15.7	285.7	10.7	10.3	-2.8	303.9	309.5	1.9	67.0	4.4	86.
12.9	50.5	4549.5	575.0	-12.9	-17.4	278.5	11.6	11.5	-1.7	305.0	307.9	0.9	38.0	4.9	89.
13.9	53.5	4887.0	550.0	-15.5	-18.6	272.5	13.3	13.3	-0.6	305.8	310.8	1.6	79.3	5.7	95.
15.0	56.5	5237.0	525.0	-17.0	-19.4	267.3	13.5	13.5	0.6	307.4	312.3	1.6	85.8	6.6	89.
16.1	59.8	5600.4	500.0	-20.2	-26.1	262.5	11.6	11.5	1.5	306.4	311.3	0.9	59.5	7.4	89.
17.3	63.1	5978.6	475.0	-22.9	-32.1	263.0	10.8	10.7	1.3	305.7	311.5	0.5	42.4	8.2	84.
18.5	66.5	6372.4	450.0	-26.4	-34.2	263.1	11.7	11.6	1.4	310.1	311.6	0.5	47.5	9.0	88.
19.8	70.1	6753.0	425.0	-28.0	-38.2	261.6	14.9	14.7	2.2	315.1	313.2	0.3	39.9	10.0	87.
21.1	73.6	7213.7	400.0	-32.3	-50.3	256.0	18.9	16.4	4.6	312.9	313.3	0.1	14.8	11.3	86.
22.5	77.5	7666.2	375.0	-35.2	-58.2	246.9	22.8	21.0	8.9	315.0	315.1	0.0	8.6	12.9	84.
24.1	81.3	8123.6	350.0	-38.7	-69.9	240.5	25.7	22.4	12.6	316.6	999.9	99.9	999.9	15.2	81.
25.9	85.4	8648.0	325.0	-42.9	-79.2	242.6	27.0	23.9	12.4	317.6	999.9	99.9	999.9	17.9	78.
27.7	89.7	9181.6	300.0	-47.8	-99.9	242.2	25.5	22.5	11.9	317.6	999.9	99.9	999.9	20.6	76.
29.9	94.3	9750.7	275.0	-51.5	-99.9	245.1	26.4	24.0	11.1	320.6	999.9	99.9	999.9	24.0	74.
32.2	99.0	10364.8	250.0	-54.5	-99.9	243.1	28.0	25.0	12.7	325.1	999.9	99.9	999.9	27.8	73.
34.8	104.0	11032.3	225.0	-59.0	-99.9	230.1	31.8	24.4	20.4	328.1	999.9	99.9	999.9	32.1	71.
37.6	109.5	11775.2	200.0	-56.4	-99.9	249.7	30.8	28.9	10.7	343.4	999.9	99.9	999.9	37.6	69.
40.7	115.2	12423.1	175.0	-57.0	-99.9	237.9	21.4	18.1	11.4	355.8	999.9	99.9	999.9	41.9	65.
44.3	121.5	13559.6	15.0	-57.5	-99.9	253.1	22.1	21.2	6.4	371.1	999.9	99.9	999.9	47.2	63.
48.6	128.5	14746.1	125.0	-57.8	-99.9	253.5	28.5	27.4	8.1	390.3	999.9	99.9	999.9	52.7	60.
53.6	135.8	16103.9	100.0	-54.0	-99.9	260.8	25.8	25.5	4.1	423.5	999.9	99.9	999.9	60.7	70.
59.9	142.8	19035.6	75.0	-53.0	-99.9	204.8	20.0	8.4	18.1	461.9	999.9	99.9	999.9	67.0	69.
68.1	150.3	23615.9	50.0	-53.8	-99.9	265.3	7.5	7.5	0.6	510.8	999.9	99.9	999.9	70.4	65.
80.2	158.3	25115.4	25.0	-50.7	-99.9	238.9	3.2	2.7	1.6	639.5	999.9	99.9	999.9	71.5	64.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAC
OF POOR QUALITY

STATION NO. 655
ST CLOUD, MINN24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	CEW PT DG C	QIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WX / S GM/KG	PH PCT	RANGE KM	AZ DG
0.0	6.6	316.0	976.3	5.9	4.5	70.0	3.6	-3.4	-1.2	281.7	295.6	5.4	91.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	999.9	999.9
0.0	6.7	326.9	975.0	5.9	4.6	75.1	4.2	-4.1	-1.0	281.8	295.8	5.5	91.6	0.0	336.
0.9	8.8	539.6	950.0	4.6	4.5	85.7	6.7	-6.6	-0.4	282.5	296.8	5.6	95.5	0.3	265.
1.9	10.9	756.5	925.0	2.6	2.6	78.2	6.3	-6.1	-1.3	282.6	295.5	5.0	100.8	0.7	265.
2.6	13.1	977.6	900.0	1.0	1.0	80.4	6.1	-6.0	-1.0	283.2	295.2	4.6	100.8	1.0	262.
3.4	15.4	1204.7	875.0	1.7	0.5	94.4	7.3	-7.3	0.6	286.2	298.2	4.6	91.8	1.3	264.
4.3	17.5	1439.0	850.0	2.1	0.4	78.9	6.8	-6.7	-1.3	288.9	301.4	4.7	88.7	1.7	265.
5.3	19.9	1759.9	825.0	1.4	-1.4	68.5	5.9	-5.5	-3.2	290.6	302.0	4.2	81.4	2.1	264.
6.2	22.1	1927.9	800.0	1.2	-8.8	351.5	3.9	0.6	-3.2	292.7	299.8	2.5	48.4	2.2	253.
7.2	24.6	2183.9	775.0	2.3	-25.3	323.7	5.0	3.0	-4.1	296.4	299.4	0.6	10.8	2.2	253.
8.2	26.9	2448.1	750.0	1.3	-28.1	315.0	6.2	4.4	-4.4	298.1	300.3	0.7	12.9	2.1	244.
9.1	29.5	2720.1	725.0	-0.5	-25.0	308.6	6.9	5.4	-4.3	299.0	301.2	0.7	13.5	1.9	221.
10.1	32.1	2999.3	700.0	-2.4	-25.7	302.8	8.6	7.3	-4.7	299.9	302.1	0.7	14.8	1.9	221.
11.2	34.9	3296.8	675.0	-4.5	-17.9	295.6	9.5	8.6	-4.1	300.8	305.1	1.4	35.2	1.9	201.
12.2	37.3	3583.1	650.0	-6.6	-14.4	285.2	9.4	9.1	-2.5	301.7	307.5	1.9	53.7	1.9	195.
13.2	40.1	3864.2	625.0	-9.2	-18.5	283.0	10.0	9.7	-2.2	302.1	308.5	1.4	46.7	2.1	168.
14.3	42.8	4203.1	600.0	-10.8	-33.4	295.9	10.7	10.3	-2.9	303.6	304.8	0.4	13.6	2.5	154.
15.5	45.9	4528.8	575.0	-12.7	-47.6	285.2	12.8	12.4	-3.1	305.1	305.4	0.1	3.5	3.1	143.
16.6	48.2	4866.5	550.0	-15.0	-40.0	282.0	13.5	13.2	-2.8	306.3	307.0	0.2	9.6	3.8	133.
17.8	51.8	5216.7	525.0	-17.6	-38.5	280.0	13.3	13.1	-2.3	307.3	308.2	0.3	14.2	4.6	128.
19.1	55.0	5579.8	500.0	-20.2	-38.8	282.5	15.0	14.6	-3.2	308.4	309.4	0.3	21.1	5.6	122.
20.3	58.1	5957.6	475.0	-22.9	-39.3	275.7	16.4	14.3	-1.9	309.6	310.7	0.3	20.6	6.7	119.
21.7	61.6	6352.2	450.0	-25.2	-41.6	268.4	18.7	18.6	0.5	311.6	312.3	0.2	19.7	8.1	114.
23.2	65.1	6764.5	425.0	-28.2	-48.2	268.1	19.8	18.8	0.5	312.8	313.2	0.1	13.4	9.5	110.
24.6	68.6	7197.7	400.0	-30.8	-59.7	270.4	20.7	20.7	-0.1	314.0	314.9	0.0	4.0	11.2	107.
26.3	72.2	7652.4	375.0	-34.4	-61.3	265.7	24.4	26.3	2.0	316.0	316.1	0.0	4.5	13.3	104.
28.1	76.2	8131.3	350.0	-38.2	-59.7	264.1	28.4	29.3	3.1	317.1	317.3	0.0	8.3	16.3	107.
29.9	80.3	8637.1	325.0	-41.8	-59.9	258.6	32.5	31.2	9.2	319.1	319.9	99.9	99.9	19.1	96.
31.8	84.6	9175.2	300.0	-45.6	-59.9	252.4	36.9	29.1	10.4	321.1	321.1	99.9	99.9	22.8	91.
33.6	89.0	9740.8	275.0	-49.4	-59.9	243.9	36.6	29.3	14.3	323.7	323.7	99.9	99.9	26.1	90.
35.8	94.0	10367.3	250.0	-54.6	-59.9	235.1	30.0	24.8	16.9	324.9	324.9	99.9	99.9	29.6	80.
37.1	99.0	11035.4	225.0	-59.3	-59.9	233.9	32.7	26.8	19.2	327.6	327.6	99.9	99.9	33.2	82.
40.5	104.4	11770.1	200.0	-60.6	-59.9	246.3	33.2	30.4	12.4	336.8	336.8	99.9	99.9	37.7	79.
43.3	110.6	12597.5	175.0	-62.6	-59.9	256.5	33.9	32.9	7.9	346.6	346.6	99.9	99.9	41.4	78.
46.7	117.0	13562.5	150.0	-57.0	-59.9	263.5	28.9	26.7	3.1	371.9	371.9	99.9	99.9	48.4	76.
50.7	124.7	14725.9	125.0	-54.5	-59.9	258.6	23.3	22.1	7.3	396.4	396.4	99.9	99.9	55.3	79.
56.0	133.0	16164.8	100.0	-52.0	-59.9	268.5	17.1	17.0	1.6	427.4	427.4	99.9	99.9	61.7	79.
62.2	142.3	18014.3	75.0	-56.3	-59.9	258.7	25.3	24.8	5.0	454.8	454.8	99.9	99.9	68.6	78.
69.9	151.3	20603.2	50.0	-54.7	-59.9	208.6	7.5	2.9	6.9	514.6	514.6	99.9	99.9	73.2	71.
82.3	162.3	25075.3	25.0	-50.0	-59.9	348.7	4.5	1.5	-4.3	641.3	641.3	99.9	99.9	74.5	81.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 662
RAPID CITY, S D
24 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	14.2	966.0	898.4	5.0	4.6	350.0	2.6	0.5	-2.6	287.6	303.1	5.9	97.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.9	16.0	1183.7	875.0	8.4	0.1	999.9	99.9	99.9	99.9	293.1	305.2	4.4	99.9	999.9	999.9
1.7	18.3	1422.5	850.0	5.9	-1.3	300.7	10.8	9.3	-5.3	292.9	304.2	4.1	59.8	0.7	121.
2.4	20.4	1666.3	825.0	3.9	-1.8	296.7	14.1	12.8	-5.9	293.2	304.4	4.1	66.5	1.2	120.
3.1	22.5	1915.5	800.0	1.7	-3.1	289.7	16.9	15.9	-5.7	293.4	303.9	3.8	70.2	1.9	117.
4.0	24.8	2171.2	775.0	1.1	-4.4	284.3	21.2	20.6	-5.3	295.4	305.4	3.6	68.9	2.9	113.
4.9	26.9	2434.7	750.0	0.2	-9.4	278.2	19.5	18.3	-2.7	297.1	304.3	2.5	48.5	4.0	110.
5.8	29.3	2705.4	725.0	-1.7	-11.9	272.0	16.0	16.0	-0.6	297.9	304.1	2.1	45.4	4.9	107.
6.7	31.8	2984.1	700.0	-3.8	-14.2	262.0	14.5	14.4	2.0	298.5	303.9	1.8	43.9	5.7	104.
7.9	34.3	3270.5	675.0	-5.4	-16.4	252.8	16.0	15.3	4.7	299.7	301.8	0.7	17.2	6.7	100.
8.8	36.6	3565.3	650.0	-7.6	-18.4	241.6	16.0	14.0	7.6	300.4	302.5	0.7	20.6	7.5	97.
10.0	39.2	3868.7	625.0	-10.8	-20.7	229.7	15.1	11.4	9.9	300.2	302.4	0.7	25.5	8.2	92.
11.0	41.7	4181.3	600.0	-13.0	-23.2	222.9	15.0	12.0	9.0	301.1	302.1	0.3	13.1	8.9	88.
12.0	44.4	4503.5	575.0	-16.1	-26.8	214.1	14.1	12.2	7.0	301.1	301.6	0.1	7.9	9.9	85.
13.1	47.3	4836.6	550.0	-18.4	-31.7	209.0	12.6	11.7	4.5	302.2	302.8	0.2	10.7	10.5	83.
14.1	50.1	5182.1	525.0	-20.4	-33.1	204.5	14.0	13.5	3.7	303.9	304.4	0.2	11.0	11.3	83.
15.2	52.9	5541.6	500.0	-22.8	-33.9	203.8	17.8	16.0	7.9	305.2	305.7	0.2	12.5	12.3	82.
16.2	55.8	5915.6	475.0	-25.6	-36.7	209.7	10.9	15.2	12.9	306.3	306.7	0.1	11.7	13.5	80.
17.7	59.0	6305.1	450.0	-28.3	-38.7	214.4	26.3	14.8	21.7	307.7	308.0	0.1	11.9	15.0	75.
19.3	62.4	6712.7	425.0	-31.0	-40.8	211.8	29.7	15.6	25.2	309.2	309.6	0.1	13.6	17.1	68.
20.9	65.7	7140.5	400.0	-33.8	-42.0	212.2	30.8	20.7	22.8	310.9	311.2	0.1	13.9	19.7	64.
22.4	69.1	7589.7	375.0	-37.0	-44.4	222.6	32.4	20.8	23.1	312.5	312.7	0.1	14.3	22.2	61.
23.7	72.7	8063.7	350.0	-40.2	-46.9	226.6	32.4	21.9	23.9	314.6	314.6	99.9	999.9	24.9	59.
25.5	76.6	8566.4	325.0	-43.5	-49.9	228.4	31.2	23.3	20.7	316.7	316.7	99.9	999.9	28.1	58.
27.4	80.6	9101.1	300.0	-46.7	-52.9	237.8	23.9	20.3	12.7	319.5	319.5	99.9	999.9	31.1	57.
29.1	84.8	9672.5	275.0	-51.1	-56.9	235.3	16.3	13.4	9.3	321.3	321.3	99.9	999.9	33.4	57.
31.1	89.2	10287.9	250.0	-53.6	-59.9	231.5	20.6	12.0	16.8	326.3	326.3	99.9	999.9	35.1	57.
33.6	94.2	10961.7	225.0	-56.0	-62.9	231.7	27.1	23.9	12.8	332.6	332.6	99.9	999.9	39.3	55.
36.4	99.4	11717.6	200.0	-53.6	-59.9	254.4	26.7	25.7	7.0	347.8	347.8	99.9	999.9	42.8	57.
38.0	105.0	12571.7	175.0	-55.2	-62.9	245.9	23.1	21.1	9.4	357.2	357.2	99.9	999.9	46.4	58.
42.4	111.3	13547.7	150.0	-58.1	-65.9	250.4	18.9	17.8	6.4	369.9	369.9	99.9	999.9	50.3	59.
46.7	118.7	14703.8	125.0	-53.7	-60.9	252.3	17.8	17.0	5.4	379.8	379.8	99.9	999.9	55.6	61.
51.3	127.0	16135.2	100.0	-55.5	-62.9	259.4	21.2	19.8	7.5	420.5	420.5	99.9	999.9	60.0	60.
56.9	136.5	17973.4	75.0	-55.1	-65.9	239.4	15.0	13.6	8.0	457.5	457.5	99.9	999.9	65.7	61.
64.2	146.0	20591.7	50.0	-57.7	-68.9	192.2	3.4	0.7	3.4	507.6	507.6	99.9	999.9	67.2	61.
76.4	156.5	25070.0	25.0	-49.6	-69.9	133.7	3.2	1.4	-2.9	642.3	642.3	99.9	999.9	69.4	61.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER24 APRIL 1975
1130 GMT

TIME MIN	CNTCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	OIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.9	180.0	997.1	18.2	14.9	120.0	3.1	-2.7	1.5	293.0	321.0	10.8	81.0	0.0	0.
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
0.6	7.3	372.0	975.0	16.8	13.6	194.5	13.3	3.3	12.8	293.4	320.2	10.3	82.3	0.3	36.0
1.3	10.3	593.7	950.0	16.6	15.1	204.9	17.6	7.4	16.0	295.6	325.6	11.5	90.5	0.9	12.
2.2	12.0	821.7	925.0	16.4	15.2	219.9	21.1	11.6	16.2	297.7	329.1	11.9	92.6	1.9	24.
2.9	14.4	1055.5	900.0	15.5	13.8	222.1	20.9	14.0	15.5	298.9	328.6	11.1	85.9	2.9	30.
3.9	14.5	1294.5	875.0	14.0	12.3	228.7	18.9	14.2	12.5	299.7	327.5	10.4	89.5	3.9	38.
4.7	16.8	1538.9	850.0	12.1	11.1	235.8	20.0	16.5	11.2	300.1	326.6	9.9	93.8	4.9	38.
5.7	21.7	1789.3	825.0	11.0	8.8	244.8	16.0	14.4	8.8	301.4	325.0	8.7	86.1	5.8	42.
6.8	23.5	2046.1	800.0	9.3	6.7	238.8	15.4	13.5	6.2	302.1	323.5	7.8	84.6	6.8	45.
7.7	25.9	2309.2	775.0	7.9	5.2	232.4	17.0	13.5	10.4	303.3	324.7	7.7	89.5	7.7	46.
8.8	28.2	2579.5	750.0	6.2	5.3	234.5	19.3	15.7	11.2	304.3	325.1	7.5	94.0	8.8	47.
9.4	30.3	2857.3	725.0	5.1	-4.8	237.4	20.5	17.3	10.9	305.6	316.6	3.8	50.1	10.0	44.
10.7	33.6	3144.1	700.0	5.5	-17.2	244.1	19.4	17.4	8.5	308.7	313.1	1.4	17.6	11.1	44.
11.7	36.0	3440.3	675.0	3.8	-12.4	252.1	20.7	19.7	6.4	310.1	314.8	2.2	29.5	12.2	51.
12.7	38.3	3746.0	650.0	2.0	-7.3	254.0	22.7	21.8	6.3	311.7	321.9	3.4	49.9	13.5	53.
13.4	41.4	4061.3	625.0	-0.9	-7.1	251.5	25.3	24.0	6.1	311.9	322.7	3.6	62.4	15.0	55.
14.2	44.3	4385.9	600.0	-3.6	-11.5	248.2	24.6	22.9	9.1	312.3	320.3	2.6	54.1	16.6	57.
16.1	47.4	4720.5	575.0	-6.6	-11.4	245.6	23.8	21.7	9.8	312.6	321.2	2.8	69.8	18.3	58.
17.2	50.3	5066.9	550.0	-9.0	-9.0	250.1	21.4	20.1	7.3	313.9	324.5	3.5	100.3	19.9	54.
18.4	53.4	5426.1	525.0	-11.4	-12.1	264.2	19.5	19.4	2.0	315.0	323.9	2.9	95.1	21.2	59.
19.6	56.4	5798.2	500.0	-14.9	-20.0	267.9	22.3	22.3	0.9	315.0	320.2	1.6	67.0	22.5	51.
20.9	59.7	6184.4	475.0	-16.7	-33.7	270.5	21.8	21.8	-0.2	317.3	319.0	0.5	22.1	24.0	63.
22.2	63.3	6590.1	450.0	-18.2	-37.9	268.5	20.2	20.2	0.5	320.4	321.5	0.3	15.7	25.4	65.
23.6	66.7	7014.1	425.0	-21.7	-41.6	267.3	21.5	21.5	1.0	321.1	321.9	0.2	14.5	27.1	64.
25.1	70.4	7457.3	400.0	-25.8	-44.7	266.5	22.0	21.9	1.3	321.4	324.1	0.2	14.9	28.9	64.
26.9	74.1	7921.4	375.0	-28.9	-47.1	273.3	23.2	23.2	-1.3	323.3	323.6	0.1	15.1	31.1	59.
28.8	78.2	8411.2	350.0	-32.5	-50.0	279.5	22.8	22.5	-3.7	324.9	325.3	0.1	15.5	33.5	71.
30.6	82.3	8929.2	325.0	-36.8	-53.3	277.7	25.6	24.4	-3.4	325.9	326.2	0.1	15.9	35.9	73.
32.5	86.7	9478.1	300.0	-41.3	-59.9	282.6	25.5	24.9	-5.6	327.2	999.9	99.9	99.9	38.5	75.
34.4	91.6	10062.4	275.0	-46.6	-59.9	281.1	22.8	22.4	-4.4	327.8	999.9	99.9	99.9	40.9	77.
36.4	96.4	10687.6	250.0	-51.6	-59.9	280.1	24.1	23.7	-4.2	329.4	999.9	99.9	99.9	43.4	74.
38.4	101.8	11365.7	225.0	-55.3	-59.9	280.7	30.6	30.1	-5.7	333.7	999.9	99.9	99.9	47.1	80.
41.3	107.9	12109.9	200.0	-59.1	-59.9	279.5	33.5	33.0	-5.5	339.3	999.9	99.9	99.9	52.0	82.
43.9	114.0	12942.8	175.0	-60.8	-59.9	273.7	30.1	30.0	-1.9	349.7	999.9	99.9	99.9	56.7	83.
46.8	121.0	13898.0	150.0	-62.0	-59.9	268.3	28.7	28.6	0.8	363.2	999.9	99.9	99.9	61.4	84.
50.4	129.0	15028.2	125.0	-62.4	-59.9	271.4	30.5	30.5	-0.7	382.0	999.9	99.9	99.9	68.4	85.
54.4	137.3	16390.2	100.0	-65.7	-59.9	270.7	22.6	22.6	-0.3	400.8	999.9	99.9	99.9	74.4	86.
59.6	146.3	18119.9	75.0	-67.9	-59.9	271.0	14.9	14.9	-0.3	430.7	999.9	99.9	99.9	77.8	86.
66.3	156.3	20602.0	50.0	-62.1	-59.9	352.4	3.4	0.4	-3.1	497.2	999.9	99.9	99.9	80.3	87.
76.2	166.3	23021.1	25.0	-51.5	-59.9	999.9	99.9	99.9	99.9	636.9	999.9	99.9	99.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 22002
FT. SILL, OKLA24 APRIL 1975
1309 GMT

112 165. 0

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	8.3	362.0	965.8	21.0	18.8	180.0	4.6	0.0	4.6	299.0	336.6	14.3	87.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	9.7	505.2	950.0	19.8	18.0	215.6	12.3	7.2	10.0	299.1	335.5	13.8	89.2	0.3	21.
1.5	11.9	735.2	925.0	18.4	17.1	224.1	17.3	12.1	12.4	299.9	335.5	13.4	92.1	1.0	33.
2.3	14.3	971.1	900.0	19.6	16.2	237.5	18.8	15.9	10.1	302.4	337.5	13.1	86.5	1.9	42.
3.2	16.5	1213.7	875.0	20.7	-24.1	244.2	13.4	12.1	5.8	305.5	304.8	1.1	6.7	2.7	49.
4.1	19.0	1463.8	850.0	21.4	-36.9	239.5	11.4	9.8	5.8	308.6	309.2	0.2	1.0	3.4	51.
5.1	21.3	1720.9	825.0	19.9	-37.8	251.1	7.4	7.0	2.4	309.6	310.2	0.2	1.0	3.9	53.
6.1	23.8	1584.2	800.0	17.8	-39.1	258.7	7.4	7.2	1.4	310.1	310.7	0.2	1.0	4.3	55.
7.2	26.2	2253.6	775.0	15.3	-40.2	257.6	9.3	9.1	2.0	310.2	310.8	0.1	1.0	4.8	58.
8.3	28.9	2529.5	750.0	12.8	-39.2	252.8	11.5	11.0	3.4	310.5	311.1	0.2	1.4	5.4	60.
9.3	31.6	2812.4	725.0	10.5	-38.8	248.6	13.7	12.7	5.0	310.9	311.6	0.2	1.7	6.2	61.
10.4	34.3	3132.7	700.0	8.0	-32.6	248.3	16.9	15.7	6.2	311.4	312.6	0.4	3.7	7.2	62.
11.7	37.0	3401.4	675.0	6.6	-31.5	251.8	20.9	19.8	6.5	313.1	314.4	0.4	4.5	8.7	63.
12.9	39.5	3709.6	650.0	4.2	-32.6	251.5	21.6	20.5	6.8	313.7	315.0	0.4	4.8	10.3	65.
14.2	42.7	4026.5	625.0	1.3	-27.2	249.3	23.6	22.1	8.3	314.0	316.2	0.7	9.7	11.9	66.
15.3	45.8	4352.2	600.0	-1.4	-26.6	250.3	25.5	24.1	8.4	314.6	316.6	0.6	10.4	13.6	66.
16.4	48.9	4690.6	575.0	-3.7	-33.4	252.5	29.2	27.8	8.8	315.7	317.1	0.4	7.8	15.4	67.
17.6	51.7	5040.8	550.0	-5.1	-39.2	251.2	31.1	29.4	10.0	318.0	318.8	0.2	4.9	17.5	67.
18.8	55.0	5403.7	525.0	-8.4	-41.9	250.5	28.9	27.3	9.7	318.3	318.9	0.2	4.7	19.8	68.
20.1	58.3	5790.0	500.0	-11.1	-50.8	247.2	26.1	24.1	10.1	319.5	319.7	0.1	2.1	21.9	69.
21.4	61.7	6172.4	475.0	-13.6	-45.8	248.5	26.0	24.2	9.5	321.1	321.6	0.1	4.6	24.0	69.
22.8	65.3	6581.1	450.0	-17.0	-45.7	252.3	22.1	21.1	6.7	321.9	322.4	0.1	6.2	25.9	69.
24.3	68.9	7036.3	425.0	-20.8	-43.6	254.9	25.2	24.3	6.6	322.2	322.9	0.2	10.9	28.0	69.
25.9	72.6	7450.8	400.0	-24.7	-40.9	258.1	24.2	23.7	5.0	322.9	323.6	0.3	20.4	30.3	69.
27.6	76.7	7916.8	375.0	-28.5	-43.0	260.1	30.0	29.6	5.2	323.8	324.6	0.2	23.1	33.0	70.
29.3	80.7	8407.8	350.0	-31.5	-47.0	259.3	26.6	26.3	5.0	326.3	326.8	0.2	19.8	35.9	71.
31.0	85.0	8927.5	325.0	-35.5	-51.8	259.2	27.8	27.3	5.3	327.7	328.1	0.1	16.7	39.0	71.
32.9	89.5	9478.6	300.0	-40.4	-49.9	258.1	28.8	28.1	5.9	328.5	329.9	99.9	99.9	41.9	72.
34.8	94.3	10065.3	275.0	-45.2	-49.9	260.5	27.6	27.3	4.6	329.7	330.9	99.9	99.9	44.9	72.
36.7	99.3	10694.8	250.0	-50.2	-49.9	265.9	24.1	24.0	1.7	331.4	331.9	99.9	99.9	48.3	73.
38.9	104.6	11376.3	225.0	-54.6	-49.9	263.3	25.3	25.1	3.0	334.9	335.9	99.9	99.9	51.2	74.
41.1	110.4	12120.1	200.0	-59.1	-49.9	270.0	26.9	26.9	-0.0	337.6	337.9	99.9	99.9	54.6	75.
43.5	116.3	12944.0	175.0	-64.0	-49.9	999.9	99.9	99.9	99.9	344.4	999.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	150.0	-69.9	-49.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	125.0	-69.9	-49.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	-69.9	-49.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	-69.9	-49.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	-69.9	-49.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	-69.9	-49.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	-69.9	-49.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° PV TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 °° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

Intentionally Left Blank

Sounding Data

24 April 1975

1500 GMT

SOUNDING DATA

STATION NO. 206
CHARLESTON, SC24 APRIL 1975
1500 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.5	13.0	1022.7	24.0	14.7	210.0	7.2	3.6	6.2	296.7	324.0	10.4	56.0	0.0	0.
0.5	6.2	209.7	1000.0	21.5	12.4	214.2	11.9	6.7	9.9	295.8	320.0	9.1	56.4	0.4	37.
1.3	8.2	427.7	975.0	19.4	12.2	215.5	11.2	7.1	8.6	295.9	320.3	9.2	62.8	0.9	37.
1.7	10.3	650.9	950.0	17.5	11.2	216.4	10.8	6.4	6.7	296.1	319.7	8.9	66.2	1.3	38.
2.6	12.2	878.2	925.0	15.1	11.6	209.5	10.6	5.2	9.2	296.0	320.8	9.3	79.5	1.7	36.
3.3	14.4	1110.1	900.0	13.0	9.8	214.1	11.3	6.3	9.4	296.1	318.9	8.5	80.8	2.2	35.
4.1	16.3	1346.4	875.0	12.0	1.4	214.9	10.5	6.0	8.6	296.9	310.4	4.9	48.4	2.8	35.
4.9	18.5	1585.1	850.0	11.6	-3.5	228.8	7.1	5.4	4.7	298.7	309.6	3.5	34.7	3.2	35.
5.5	20.7	1438.5	825.0	10.4	4.1	242.4	5.2	4.7	2.4	300.4	317.8	6.3	65.3	3.4	37.
6.3	22.9	2064.1	800.0	8.5	0.9	263.4	4.7	4.7	0.5	300.9	315.3	5.1	58.7	3.6	39.
7.1	25.2	2356.2	775.0	7.1	-4.0	259.4	4.7	4.6	0.9	301.9	312.7	3.8	46.1	3.7	42.
7.9	27.5	2625.4	750.0	6.4	-11.9	252.0	4.9	4.6	1.5	303.8	309.9	2.1	25.7	3.9	44.
8.7	29.3	2903.0	725.0	5.2	-0.2	252.7	4.9	4.7	1.5	303.8	320.7	5.2	69.2	4.1	45.
9.6	32.4	3189.4	700.0	3.6	-0.1	261.2	4.6	4.5	0.7	307.2	323.8	5.4	76.6	4.3	47.
10.5	35.0	3464.0	675.0	2.1	-1.3	263.3	5.9	5.8	0.7	308.6	323.6	5.2	78.5	4.5	49.
11.3	37.4	3726.6	650.0	0.9	-4.4	272.9	6.7	6.7	-0.3	312.3	323.1	4.3	67.6	4.8	51.
12.3	40.1	4103.4	625.0	-0.4	-9.2	297.1	7.2	6.4	-3.3	312.3	321.6	3.0	51.4	5.1	55.
13.5	42.7	4425.2	600.0	-1.9	-19.4	311.8	9.9	7.4	-6.6	312.0	314.5	1.4	25.2	5.3	61.
14.5	45.4	4766.0	575.0	-4.6	-20.4	318.0	11.9	7.0	-8.8	314.8	319.0	1.3	27.2	5.5	67.
15.6	48.4	5114.0	550.0	-7.5	-14.5	322.5	13.6	7.4	-11.0	315.4	320.5	1.6	40.8	5.8	70.
16.9	51.2	5474.0	525.0	-10.7	-24.6	326.0	12.9	7.1	-10.8	315.6	319.1	1.1	32.6	6.3	84.
18.0	54.3	5848.4	500.0	-11.5	-31.7	315.6	11.4	7.4	-8.7	319.0	320.8	0.5	16.8	6.7	91.
19.4	57.3	6235.2	475.0	-14.6	-34.1	301.4	12.0	10.3	-6.3	315.8	321.4	0.4	17.1	7.5	98.
21.0	60.6	6647.1	450.0	-16.7	-35.7	287.4	13.5	12.9	-4.0	322.3	323.7	0.4	17.3	8.7	98.
22.7	64.0	7073.9	425.0	-20.0	-38.3	290.3	14.7	13.8	-5.1	323.3	324.4	0.3	17.7	10.1	100.
24.4	67.3	7520.2	400.0	-23.7	-41.2	285.4	14.8	14.3	-5.1	324.2	325.1	0.3	18.1	11.5	100.
26.2	70.8	7868.9	375.0	-26.8	-43.6	293.1	15.2	14.0	-6.0	326.1	326.9	0.2	18.4	13.2	101.
28.3	74.6	8482.9	350.0	-31.0	-47.0	299.4	16.9	14.8	-6.3	327.8	327.5	0.2	18.8	15.1	103.
30.5	78.7	9003.3	325.0	-35.4	-50.6	297.6	20.6	18.2	-5.2	327.8	328.2	0.1	19.3	17.5	106.
32.6	82.5	9556.1	300.0	-39.7	94.9	304.7	25.0	20.5	-14.2	329.4	959.9	99.9	99.9	20.2	108.
34.7	86.7	10145.2	275.0	-44.5	99.9	304.3	26.0	21.5	-14.7	330.8	959.9	99.9	99.9	23.5	110.
37.1	91.4	10775.3	250.0	-49.9	99.9	297.1	21.3	18.9	-9.7	331.5	959.9	99.9	99.9	26.7	112.
39.8	96.2	11457.4	225.0	-54.1	96.9	286.1	23.2	22.3	-6.4	335.6	959.9	99.9	99.9	30.0	111.
42.9	101.5	12202.0	200.0	-60.1	92.9	287.3	24.2	23.1	-7.2	337.6	959.9	99.9	99.9	34.4	111.
46.0	107.3	13028.5	175.0	-62.5	90.9	284.7	32.0	31.0	-8.1	340.9	959.9	99.9	99.9	39.6	110.
49.6	113.5	13992.9	150.0	-66.3	99.9	287.7	29.5	27.0	-9.1	373.1	959.9	99.9	99.9	46.5	109.
53.9	120.7	15142.3	125.0	-60.3	99.9	302.2	18.3	15.5	-5.8	385.2	959.9	99.9	99.9	52.4	104.
58.3	128.7	16562.2	100.0	-68.7	99.9	280.7	12.4	12.2	-2.3	395.0	959.9	99.9	99.9	56.7	110.
64.1	137.7	18217.3	75.0	-67.2	90.9	255.0	10.6	9.6	-4.5	432.1	959.9	99.9	99.9	62.2	109.
71.4	146.5	20706.1	50.0	-60.4	99.9	84.4	4.4	-4.4	-0.4	501.1	959.9	99.9	99.9	64.4	111.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA24 APRIL 1975
1430 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.5	6.0	1022.1	25.1	15.4	120.0	6.2	-5.4	3.1	297.9	326.7	10.9	55.0	0.0	0.
0.9	6.2	198.9	1000.0	22.2	12.8	118.4	7.7	-5.8	3.7	296.6	321.5	9.4	55.4	0.4	30.
1.7	6.4	412.5	975.0	20.2	12.9	136.2	8.3	-5.9	5.2	296.7	322.2	9.6	62.5	0.8	30.
2.6	10.5	642.1	950.0	17.8	12.2	138.3	8.8	-5.8	6.5	296.6	321.6	9.4	69.4	1.2	30.
3.4	12.5	869.8	925.0	15.7	10.6	136.7	9.5	-5.9	6.2	296.6	320.6	8.8	71.8	1.6	31.
4.3	14.9	1102.1	900.0	14.9	6.3	128.0	7.5	-6.2	4.2	297.8	316.0	6.7	56.2	2.1	31.
5.3	17.0	1340.0	875.0	14.4	-6.5	91.4	5.6	-5.6	0.2	299.1	306.8	2.7	22.9	2.4	30.
6.4	19.4	1584.5	850.0	14.1	-10.4	77.1	5.9	-5.8	-1.3	301.2	307.3	2.0	17.2	2.7	30.
7.4	21.5	1835.6	825.0	13.0	-11.3	58.4	6.6	-6.6	1.0	302.6	308.4	2.0	17.3	3.0	29.
8.3	24.0	2053.0	800.0	11.5	-12.4	108.0	4.8	-4.5	1.6	303.7	309.2	1.8	17.4	3.3	29.
9.4	26.3	2356.9	775.0	9.3	-15.1	65.2	2.1	-1.9	-0.9	304.1	309.1	1.7	17.5	3.5	29.
10.6	28.9	2628.5	750.0	9.5	-14.0	9.1	3.0	-0.5	-3.0	307.1	312.4	1.7	17.5	3.5	29.
11.6	31.5	2906.1	725.0	8.4	-14.8	35.4	2.7	0.3	-2.7	308.9	314.1	1.7	17.6	3.4	29.
12.8	34.2	3198.4	700.0	8.2	-15.5	6.4	2.9	-0.3	-2.9	311.7	316.9	1.6	16.9	3.4	28.
14.0	36.7	3457.9	675.0	6.8	-12.6	343.8	2.7	0.8	-2.6	313.5	320.1	2.1	23.2	3.3	28.
15.2	38.5	3806.6	650.0	4.6	-12.4	333.8	4.0	1.8	-3.6	314.5	321.6	2.3	27.9	3.2	28.
16.5	42.1	4125.0	625.0	2.8	-13.6	332.1	6.9	2.3	-4.3	315.9	321.6	1.8	24.3	3.0	27.
17.9	45.1	4454.1	600.0	0.5	-11.9	335.6	6.1	2.5	-5.6	317.0	325.0	2.6	38.9	2.9	26.
19.2	48.1	4754.0	575.0	-2.4	-10.3	337.5	9.6	3.7	-8.9	317.6	327.0	3.0	54.5	2.6	25.
20.5	51.3	5145.7	550.0	-4.4	-12.2	340.2	11.7	4.0	-11.0	319.2	327.7	2.7	54.4	2.7	23.
21.9	54.1	5511.2	525.0	-6.6	-15.4	337.2	11.8	4.6	-6.9	320.7	327.7	2.2	49.3	3.1	21.
23.4	57.1	5890.6	500.0	-9.3	-17.9	340.3	9.4	3.2	-6.9	321.9	328.0	1.9	49.2	3.7	20.
24.3	60.0	6245.2	475.0	-12.6	-21.3	324.6	7.2	4.0	-6.3	322.5	327.4	1.5	48.1	4.2	19.
26.5	64.3	6655.8	450.0	-15.8	-23.9	323.9	7.9	4.6	-6.4	323.5	327.6	1.2	49.7	4.7	19.
29.1	67.4	7124.7	425.0	-18.8	-27.4	308.5	9.8	7.6	-6.1	325.0	328.2	0.9	46.4	5.2	18.
29.7	70.9	7574.6	400.0	-20.7	-30.8	294.4	12.3	11.2	-5.1	328.1	329.2	0.3	16.5	5.8	17.
31.6	74.7	8045.5	375.0	-23.8	-35.0	264.9	14.5	13.0	-6.6	330.1	332.0	0.5	24.5	6.7	16.
33.4	78.8	8545.8	350.0	-27.8	-37.5	292.8	14.6	13.5	-5.7	331.2	332.8	0.4	38.9	7.9	15.
35.4	82.9	9077.6	325.0	-32.1	-40.0	290.4	14.6	13.2	-6.6	332.4	333.8	0.4	45.0	9.3	14.
37.3	87.0	9637.1	300.0	-36.9	-44.9	256.8	14.6	13.0	-6.6	333.3	334.1	0.2	43.0	10.8	14.
39.6	91.8	10232.8	275.0	-41.8	-49.9	253.8	17.1	15.7	-6.8	334.6	339.9	99.9	99.9	12.7	13.
41.9	96.6	10871.7	250.0	-46.8	-54.9	292.8	22.3	20.5	-6.6	336.5	339.9	99.9	99.9	15.2	13.
44.4	101.6	11561.2	225.0	-52.6	-59.9	298.1	26.0	23.0	-12.3	337.5	339.9	99.9	99.9	18.6	13.
47.2	107.5	12310.9	200.0	-58.8	-64.9	258.4	28.6	24.6	-13.3	339.7	339.9	99.9	99.9	23.1	12.
50.0	113.5	13138.7	175.0	-64.3	-69.9	292.8	28.5	26.3	-11.0	343.9	339.9	99.9	99.9	27.9	12.
53.6	120.3	14053.6	150.0	-69.2	-74.9	254.5	20.1	18.3	-8.3	368.4	339.9	99.9	99.9	32.8	12.
57.4	127.7	15220.3	125.0	-64.9	-69.9	300.0	21.2	18.4	-10.6	377.5	339.9	99.9	99.9	37.6	12.
61.8	136.0	16543.8	100.0	-70.6	-74.9	279.1	15.2	15.0	-2.4	391.4	339.9	99.9	99.9	41.7	12.
67.4	144.7	18249.5	75.0	-71.2	-79.9	303.9	8.5	7.0	-4.7	423.7	339.9	99.9	99.9	45.3	11.
75.2	154.3	20716.0	50.0	-60.6	-69.9	18.0	3.0	-0.8	-2.9	500.8	339.9	99.9	99.9	46.1	12.
87.3	164.3	23159.9	25.0	-52.9	-59.9	50.9	5.3	-4.1	-3.4	633.1	339.9	99.9	99.9	45.6	12.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 213
WAYCROSS, GA

24 APRIL 1975
1503 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	3.3	44.0	1017.4	24.7	15.1	180.0	0.0	5.1	297.8	320.2	10.7	55.0	0.0	0.
0.4	4.6	195.2	1000.0	23.3	15.0	181.0	0.0	1.2	297.9	320.7	10.8	59.9	0.3	6.
0.8	6.3	415.5	975.0	20.7	13.2	181.4	0.1	3.5	297.3	323.5	9.9	62.1	0.4	7.
1.4	8.3	639.4	950.0	18.3	12.8	185.2	0.5	6.0	297.1	323.3	9.9	70.7	0.5	6.
2.1	10.3	667.5	925.0	15.9	11.9	195.7	0.2	1.7	296.8	322.1	9.5	77.1	0.8	7.
3.0	12.3	1055.9	900.0	14.5	6.5	200.8	0.2	2.2	297.4	318.1	8.9	59.8	1.1	11.
3.8	14.3	1334.3	875.0	14.5	7.7	203.8	0.6	4.2	296.9	320.6	7.6	63.9	1.4	12.
4.7	16.3	1582.7	850.0	12.5	8.8	224.8	1.9	3.6	300.3	323.3	8.4	78.6	1.6	15.
5.6	18.5	1833.3	825.0	11.5	2.2	264.4	4.1	4.0	301.6	318.9	6.3	60.7	1.9	21.
6.5	20.6	2090.8	800.0	12.0	-18.8	242.5	2.4	1.1	304.1	307.8	1.2	10.8	1.9	26.
7.5	22.7	2155.5	775.0	11.0	-18.7	210.5	1.3	2.2	315.8	309.4	1.1	10.7	2.1	27.
8.3	25.1	2627.7	750.0	8.8	-1.4	164.5	0.5	-0.5	306.7	320.0	4.6	48.7	2.2	25.
9.4	27.2	2907.7	725.0	7.1	-1.1	25.1	0.5	-0.2	307.9	324.0	4.9	55.9	2.2	24.
10.4	29.7	3195.7	700.0	4.9	-1.7	328.3	1.7	0.9	308.5	324.6	4.9	62.4	2.1	26.
11.5	32.2	3492.1	675.0	3.7	-2.2	308.3	2.5	2.0	310.5	328.6	4.8	65.0	2.1	29.
12.6	34.7	3798.0	650.0	1.9	-2.1	317.4	4.6	3.1	317.4	326.6	5.1	74.8	2.0	35.
13.7	37.1	4113.9	625.0	0.9	-6.1	316.7	6.3	4.3	313.9	325.7	3.9	59.7	2.0	46.
15.0	39.6	4441.3	600.0	-1.0	-8.4	311.9	7.5	5.6	315.4	325.7	3.4	57.2	2.5	60.
16.1	42.0	4779.7	575.0	-3.2	-10.2	307.6	8.7	6.9	316.6	320.1	3.1	58.5	2.3	74.
17.4	44.3	5127.9	550.0	-6.	-11.3	311.3	8.8	6.6	317.1	325.9	2.8	64.3	2.7	85.
18.6	47.3	5452.4	525.0	-8.9	-13.9	307.5	10.2	4.1	318.0	325.7	2.5	66.9	3.7	94.
19.9	50.7	5804.8	500.0	-11.1	-23.9	293.8	10.6	9.7	319.7	324.4	1.5	44.5	4.0	100.
21.3	53.7	6211.0	475.0	-13.4	-23.3	281.6	12.1	11.9	321.5	325.7	1.3	44.1	4.4	101.
22.8	56.7	6670.4	450.0	-16.2	-23.6	285.3	13.7	13.2	322.9	327.1	1.3	52.7	6.0	101.
24.2	60.0	7094.4	425.0	-19.1	-25.5	289.3	15.7	14.5	324.5	328.3	1.1	56.5	7.3	102.
25.8	63.4	7546.9	400.0	-22.2	-29.3	285.7	18.9	18.2	326.1	329.0	0.8	52.7	9.0	103.
27.3	66.9	8018.3	375.0	-25.7	-34.7	284.9	19.4	18.8	327.5	329.4	0.5	42.6	10.6	103.
29.1	70.6	8515.0	350.0	-29.3	-43.5	282.7	20.4	19.9	328.2	330.1	0.2	23.7	12.9	103.
31.0	74.3	9040.4	325.0	-33.0	-48.1	285.4	21.4	20.7	331.1	331.7	0.1	20.1	15.1	104.
33.0	78.7	9577.9	300.0	-37.9	-51.0	286.6	22.7	21.3	331.9	332.3	0.1	23.7	17.3	104.
35.1	82.8	10190.7	275.0	-43.0	-58.9	280.7	23.2	21.7	336.9	336.9	99.9	99.9	20.8	105.
37.2	87.4	10827.2	250.0	-47.3	-68.9	285.5	27.0	25.8	335.7	336.9	99.9	99.9	23.9	105.
39.4	92.5	11514.5	225.0	-53.2	-93.9	285.3	30.5	28.4	337.0	336.9	99.9	99.9	27.5	106.
42.0	97.2	12264.7	200.0	-58.3	-99.9	280.4	33.6	33.1	340.5	336.9	99.9	99.9	32.8	105.
44.8	103.8	13097.8	175.0	-60.9	-98.9	284.2	32.1	31.1	348.5	336.9	99.9	99.9	37.8	104.
47.1	110.5	14056.5	150.0	-68.1	-98.9	282.7	26.3	25.7	360.6	336.9	99.9	99.9	43.5	104.
50.3	126.7	15189.3	125.0	-63.1	-98.9	280.1	23.8	23.5	380.8	336.9	99.9	99.9	48.6	104.
56.9	137.3	16551.4	100.0	-67.3	-98.9	271.9	12.6	11.7	397.8	336.9	99.9	99.9	54.4	104.
61.3	147.3	18269.4	75.0	-70.9	-98.9	299.4	9.9	8.6	428.2	336.9	99.9	99.9	58.3	104.
69.5	145.0	23751.5	50.0	-56.0	-98.9	66.7	7.8	-7.2	508.4	336.9	99.9	99.9	59.8	106.
81.3	161.0	25209.9	25.0	-50.5	-98.9	212.2	0.9	0.7	639.5	336.9	99.9	99.9	60.3	106.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 220
APALACHICOLA, FLA

26 APRIL 1975
1430 GMT

TIME MIN	CATCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.6	11.0	1021.5	23.0	19.2	160.0	6.2	-2.1	5.0	296.2	332.3	13.8	79.0	0.0	0.
0.8	6.2	195.8	1000.0	20.0	16.2	172.0	11.0	-1.5	10.9	294.8	325.3	11.7	78.6	0.4	349.
1.6	6.3	414.1	975.0	18.9	13.9	183.7	12.2	0.8	18.2	295.5	322.7	10.3	72.8	1.0	353.
2.4	10.5	637.6	950.0	18.4	12.4	196.5	9.4	1.4	5.3	297.1	322.7	9.6	68.3	1.5	359.
3.2	12.5	860.1	925.0	17.1	13.2	185.2	6.1	0.6	6.1	298.2	326.0	10.4	78.1	1.9	0.
4.0	14.7	1095.8	900.0	15.3	12.6	158.5	4.9	1.6	4.6	298.7	326.2	10.3	83.8	2.1	1.
4.9	16.8	1338.8	875.0	14.3	10.7	223.6	5.3	3.6	3.8	295.9	324.9	9.3	78.7	2.4	5.
5.9	19.1	1567.4	850.0	12.6	8.5	221.8	4.4	2.9	3.2	300.5	323.0	8.3	76.1	2.6	10.
6.8	21.3	1834.9	825.0	14.1	-2.9	213.4	1.5	0.8	1.2	304.0	315.2	3.9	31.6	2.7	11.
7.8	23.7	2094.2	800.0	13.0	3.1	168.0	0.9	-0.2	0.9	305.8	322.8	6.0	50.8	2.7	11.
8.7	26.0	2350.3	775.0	11.3	0.5	161.2	2.4	-0.8	2.3	306.6	321.4	5.1	47.4	2.8	10.
9.7	28.4	2633.4	750.0	9.3	-2.8	176.0	3.2	-0.2	3.2	307.3	319.4	4.2	42.3	3.0	9.
10.8	31.0	2914.1	72.0	8.4	-3.3	210.5	2.7	1.4	2.3	309.2	321.4	4.2	43.7	3.2	9.
11.9	33.6	3203.4	700.0	6.4	-5.9	263.0	2.0	2.0	0.2	310.0	320.5	3.5	41.0	3.3	11.
13.0	36.1	3501.1	675.0	5.6	-7.8	326.6	3.2	1.8	-2.7	312.3	321.9	3.2	37.4	3.3	13.
14.3	38.5	3828.7	650.0	3.3	-6.3	347.3	6.0	1.3	-3.8	313.4	323.3	3.7	49.3	3.0	17.
15.5	41.4	4125.9	625.0	1.4	-10.5	334.8	8.2	3.5	-7.5	315.1	324.1	2.7	40.4	2.6	22.
16.7	44.3	4453.2	600.0	-1.2	-11.3	332.4	11.0	5.1	-9.8	315.3	324.1	2.9	45.8	2.2	39.
17.9	47.3	4790.9	575.0	-4.3	-11.1	344.4	11.9	3.2	-11.5	315.3	324.1	2.8	67.9	1.9	54.
19.2	50.2	5140.0	550.0	-6.7	-11.7	336.9	11.0	4.3	-10.1	316.4	325.2	2.8	67.9	1.9	54.
20.5	53.1	5502.4	525.0	-9.6	-14.2	329.9	11.6	5.8	-10.0	318.3	326.0	2.4	64.1	2.4	106.
22.0	56.1	5875.6	500.0	-10.4	-17.5	313.8	11.6	4.5	-8.2	320.6	326.8	1.9	55.6	3.3	117.
23.5	59.5	6272.8	475.0	-13.3	-20.1	303.4	11.9	9.9	-6.5	321.6	326.9	1.6	56.4	4.4	115.
25.0	62.9	6681.7	450.0	-16.6	-23.5	305.7	13.4	10.9	-7.8	322.5	326.7	1.3	55.1	5.3	120.
26.5	66.3	7104.8	425.0	-20.0	-25.0	312.7	14.9	11.0	-10.1	323.4	327.3	1.2	64.4	6.8	122.
28.1	70.0	7555.5	400.0	-23.3	-28.3	302.6	16.0	12.5	-10.0	324.7	327.9	0.9	63.3	6.3	124.
29.9	73.6	8076.2	375.0	-25.6	-36.1	304.1	15.4	12.8	-8.6	327.7	329.3	0.5	36.5	9.9	124.
31.7	77.5	8521.1	350.0	-28.1	-41.4	301.3	19.0	16.2	-9.9	329.5	330.6	0.3	26.1	11.8	124.
33.6	81.5	9044.0	325.0	-31.1	-47.7	302.4	20.3	17.0	-11.0	331.1	331.7	0.2	21.3	14.0	124.
35.6	85.7	9594.0	300.0	-34.0	-51.4	304.2	20.8	17.2	-11.7	332.7	333.2	0.1	21.0	16.5	124.
37.8	90.3	10200.0	275.0	-36.9	-54.9	301.3	23.1	19.7	-12.0	333.5	333.5	99.9	99.9	19.4	124.
40.1	95.2	10800.0	250.0	-39.8	-58.4	294.3	24.2	21.4	-11.4	334.5	334.5	99.9	99.9	22.1	123.
42.7	100.2	11400.0	225.0	-42.7	-61.9	288.6	23.8	22.6	-7.7	336.7	336.7	99.9	99.9	25.1	122.
45.0	105.6	12000.0	200.0	-45.6	-64.4	287.8	23.0	23.3	-10.4	339.9	339.9	99.9	99.9	29.9	120.
47.8	111.5	12600.0	175.0	-48.5	-67.9	289.9	29.9	28.2	-10.2	345.5	345.5	99.9	99.9	35.9	118.
51.4	116.0	14001	150.0	-51.4	-71.4	302.8	23.4	19.7	-12.7	360.0	360.0	99.9	99.9	41.0	119.
55.4	120.5	15100.5	125.0	-54.3	-74.9	264.6	19.2	18.6	-4.8	374.2	374.2	99.9	99.9	45.9	119.
60.3	133.5	16700.0	100.0	-57.2	-77.4	297.3	18.0	16.0	-4.3	393.3	393.3	99.9	99.9	52.4	118.
65.1	141.7	18227.7	75.0	-60.1	-80.9	305.7	7.1	5.4	-4.5	430.9	430.9	99.9	99.9	54.0	114.
70.5	150.3	20730.2	50.0	-62.9	-83.4	346.6	9.9	1.4	-5.7	508.0	508.0	99.9	99.9	56.7	120.
82.7	159.5	25496.6	25.0	-65.8	-85.9	61.3	3.2	-2.8	-1.5	636.4	636.4	99.9	99.9	57.2	121.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 226
CENTERVILLE, ALA24 APRIL 1975
1435 GMT

TIME MIN	CNTCY	HEIGHT CM	PHES MB	TEMP °C	DEW PT °C	C/D L	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PGT T DG K	E POT T DG K	MR RTO CM/KG	RM PCT	RANGE KM	AZ DG
0-0	5-9	140-0	1003-9	19-0	17-1	180-0	9-1	0-0	9-1	293-5	325-9	12-5	90-0	0-0	0-0
0-2	6-3	173-6	1000-0	18-3	16-7	180-0	9-3	1-4	9-2	293-1	324-3	12-1	90-4	0-2	1-0
0-7	8-6	390-6	975-0	16-8	16-0	192-1	10-1	2-1	9-8	293-6	324-3	11-8	95-1	0-3	1-0
1-4	10-3	612-4	950-0	16-0	15-2	209-7	13-7	6-8	11-9	294-9	325-0	11-5	95-0	0-4	1-0
2-3	12-3	839-6	925-0	15-2	12-7	223-4	16-3	11-7	11-9	297-7	322-8	10-1	85-0	1-0	2-7
3-0	15-6	1072-3	900-0	14-9	11-5	225-4	15-7	11-3	11-1	294-1	323-6	9-5	80-2	2-1	3-1
3-9	18-1	1211-1	870-0	14-4	11-8	232-6	13-5	10-7	9-3	300-1	327-1	10-0	84-8	3-1	3-7
4-7	20-4	1576-0	850-0	12-6	11-2	237-1	14-6	12-3	7-0	307-0	317-3	9-9	91-0	3-7	4-0
5-4	22-9	1806-1	825-0	11-0	9-6	241-4	13-6	11-9	6-5	301-4	317-3	9-2	90-9	4-4	4-1
6-5	25-5	2061-4	870-0	9-6	8-0	244-1	14-7	13-3	6-4	302-4	317-3	8-4	86-8	5-2	4-1
7-5	28-0	2326-7	775-0	7-6	6-3	242-7	15-1	13-4	6-9	303-0	317-3	7-8	91-3	5-2	4-1
8-3	30-7	2566-7	750-0	6-0	4-9	240-3	15-7	13-6	7-4	304-1	317-3	7-3	92-2	6-7	5-0
9-1	33-4	2873-7	725-0	5-7	-23-5	239-4	15-1	13-3	7-7	305-4	317-3	6-8	10-4	7-4	5-1
10-1	36-0	3162-5	700-0	7-4	-19-4	245-3	16-1	14-7	6-5	310-9	317-3	1-2	12-7	8-1	5-0
11-0	38-9	3447-6	675-0	5-4	-15-1	253-3	18-1	17-5	4-6	311-9	317-3	1-7	21-0	9-2	5-2
12-0	41-6	3767-6	650-0	2-7	-16-5	257-8	20-0	19-6	4-5	312-1	317-3	1-6	22-6	10-3	5-2
13-0	44-5	4082-3	625-0	0-2	-14-3	262-1	19-8	19-7	4-7	313-7	317-3	1-7	27-7	11-5	5-2
14-0	47-5	4420-0	600-0	-2-3	-10-7	270-1	20-1	20-1	-6-1	313-7	317-3	1-7	32-0	12-5	5-1
15-1	50-5	4745-6	575-0	-4-8	-10-7	274-9	19-9	16-6	-3-2	314-7	323-7	2-9	63-6	13-7	5-0
16-3	53-5	5052-6	550-0	-7-6	-11-6	280-6	16-3	16-0	-3-0	315-4	324-2	2-9	73-0	14-5	6-0
17-4	56-6	5454-2	525-0	-10-2	-17-5	290-4	19-1	18-8	-3-5	316-3	324-2	1-8	54-9	15-7	7-0
18-9	60-3	5827-6	500-0	-13-8	-23-7	285-7	20-2	19-3	-5-8	316-3	320-0	1-1	42-9	17-0	7-0
19-9	63-4	6216-0	475-0	-15-4	-47-5	277-7	20-4	20-3	-2-7	318-9	320-0	0-3	14-0	20-2	7-0
21-5	66-7	6622-9	450-0	-17-3	-60-7	271-9	20-6	20-6	-6-7	321-4	321-4	0-2	1-0	20-2	7-0
22-9	70-2	7045-0	425-0	-20-4	-62-9	276-0	19-4	19-1	-1-9	324-8	322-9	0-0	1-0	21-6	7-0
24-8	73-9	7494-4	400-0	-24-1	-65-3	277-1	17-4	17-7	-1-2	323-6	323-7	0-0	1-0	23-2	7-0
26-0	77-7	7945-0	375-0	-27-8	-65-2	275-6	21-1	21-0	-2-1	324-7	325-0	0-1	7-0	24-9	8-0
27-5	81-9	8412-7	350-0	-32-0	-63-8	275-9	21-4	21-3	-2-2	324-6	325-8	0-1	9-7	26-4	8-0
29-1	85-9	8972-4	325-0	-36-5	-43-3	268-3	20-6	20-6	0-0	320-3	327-3	0-2	49-1	28-7	8-0
30-7	89-8	9522-2	300-0	-41-1	59-9	264-4	24-7	24-5	2-4	327-5	997-9	99-9	95-9	31-3	8-0
32-9	94-6	10172-3	275-0	-46-2	99-9	266-4	26-2	26-2	0-8	328-4	997-9	99-9	99-9	34-6	8-0
35-1	99-2	10732-8	250-0	-51-9	99-9	271-5	24-9	24-9	-0-7	328-4	997-9	99-9	99-9	34-2	8-0
37-4	104-3	11415-2	225-0	-55-2	99-9	283-7	27-2	26-4	-4-4	333-9	999-9	99-9	99-9	41-4	8-0
40-1	109-4	12157-4	200-0	-58-2	99-9	285-4	27-3	26-4	-7-3	340-6	999-9	99-9	99-9	46-5	8-0
43-4	115-6	12696-6	175-0	-59-8	99-9	287-4	28-0	28-6	1-3	351-3	999-9	99-9	99-9	51-5	8-0
47-2	122-3	13656-4	150-0	-59-2	99-9	274-9	30-5	30-4	-1-5	360-1	999-9	99-9	99-9	57-3	8-0
51-6	125-3	15057-9	125-0	-62-7	99-9	276-8	22-5	22-3	-2-6	361-5	999-9	99-9	99-9	65-2	8-0
56-7	137-0	16440-4	100-0	-66-7	99-9	265-5	21-6	21-6	0-2	395-0	999-9	99-9	99-9	72-1	8-0
62-5	144-7	18165-3	75-0	-69-9	99-9	272-1	17-8	17-8	-0-6	428-4	999-9	99-9	99-9	77-1	8-0
71-2	153-1	20663-2	50-0	-70-5	99-9	78-7	3-1	-3-1	-0-6	500-0	999-9	99-9	99-9	79-0	9-0
84-5	162-1	25656-2	25-0	-71-1	99-9	149-1	0-3	-0-2	0-3	638-0	999-9	99-9	99-9	79-4	9-0

* PV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 * BY SPEED MEANS ELEVATION ANGLE LESS THAN C D/G

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 232
BOOTHVILLE, LA24 APRIL 1975
1:15 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	OUT Y DEG K	E POT Y DEG K	WIND CM/KG	RM PCT	RANGE KM	AZ DEG
0.0	4.9	1.0	1018.8	24.3	22.6	0.0	4.0	-2.3	4.0	298.2	342.9	17.2	90.1	0.0	0.0
0.6	6.3	14.1	1000.0	22.5	21.3	13.6	10.8	-3.1	10.7	297.6	340.1	16.2	93.2	0.3	34.0
1.4	6.4	16.0	950.0	21.3	19.9	174.4	11.2	-1.1	11.1	296.8	338.5	15.2	92.1	0.9	34.5
2.1	15.9	10.3	950.0	19.5	18.2	181.3	11.7	0.3	11.7	296.8	338.5	14.0	92.5	1.3	35.0
2.9	13.1	4.0	925.0	19.4	16.3	183.4	11.5	0.7	11.4	295.6	337.7	12.8	92.7	1.9	35.5
3.8	15.4	4.75	900.0	17.5	10.5	183.8	9.6	0.6	9.6	310.7	325.0	8.9	63.8	2.4	35.7
4.7	17.5	131.5	875.0	18.0	5.6	191.3	7.9	1.5	7.7	30.4	321.7	4.5	44.8	2.9	35.8
5.5	20.1	154.1	850.0	16.7	4.2	201.8	7.7	2.9	7.1	30.5	321.6	6.1	43.3	3.2	3.0
6.5	22.4	181.1	825.0	15.4	2.7	203.9	7.7	3.1	7.1	305.7	321.7	5.6	42.2	3.7	3.0
7.4	24.9	207.2	800.0	13.4	0.0	208.1	7.5	3.5	6.6	306.1	319.9	4.8	39.8	4.0	5.0
8.4	27.2	234.9	775.0	12.3	-2.3	217.6	6.3	5.1	5.6	307.6	319.9	4.2	36.0	4.5	5.0
9.5	29.3	261.2	750.0	11.6	-12.9	225.1	6.5	4.6	4.6	308.4	315.2	3.0	36.0	4.9	1.0
10.5	32.6	290.4	725.0	11.7	-15.6	242.0	2.8	2.5	1.3	312.5	317.4	1.6	17.2	5.1	1.0
11.5	35.2	316.9	700.0	10.4	-13.1	249.9	2.2	1.9	1.1	315.2	320.2	1.9	16.8	5.2	1.5
12.6	37.8	343.9	675.0	7.4	-15.6	320.2	2.4	1.6	-2.0	315.6	319.9	1.7	17.1	5.1	1.0
13.8	40.5	370.3	650.0	5.1	-15.9	314.0	2.9	2.1	-2.0	315.9	320.3	1.7	20.2	5.0	1.5
15.0	43.1	412.5	625.0	2.2	-15.5	315.7	3.2	2.2	-2.3	315.2	321.0	1.8	25.6	4.9	2.1
16.3	45.2	445.1	600.0	-1.2	-14.5	323.1	4.3	2.5	-3.4	315.0	321.5	2.1	35.4	4.9	2.3
17.5	48.1	478.8	575.0	-4.3	-12.6	323.1	4.5	2.7	-2.6	315.2	321.1	2.5	52.5	4.6	2.7
18.7	51.1	513.5	550.0	-7.2	-12.6	324.9	4.0	3.8	-1.0	315.9	324.0	2.6	65.1	4.5	3.0
19.9	53.3	546.1	525.0	-9.2	-12.8	268.6	6.2	6.2	0.0	317.7	326.2	2.7	75.2	1.7	3.0
21.1	57.9	587.5	500.0	-11.9	-15.3	268.6	7.7	7.7	0.2	318.8	326.2	2.7	75.2	1.7	3.0
22.5	61.3	625.6	475.0	-14.4	-22.3	262.2	9.7	9.6	1.3	320.3	324.8	1.4	53.7	5.5	4.0
24.0	65.9	667.5	450.0	-15.7	-25.3	268.0	12.5	12.5	0.4	323.6	327.2	1.1	43.4	6.3	5.0
25.6	69.1	710.5	425.0	-17.8	-28.0	268.0	14.9	14.9	0.4	326.2	329.3	0.9	40.3	7.4	5.0
27.2	72.0	755.1	400.0	-21.5	-31.0	270.0	16.2	16.2	-0.1	327.1	329.6	0.7	41.7	8.0	5.0
28.9	75.4	802.1	375.0	-25.0	-32.4	270.0	19.1	19.1	-1.3	327.4	329.8	0.7	53.9	10.5	6.7
30.6	78.2	852.6	350.0	-24.3	-45.0	270.1	21.0	21.0	-0.0	330.5	331.2	0.2	18.2	12.3	7.0
32.3	81.2	904.3	325.0	-33.5	-47.5	277.2	20.7	20.6	-2.6	330.4	331.0	0.2	24.2	14.3	7.0
34.0	84.3	950.8	300.0	-37.6	-48.2	285.2	27.2	26.3	-7.2	332.2	332.8	0.2	31.8	16.9	7.0
35.7	87.0	1020.5	275.0	-41.4	-50.9	274.4	31.6	31.7	-2.5	335.2	335.9	99.9	99.9	20.4	7.0
37.4	90.4	1081.0	250.0	-46.7	-50.9	276.8	31.5	31.3	-3.7	336.7	336.9	99.9	99.9	24.8	7.0
39.1	93.5	1151.1	225.0	-52.5	-50.9	281.3	33.5	32.8	-6.9	338.0	338.9	99.9	99.9	29.1	7.0
40.8	97.2	1221.5	200.0	-58.5	-50.9	284.0	30.9	30.8	-2.2	340.1	339.9	99.9	99.9	34.0	7.0
42.5	100.0	1310.1	175.0	-64.8	-50.9	271.7	27.1	27.1	-0.6	343.0	339.9	99.9	99.9	38.9	7.0
44.2	107.7	1405.8	150.0	-60.6	-50.9	276.3	31.3	31.1	-3.4	345.8	339.9	99.9	99.9	45.5	7.0
45.9	119.7	1518.0	125.0	-63.3	-50.9	272.6	22.5	22.5	-1.0	348.3	339.9	99.9	99.9	51.7	7.0
47.6	127.0	1635.6	100.0	-69.8	-50.9	274.1	14.4	14.4	-1.0	352.9	339.9	99.9	99.9	57.3	7.0
49.3	135.0	1750.0	75.0	-70.0	-50.9	240.8	5.8	5.8	-1.0	426.1	339.9	99.9	99.9	60.6	7.0
51.0	143.2	1823.1	50.0	-58.0	-50.9	240.8	2.2	2.2	-2.2	527.0	339.9	99.9	99.9	61.6	7.0
52.7	151.7	2070.9	25.0	-52.0	-50.9	240.8	2.5	-2.2	-0.9	635.7	339.9	99.9	99.9	61.6	7.0
54.4	160.3	2314.0	25.0	-52.0	-50.9	240.8	2.5	-2.2	-0.9	635.7	339.9	99.9	99.9	61.6	7.0

0.07 SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0.07 TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00.37 SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CUMP M/SEC	V CUMP M/SEC	POT Y DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.1	100.0	1006.0	23.6	21.1	180.0	5.7	0.0	5.7	298.4	340.0	15.9	86.0	0.0	0.
2.1	4.5	1.2.5	1000.0	22.8	20.7	183.4	6.0	0.4	6.0	298.1	338.7	15.6	87.8	0.1	2.
1.0	6.2	373.0	975.0	20.5	19.0	186.6	8.1	1.2	1.2	297.7	335.4	14.4	91.2	0.4	6.
1.6	6.1	557.4	950.0	16.5	17.5	202.6	9.7	3.7	6.9	297.7	332.9	13.4	94.2	0.8	9.
2.7	10.0	626.4	925.0	17.0	15.7	214.5	12.8	7.2	10.5	298.4	330.8	12.3	91.9	1.5	20.
3.5	11.8	1060.5	900.0	15.7	14.0	217.5	13.7	6.4	10.9	299.2	329.2	11.2	89.2	2.1	25.
4.4	13.8	1298.6	875.0	13.9	12.0	222.6	14.5	9.8	10.2	300.2	325.2	9.2	87.1	3.6	32.
5.3	15.7	1548.1	850.0	12.3	10.2	224.8	14.4	10.2	10.9	301.3	322.5	7.7	76.4	4.5	34.
6.3	17.9	1764.3	825.0	11.1	7.1	228.6	16.4	12.3	11.1	305.4	317.5	4.2	35.8	5.6	34.
7.3	19.8	2052.1	800.0	12.9	-1.9	237.4	20.5	17.3	11.1	306.1	317.6	3.2	26.4	6.8	43.
9.3	21.8	2318.9	775.0	12.9	-5.9	245.4	20.9	19.0	8.7	312.4	322.8	3.5	23.9	8.1	47.
9.4	24.0	2558.8	750.0	14.2	-5.2	248.5	20.2	18.8	7.4	313.2	322.1	2.9	23.9	6.2	50.
10.	26.1	2879.7	725.0	12.1	-7.8	248.9	17.7	16.5	6.4	313.9	321.6	2.5	23.0	11.3	51.
11.5	28.3	3172.4	700.0	10.0	-10.2	247.1	17.7	16.3	6.9	313.9	321.2	2.3	24.8	12.5	54.
12.6	30.6	3473.0	675.0	7.2	-11.6	243.6	17.6	15.7	7.6	313.6	322.1	2.7	34.5	13.7	55.
13.7	33.1	3781.5	650.0	4.0	-10.2	243.7	17.1	15.3	6.8	314.0	321.9	2.6	31.6	14.8	56.
14.9	35.5	4098.9	625.0	1.1	-11.4	245.1	16.2	14.7	4.2	314.1	323.3	3.0	55.3	16.8	58.
16.2	37.9	4425.5	600.0	-2.1	-9.8	254.3	15.3	14.8	3.7	315.4	324.5	3.0	60.9	18.0	58.
17.4	40.4	4762.8	575.0	-4.3	-10.6	258.0	19.5	19.1	3.2	315.7	323.8	2.6	68.7	17.6	60.
18.8	43.0	5111.4	550.0	-7.3	-12.8	261.2	20.9	20.7	3.5	316.9	325.2	2.7	76.8	15.1	61.
20.1	45.8	5472.7	525.0	-9.8	-13.1	260.5	21.0	20.8	3.5	318.1	324.2	1.9	65.2	20.9	63.
21.5	48.6	5847.6	500.0	-12.4	-17.7	266.0	21.8	21.8	1.7	314.4	323.8	0.7	53.6	22.5	65.
22.9	51.3	6237.8	475.0	-15.1	-22.5	265.4	21.3	21.2	3.8	321.4	323.8	0.7	32.0	24.4	67.
24.4	54.4	6645.0	450.0	-17.4	-30.0	260.8	23.7	23.4	3.4	322.5	323.9	0.4	22.6	28.5	69.
25.9	57.3	7070.4	425.0	-20.6	-36.4	260.7	21.0	20.7	3.4	324.4	325.3	0.2	23.1	30.6	70.
27.6	60.6	7513.6	400.0	-24.5	-39.7	263.6	19.8	19.7	-0.3	325.2	325.9	0.2	23.3	33.2	71.
29.4	64.0	7982.3	375.0	-28.0	-42.6	267.2	24.8	24.7	-1.7	326.4	326.9	0.1	23.6	35.4	73.
31.2	67.3	8473.7	350.0	-32.2	-46.2	270.9	23.0	23.0	-0.5	326.9	326.9	99.9	99.9	36.4	74.
33.1	70.9	8992.0	325.0	-36.4	-49.7	275.1	19.6	19.5	-1.5	331.1	999.9	99.9	99.9	41.5	76.
35.4	74.8	9540.9	300.0	-41.5	99.9	271.1	25.7	25.7	-0.5	326.9	999.9	99.9	99.9	44.6	77.
37.6	78.8	10126.0	275.0	-45.6	99.9	277.2	20.9	20.7	-3.5	335.2	999.9	99.9	99.9	48.7	79.
39.9	83.0	10753.4	250.0	-50.4	99.9	273.1	28.7	28.6	-5.0	341.3	999.9	99.9	99.9	53.9	81.
42.2	87.6	11438.9	225.0	-54.4	99.9	275.9	34.0	33.8	-0.3	351.4	999.9	99.9	99.9	58.4	82.
45.0	92.3	12195.6	200.0	-57.7	99.9	279.6	29.8	29.8	-0.3	366.8	999.9	99.9	99.9	64.5	82.
47.9	96.3	13022.7	175.0	-59.7	99.9	283.0	24.1	23.9	-0.0	363.0	999.9	99.9	99.9	72.1	83.
51.3	104.5	13985.3	150.0	-59.9	99.9	270.6	34.8	34.8	-0.3	430.8	999.9	99.9	99.9	76.5	83.
55.3	111.7	15118.6	125.0	-61.9	99.9	270.6	25.9	25.9	-5.0	509.2	999.9	99.9	99.9	84.2	83.
60.0	120.5	16476.5	100.0	-68.4	99.9	259.9	15.0	14.7	-2.3	636.0	999.9	99.9	99.9	88.0	83.
65.6	131.5	18205.6	75.0	-67.8	99.9	306.9	9.4	7.5	-2.3			99.9	99.9		
73.3	144.5	20694.8	50.0	-57.0	99.9	293.1	6.0	5.5	-0.3			99.9	99.9		
85.7	159.5	25150.1	25.0	-51.8	99.9	6.3	2.7	-0.3				99.9	99.9		

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 240
LAKE CHARLES, LA
24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DEG K	E POT T DEG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DEG
00.0	34.6	5.0	1015.4	23.3	21.7	180.0	9.3	-3.2	8.7	237.4	340.0	16.4	91.0	0.0	0.0
00.3	4.9	138.8	1000.0	22.6	21.2	99.9	9.9	9.9	99.9	237.9	334.8	16.1	92.0	999.9	99.9
00.6	6.8	359.7	975.0	21.5	19.9	99.9	9.9	9.9	99.9	238.0	338.8	15.2	91.0	999.9	99.9
01.0	5.2	585.4	950.0	22.1	12.6	193.8	15.4	3.7	14.9	300.9	327.2	9.7	54.8	1.7	1.0
01.3	11.3	217.2	925.0	21.9	9.2	190.3	12.8	4.2	12.0	302.6	324.7	8.0	44.4	2.1	5.0
01.6	13.6	1054.3	900.0	19.9	7.9	200.1	11.5	4.0	10.9	303.0	323.7	7.4	45.7	2.8	9.0
01.9	15.8	1296.5	875.0	18.3	6.8	198.0	13.2	4.1	12.5	303.8	323.6	7.1	46.9	3.3	11.0
02.2	18.3	1544.5	850.0	16.6	9.5	201.6	12.5	4.6	11.6	304.7	324.1	8.8	62.9	3.9	12.0
02.5	20.6	1798.1	825.0	14.6	7.3	205.3	14.7	7.2	12.8	305.1	324.8	7.8	61.5	4.6	14.0
02.8	23.1	2057.9	800.0	13.9	1.8	208.7	16.4	7.8	14.4	306.7	322.3	5.5	43.8	5.5	16.0
03.1	25.6	2325.4	775.0	13.1	-1.1	214.1	18.3	9.1	13.5	308.5	321.9	4.6	37.4	6.3	18.0
03.4	28.1	2601.1	750.0	14.5	-14.9	222.1	14.4	10.7	9.6	312.5	317.6	1.6	11.6	7.0	20.0
03.7	30.8	2827.2	725.0	14.1	-8.2	239.9	13.4	11.6	6.7	315.3	324.1	2.9	20.6	7.6	24.0
04.0	33.6	3181.9	700.0	12.1	-11.2	237.9	12.9	10.9	6.8	316.1	323.4	2.3	18.4	8.2	27.0
04.3	36.1	3484.9	675.0	9.6	-9.9	233.5	13.3	10.7	7.9	316.8	325.1	2.6	26.9	9.4	30.0
04.6	39.1	3796.6	650.0	7.1	-10.6	232.9	12.9	10.3	7.8	317.3	324.7	2.4	29.9	9.9	32.0
04.9	41.8	4117.1	625.0	3.8	-12.2	238.8	11.6	9.9	6.0	317.1	324.7	2.6	37.1	10.5	34.0
05.2	44.8	4447.1	600.0	1.1	-11.9	231.9	10.9	10.4	3.4	317.7	325.7	2.6	37.1	10.5	34.0
05.5	47.9	4768.0	575.0	-1.6	-13.0	255.8	11.8	11.6	2.1	318.4	325.8	2.4	41.2	11.0	36.0
05.8	50.8	5139.9	550.0	-4.9	-14.3	259.3	11.9	11.5	3.0	318.6	325.8	2.3	47.6	11.6	39.0
06.1	54.1	5503.9	525.0	-7.7	-13.3	236.9	8.7	7.3	4.7	319.5	327.7	2.6	64.1	12.2	41.0
06.4	57.3	5881.6	500.0	-10.7	-13.3	222.3	10.3	6.9	7.6	320.3	328.9	2.8	81.5	13.0	41.0
06.7	60.7	6274.1	475.0	-13.6	-19.5	231.3	13.7	10.7	8.5	321.3	326.8	1.7	61.1	13.9	41.0
07.0	64.3	6683.6	450.0	-15.8	-29.8	244.2	16.1	14.5	7.0	323.4	327.0	0.7	28.8	15.1	43.0
07.3	67.7	7112.3	425.0	-18.9	-21.5	243.2	18.0	17.2	5.2	324.7	327.0	0.6	31.9	16.5	45.0
07.6	71.3	7560.9	400.0	-22.4	-33.8	289.5	18.9	18.9	0.2	325.8	327.8	0.5	34.4	17.6	48.0
07.9	75.3	8030.9	375.0	-26.7	-36.6	271.1	20.9	20.9	-0.4	326.2	328.1	0.5	46.7	18.9	51.0
08.2	79.6	8524.6	350.0	-30.0	-50.7	270.6	20.4	20.4	-0.2	328.2	328.6	0.1	11.2	20.5	55.0
08.5	83.9	9048.3	325.0	-34.1	-52.2	270.4	22.9	22.9	-0.2	325.5	329.9	0.1	14.0	22.4	58.0
08.8	88.2	9604.1	300.0	-37.6	-58.4	272.3	29.2	29.2	-1.2	332.2	332.4	0.0	9.3	25.0	62.0
09.1	93.0	10199.0	275.0	-41.9	99.9	270.7	34.6	34.6	-0.4	334.5	339.9	99.9	99.9	28.3	66.0
09.4	98.0	10836.3	250.0	-46.6	99.9	272.5	36.4	36.4	-1.6	336.9	339.9	99.9	99.9	32.7	70.0
09.7	103.2	11528.6	225.0	-52.4	99.9	274.8	35.4	35.3	-3.0	338.2	339.9	99.9	99.9	37.9	73.0
10.0	109.0	12276.4	200.0	-58.6	99.9	278.3	36.8	36.4	-5.3	340.0	339.9	99.9	99.9	42.6	76.0
10.3	115.2	13109.1	175.0	-62.8	99.9	266.8	35.7	34.2	-10.4	340.4	339.9	99.9	99.9	48.3	79.0
10.6	122.0	14061.1	150.0	-68.0	99.9	266.1	34.0	33.9	-2.3	340.7	339.9	99.9	99.9	55.7	81.0
10.9	129.3	15155.1	125.0	-72.6	99.9	270.8	22.0	21.5	4.6	341.6	339.9	99.9	99.9	61.4	81.0
11.2	137.3	16588.0	100.0	-69.2	99.9	270.9	21.1	21.1	-0.3	344.1	339.9	99.9	99.9	68.1	82.0
11.5	145.3	18257.7	75.0	-68.2	99.9	265.6	13.0	12.9	1.0	429.9	339.9	99.9	99.9	72.4	83.0
11.8	154.3	20741.8	50.0	-59.5	99.9	267.4	3.2	3.2	0.1	503.3	339.9	99.9	99.9	75.0	83.0
12.1	163.7	25166.6	25.0	-51.4	99.9	42.0	2.1	-1.4	-1.6	637.2	339.9	99.9	99.9	75.5	84.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 240

SMREVEPCCT, LA

24 APRIL 1975

1500 GMT

165 10. 0

TIME MIN	CNTCT	HEIGHT GFW	PRES MB	TEMP DC C	DEW PT DC C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.2	75.0	1004.7	23.3	18.4	190.0	7.2	1.3	7.1	297.9	333.1	13.4	74.0	0.0	0.0
0.1	4.6	120.2	1000.0	23.4	19.1	192.9	7.6	1.7	7.4	248.5	335.5	14.1	76.5	0.1	5.0
1.1	6.4	341.5	975.0	21.6	18.7	199.1	8.6	2.8	8.2	298.7	335.8	14.1	83.8	0.6	13.0
2.0	8.4	560.7	950.0	19.3	18.0	206.4	11.5	5.1	10.3	258.7	335.2	13.9	92.1	1.1	16.0
3.9	10.4	756.6	925.0	16.3	16.4	210.9	14.1	7.3	12.1	299.7	333.7	12.8	88.4	1.4	22.0
3.9	12.3	1032.1	900.0	18.9	11.4	220.5	20.2	13.1	15.3	302.2	328.2	9.5	63.0	2.9	27.0
4.9	14.5	1275.3	875.0	19.8	12.0	226.4	22.0	16.0	15.1	305.7	333.7	10.1	60.7	4.1	31.0
5.9	16.5	1524.7	850.0	17.9	11.4	232.6	22.4	17.8	13.6	306.2	335.0	10.1	66.1	5.4	37.0
6.9	18.6	1779.7	825.0	15.8	8.2	233.2	24.2	19.3	13.5	306.5	329.7	8.3	60.5	6.6	40.0
7.9	20.8	2046.9	800.0	15.7	-0.0	240.3	20.5	17.8	10.1	308.5	322.5	4.8	34.6	6.1	43.0
9.0	23.0	2310.2	775.0	15.8	-4.2	245.8	15.9	14.5	6.5	311.3	325.1	3.6	24.9	9.3	46.0
10.1	25.3	2587.6	750.0	13.9	-5.9	241.3	10.5	9.2	5.9	312.1	325.1	3.3	25.0	10.3	47.0
11.2	27.5	2872.2	725.0	11.9	-5.0	234.2	6.4	5.2	3.7	312.0	324.0	3.7	30.4	10.5	48.0
12.4	30.0	3164.8	700.0	10.5	-8.6	236.1	6.2	5.1	3.5	314.5	324.3	2.9	25.1	10.9	48.0
13.5	32.6	3466.1	675.0	7.6	-12.5	257.6	7.3	7.1	1.6	314.6	321.5	2.2	22.3	11.3	48.0
14.9	35.2	3776.1	650.0	6.1	-15.0	261.9	11.7	11.6	1.7	316.1	321.9	1.8	20.3	12.7	50.0
15.9	37.6	4066.0	625.0	3.7	-14.0	264.1	13.4	12.9	3.7	316.9	323.0	1.9	24.3	12.7	50.0
17.1	40.3	4425.5	600.0	0.6	-17.0	250.1	15.0	14.1	5.1	317.0	322.4	1.7	25.3	13.7	50.0
18.4	42.9	4725.1	575.0	-2.3	-20.1	258.6	15.3	15.0	3.0	317.5	321.8	1.3	23.9	14.8	50.0
19.7	45.9	5115.7	550.0	-5.9	-22.4	271.9	16.8	16.8	-0.6	317.2	321.0	1.1	25.6	15.9	50.0
21.2	48.8	5476.0	525.0	-9.0	-24.8	279.0	17.2	17.2	0.3	317.7	320.9	1.0	26.2	17.2	61.0
22.8	51.6	5854.4	500.0	-10.6	-29.7	251.4	19.5	18.5	6.2	320.1	322.3	0.6	19.0	18.9	60.0
24.4	54.8	6246.8	475.0	-13.5	-31.8	252.1	20.1	19.2	6.1	321.2	323.1	0.6	19.6	20.7	61.0
26.1	57.9	6655.3	450.0	-16.7	-35.2	257.1	19.3	18.6	4.3	322.2	323.7	0.4	18.3	22.7	60.0
27.9	61.3	7087.1	425.0	-19.1	-37.7	261.2	19.2	18.9	2.9	324.4	325.7	0.3	17.5	24.7	60.0
29.7	64.9	7530.7	400.0	-23.0	-40.8	264.2	18.5	18.4	1.9	325.0	326.0	0.3	17.8	26.7	60.0
31.4	68.3	8000.2	375.0	-26.6	-43.7	267.5	18.3	18.3	0.8	326.3	327.1	0.2	18.3	30.4	60.0
33.2	71.8	8494.6	350.0	-30.7	-46.9	273.3	19.3	19.2	-1.1	327.3	327.9	0.2	18.3	32.9	71.0
35.4	75.2	9015.9	325.0	-35.1	-50.0	263.4	22.7	22.6	2.5	328.2	328.6	0.1	20.0	32.9	71.0
37.9	80.0	9568.6	300.0	-39.3	99.4	270.5	26.8	26.8	-0.2	330.0	329.9	99.9	99.9	35.2	72.0
40.1	84.4	10150.9	275.0	-44.0	99.9	271.6	26.4	26.4	-0.7	331.6	329.9	99.9	99.9	39.9	72.0
42.7	89.0	10792.3	250.0	-48.7	99.9	277.1	24.3	24.1	-3.0	333.7	329.9	99.9	99.9	43.9	72.0
45.5	94.0	11477.2	225.0	-53.6	99.9	273.6	31.7	33.7	-2.1	336.4	329.9	99.9	99.9	46.8	72.0
48.8	95.4	12226.3	200.0	-58.8	99.9	277.0	36.4	36.2	-4.4	336.6	329.9	99.9	99.9	55.3	80.0
52.1	105.0	13056.5	175.0	-61.8	99.9	278.2	28.3	28.0	-4.0	347.9	329.9	99.9	99.9	61.6	82.0
56.2	111.2	14018.7	150.0	-59.4	99.9	264.6	31.8	31.7	3.0	367.7	329.9	99.9	99.9	70.1	93.0
61.2	115.3	15152.3	125.0	-61.2	99.9	269.9	25.9	25.9	0.1	384.2	329.9	99.9	99.9	79.7	83.0
66.2	127.7	16513.4	100.0	-67.2	99.9	261.6	26.4	26.1	3.9	398.0	329.9	99.9	99.9	85.7	83.0
73.7	136.0	18252.1	75.0	-64.6	99.9	271.0	11.0	11.0	-0.2	437.5	329.9	99.9	99.9	94.1	82.0
83.4	145.0	20760.3	50.0	-58.2	99.9	262.9	8.2	8.2	1.0	506.4	329.9	99.9	99.9	95.4	83.0
90.1	161.0	25228.6	25.0	-49.8	99.9	346.4	2.7	0.6	-2.6	641.5	329.9	99.9	99.9	96.8	85.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE
OF POOR QUALITY

STATION NO. 295
VICTORIA, B.C.24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T CG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.1	33.0	1009.1	25.0	20.5	170.0	7.7	-1.3	7.6	299.4	339.5	15.2	76.0	0.0	0.
0.2	4.8	112.9	1000.0	24.7	21.0	999.9	99.9	99.9	99.9	300.0	341.7	15.9	79.9	999.9	99.9
0.4	6.5	334.9	975.0	22.0	20.5	999.9	99.9	99.9	99.9	299.8	340.9	15.8	99.9	999.9	99.9
0.6	6.6	560.9	950.0	20.2	19.5	999.9	99.9	99.9	99.9	299.8	339.8	15.2	95.5	999.9	99.9
2.5	10.6	791.3	925.0	19.6	10.5	176.6	17.0	-1.0	17.0	300.5	324.4	8.6	57.2	1.8	350.
3.2	12.6	1027.6	900.0	20.6	3.6	178.8	19.2	-0.4	19.2	303.5	319.1	5.5	32.7	2.7	352.
4.1	15.0	1270.3	875.0	19.0	3.6	179.6	20.3	-0.1	20.3	304.3	320.1	5.6	35.4	3.7	352.
4.8	16.7	1518.4	850.0	17.0	5.4	179.8	21.0	-0.1	21.0	304.8	323.6	6.7	46.8	4.6	355.
5.7	19.0	1772.3	825.0	15.8	3.4	174.6	19.7	-1.6	19.6	306.1	323.0	8.0	43.6	5.6	356.
6.5	21.1	2033.3	800.0	15.3	-6.9	181.8	19.1	0.0	19.1	307.9	318.6	2.9	21.6	6.7	356.
7.5	23.5	2302.9	775.0	16.7	-18.4	194.0	15.5	3.7	15.1	311.9	315.7	1.2	7.6	7.6	358.
8.4	25.7	2581.6	750.0	17.0	-20.4	194.2	11.4	2.8	11.0	315.1	318.4	1.0	6.2	8.4	360.
9.4	28.1	2866.2	725.0	15.9	-21.5	200.6	7.5	2.6	7.0	317.0	323.2	0.9	6.0	8.8	0.
10.4	30.7	3165.5	700.0	13.8	-21.7	216.4	4.3	3.2	4.1	317.9	321.0	4.6	6.8	9.2	2.
11.4	33.2	3470.1	675.0	10.9	-2.9	247.4	5.2	4.0	1.7	318.5	332.4	4.6	37.7	9.3	3.
12.4	35.7	3782.7	650.0	8.5	-6.8	255.4	5.9	5.7	1.5	319.0	330.0	3.6	33.2	9.4	4.
13.5	38.3	4106.1	625.0	5.5	-8.6	252.6	7.1	6.8	2.1	319.2	329.1	3.2	35.3	9.5	7.
14.5	40.8	4438.2	600.0	2.5	-8.2	243.4	8.3	7.4	3.7	319.4	330.0	3.4	45.0	9.8	9.
15.7	43.7	4780.4	575.0	-0.8	-10.0	258.8	7.8	7.7	1.5	319.4	329.1	3.1	49.0	10.1	12.
16.9	46.6	5133.5	550.0	-4.0	-14.2	282.2	8.3	8.1	-1.7	319.6	327.0	2.3	44.8	10.3	15.
18.1	49.5	5458.9	525.0	-6.4	-20.9	290.0	10.2	9.5	-3.5	320.9	325.4	1.4	30.4	10.2	19.
19.4	52.4	5878.3	500.0	-9.3	-23.6	277.1	11.9	11.8	-1.5	321.7	325.5	1.1	30.3	10.3	24.
20.8	55.6	6272.9	475.0	-12.2	-25.5	260.8	14.0	13.8	2.2	322.9	326.3	1.0	31.9	10.8	29.
22.2	58.9	6673.8	450.0	-15.3	-40.2	248.3	14.3	13.6	5.3	324.0	324.9	0.2	9.7	11.7	33.
23.7	62.3	7113.0	425.0	-18.4	-34.5	244.3	16.7	15.0	7.3	325.4	327.1	0.5	22.6	12.9	36.
25.3	65.7	7562.1	400.0	-22.5	-34.5	250.6	18.2	17.2	6.0	325.7	327.6	0.5	33.9	14.3	39.
26.9	69.3	8034.2	375.0	-24.4	-44.2	264.9	23.2	23.1	5.0	329.3	330.1	0.2	14.4	16.1	44.
28.9	73.3	8523.7	350.0	-27.2	-36.8	277.2	26.6	26.4	-3.3	332.0	333.7	0.5	39.3	17.9	51.
30.6	77.0	9033.6	325.0	-31.0	-38.4	273.6	30.3	30.3	-1.9	333.8	335.4	0.4	47.8	20.3	57.
32.6	81.2	9625.4	300.0	-36.0	-40.3	272.1	27.3	27.3	-1.1	334.6	336.0	0.4	64.3	22.9	62.
34.3	85.6	10223.6	275.0	-41.2	99.9	266.8	29.7	29.7	1.7	335.6	999.9	99.9	999.9	25.6	65.
36.4	90.3	10853.1	250.0	-46.3	99.9	266.9	35.6	35.5	1.9	337.2	999.9	99.9	999.9	29.6	68.
38.9	95.4	11523.5	225.0	-52.2	99.9	281.4	34.8	34.1	-6.8	338.5	999.9	99.9	999.9	34.3	72.
41.5	100.7	12304.5	200.0	-58.4	59.9	283.3	37.3	36.3	-8.6	340.3	999.9	99.9	999.9	39.0	76.
44.6	106.8	13132.6	175.0	-63.0	94.9	292.4	42.2	39.0	-16.1	344.9	999.9	99.9	999.9	45.3	81.
47.5	113.3	14075.2	150.0	-64.3	99.9	261.5	24.6	24.3	3.6	359.4	999.9	99.9	999.9	50.2	83.
51.2	120.7	15190.4	125.0	-65.4	99.9	270.7	27.2	27.2	-0.3	376.5	999.9	99.9	999.9	57.2	83.
55.4	129.0	16532.3	100.0	-70.3	99.9	263.4	19.8	19.7	-5.3	391.8	999.9	99.9	999.9	62.4	83.
61.1	136.5	18238.6	75.0	-67.6	99.9	220.8	8.5	5.6	6.4	431.3	999.9	99.9	999.9	66.7	82.
69.0	148.5	20731.0	50.0	-57.7	99.9	12.0	3.7	-0.8	-3.6	507.5	999.9	99.9	999.9	69.4	83.
81.1	160.0	25171.3	25.0	-50.1	99.9	32.6	6.8	-3.7	-5.7	640.6	999.9	99.9	999.9	67.0	84.

* EV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* EV TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** EV SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 260
STEPHENVILLE, TEX24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0-0	9-6	295.0	905.2	22.0	19.7	180.0	9.3	0.0	9.3	300.2	340.4	15.2	67.0	0.0	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0-6	10-9	537.2	950.0	20.7	18.7	180.0	15.2	2.4	15.0	300.1	339.5	14.5	86.7	0.5	9
1-3	13-5	768.2	925.0	19.4	18.0	197.7	20.0	6.1	19.1	301.1	339.0	14.3	91.9	1.2	12
2-2	15-9	1005.2	900.0	21.1	12.7	207.1	20.3	12.0	23.4	304.7	331.0	10.3	58.6	2.4	17
2-9	18-5	1248.6	875.0	21.7	8.7	218.9	22.8	12.4	15.2	307.4	330.3	8.1	43.5	3.6	21
3-9	21-0	1501.1	850.0	21.2	9.7	221.8	12.9	8.6	9.5	309.6	335.9	9.0	47.7	4.1	25
4-6	23-7	1755.4	825.0	19.6	9.3	230.5	9.8	7.5	6.2	310.5	335.9	9.0	51.3	5.1	27
5-8	26-2	2023.6	800.0	17.5	7.2	235.5	4.4	3.6	2.5	310.9	331.8	8.0	50.8	5.5	29
6-7	28-1	2298.3	775.0	16.1	3.0	218.1	5.9	3.6	4.6	311.9	329.8	6.1	41.4	5.7	30
7-7	32-0	2571.9	750.0	13.6	0.9	213.5	5.8	3.2	4.8	312.1	329.0	5.4	41.7	6.1	32
8-7	34-9	2854.5	725.0	11.4	-0.7	212.1	6.5	3.5	5.5	312.6	327.4	5.0	42.9	6.4	34
9-7	37-7	3143.6	700.0	8.9	-2.2	220.9	7.4	4.8	5.6	313.0	326.8	4.7	45.7	6.9	36
10-7	40-5	3448.9	675.0	7.2	-8.6	223.1	10.0	6.8	7.3	314.1	323.3	3.0	31.9	7.3	38
11-6	43-5	3758.4	650.0	5.2	-6.0	220.7	13.5	8.8	10.3	315.3	326.7	3.8	44.0	8.3	40
12-7	46-5	4077.5	625.0	2.9	-7.9	219.4	15.2	9.7	11.8	316.2	326.6	3.4	44.8	8.7	42
13-7	49-9	4406.6	600.0	0.3	-13.3	221.1	17.1	11.2	12.9	316.8	324.0	2.3	35.1	9.4	44
14-7	52-3	4746.6	575.0	-2.2	-16.1	230.6	17.2	13.3	10.9	317.7	323.7	1.9	33.2	10.9	46
15-9	56-0	5097.7	550.0	-5.2	-19.7	237.9	19.4	16.5	10.3	318.0	322.8	1.5	31.0	12.1	48
17-1	59.4	5460.8	525.0	-8.7	-21.8	242.1	21.7	19.2	10.1	318.1	322.2	1.3	33.6	13.5	50
18-4	62.3	5836.5	500.0	-12.1	-21.6	251.8	20.9	19.6	6.5	318.4	322.9	1.4	44.8	15.1	52
19-4	66.3	6226.7	475.0	-14.8	-24.2	253.4	20.2	19.4	5.8	319.7	320.2	0.2	6.1	16.0	54
21-3	70.0	6634.3	450.0	-18.5	-28.4	249.2	19.5	18.2	6.9	322.4	322.5	0.0	1.0	18.1	56
22-7	73.6	7061.5	425.0	-19.6	-37.3	253.3	19.8	18.9	5.7	323.8	323.9	0.0	1.9	19.7	58
24-1	77.5	7509.3	400.0	-23.5	-34.9	258.5	19.0	18.7	3.8	324.4	324.6	0.1	3.7	21.2	60
25-7	81.3	7977.1	375.0	-26.9	-34.4	263.0	23.2	23.0	2.6	326.0	326.2	0.1	5.4	22.9	62
27-2	85.4	8471.6	350.0	-30.2	-41.1	267.7	23.9	23.8	2.2	327.9	329.0	0.0	3.2	24.7	64
28-8	89.7	8994.4	325.0	-34.5	-40.3	261.7	29.7	26.4	4.3	327.1	329.2	0.0	5.3	27.1	66
30-8	94.3	9548.1	300.0	-38.4	99.3	265.5	30.2	30.1	2.4	329.8	99.9	99.9	99.9	30.3	68
32-9	99.0	10138.5	275.0	-42.5	99.9	269.8	33.6	33.2	5.4	332.2	99.9	99.9	99.9	34.3	70
35-0	103.9	10774.0	250.0	-47.9	99.9	272.5	42.6	42.3	5.6	334.6	99.9	99.9	99.9	38.7	72
37-2	109.2	11461.0	225.0	-53.2	99.9	265.3	43.1	42.9	4.3	337.0	99.9	99.9	99.9	44.3	74
39-8	114.8	12210.5	200.0	-58.9	99.9	270.9	43.1	43.1	-0.6	339.6	99.9	99.9	99.9	51.0	76
42-9	121.0	13048.6	175.0	-62.2	99.9	275.7	43.8	45.7	-2.1	347.3	99.9	99.9	99.9	58.5	78
45-9	127.5	13991.7	150.0	-62.7	99.9	261.2	35.0	36.6	5.4	362.2	99.9	99.9	99.9	65.7	80
50-0	135.0	15125.2	125.0	-60.2	99.9	265.3	27.5	27.4	2.2	386.0	99.9	99.9	99.9	75.4	82
54-6	142.3	16507.1	100.0	-66.1	99.9	243.9	22.5	20.2	9.9	400.0	99.9	99.9	99.9	81.4	84
60-7	150.7	18238.2	75.0	-65.3	99.9	39.7	2.6	-1.7	-2.0	436.1	99.9	99.9	99.9	86.9	86
69-0	160.3	20766.3	50.0	-55.1	99.9	99.9	6.1	-6.1	0.4	513.8	99.9	99.9	99.9	89.2	88
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 261
DEL RIO, TEX

24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	8.7	314.0	973.0	22.3	19.1	120.0	5.1	-4.4	2.5	299.7	337.9	14.5	82.0	0.0	C.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.0	10.5	522.8	950.0	21.3	20.1	138.6	8.4	-5.5	6.3	300.9	342.6	13.8	92.9	0.4	337.
1.5	13.4	754.1	925.0	19.0	18.8	148.5	9.4	-4.9	8.0	300.8	340.5	15.0	99.0	0.8	314.
2.3	15.9	990.0	900.0	17.8	17.6	167.4	8.2	-1.8	8.0	301.7	339.6	14.2	98.0	1.2	323.
3.1	18.6	1221.8	875.0	18.9	12.3	182.0	8.4	0.2	6.4	304.8	333.2	10.4	66.1	1.4	330.
3.9	21.1	1482.8	850.0	21.8	10.0	197.5	5.1	1.5	4.9	310.3	336.1	9.1	46.9	1.7	336.
4.7	23.9	1742.0	825.0	20.9	9.0	226.1	6.5	4.7	4.5	311.9	336.9	8.8	46.2	1.8	343.
5.6	26.4	2007.8	800.0	19.5	8.8	216.0	7.6	4.4	6.1	313.1	338.7	9.0	50.1	2.1	352.
6.5	29.3	2280.2	775.0	17.3	7.0	215.2	10.5	6.0	8.5	313.5	337.1	8.2	50.9	2.4	359.
7.3	32.1	2560.2	750.0	14.8	2.6	225.2	10.7	7.6	7.5	315.6	333.8	6.2	38.5	2.9	7.
8.2	35.0	2847.8	725.0	14.5	-2.7	226.5	9.3	6.7	6.4	315.9	328.9	4.3	30.4	3.3	13.
9.1	37.8	3143.6	700.0	13.5	-20.2	220.4	8.2	5.3	6.2	317.6	321.2	1.1	7.9	3.7	17.
10.1	40.7	3442.1	675.0	11.4	-22.4	222.4	8.2	5.6	6.1	318.5	321.6	0.9	7.5	4.1	14.
11.1	43.6	3761.5	650.0	8.6	-18.7	224.0	8.5	5.9	6.1	318.9	324.0	1.6	14.8	4.6	22.
12.1	46.8	4083.9	625.0	5.9	-13.3	221.5	9.8	6.5	7.4	319.5	326.5	2.2	23.8	5.1	24.
13.2	50.1	4416.1	600.0	3.0	-18.6	222.2	11.3	7.6	8.3	319.8	324.6	1.5	12.5	5.8	26.
14.3	53.1	4758.9	575.0	0.1	-18.2	222.3	13.1	8.8	9.7	320.2	325.4	1.6	23.6	6.6	28.
15.6	56.1	5112.8	550.0	-3.1	-15.5	234.3	15.0	12.4	8.9	320.6	327.3	2.1	37.6	7.6	30.
16.7	59.5	5479.2	525.0	-5.8	-19.6	247.6	18.3	16.7	6.8	321.6	326.8	1.5	32.5	8.6	35.
17.9	63.1	5859.2	500.0	-9.2	-24.8	255.3	19.3	18.6	4.9	321.9	325.5	1.1	28.3	9.7	39.
19.1	66.4	6254.2	475.0	-11.6	-25.8	257.7	19.6	19.1	4.2	323.6	324.4	0.2	6.0	10.9	44.
20.4	70.1	6666.8	450.0	-13.7	-26.6	257.1	19.7	15.3	3.5	326.0	326.1	0.0	1.0	12.0	46.
21.4	73.9	7095.0	425.0	-17.1	-28.0	253.0	15.5	14.8	4.5	327.0	327.1	0.0	1.0	13.1	50.
23.1	77.8	7550.1	400.0	-20.0	-32.7	254.5	17.9	17.2	4.8	328.9	329.0	0.0	1.0	14.4	52.
24.7	81.7	8025.9	375.0	-23.2	-31.2	265.1	22.0	21.9	1.9	330.8	331.2	0.1	6.2	16.0	53.
26.1	85.8	8526.7	350.0	-27.4	-32.9	266.4	27.2	27.1	1.7	331.8	334.2	0.7	59.5	17.8	54.
27.9	90.2	9056.2	325.0	-31.1	-36.2	266.4	30.1	30.0	3.0	333.7	335.6	0.5	60.6	20.6	63.
29.5	94.8	9618.1	300.0	-36.0	-42.2	261.7	30.9	30.6	4.4	334.6	335.7	0.3	52.5	23.5	65.
31.4	99.6	10216.1	275.0	-41.0	-49.9	259.2	32.8	32.2	6.2	335.8	339.9	99.9	999.9	27.0	67.
33.5	104.6	10857.6	250.0	-46.2	-59.9	255.6	37.7	37.0	7.5	337.4	344.9	99.9	999.9	31.4	69.
35.6	110.0	11548.9	225.0	-52.0	-69.9	257.7	36.4	35.5	7.7	338.8	349.9	99.9	999.9	36.0	70.
37.9	115.4	12301.0	200.0	-58.5	-79.3	264.3	39.1	38.9	3.9	340.2	349.9	99.9	999.9	41.1	71.
40.6	122.0	13126.7	175.0	-65.0	-89.9	274.4	42.2	42.1	-3.3	342.6	349.9	99.9	999.9	47.3	74.
43.6	128.7	14066.1	150.0	-69.6	-99.9	288.2	32.0	32.0	1.0	358.9	349.9	99.9	999.9	54.5	77.
47.2	135.8	15179.0	125.0	-66.0	-99.9	286.3	24.7	24.0	5.8	375.6	349.9	99.9	999.9	61.3	77.
51.9	143.3	16529.6	100.0	-68.9	-99.9	280.6	20.7	20.4	3.4	394.6	349.9	99.9	999.9	67.4	77.
57.1	151.0	18235.1	75.0	-70.9	-99.9	283.7	16.2	14.8	6.7	424.3	349.9	99.9	999.9	72.8	76.
64.5	159.7	20726.8	50.0	-58.3	-99.9	257.9	4.8	4.7	1.0	506.3	349.9	99.9	999.9	76.2	76.
75.8	169.0	25162.8	25.0	-51.3	-99.9	999.9	99.9	99.9	99.9	637.2	599.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 265
MIDLAND, TEX24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PWT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ CG
0.0	12.2	873.0	912.0	21.8	15.0	190.0	3.6	0.6	2.5	304.5	338.1	12.4	68.0	0.0	0.
99.3	95.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.3	95.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.3	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.3	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.4	13.3	968.1	900.0	20.7	15.7	184.3	6.1	0.5	6.0	304.5	338.7	12.6	73.3	0.2	61.
1.3	15.5	1222.1	875.0	20.2	14.6	243.1	6.0	5.4	2.7	304.4	339.4	12.0	70.0	0.5	42.
2.2	17.4	1462.9	850.0	22.0	-7.3	256.8	7.1	6.3	-3.2	304.6	317.6	2.6	13.6	0.8	67.
3.2	20.2	1740.8	825.0	20.4	-9.6	311.3	7.2	5.4	-4.8	310.4	317.3	2.2	12.3	1.0	67.
4.2	22.5	2004.8	800.0	18.3	-11.1	314.9	6.4	4.5	-4.5	310.9	317.3	2.1	12.5	1.4	100.
5.1	25.1	2275.1	775.0	16.3	-12.5	307.4	4.8	3.8	-2.9	311.6	317.5	1.9	12.6	1.6	101.
6.2	27.4	2552.5	750.0	14.2	-13.9	280.2	6.9	6.8	-1.2	312.2	317.7	1.7	12.8	2.0	137.
7.1	30.0	2836.6	725.0	11.5	-12.9	253.2	8.6	6.6	0.4	312.3	318.4	2.0	16.7	2.3	135.
8.1	32.7	3128.7	700.0	9.3	-14.2	223.2	10.6	10.0	3.6	313.6	318.6	1.8	17.4	2.7	120.
9.1	35.4	3422.7	675.0	7.0	-16.5	250.4	10.6	10.0	3.6	313.6	318.6	1.6	16.9	3.3	95.
10.2	38.0	3737.3	650.0	4.8	-17.1	241.2	11.7	10.3	5.6	314.6	317.4	1.5	18.2	3.5	90.
11.4	40.7	4055.5	625.0	2.2	-20.1	242.2	14.5	12.9	6.8	315.1	317.1	1.2	17.2	4.7	85.
12.5	43.6	4383.5	600.0	0.3	-23.2	248.5	17.7	16.4	6.5	315.5	319.7	1.0	15.2	5.8	91.
13.8	46.6	4723.2	575.0	-1.8	-25.9	247.3	19.6	18.0	7.5	318.0	320.7	0.8	13.7	7.2	70.
15.2	49.8	5075.3	550.0	-3.8	-27.4	237.0	21.6	18.1	11.8	318.7	322.1	0.7	13.8	8.9	70.
16.5	52.7	5440.7	525.0	-6.7	-29.6	234.2	21.2	17.3	12.4	320.9	322.5	0.6	14.1	10.4	72.
17.7	55.8	5819.3	500.0	-10.0	-32.0	235.4	21.1	17.3	12.4	320.9	322.5	0.5	14.4	12.0	70.
18.9	58.1	6212.2	475.0	-13.4	-34.6	235.4	19.2	15.8	16.9	318.0	322.9	0.4	14.7	13.4	64.
20.4	62.7	6621.2	450.0	-16.6	-37.1	233.8	16.9	13.0	10.0	318.3	323.6	0.3	15.0	14.8	67.
21.7	65.3	7047.6	425.0	-20.1	-39.8	232.9	19.2	15.3	11.6	324.2	324.2	0.3	15.3	16.3	61.
23.2	69.3	7494.0	400.0	-23.5	-42.4	238.6	19.4	16.6	10.1	324.4	325.3	0.2	15.6	18.0	61.
25.0	73.4	7962.9	375.0	-26.4	-44.7	249.6	24.7	23.1	8.7	324.5	327.2	0.2	15.8	20.3	65.
26.7	77.5	8457.8	350.0	-30.2	-47.7	254.4	30.5	30.1	7.3	324.0	328.5	0.1	16.1	23.1	67.
28.5	81.5	8980.3	325.0	-34.6	-51.2	256.6	29.5	28.7	6.9	324.6	328.5	0.1	16.5	26.5	67.
30.6	85.8	9534.1	300.0	-39.2	-54.9	256.1	33.4	32.4	8.0	330.0	333.3	0.1	16.9	30.3	64.
32.6	90.6	10126.2	275.0	-43.1	-59.9	260.9	36.3	35.8	5.7	332.8	999.9	99.9	999.9	34.5	70.
34.6	95.4	10761.7	250.0	-47.6	-64.9	258.4	41.5	40.6	8.4	335.3	999.9	99.9	999.9	39.2	71.
36.9	100.6	11446.4	225.0	-53.5	-69.9	264.5	45.9	45.7	4.4	336.6	999.9	99.9	999.9	45.0	72.
39.3	106.3	12196.3	200.0	-59.1	-74.9	267.1	50.2	50.1	2.5	339.2	999.9	99.9	999.9	51.4	74.
42.2	112.5	13023.6	175.0	-63.3	-79.9	265.2	51.2	51.0	4.3	345.5	999.9	99.9	999.9	56.7	74.
45.2	119.3	13973.0	150.0	-62.6	-84.9	261.2	34.0	33.6	5.2	362.2	999.9	99.9	999.9	67.9	77.
48.4	127.0	15100.4	125.0	-62.0	-89.9	259.7	33.8	32.8	8.3	381.6	999.9	99.9	999.9	74.7	77.
53.4	136.0	16470.4	100.0	-65.5	-94.9	258.7	24.0	23.5	4.7	401.2	999.9	99.9	999.9	82.7	77.
59.1	145.0	18206.7	75.0	-66.1	-99.9	251.7	10.7	10.1	3.3	434.3	999.9	99.9	999.9	89.7	74.
67.4	156.0	20732.0	50.0	-57.0	-99.9	99.9	6.5	-0.3	-2.7	509.2	999.9	99.9	999.9	91.7	77.
70.8	166.0	25190.3	25.0	-52.3	-99.9	999.9	99.9	99.9	50.9	634.2	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 1 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

24 APRIL 1975
1500 GMT

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	CEV PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E PUT Y DG K	MX RTD GM/KG	SW PCT	RANGE KM	AZ DG
0.0	4.0	4.0	1023.4	21.5	14.9	220.0	6.2	4.0	4.7	254.1	321.5	10.5	66.0	0.0	0
0.8	6.0	204.2	1000.0	20.3	12.5	221.1	14.1	9.3	10.6	254.6	318.8	9.2	60.9	0.5	43
1.5	6.0	422.4	975.0	18.5	11.1	219.4	16.4	10.4	12.7	254.9	317.7	8.6	62.2	1.2	42
2.2	16.9	646.6	950.0	16.0	10.3	215.6	15.0	8.7	12.2	254.5	316.6	8.3	68.8	1.8	40
2.9	15.2	870.5	925.0	13.7	9.3	212.6	16.4	8.8	13.0	254.4	315.6	8.0	74.9	2.5	39
3.6	15.5	1101.1	900.0	11.8	9.1	210.3	16.0	8.0	17.8	254.7	316.3	8.1	83.6	3.2	37
4.4	18.0	1336.5	875.0	10.1	7.8	213.9	15.5	8.7	12.9	255.2	315.7	7.6	86.1	3.9	36
5.1	20.5	1577.6	850.0	9.9	5.0	230.4	15.5	11.9	9.9	256.9	305.9	3.2	35.5	4.6	37
5.7	23.3	1824.6	825.0	8.4	-0.1	242.6	13.6	12.1	6.3	247.8	304.5	2.3	27.7	5.1	35
6.4	25.6	2078.4	800.0	6.8	4.2	250.7	11.2	10.5	3.7	259.3	317.3	6.5	83.9	5.7	42
7.5	28.3	2339.3	775.0	5.5	3.1	256.3	9.7	9.4	2.3	300.6	317.8	6.2	84.7	6.1	45
8.4	31.0	2607.2	750.0	4.4	3.6	262.2	8.4	8.4	1.2	302.2	320.7	6.7	84.9	6.5	47
9.2	32.9	2863.1	725.0	2.9	0.9	267.7	7.2	7.2	0.3	303.4	319.3	5.7	86.7	6.8	49
10.0	36.5	3167.7	700.0	2.0	-1.0	270.9	6.9	6.4	-0.1	305.4	319.9	5.1	80.1	7.1	51
11.0	38.4	3460.7	675.0	0.2	-2.7	276.1	6.4	6.4	-0.7	306.4	319.9	4.7	81.0	7.4	53
11.9	40.1	3762.6	650.0	-1.9	-4.7	277.3	6.0	6.0	-0.8	307.3	319.4	4.1	81.0	7.6	55
13.0	45.2	4074.0	625.0	-3.7	-7.2	283.7	8.0	7.7	-1.9	308.4	319.0	3.6	78.0	7.9	57
14.0	48.3	4395.7	600.0	-4.4	-15.1	289.3	12.7	12.0	-4.2	311.3	317.5	2.9	44.2	8.3	60
15.1	51.3	4731.1	575.0	-6.6	-24.5	294.5	14.4	13.7	-4.2	314.7	317.6	2.0	19.3	9.0	65
16.3	54.5	5079.0	550.0	-7.5	-25.6	296.1	13.6	13.4	-2.1	315.2	318.1	0.9	21.9	9.8	69
17.4	57.5	5439.9	525.0	-11.0	-25.6	277.2	14.6	14.5	-1.8	315.3	318.3	0.9	25.5	10.6	71
18.7	61.0	5811.3	500.0	-14.2	-23.1	284.3	16.8	16.3	-4.2	315.6	314.7	1.2	46.5	11.7	74
19.9	65.4	6194.9	475.0	-15.8	-42.6	295.0	17.0	15.4	-7.2	318.3	319.0	0.2	7.9	12.7	77
21.3	67.8	6505.7	450.0	-17.8	-44.0	293.8	17.7	15.2	-7.1	320.8	321.5	0.2	8.0	13.9	81
22.9	71.3	7031.0	425.0	-20.7	-43.0	256.6	16.1	14.4	-7.2	324.5	323.2	0.2	11.4	15.2	84
24.3	75.0	7476.0	400.0	-24.1	-41.9	298.1	14.9	13.2	-7.0	324.6	324.5	0.2	17.3	16.3	87
25.7	78.0	7842.7	375.0	-28.3	-46.4	291.4	14.4	13.4	-5.2	324.1	324.6	0.2	15.7	17.4	89
27.2	82.8	8233.9	350.0	-32.2	-45.5	295.1	14.6	12.8	-7.1	325.3	326.0	0.2	24.9	18.7	90
28.7	86.8	8553.9	325.0	-35.4	-49.3	306.0	13.3	10.7	-7.0	327.8	326.3	0.1	22.2	19.7	93
30.4	91.3	9126.8	300.0	-34.8	99.9	305.7	13.9	10.7	-8.9	329.4	999.9	99.9	999.9	20.8	94
32.4	95.8	10095.2	275.0	-44.9	99.9	310.2	15.2	11.6	-6.8	330.2	999.9	99.9	999.9	22.1	97
34.4	100.6	10725.1	250.0	-50.1	99.9	303.0	16.4	13.7	-6.9	331.6	999.9	99.9	999.9	23.9	99
36.4	105.6	11403.9	225.0	-56.1	99.9	304.9	21.1	17.3	-12.1	332.5	999.9	99.9	999.9	25.9	101
38.9	111.3	12144.2	200.0	-60.5	99.9	300.5	20.6	24.7	-14.5	337.0	999.9	99.9	999.9	29.6	104
41.3	117.0	12867.7	175.0	-64.8	99.9	318.0	24.7	16.5	-16.4	343.0	999.9	99.9	999.9	33.3	107
44.2	123.9	13915.5	150.0	-60.9	99.9	292.0	33.9	31.4	-12.7	365.2	999.9	99.9	999.9	37.9	109
47.9	131.0	15056.3	125.0	-56.1	99.9	290.5	23.9	28.4	-8.4	393.5	999.9	99.9	999.9	45.1	109
51.6	136.7	16448.9	100.0	-63.4	99.9	297.8	22.4	19.8	-10.5	405.2	999.9	99.9	999.9	50.8	109
54.6	147.0	18194.6	75.0	-66.2	99.9	256.2	14.5	12.8	-6.9	434.2	999.9	99.9	999.9	55.9	109
63.4	156.5	20701.6	50.0	-57.7	99.9	57.9	1.0	-1.0	0.1	507.5	999.9	99.9	999.9	56.6	111
73.7	167.0	25143.0	25.0	-51.2	99.9	301.8	2.2	1.8	-1.1	437.5	999.9	99.9	999.9	56.2	112

ORIGINAL PAGE IS
OF POOR QUALITY

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 311
ATMOS. GA
24 APRIL 1975
1500 GMT

TIME MIN	CHTCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	0.0	246.0	992.6	20.6	15.6	220.0	6.7	4.3	5.1	295.9	325.6	11.3	73.0	0.7	C.
99.0	99.0	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	0.6	259.6	975.0	17.5	11.6	218.5	9.8	5.5	6.8	294.0	317.3	8.9	68.1	0.2	23.
1.0	10.8	621.3	950.0	15.9	12.0	217.9	9.4	5.8	7.4	294.6	319.2	9.3	77.5	0.4	31.
1.6	13.3	847.2	925.0	13.6	9.6	219.4	11.7	7.4	9.0	294.3	316.0	8.2	76.8	0.9	34.
2.4	15.7	1076.5	900.0	13.6	10.9	220.5	14.6	10.3	10.4	296.7	321.1	5.2	83.6	1.5	37.
3.2	18.1	1315.4	875.0	11.3	10.0	232.9	15.7	12.5	9.5	296.7	320.3	8.9	91.8	2.2	41.
4.1	20.5	1557.7	850.0	10.4	1.5	238.1	16.5	14.0	8.7	297.7	312.1	5.2	56.8	3.1	45.
5.0	23.0	1804.0	825.0	12.4	-11.2	239.6	14.4	12.4	7.3	322.0	307.9	2.0	18.0	3.3	46.
5.9	25.6	2044.8	800.0	11.1	3.0	240.2	12.3	11.2	4.9	303.7	320.5	6.0	57.3	4.5	51.
6.8	28.2	2329.6	775.0	9.5	0.9	241.1	12.9	11.2	6.2	304.7	319.7	5.3	55.0	5.3	53.
7.9	31.0	2600.4	750.0	8.2	0.9	235.5	13.4	11.2	7.4	306.2	321.8	5.5	60.2	6.0	53.
9.7	33.8	2875.4	725.0	5.4	-0.0	237.0	14.2	12.0	7.6	305.1	321.2	5.3	67.9	8.4	53.
10.7	36.3	3165.6	700.0	4.0	-0.4	243.0	14.4	12.8	6.5	307.4	317.5	3.4	47.1	7.6	54.
11.9	42.0	3765.2	650.0	1.5	-12.7	261.9	14.8	14.6	5.1	310.5	317.7	2.2	33.8	9.5	57.
12.9	45.0	4079.9	625.0	-0.8	-12.0	269.9	17.1	17.1	0.0	311.9	319.3	2.4	42.1	10.1	60.
14.0	48.1	4434.5	600.0	-3.6	-12.0	272.1	19.1	19.1	-0.7	312.2	320.0	2.5	52.2	11.5	63.
15.2	51.0	4740.0	575.0	-5.1	-10.7	265.5	17.9	17.8	1.4	314.4	323.4	3.0	64.9	12.6	66.
16.4	54.3	5088.1	550.0	-7.5	-15.0	257.4	16.9	16.5	3.7	315.4	322.2	2.2	54.9	13.4	67.
17.5	57.3	5448.9	525.0	-5.9	-20.1	241.3	17.2	17.0	2.6	316.6	321.4	1.5	43.4	14.6	68.
18.4	60.7	5823.5	500.0	-12.8	-21.5	271.2	18.8	18.8	-0.4	317.6	322.0	1.4	47.9	16.2	70.
20.2	64.2	6212.4	475.0	-16.0	-23.1	282.9	19.2	19.7	-4.3	318.3	322.4	1.2	54.2	17.7	74.
21.6	67.6	6619.0	450.0	-18.2	-40.3	282.6	18.1	17.7	-4.0	320.3	322.2	0.6	28.0	19.5	75.
23.1	71.3	7043.0	425.0	-20.5	-53.6	282.2	17.4	17.0	-3.7	322.6	322.8	0.1	34.3	20.5	77.
24.7	74.3	7487.8	400.0	-24.7	-40.1	278.5	19.2	19.0	-2.9	322.8	323.8	0.3	22.4	22.1	79.
26.3	78.9	7954.2	375.0	-29.3	-57.4	278.4	19.4	19.2	-2.8	324.1	324.2	0.0	4.2	23.4	82.
28.1	82.8	8446.0	350.0	-31.3	-59.0	289.6	22.7	21.4	-7.6	324.5	324.7	0.0	4.5	25.4	84.
29.8	86.9	8967.4	325.0	-34.9	-61.1	293.9	20.5	18.8	-6.3	328.5	328.6	0.0	4.0	27.6	86.
31.7	91.4	9520.5	300.0	-39.7	99.9	298.2	22.1	21.0	-6.9	329.4	329.9	99.9	99.9	29.4	87.
33.7	96.3	10108.6	275.0	-45.1	99.9	288.0	20.4	19.6	-5.6	330.0	329.9	99.9	99.9	32.2	89.
35.8	100.3	10737.3	250.0	-50.6	99.9	283.1	20.4	19.9	-4.6	330.9	329.9	99.9	99.9	34.1	91.
38.2	106.2	11417.9	225.0	-55.0	99.9	265.1	20.2	18.3	-8.6	336.3	329.9	99.9	99.9	37.4	94.
40.5	111.6	12102.8	200.0	-59.5	99.9	288.1	24.7	23.7	-8.9	338.5	329.9	99.9	99.9	40.1	96.
42.9	117.5	12967.0	175.0	-61.7	99.9	270.7	26.5	26.5	-0.3	346.1	329.9	99.9	99.9	44.0	98.
46.0	124.3	13956.5	150.0	-58.6	99.9	268.1	31.9	31.9	0.5	345.2	329.9	99.9	99.9	49.2	92.
48.2	131.3	15096.8	125.0	-61.0	99.9	285.2	27.2	26.2	-7.1	348.6	329.9	99.9	99.9	55.2	93.
53.2	136.3	16655.8	100.0	-66.8	99.9	271.2	19.7	19.7	-0.4	358.7	329.9	99.9	99.9	60.6	94.
58.5	142.5	18205.6	75.0	-65.4	99.9	303.6	9.9	7.4	-4.3	435.9	329.9	99.9	99.9	65.5	94.
63.5	153.0	20895.7	50.0	-60.3	99.9	328.6	6.0	3.0	-5.2	501.5	329.9	99.9	99.9	68.4	95.
77.3	161.0	25130.0	25.0	-50.2	99.9	70.0	2.8	-2.7	-1.0	630.4	329.9	99.9	99.9	66.9	97.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GEW	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DEG K	E POT Y DEG K	WX PTO GM/KG	RH PCT	RANGE KM	AZ DEG
0.3	7.5	275.0	987.9	20.6	15.4	210.0	7.7	3.8	6.7	296.3	326.6	11.5	74.0	0.3	0.
0.9	96.9	96.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	8.4	386.4	975.0	16.7	11.6	99.9	99.9	99.9	99.9	255.2	319.7	8.9	63.2	99.9	99.9
1.3	11.1	610.4	950.0	16.0	11.6	99.9	99.9	99.9	99.9	294.6	319.7	9.1	75.6	99.9	99.9
2.2	13.7	835.7	925.0	13.7	11.7	224.8	15.6	11.0	11.1	254.5	319.4	9.4	88.2	1.6	44.
3.3	16.1	1067.4	900.0	12.4	10.6	231.6	20.9	16.4	13.0	295.4	319.2	9.0	89.1	3.1	47.
4.5	18.7	1304.8	875.0	12.7	7.4	240.8	19.8	17.3	9.7	298.0	318.1	7.4	69.9	4.5	50.
5.5	21.1	1547.7	850.0	11.1	5.4	247.4	22.8	21.0	8.7	298.6	316.8	6.6	69.1	5.7	53.
6.5	23.3	1796.6	825.0	9.7	1.4	243.9	21.1	18.9	9.3	299.5	313.9	5.2	56.5	6.9	55.
7.5	26.3	2051.7	800.0	8.5	3.6	244.9	19.3	17.5	8.2	301.0	318.3	6.2	71.5	8.2	57.
8.9	29.2	2314.4	775.0	7.7	2.4	243.9	16.3	15.5	5.1	302.5	319.4	5.9	69.0	9.4	58.
10.8	35.0	2661.7	725.0	6.3	1.7	253.4	16.5	15.8	4.7	304.1	320.5	5.8	72.5	10.5	59.
11.3	37.9	3146.5	700.0	4.2	0.9	259.2	14.2	13.9	2.6	304.8	320.9	4.7	70.1	11.4	61.
13.3	43.6	3439.1	675.0	0.3	0.6	253.0	13.8	13.2	4.0	304.9	321.1	5.7	73.1	12.2	62.
14.2	40.6	3742.0	650.0	-0.5	-3.0	243.5	17.8	15.9	7.9	309.0	322.0	4.8	81.9	13.2	63.
15.4	46.9	4053.2	625.0	-2.0	-8.0	249.6	19.3	19.0	6.7	310.5	320.6	3.4	83.6	14.5	63.
16.6	50.3	4378.8	600.0	-3.4	-22.2	261.3	18.2	18.0	2.7	312.3	315.7	1.1	21.7	15.0	64.
17.4	52.3	4712.7	575.0	-6.0	-27.1	259.3	19.0	18.7	3.5	313.0	315.6	0.8	18.5	16.3	64.
19.1	56.3	5060.1	550.0	-8.6	-29.9	268.4	17.8	17.8	0.5	313.9	316.2	0.7	19.3	16.8	64.
20.6	59.7	5419.4	525.0	-12.0	-23.6	276.0	18.1	18.0	-1.0	314.1	317.6	1.1	37.2	21.0	64.
21.4	63.3	5740.0	500.0	-14.3	-24.7	286.2	18.1	17.2	-5.7	315.6	319.0	1.0	40.9	22.4	70.
23.4	66.7	6177.4	475.0	-16.4	-25.7	290.0	21.6	20.3	-7.0	317.8	321.1	1.0	44.7	24.5	73.
25.3	70.5	6583.2	450.0	-18.3	-53.0	291.4	19.1	17.8	-7.0	320.2	323.4	0.1	29.9	25.6	76.
26.9	74.2	7007.2	425.0	-21.4	-54.4	284.4	19.0	18.4	-4.7	321.5	321.7	0.1	3.3	27.1	78.
28.6	78.3	7451.2	400.0	-24.9	-56.0	282.9	19.3	19.5	-6.3	322.6	322.8	0.0	3.6	28.9	80.
30.4	82.3	7911.3	375.0	-28.2	-57.7	288.0	20.5	19.5	-7.5	324.2	324.3	0.0	4.0	30.9	82.
32.3	86.5	8408.2	350.0	-31.9	-59.7	297.7	15.8	14.0	-7.3	325.7	325.8	0.0	4.4	32.0	84.
34.3	91.2	8927.4	325.0	-36.3	-62.3	293.2	24.7	22.7	-9.7	326.5	326.7	0.0	4.8	34.6	84.
36.4	95.8	9476.4	300.0	-40.0	-69.9	298.5	23.3	20.4	-11.1	325.0	326.9	99.9	99.9	37.2	94.
38.5	100.6	10065.8	275.0	-45.5	-99.9	305.4	20.6	16.8	-11.7	329.4	329.9	99.9	99.9	39.4	94.
40.7	105.6	10694.1	250.0	-50.8	-99.9	305.6	23.8	19.3	-13.8	330.5	329.9	99.9	99.9	42.2	94.
43.1	111.3	11370.9	225.0	-56.6	-99.9	308.2	20.4	16.0	-12.6	331.2	329.9	99.9	99.9	45.1	94.
45.8	117.0	12102.2	200.0	-63.1	-99.9	291.2	25.3	23.6	-9.1	332.8	329.9	99.9	99.9	48.6	94.
48.4	123.7	12925.9	175.0	-61.3	-99.9	291.4	28.0	26.1	-10.2	348.8	329.9	99.9	99.9	51.4	94.
52.3	130.5	13998.0	150.0	-57.8	-99.9	285.5	33.8	32.6	-9.0	370.5	329.9	99.9	99.9	60.3	94.
56.3	137.8	15037.6	125.0	-62.0	-99.9	278.9	25.8	25.5	-4.0	382.7	329.9	99.9	99.9	67.0	100.
61.1	144.4	16437.4	100.0	-64.6	-99.9	277.8	27.5	27.2	-3.7	403.0	329.9	99.9	99.9	74.7	94.
67.2	152.3	18161.9	75.0	-64.3	-99.9	303.5	14.0	11.7	-7.7	438.2	329.9	99.9	99.9	79.2	100.
75.8	160.3	20672.7	50.0	-59.2	-99.9	22.4	3.0	-1.1	-2.7	504.1	329.9	99.9	99.9	80.1	131.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE 12
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 * BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS

STATION NO. 327
NASHVILLE, TENN24 APRIL 1975
1500 GMT

163 20. 0

TIME MIN	CNTCT	WEIGHT GFW	PRES PSI	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MR RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.3	180.0	982.5	21.8	16.7	120.0	7.7	0.0	7.7	297.2	329.3	12.2	73.0	6.0	20
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.7	314.5	975.0	20.4	16.1	199.3	17.3	5.7	16.3	297.3	328.6	11.9	76.2	0.4	22
0.6	8.7	556.5	950.0	18.2	16.3	203.4	17.0	6.5	15.6	297.3	329.9	12.4	89.3	0.7	21
1.5	11.0	786.7	925.0	15.9	14.7	214.3	20.4	11.5	16.8	297.1	327.8	11.6	93.9	1.4	24
2.4	13.4	1020.9	900.0	13.3	13.6	228.2	26.5	18.5	19.0	298.7	327.9	11.0	89.8	2.8	32
3.2	15.6	1254.5	875.0	15.0	11.6	236.1	27.4	21.1	17.6	300.7	327.3	9.9	80.2	4.1	37
4.1	17.9	1505.1	850.0	14.3	9.0	237.3	25.1	21.1	13.0	302.3	325.6	8.5	70.1	5.4	41
4.9	20.3	1757.3	825.0	13.3	7.6	241.5	24.3	21.4	11.6	303.7	325.8	8.0	68.5	6.5	44
5.8	22.7	2015.8	800.0	11.4	5.3	243.3	26.0	23.2	11.7	304.2	323.9	7.0	66.2	7.4	47
6.7	25.3	2280.6	775.0	9.3	5.0	248.9	24.8	23.2	8.9	304.8	324.7	7.1	74.2	9.2	50
7.7	27.7	2552.2	750.0	7.6	3.6	248.9	26.1	24.3	9.4	305.8	324.7	6.7	76.6	10.5	53
9.7	30.4	2830.9	725.0	5.3	2.5	250.6	26.0	24.5	8.6	306.1	324.2	6.4	82.2	12.1	56
9.7	33.1	3117.0	700.0	3.1	1.6	251.2	26.5	25.1	8.5	306.7	324.2	6.2	89.9	13.6	57
10.9	35.8	3412.1	675.0	2.7	-7.0	249.2	29.7	27.7	10.5	307.1	319.2	3.4	49.5	15.4	58
11.9	38.6	3716.7	650.0	1.7	-17.9	248.0	31.4	29.3	11.3	311.0	315.6	1.4	21.7	17.4	60
13.0	41.4	4032.3	625.0	-0.1	-6.0	248.4	32.6	30.3	12.0	312.8	314.9	3.9	44.7	19.0	61
14.2	44.4	4358.4	600.0	-1.6	-19.9	245.4	31.0	29.2	12.9	314.5	318.7	1.3	23.2	21.8	61
15.3	47.5	4675.8	575.0	-4.1	-25.8	247.8	29.6	27.4	11.2	315.3	319.0	0.8	16.5	23.4	64
16.4	50.5	5044.6	550.0	-6.9	-32.4	250.1	28.0	27.7	7.9	316.0	314.9	0.9	20.7	25.7	67
17.6	53.7	5405.7	525.0	-8.4	-30.4	250.5	30.3	29.5	7.1	317.2	319.1	0.6	16.1	27.8	67
18.4	56.9	5781.0	500.0	-11.5	-34.3	250.9	30.4	29.9	5.3	319.0	320.4	0.4	13.0	30.7	67
20.2	60.3	6171.7	475.0	-15.0	-36.9	250.9	28.3	27.7	5.4	319.3	320.5	0.3	13.4	32.2	67
21.7	64.0	6577.3	450.0	-19.1	-39.9	257.3	31.3	30.5	6.9	319.2	320.2	0.2	14.2	40.1	69
23.1	67.3	7001.8	425.0	-20.3	-40.9	260.3	30.4	30.3	3.0	323.0	324.3	0.2	14.9	46.6	71
24.4	71.3	7447.4	400.0	-24.1	-43.8	263.2	34.2	33.9	4.1	323.6	324.3	0.2	15.3	48.2	72
26.5	75.2	7914.7	375.0	-28.0	-46.7	268.9	34.5	34.4	3.1	324.5	325.1	0.1	14.6	43.4	70
28.1	79.1	8404.3	350.0	-32.2	-50.0	271.5	27.0	27.0	-0.7	325.3	325.7	0.1	14.9	46.6	71
30.1	82.2	8725.3	325.0	-35.9	-53.0	275.1	24.3	24.2	-2.1	327.1	327.4	0.1	15.3	48.2	72
32.1	87.5	9476.8	300.0	-40.0	-59.9	270.0	25.8	25.8	0.0	328.9	999.9	99.9	999.9	52.2	74
34.3	92.4	10064.2	275.0	-45.1	-60.0	263.2	16.2	16.1	1.9	329.9	999.9	99.9	999.9	54.4	74
36.7	97.4	10693.5	250.0	-50.3	-60.0	260.9	21.1	20.8	3.3	331.3	999.9	99.9	999.9	57.1	75
39.1	102.6	11373.1	225.0	-55.9	-60.0	261.9	21.8	21.6	3.1	332.9	999.9	99.9	999.9	60.5	75
41.7	108.5	12114.1	200.0	-60.3	-60.0	261.1	20.6	24.5	2.7	337.4	999.9	99.9	999.9	63.9	76
44.6	114.8	12938.8	175.0	-64.0	-60.0	262.2	23.6	23.6	3.2	344.3	999.9	99.9	999.9	67.8	76
48.3	121.7	13502.1	150.0	-68.5	-60.0	260.5	44.7	44.6	2.8	364.3	999.9	99.9	999.9	74.2	77
52.1	129.0	14047.4	125.0	-60.9	-60.0	278.5	25.4	25.2	-3.0	364.7	999.9	99.9	999.9	81.9	79
56.7	137.3	14622.8	100.0	-63.0	-59.9	272.0	16.5	16.5	-0.6	406.1	993.9	99.9	993.9	89.0	70
62.2	145.7	15176.6	75.0	-63.0	-59.9	273.2	12.9	12.9	-1.2	440.8	999.9	99.9	999.9	95.6	90
68.9	157.8	20657.8	50.0	-58.3	-59.9	43.9	3.0	-2.1	-2.1	506.2	999.9	99.9	999.9	95.6	90
81.0	182.0	25146.9	25.0	-50.6	-59.9	246.8	8.7	8.0	3.4	634.3	999.9	99.9	999.9	94.8	81

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 340
LITTLE ROCK, ARK
24 APRIL 1975
1540 GMT

TIME MIN	CNTCY	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/AC	BN PCY	RANGE KM	AZ DG
0.0	5.7	79.0	1300.4	24.6	18.8	230.0	7.7	5.9	4.9	299.0	335.3	13.8	71.0	0.0	0.
0.2	5.9	117.5	1000.0	23.0	18.0	227.1	11.3	8.3	7.7	298.7	333.2	13.2	70.3	0.2	35.
1.0	6.2	338.9	975.0	21.7	16.1	230.7	12.9	9.9	8.2	298.4	334.6	13.6	80.1	0.7	45.
1.6	10.5	568.2	950.0	19.3	17.2	235.4	14.8	12.2	8.4	298.5	333.3	13.2	88.0	1.3	40.
2.6	12.8	793.6	925.0	17.4	15.9	242.4	17.9	15.9	8.3	298.8	331.6	12.4	90.8	2.1	53.
3.3	15.2	1028.2	905.0	16.7	15.1	246.9	20.1	18.0	7.3	300.3	332.6	12.1	90.3	2.9	50.
4.1	17.6	1268.3	875.0	14.8	13.4	248.0	21.1	19.6	7.9	300.6	330.5	11.1	91.2	3.6	63.
4.9	20.0	1513.4	850.0	12.9	8.1	248.3	22.4	20.8	8.3	300.7	322.6	8.0	72.5	4.0	61.
5.4	22.4	1767.3	825.0	16.5	3.0	247.1	18.3	20.8	8.3	300.7	322.6	8.0	72.5	4.0	61.
6.7	25.1	2028.6	800.0	14.6	3.1	238.9	15.2	13.0	7.9	307.5	324.8	6.0	40.1	7.0	63.
7.7	27.3	2297.9	775.0	14.3	-0.5	250.7	11.9	11.2	3.3	309.8	323.8	4.8	36.4	7.0	63.
8.7	30.2	2572.5	750.0	11.6	1.1	262.7	11.6	11.5	1.5	310.1	326.2	5.5	47.7	8.4	64.
9.0	33.3	2854.7	725.0	5.6	1.0	266.1	12.0	12.0	0.8	309.8	325.4	4.5	50.8	9.7	67.
10.5	35.5	3144.5	700.0	6.7	-2.9	272.4	11.9	11.9	-0.3	310.4	323.6	3.4	50.8	10.4	66.
11.7	36.4	3441.7	675.0	3.8	-5.6	272.4	11.9	11.9	-0.3	310.4	321.4	3.4	52.2	11.1	70.
12.7	41.1	3747.1	650.0	1.3	-7.4	276.0	13.7	13.6	-1.4	310.9	321.0	3.4	52.2	11.1	70.
13.7	44.1	4061.7	625.0	-0.8	-26.7	278.4	16.7	16.5	-2.4	311.6	314.0	0.1	1.0	13.0	72.
14.8	47.3	4385.9	600.0	-2.2	-51.3	280.2	20.9	20.6	-3.7	313.5	313.7	0.1	1.0	13.0	72.
15.0	50.3	4722.7	575.0	-5.3	-51.3	281.8	23.2	22.7	-4.7	313.8	314.0	0.0	1.0	14.3	77.
17.1	53.4	5075.3	550.0	-7.2	-54.5	274.9	25.8	25.7	-3.2	315.5	315.7	0.0	1.0	16.0	80.
18.3	56.6	5430.6	525.0	-10.2	-56.4	271.6	28.7	28.7	-0.8	316.1	316.2	0.0	1.0	17.9	81.
19.5	60.3	5904.6	500.0	-12.4	-57.8	264.5	29.3	29.2	2.8	317.9	319.0	0.0	1.0	20.1	82.
20.1	63.5	6196.4	475.0	-13.6	-58.5	259.0	25.7	25.2	4.9	321.1	321.6	0.0	1.0	22.0	82.
22.1	67.0	6604.3	450.0	-17.2	-60.9	258.4	22.3	21.6	4.5	321.5	321.6	0.0	1.0	24.0	82.
23.7	70.6	7030.2	425.0	-20.7	-63.1	260.5	23.1	22.8	3.8	322.7	322.7	0.0	1.0	26.1	81.
25.4	74.4	7474.5	400.0	-24.8	-65.8	259.7	25.4	24.9	5.0	322.7	322.7	0.0	1.0	28.6	81.
27.1	78.5	7940.3	375.0	-28.8	-68.4	260.5	26.6	26.2	4.4	323.3	323.4	0.0	1.0	31.5	81.
29.1	82.5	8430.0	350.0	-32.5	-69.6	262.2	27.7	27.4	3.8	324.9	324.9	0.0	1.0	34.5	81.
31.3	86.8	8948.7	325.0	-36.1	-68.7	263.4	26.0	25.8	2.6	326.9	326.9	0.0	1.0	38.0	81.
33.6	91.3	9500.2	300.0	-40.0	-69.9	264.7	28.4	28.2	2.6	329.0	329.0	0.0	1.0	41.9	81.
36.0	95.9	10099.4	275.0	-43.6	-69.9	273.6	26.2	26.2	-1.4	332.1	332.1	0.0	1.0	45.8	81.
38.2	100.3	10723.0	250.0	-48.0	-69.9	278.7	24.5	24.2	-3.7	335.8	335.8	0.0	1.0	49.7	81.
40.7	106.3	11410.1	225.0	-52.7	-69.9	281.1	25.1	24.6	-4.8	337.2	337.2	0.0	1.0	52.6	81.
43.4	112.3	12160.6	200.0	-58.6	-69.9	281.9	19.0	18.1	-10.0	340.0	340.0	0.0	1.0	56.0	81.
46.3	118.3	12989.9	175.0	-63.3	-69.9	272.4	22.2	22.2	-0.9	345.2	345.2	0.0	1.0	59.1	81.
49.6	125.3	13937.5	150.0	-61.7	-69.9	259.0	38.2	37.5	7.3	363.4	363.4	0.0	1.0	64.9	81.
53.0	132.7	15068.4	125.0	-57.9	-69.9	254.7	27.6	26.8	7.3	386.4	386.4	0.0	1.0	74.7	81.
56.7	140.3	16453.8	100.0	-62.1	-69.9	260.2	13.4	13.2	2.3	407.8	407.8	0.0	1.0	82.8	81.
63.9	148.7	19201.4	75.0	-68.5	-69.9	245.5	11.3	10.2	4.7	429.3	429.3	0.0	1.0	85.2	81.
71.3	156.0	20720.8	50.0	-57.7	-69.9	313.6	9.6	7.8	-6.6	507.4	507.4	0.0	1.0	89.4	81.
83.0	167.7	23186.1	25.0	-50.2	-69.9	999.9	99.9	99.9	99.9	648.7	999.9	99.9	99.9	99.9	99.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 349
MCNETTE, MO24 APRIL 1975
1507 GMT

146 46.0 0

TIME MIN	CATCY	HEIGHT GEM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.9	436.0	961.1	15.0	13.8	150.0	7.7	-3.9	6.7	293.4	320.5	10.4	89.0	0.0	0.
0.0	9.9	99.0	1000.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	9.0
0.0	9.9	99.0	975.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	99.0	9.0
0.3	8.9	536.0	950.0	15.0	13.3	147.9	14.7	-7.8	12.5	293.7	320.3	10.2	89.0	0.4	3.7
1.2	11.1	782.4	925.0	14.4	11.7	145.6	11.4	-6.7	9.7	255.3	320.2	9.4	84.2	1.1	3.4
2.1	13.5	996.2	900.0	16.7	11.4	16.1	8.0	-1.8	7.8	300.0	320.3	9.7	72.8	1.5	3.4
3.1	15.9	1236.1	875.0	14.9	13.2	197.7	10.4	3.2	9.9	300.7	330.3	11.0	87.7	2.0	3.7
3.9	16.1	1461.7	850.0	13.7	13.1	220.9	12.0	7.9	9.1	362.0	332.4	11.3	96.4	2.4	3.8
4.9	20.3	1734.0	825.0	12.0	12.5	231.1	15.3	11.3	9.6	303.5	332.9	10.8	95.2	2.9	3.
5.8	22.7	1902.6	800.0	11.5	10.3	236.7	16.5	11.5	9.5	305.7	332.1	9.9	92.3	3.5	13.
6.6	25.3	2150.3	775.0	10.0	7.9	236.7	17.2	14.4	9.5	305.7	329.8	8.7	87.0	4.2	13.
7.7	27.9	2330.5	750.0	8.1	5.8	235.8	16.9	14.0	9.5	306.4	328.3	7.6	85.4	5.0	19.
8.7	30.6	2510.0	725.0	5.8	4.3	237.4	17.9	15.1	9.5	306.7	327.1	7.2	80.6	5.9	11.
9.7	33.3	2697.6	700.0	7.2	-11.1	241.0	20.6	18.0	10.0	310.7	317.9	2.3	25.8	7.0	17.
10.8	35.9	2875.7	675.0	5.1	-11.4	242.3	21.6	19.1	10.0	311.6	316.9	2.4	29.2	8.4	11.
12.0	38.6	3052.3	650.0	2.1	-12.7	242.4	22.0	19.5	10.2	311.4	316.5	2.2	32.4	9.8	45.
13.2	41.4	3237.2	625.0	-1.0	-15.3	246.3	21.4	19.6	8.6	311.5	317.3	1.9	32.7	11.3	47.
14.3	44.2	3421.9	600.0	-3.1	-17.5	246.0	21.7	20.2	7.3	312.7	317.8	1.6	31.6	12.0	49.
15.4	47.1	3607.8	575.0	-5.3	-19.5	250.5	23.0	22.6	4.2	313.9	318.4	1.4	31.7	14.1	57.
16.6	50.3	3795.4	550.0	-7.7	-23.4	274.6	25.2	25.1	-2.0	315.0	318.4	1.1	27.2	15.4	54.
17.9	53.3	3985.4	525.0	-10.1	-27.7	273.2	28.2	28.2	-1.6	316.4	318.9	0.7	21.9	17.1	57.
19.3	56.3	4176.1	500.0	-11.9	-29.8	282.7	27.3	27.1	3.5	318.6	320.8	0.6	20.7	19.2	64.
20.7	59.6	4361.4	475.0	-14.1	-29.5	254.8	27.4	26.8	7.3	320.6	323.0	0.7	25.8	21.5	67.
22.2	63.1	4553.1	450.0	-17.6	-30.3	256.0	28.6	27.9	6.6	321.1	323.4	0.7	31.8	24.0	60.
23.6	66.3	4747.9	425.0	-21.2	-33.2	256.5	31.7	30.3	7.4	321.8	323.7	0.5	32.9	26.5	47.
25.2	70.3	4942.0	400.0	-25.1	-35.6	255.0	31.3	30.2	8.1	322.3	323.9	0.5	30.8	28.4	54.
26.9	74.6	5137.3	375.0	-29.2	-39.4	257.4	31.3	30.6	6.6	324.9	324.1	0.3	30.1	30.4	59.
28.7	78.5	5332.2	350.0	-33.0	-39.2	262.3	33.5	33.2	4.5	324.2	325.5	0.4	51.5	34.3	70.
30.5	81.5	5527.7	325.0	-36.6	-44.7	262.7	36.0	35.7	4.6	326.2	327.0	0.2	42.1	36.7	71.
32.5	85.7	5723.0	300.0	-41.0	59.9	261.4	39.3	39.8	5.9	327.5	328.5	99.9	99.9	44.3	72.
34.4	90.3	5918.2	275.0	-45.1	99.9	267.0	35.2	35.1	1.8	324.5	329.5	99.9	99.9	49.0	73.
36.9	95.2	6113.6	250.0	-49.6	99.9	269.9	38.8	38.8	0.0	332.4	329.9	99.9	99.9	53.7	75.
39.3	100.2	6309.1	225.0	-54.4	99.9	264.5	41.2	41.0	3.9	335.1	329.9	99.9	99.9	58.9	74.
41.6	105.5	6504.8	200.0	-58.0	99.9	262.4	30.3	30.3	3.8	340.0	329.9	99.9	99.9	64.6	77.
44.0	111.3	6700.6	175.0	-61.9	99.9	261.4	27.1	27.1	3.9	347.7	329.3	99.9	99.9	69.2	72.
46.4	117.8	6897.1	150.0	-65.8	99.9	250.3	27.7	26.1	4.3	367.1	329.9	99.9	99.9	75.1	77.
48.8	124.0	7093.0	125.0	-69.8	99.9	266.5	30.0	30.0	1.9	382.5	329.9	99.9	99.9	81.6	77.
51.2	130.3	7288.9	100.0	-73.7	99.9	258.4	14.9	14.9	4.9	408.5	329.9	99.9	99.9	91.4	77.
53.6	136.7	7484.8	75.0	-77.6	99.9	263.8	9.2	9.2	1.0	435.6	329.9	99.9	99.9	96.0	74.
56.0	143.1	7680.7	50.0	-81.5	99.9	263.8	99.9	99.9	99.9	511.2	329.9	99.9	99.9	99.9	99.9
58.4	149.5	7876.6	25.0	-85.4	99.9	263.8	99.9	99.9	99.9	99.9	329.9	99.9	99.9	99.9	99.9
60.8	155.9	8072.5	0.0	-89.3	99.9	263.8	99.9	99.9	99.9	99.9	329.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 363
APARILLO, TEX24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.8	1095.0	866.5	15.3	-4.1	310.0	4.1	3.1	-2.6	299.0	308.1	3.2	26.0	0.0	0.
0.9	56.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.0	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.3	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.0	56.3	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	56.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	16.9	1205.5	875.0	15.0	-5.9	265.3	4.3	4.3	0.1	269.0	308.0	2.8	23.1	0.2	86.
1.1	16.3	1452.2	850.0	18.2	-6.0	305.9	4.1	3.1	-2.4	305.6	314.2	2.9	18.7	0.3	86.
2.0	19.1	1706.6	825.0	16.6	-7.7	329.2	12.5	6.4	-10.7	306.5	314.3	2.6	18.2	0.7	131.
2.9	21.2	1507.5	800.0	14.7	-8.6	315.2	7.9	5.6	-5.6	307.1	314.5	2.5	18.7	1.1	131.
3.7	23.5	2234.7	775.0	12.7	-10.1	335.8	7.1	2.9	-6.5	307.7	314.7	2.3	19.4	1.5	136.
4.6	25.8	2538.6	750.0	10.9	-11.5	261.2	8.0	7.8	-1.5	308.7	315.2	2.1	19.5	1.8	134.
5.5	24.2	2795.5	725.0	8.0	-13.4	275.1	8.9	8.9	-0.8	308.5	314.3	1.9	20.1	2.3	126.
6.5	30.7	3077.7	700.0	5.7	-14.9	264.6	8.5	8.4	0.6	309.0	314.3	1.7	21.1	2.7	120.
7.4	33.2	3373.7	675.0	3.0	-15.8	263.6	10.7	10.6	1.2	309.2	314.3	1.6	23.5	3.1	114.
8.4	35.7	3677.7	650.0	0.1	-17.5	267.3	11.6	11.6	0.6	309.3	313.9	1.5	25.1	3.7	104.
9.3	38.2	3990.7	625.0	-1.8	-18.7	265.1	12.1	12.0	1.0	310.6	315.0	1.4	26.1	4.3	106.
10.3	40.8	4314.4	600.0	-4.0	-23.9	249.7	15.0	14.0	5.2	311.5	314.5	0.9	19.6	5.0	102.
11.5	43.6	4649.0	575.0	-5.7	-27.3	242.0	19.2	17.0	9.0	313.4	315.7	0.7	16.2	6.0	95.
12.5	46.4	4996.2	550.0	-7.3	-29.5	241.1	20.6	18.0	9.9	315.5	317.5	0.6	14.9	7.2	86.
13.7	49.4	5357.0	525.0	-10.0	-31.1	244.3	22.7	20.5	9.9	316.5	318.3	0.5	15.8	8.5	84.
14.7	52.3	5730.7	500.0	-13.3	-33.7	244.6	23.4	21.2	9.9	316.8	318.3	0.4	16.1	9.9	82.
16.0	55.3	6119.1	475.0	-16.1	-35.5	243.6	25.0	22.4	11.1	318.0	319.4	0.4	16.8	11.6	79.
17.2	58.4	6523.7	450.0	-19.0	-36.1	245.7	26.8	24.5	11.0	319.4	320.8	0.4	20.5	13.5	77.
18.7	61.8	6946.8	425.0	-22.1	-28.9	245.9	29.6	27.4	10.1	320.7	323.5	0.8	53.6	15.7	76.
20.2	65.2	7390.0	400.0	-25.3	-32.1	251.2	32.0	30.3	10.3	322.1	324.3	0.6	52.7	16.7	75.
21.7	68.7	7854.8	375.0	-29.3	-36.1	249.8	31.9	29.9	11.0	322.8	324.4	0.5	51.3	21.5	74.
23.3	72.2	8344.1	350.0	-32.8	-41.1	247.4	32.3	29.8	12.4	324.5	325.6	0.3	42.6	24.7	74.
25.0	76.2	8861.8	325.0	-36.9	-44.6	248.8	34.4	32.1	12.4	325.7	326.5	0.2	44.5	28.1	73.
26.7	80.3	9411.0	300.0	-41.2	99.9	254.9	35.4	34.1	9.2	327.3	999.9	99.9	99.9	31.7	73.
28.5	84.9	9954.9	275.0	-46.5	99.9	256.7	35.2	34.3	8.1	327.9	999.9	99.9	99.9	35.6	73.
30.6	89.3	10620.8	250.0	-51.0	99.9	257.6	39.7	38.7	8.5	330.2	999.9	99.9	99.9	40.2	74.
32.9	94.0	11299.1	225.0	-55.6	99.9	256.6	41.8	40.7	9.4	333.3	999.9	99.9	99.9	44.6	74.
35.3	98.2	12043.2	200.0	-59.5	99.9	260.5	44.8	44.2	7.4	338.6	999.9	99.9	99.9	49.4	75.
38.0	105.9	12870.5	175.0	-63.1	99.9	257.5	23.5	23.0	5.1	345.9	999.9	99.9	99.9	55.1	75.
41.0	111.3	13826.1	150.0	-61.0	99.9	256.0	38.1	36.9	9.2	364.9	999.9	99.9	99.9	62.6	76.
44.4	116.3	14956.7	125.0	-62.7	99.9	251.6	26.8	25.4	8.5	381.5	999.9	99.9	99.9	69.2	76.
49.2	127.0	16336.2	100.0	-61.0	99.9	256.5	19.1	18.6	4.4	409.8	999.9	99.9	99.9	75.9	75.
54.5	136.7	18120.3	75.0	-61.1	99.9	265.4	22.4	22.3	1.8	444.8	999.9	99.9	99.9	84.5	75.
59.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
67.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 402
WALLOPS ISLAND, VA24 APRIL 1975
1415 GMT

TIME MIN	CNCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTD CM/KG	RM PCY	RANGE KM	AZ DG
0.0	4.2	4.0	1017.5	16.7	11.2	999.9	99.9	99.9	99.9	289.5	310.9	8.3	70.0	999.9	999.9
0.4	5.5	153.0	1000.0	18.7	12.4	999.9	99.9	99.9	99.9	293.1	317.0	9.1	66.6	999.9	999.9
1.0	7.4	370.2	975.0	17.5	11.9	999.9	99.9	99.9	99.9	293.9	317.8	9.1	70.0	999.9	999.9
2.0	9.5	591.6	950.0	15.2	11.7	999.9	99.9	99.9	99.9	293.8	317.8	9.1	70.4	999.9	999.9
3.2	11.1	817.1	925.0	13.4	11.9	999.9	99.9	99.9	99.9	294.2	319.2	9.5	90.6	999.9	999.9
4.1	13.5	1066.0	900.0	11.7	10.8	999.9	99.9	99.9	99.9	294.8	318.8	9.1	94.0	999.9	999.9
4.9	15.6	1284.4	875.0	12.4	8.9	999.9	99.9	99.9	99.9	297.7	319.9	8.2	79.6	999.9	999.9
5.8	17.7	1528.1	850.0	12.4	7.6	999.9	99.9	99.9	99.9	300.1	321.3	7.7	72.5	999.9	999.9
6.9	20.0	1778.1	825.0	10.6	6.4	999.9	99.9	99.9	99.9	300.7	320.9	7.4	75.7	999.9	999.9
7.9	22.1	2034.1	800.0	8.5	6.3	999.9	99.9	99.9	99.9	301.2	321.9	7.5	85.9	999.9	999.9
8.9	24.4	2296.6	775.0	6.9	4.7	999.9	99.9	99.9	99.9	302.2	321.4	6.9	85.4	999.9	999.9
9.8	26.6	2566.0	750.0	5.4	1.6	999.9	99.9	99.9	99.9	303.2	319.4	5.7	76.2	999.9	999.9
10.8	28.0	2842.6	725.0	3.9	-0.1	999.9	99.9	99.9	99.9	304.4	319.4	5.3	75.1	999.9	999.9
11.7	31.5	3127.3	700.0	1.8	-2.6	999.9	99.9	99.9	99.9	305.1	318.1	4.5	72.4	999.9	999.9
12.8	34.1	3420.3	675.0	0.7	-6.1	999.9	99.9	99.9	99.9	306.9	317.4	3.6	60.1	999.9	999.9
13.8	36.5	3722.7	650.0	-1.3	-7.9	999.9	99.9	99.9	99.9	307.9	317.6	3.3	60.6	999.9	999.9
14.9	38.1	4034.3	625.0	-3.1	-9.0	999.9	99.9	99.9	99.9	309.3	318.5	3.1	63.5	999.9	999.9
15.1	41.7	4357.3	600.0	-4.0	-21.7	999.9	99.9	99.9	99.9	311.5	314.6	1.0	23.3	999.9	999.9
17.4	44.6	4692.3	575.0	-5.2	-25.2	999.9	99.9	99.9	99.9	314.0	316.8	0.9	19.0	999.9	999.9
18.6	47.4	5040.4	550.0	-7.1	-28.7	999.9	99.9	99.9	99.9	315.6	319.4	0.8	19.1	999.9	999.9
19.5	50.3	5411.2	525.0	-10.0	-28.0	999.9	99.9	99.9	99.9	316.5	318.9	0.7	21.1	999.9	999.9
21.1	53.1	5775.3	500.0	-12.8	-26.0	999.9	99.9	99.9	99.9	317.5	320.6	0.9	31.8	999.9	999.9
22.4	56.1	6165.7	475.0	-14.3	-29.8	999.9	99.9	99.9	99.9	320.3	322.5	0.7	25.3	999.9	999.9
23.7	58.4	6573.0	450.0	-17.5	-29.5	999.9	99.9	99.9	99.9	321.3	321.8	0.7	34.0	999.9	999.9
25.0	61.1	6999.9	425.0	-19.4	-34.3	999.9	99.9	99.9	99.9	324.1	325.8	0.5	25.3	999.9	999.9
27.0	64.1	7447.5	400.0	-22.5	-37.7	999.9	99.9	99.9	99.9	325.7	327.0	0.4	23.5	999.9	999.9
28.5	67.9	7917.8	375.0	-25.9	-43.4	999.9	99.9	99.9	99.9	327.2	328.0	0.2	17.4	999.9	999.9
30.2	71.6	8414.1	350.0	-29.7	-46.5	999.9	99.9	99.9	99.9	328.6	329.2	0.2	17.7	999.9	999.9
32.0	77.8	8936.7	325.0	-34.7	-48.0	999.9	99.9	99.9	99.9	328.7	329.2	0.1	21.6	999.9	999.9
33.9	82.0	9459.3	300.0	-40.1	99.9	999.9	99.9	99.9	99.9	326.9	329.9	99.9	999.9	999.9	999.9
36.0	86.4	10072.0	275.0	-44.2	99.9	999.9	99.9	99.9	99.9	331.2	329.9	99.9	999.9	999.9	999.9
38.1	91.3	10709.1	250.0	-49.8	99.9	999.9	99.9	99.9	99.9	332.1	329.9	99.9	999.9	999.9	999.9
40.7	98.4	11390.4	225.0	-55.2	99.9	999.9	99.9	99.9	99.9	333.9	329.9	99.9	999.9	999.9	999.9
43.3	101.8	12136.4	200.0	-58.4	99.9	999.9	99.9	99.9	99.9	340.3	329.9	99.9	999.9	999.9	999.9
45.8	108.3	12964.0	175.0	-64.3	99.9	999.9	99.9	99.9	99.9	343.8	329.9	99.9	999.9	999.9	999.9
49.0	114.7	13895.5	150.0	-64.4	99.9	999.9	99.9	99.9	99.9	355.7	329.9	99.9	999.9	999.9	999.9
52.8	122.3	15039.9	125.0	-56.6	99.9	999.9	99.9	99.9	99.9	352.5	329.9	99.9	999.9	999.9	999.9
57.3	130.3	16441.0	100.0	-59.2	99.9	999.9	99.9	99.9	99.9	413.3	329.9	99.9	999.9	999.9	999.9
62.9	138.3	18223.1	75.0	-63.8	99.9	999.9	99.9	99.9	99.9	439.1	329.9	99.9	999.9	999.9	999.9
70.1	147.0	20728.2	50.0	-59.9	99.9	999.9	99.9	99.9	99.9	502.3	329.9	99.9	999.9	999.9	999.9
80.6	156.0	25441.0	25.0	-52.0	99.9	999.9	99.9	99.9	99.9	635.2	329.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 405
STERLING, VA24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.5	85.0	1003.6	18.3	15.6	200.0	5.1	1.7	4.8	292.6	321.6	11.2	84.0	0.0	0
0.2	5.7	116.0	1000.0	18.5	14.2	201.6	7.5	2.8	6.9	293.0	319.0	10.3	76.6	0.1	12
1.6	7.8	333.1	975.0	16.9	13.2	208.4	12.0	5.7	10.6	293.5	319.3	9.9	79.0	1.0	25
2.5	6.8	554.2	950.0	14.6	11.3	214.3	14.4	8.1	11.9	293.2	316.6	8.9	80.7	1.7	27
3.5	11.7	780.6	925.0	15.0	10.8	220.7	13.8	9.0	10.5	295.8	319.3	8.8	75.7	2.6	31
4.5	13.9	1012.5	900.0	14.0	9.3	235.3	15.5	12.7	6.9	297.1	319.2	8.2	73.4	3.6	34
7.3	15.9	1250.2	875.0	12.6	8.6	253.8	14.6	14.0	4.1	297.9	319.7	8.1	76.7	4.1	40
6.3	14.1	1492.4	850.0	11.4	8.3	260.7	19.3	19.0	3.1	299.2	321.2	8.1	81.3	4.9	45
7.3	20.1	1743.1	825.0	10.3	7.0	270.7	17.1	17.1	-0.2	300.5	321.5	7.7	83.3	5.4	54
8.4	22.5	1990.2	800.0	9.2	4.9	266.6	19.8	19.8	1.2	301.9	320.6	6.8	73.7	6.7	60
9.5	24.7	2262.4	775.0	8.4	1.6	264.4	21.7	21.6	2.1	303.5	319.2	5.6	62.4	8.0	64
10.7	27.0	2532.5	750.0	6.1	0.4	259.6	21.0	20.7	3.8	303.9	318.9	5.3	66.8	9.5	67
11.9	29.5	2810.1	725.0	4.8	0.2	252.7	21.7	20.6	6.6	305.5	320.8	5.4	71.9	11.0	68
12.9	32.1	3055.9	700.0	3.1	-1.5	246.5	22.0	20.2	8.8	306.6	320.8	4.9	71.6	12.4	69
14.1	34.7	3390.0	675.0	0.8	-2.0	242.7	22.4	19.9	10.3	307.2	321.4	4.9	81.5	13.9	68
15.2	37.2	3692.5	650.0	-1.5	-5.0	243.8	24.3	21.8	10.7	307.7	319.7	4.1	77.3	15.5	67
16.4	39.9	4004.0	625.0	-3.6	-7.3	247.4	24.1	24.1	10.0	308.7	319.2	3.5	75.4	17.2	67
17.7	42.4	4325.5	600.0	-6.0	-9.2	253.0	27.2	26.0	7.9	309.5	319.0	3.2	78.0	19.4	67
19.0	45.2	4637.5	575.0	-8.4	-12.6	256.5	27.1	26.4	6.3	310.5	318.2	2.9	71.3	21.5	68
20.6	48.1	5007.9	550.0	-10.9	-15.2	259.8	28.5	28.1	5.1	311.3	317.9	2.1	71.1	24.0	69
21.8	50.9	5357.6	525.0	-12.0	-14.9	271.2	25.6	25.6	-0.5	311.3	321.4	2.0	77.2	26.1	71
23.4	53.9	5729.6	500.0	-14.2	-17.3	269.6	25.4	25.4	0.2	315.9	322.1	2.0	77.1	28.1	72
24.8	56.9	6116.9	475.0	-17.2	-20.1	266.5	23.6	23.5	1.4	316.9	322.1	1.6	77.8	30.3	73
26.5	60.0	6520.4	450.0	-19.6	-23.0	271.5	22.3	22.3	-0.6	318.7	323.1	1.3	74.1	32.3	74
27.9	63.3	6833.2	425.0	-22.6	-27.2	275.5	25.6	25.5	-2.4	320.1	323.3	1.0	65.8	34.4	76
29.3	66.5	7344.8	400.0	-26.5	-29.4	282.4	24.7	24.1	-8.1	322.5	323.4	0.8	76.4	36.3	77
30.9	70.0	7844.6	375.0	-29.5	-37.1	290.4	23.1	21.7	-8.1	322.5	324.0	0.4	47.5	38.3	79
32.4	73.4	8337.0	350.0	-33.7	-41.8	287.1	24.1	23.0	-7.1	323.2	324.2	0.3	43.7	40.3	80
34.4	77.3	8851.4	325.0	-38.3	-46.2	297.5	24.2	21.5	-11.2	323.6	324.5	0.2	42.8	42.7	81
36.3	81.0	9366.8	300.0	-42.8	-49.9	302.5	24.6	20.7	-12.2	325.0	324.9	0.9	99.9	44.6	84
38.2	85.1	9877.7	275.0	-47.5	-59.9	307.0	33.5	20.3	-15.2	326.5	324.9	0.9	99.9	47.4	87
40.3	89.4	10400.9	250.0	-52.4	-64.5	308.6	39.8	35.0	-19.1	328.2	324.9	0.9	99.9	51.1	89
42.9	94.3	11172.5	225.0	-58.2	-69.9	305.6	42.0	34.2	-24.4	329.3	324.9	0.9	99.9	56.7	93
45.1	99.0	12003.7	200.0	-64.5	-75.9	300.7	45.1	34.8	-23.0	330.7	324.9	0.9	99.9	61.5	94
47.8	104.2	12814.3	175.0	-64.2	-75.9	298.8	19.3	18.9	-6.3	344.0	324.9	0.9	99.9	66.0	95
51.2	110.2	13765.5	150.0	-62.4	-69.9	276.8	27.5	27.3	-3.2	362.7	324.9	0.9	99.9	65.8	94
55.4	116.5	14909.5	125.0	-53.6	-69.9	293.2	29.2	26.8	-11.5	397.9	324.9	0.9	99.9	76.1	94
60.1	124.0	16331.2	100.0	-58.7	-69.9	284.4	16.8	16.2	-4.2	414.3	324.9	0.9	99.9	83.5	94
66.4	132.3	18099.5	75.0	-43.2	-59.9	316.6	14.5	9.9	-10.5	440.4	324.9	0.9	99.9	90.0	100
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	59.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 425
HUNTINGTON, NVA24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SLC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.7	246.0	981.7	20.6	14.5	240.0	6.2	5.4	3.1	256.7	324.9	10.7	68.0	0.0	0.0
99.9	59.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	8.3	303.4	975.0	20.3	15.0	206.6	17.0	7.6	15.2	297.0	326.3	11.1	71.7	0.3	27.0
0.5	10.5	525.8	950.0	19.3	13.7	210.0	17.2	8.6	14.9	296.2	326.1	10.5	70.1	0.6	27.0
1.5	12.7	759.0	925.0	17.5	13.0	213.0	20.1	11.0	16.9	298.6	326.0	10.3	74.9	1.3	36.0
2.1	15.1	592.6	900.0	15.4	12.5	217.1	23.7	14.3	18.9	298.8	326.0	10.2	82.7	2.1	31.0
2.9	17.3	1232.0	875.0	14.1	13.0	227.3	27.8	20.4	18.8	299.8	326.9	10.9	93.3	3.3	31.0
3.7	19.7	1476.9	850.0	12.9	11.5	235.3	29.9	24.6	17.0	301.0	329.2	10.1	91.2	4.7	40.0
4.3	22.0	1729.2	825.0	12.3	10.1	240.0	30.6	26.5	15.3	304.9	329.7	9.5	86.2	5.4	44.0
5.1	24.5	1986.3	800.0	10.7	7.9	241.6	26.9	23.6	12.8	303.7	326.7	8.4	82.3	7.1	47.0
5.8	26.7	2250.9	775.0	9.3	6.0	241.6	27.6	24.2	13.1	304.9	329.1	8.7	91.5	8.2	46.0
6.5	29.5	2522.7	750.0	7.5	6.4	241.6	28.2	24.8	13.4	305.8	326.4	8.1	92.8	9.4	51.0
7.3	32.1	2802.7	725.0	6.0	4.3	242.9	28.1	25.0	12.8	307.0	327.4	7.2	88.4	10.7	54.0
8.2	34.7	3039.3	700.0	4.2	2.5	246.1	28.3	25.8	11.5	308.0	326.7	6.6	88.5	12.2	54.0
9.1	37.2	3384.4	675.0	2.0	-0.1	249.5	27.0	25.3	9.5	308.6	324.9	5.7	86.0	13.6	55.0
10.0	40.3	3688.1	650.0	-0.7	-2.4	252.0	26.0	24.8	8.0	310.0	322.4	4.2	83.8	15.1	57.0
10.9	42.5	4001.1	625.0	-2.0	-5.0	253.7	28.6	27.4	6.0	310.0	322.4	3.1	77.7	15.1	57.0
11.7	45.4	4325.1	600.0	-3.1	-9.2	254.4	31.7	30.6	4.6	312.9	322.6	3.2	62.9	17.3	55.0
12.5	48.3	4660.9	575.0	-5.5	-8.6	253.7	32.7	31.4	3.2	314.0	324.5	3.5	78.9	19.5	61.0
13.4	51.1	5008.7	550.0	-7.5	-10.7	255.7	31.0	30.1	2.1	315.6	325.1	3.1	77.7	21.7	62.0
14.3	54.1	5365.5	525.0	-10.2	-19.0	259.4	31.6	31.1	5.6	316.3	321.5	1.6	48.2	22.7	61.0
15.2	57.0	5743.2	500.0	-13.5	-22.2	261.3	29.6	29.3	4.5	316.7	320.9	1.3	47.8	24.3	66.0
16.3	60.3	6132.3	475.0	-15.3	-26.4	258.3	28.3	28.6	5.9	319.1	322.2	0.9	38.0	26.0	61.0
17.3	63.6	6539.3	450.0	-18.0	-30.9	265.9	30.4	30.3	2.1	320.7	322.9	0.6	31.6	27.8	61.0
18.5	66.9	6965.3	425.0	-19.3	-32.4	270.7	28.0	28.0	-0.4	324.4	327.4	1.5	76.3	29.5	61.0
19.6	70.3	7413.9	400.0	-22.5	-35.9	272.6	24.7	24.7	-1.1	325.8	329.7	1.1	73.5	31.4	61.0
20.8	73.7	7885.1	375.0	-25.8	-38.3	283.1	20.1	19.5	-4.5	327.5	330.6	0.9	71.7	32.1	71.0
22.0	77.5	8381.5	350.0	-28.6	-38.9	287.3	23.4	22.8	-5.1	328.9	331.0	0.6	64.0	34.1	72.0
23.1	81.2	8906.2	325.0	-31.5	-38.9	287.3	23.2	23.1	-7.2	330.4	331.9	0.4	58.5	35.7	71.0
24.6	85.3	9462.4	300.0	-38.6	-43.8	288.8	23.4	22.0	-6.0	331.0	331.9	0.3	57.2	37.2	71.0
25.9	89.5	10053.6	275.0	-44.0	-49.9	277.6	20.4	20.2	-3.5	331.6	331.9	99.9	99.9	38.9	71.0
27.2	94.0	10625.7	250.0	-49.5	-55.9	275.3	24.7	24.6	-2.3	332.5	332.9	99.9	99.9	40.4	72.0
28.6	98.6	11365.8	225.0	-55.9	-59.9	275.5	24.4	24.3	-2.3	332.5	332.9	99.9	99.9	42.9	71.0
30.2	103.3	12102.9	200.0	-63.0	-63.0	278.4	21.1	20.8	-3.1	333.0	333.0	99.9	99.9	44.4	71.0
32.1	105.3	12912.4	175.0	-67.8	-67.8	280.1	33.0	32.5	-5.8	336.1	336.1	99.9	99.9	47.4	71.0
34.4	115.2	13877.3	150.0	-58.4	-58.4	286.9	33.0	31.6	-9.6	339.5	339.5	99.9	99.9	52.1	81.0
37.2	122.0	15022.4	125.0	-59.1	-59.1	263.7	28.8	24.7	2.7	388.0	399.9	99.9	99.9	56.7	81.0
40.5	129.3	16424.0	100.0	-61.2	-61.2	259.0	18.2	15.9	3.1	409.6	399.9	99.9	99.9	61.2	91.0
44.5	137.7	18201.1	75.0	-63.2	-63.2	292.0	8.3	7.7	-3.1	440.5	399.9	99.9	99.9	64.0	91.0
49.5	146.5	20727.3	50.0	-56.9	-56.9	99.9	99.9	99.9	99.9	50.5	399.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 429
DAYTON, OHIO24 APRIL 1975
1415 GMT

107 155. C

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SLC	U COMP M/SEC	V COMP M/SEC	POT T UG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGI KM	AZ DG
00.0	7.6	298.0	976.0	14.9	14.3	250.0	6.7	6.3	2.3	291.5	316.7	10.6	96.0	0.0	0.0
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
01.7	7.7	306.7	975.0	14.7	13.9	251.0	5.9	5.6	1.3	291.3	314.0	10.3	95.0	0.0	1.0
1.0	5.9	526.2	950.0	13.0	11.3	260.5	11.3	11.2	1.9	291.5	314.8	8.9	89.7	0.4	7.0
2.0	11.7	750.7	925.0	12.3	9.9	270.2	10.9	10.9	-0.0	293.0	314.9	8.3	85.3	1.2	4.0
2.9	13.8	990.3	900.0	10.9	8.6	267.9	12.9	12.9	0.5	293.7	314.5	7.8	85.6	1.4	8.0
4.1	13.9	1215.1	875.0	9.6	7.1	264.4	9.4	9.3	0.9	294.8	314.2	7.3	84.0	2.6	9.0
5.2	18.1	1455.6	850.0	8.3	5.5	270.5	9.5	9.5	-0.1	295.7	313.7	6.7	82.5	3.2	0.0
6.2	20.2	1702.2	825.0	6.8	4.9	278.8	9.0	8.0	-1.2	296.7	314.6	6.6	87.1	3.7	4.0
7.4	22.4	1954.5	800.0	4.8	3.1	277.2	6.8	6.7	-0.8	297.1	313.5	6.0	86.5	4.2	8.0
8.6	28.7	2213.2	775.0	3.4	1.5	254.6	6.2	6.0	1.7	298.1	313.6	5.5	87.6	4.7	9.0
9.8	28.9	2479.3	750.0	2.6	0.8	241.7	10.0	8.9	4.7	300.1	315.2	5.4	98.1	5.2	8.0
10.4	29.2	2753.4	725.0	1.4	-0.1	240.1	14.2	12.3	7.1	301.7	316.4	5.3	89.9	5.9	8.0
11.8	31.3	3326.4	700.0	1.0	-0.5	245.2	18.8	17.1	7.9	304.3	314.3	5.3	89.7	6.4	8.0
12.4	34.2	3328.8	675.0	-0.1	-1.4	247.8	22.6	20.9	8.5	306.2	320.9	5.1	90.8	6.2	7.0
14.2	36.7	3621.2	650.0	-1.2	-2.3	247.3	25.4	23.4	9.8	308.3	322.7	5.0	91.6	10.0	7.0
15.6	39.4	3943.4	625.0	-3.0	-4.2	247.2	23.9	22.0	9.2	309.5	322.7	4.5	91.9	12.1	7.0
17.2	41.3	4266.5	600.0	-4.3	-5.7	252.5	23.3	22.2	7.0	311.7	324.0	4.2	89.4	14.3	7.0
18.0	44.9	4601.1	575.0	-6.3	-8.2	255.5	23.4	22.7	5.9	313.0	323.8	3.6	86.4	16.6	7.0
20.5	47.9	4948.2	550.0	-8.0	-10.0	259.3	22.7	22.3	4.2	315.0	324.9	3.2	85.1	18.9	7.0
21.9	50.6	5309.1	525.0	-9.7	-11.9	262.6	25.1	24.9	3.2	317.1	326.2	2.9	83.9	20.9	7.0
23.4	53.6	5684.5	500.0	-12.0	-14.4	264.3	23.8	23.7	2.3	318.7	326.6	2.5	82.0	23.1	7.0
25.0	56.1	6075.7	475.0	-14.6	-17.5	262.0	26.1	25.9	3.6	320.1	326.6	2.0	78.2	25.4	7.0
26.8	60.3	6423.0	450.0	-17.5	-20.6	257.6	27.1	26.5	5.8	321.4	326.8	1.6	76.1	28.3	7.0
28.5	63.4	6900.4	425.0	-20.4	-23.6	254.0	23.4	22.5	6.5	323.0	327.4	1.3	74.8	31.3	7.0
30.3	66.8	7355.6	400.0	-23.7	-27.3	257.4	28.7	28.0	6.3	324.3	327.7	1.0	72.0	33.5	7.0
32.0	70.4	7824.3	375.0	-27.2	-31.0	255.9	27.6	26.4	6.7	325.6	328.3	0.8	69.5	35.5	7.0
33.9	74.2	8317.2	350.0	-31.2	-35.4	253.5	29.0	27.8	8.2	326.7	328.6	0.5	65.6	39.9	7.0
35.8	78.3	8837.7	325.0	-35.8	-40.6	249.5	28.7	26.9	10.0	327.3	328.5	0.3	61.0	43.0	7.0
37.4	82.4	9388.7	300.0	-40.4	-45.9	248.4	26.1	24.3	9.6	328.4	328.9	99.9	99.9	46.5	7.0
40.1	86.7	9975.5	275.0	-45.5	-49.9	249.2	31.9	31.7	12.1	329.3	329.9	99.9	99.9	50.0	7.0
42.1	91.5	10602.9	250.0	-51.1	-59.9	247.9	35.4	32.8	13.3	330.1	329.9	99.9	99.9	54.4	7.0
44.7	96.6	11278.5	225.0	-57.4	-69.9	246.5	34.3	31.4	13.7	330.5	329.9	99.9	99.9	58.7	7.0
47.5	102.0	12010.0	200.0	-64.6	-79.9	245.1	35.8	32.1	14.9	330.5	329.9	99.9	99.9	65.7	7.0
50.4	106.0	12820.4	175.0	-62.5	-69.9	271.8	36.2	36.2	-1.2	346.7	329.9	99.9	99.9	72.1	7.0
52.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
54.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
56.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
58.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
60.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
62.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10. DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 1

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 433
SALEM, ILL24 APRIL 1975
1505 GMT

TIME MIN	CNTCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KN	AZ DG
0.0	6.0	175.0	989.6	16.7	15.4	250.0	3.6	3.4	1.2	292.2	321.2	11.2	92.0	0.0	0.
0.9	45.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	7.1	311.5	975.0	14.3	13.4	250.8	5.7	5.4	1.9	290.9	316.6	10.0	94.0	0.2	7.7
1.1	5.3	521.0	950.0	12.9	11.7	240.0	5.0	4.3	3.5	291.5	315.4	9.2	92.7	0.4	7.2
1.9	11.4	744.7	925.0	11.0	7.8	229.1	4.7	3.5	3.1	291.5	310.6	7.2	81.2	0.6	6.4
2.7	13.6	974.1	900.0	12.0	7.0	230.6	2.8	2.4	1.4	294.8	313.6	7.0	71.4	0.9	6.0
3.5	15.8	1210.6	875.0	12.5	3.4	192.0	1.1	0.2	1.0	297.5	312.9	5.6	54.1	0.9	6.1
4.4	18.1	1433.3	850.0	10.9	2.5	234.8	4.0	3.3	2.3	298.2	313.2	5.4	54.4	1.0	5.7
5.1	20.5	1721.7	825.0	9.2	2.7	248.8	9.2	8.6	3.3	299.0	314.7	5.7	64.1	1.3	5.9
6.1	22.9	1956.4	800.0	8.0	1.6	247.3	14.0	12.9	5.4	300.4	315.3	5.4	63.8	1.9	6.4
7.0	25.3	2218.0	775.0	6.6	0.1	257.2	14.8	14.4	3.3	301.6	315.6	5.0	63.2	2.7	6.4
7.9	27.7	2487.2	750.0	6.2	-2.4	272.9	14.8	14.8	-0.8	303.9	316.2	4.3	53.9	3.4	6.0
8.4	30.3	2765.2	725.0	5.8	-3.0	286.7	14.7	14.0	-4.8	306.4	318.6	4.2	53.2	4.2	7.5
9.5	33.0	3051.5	700.0	3.6	-3.9	288.8	19.3	18.3	-6.2	307.0	319.1	4.1	58.6	5.1	8.2
10.6	35.5	3348.0	675.0	0.9	-2.4	285.8	20.0	19.2	-5.5	307.3	321.0	4.8	78.6	6.0	8.4
11.7	38.0	3648.3	650.0	-1.3	-2.8	281.0	19.8	19.5	-3.8	308.1	322.0	4.8	89.8	7.2	8.9
12.7	40.9	3960.6	625.0	-2.9	-4.2	274.0	18.7	18.7	-1.3	309.7	322.8	4.5	90.5	8.4	9.1
13.8	43.8	4283.6	600.0	-4.6	-6.0	268.1	18.1	18.0	1.8	311.4	323.4	4.1	89.4	9.6	9.4
14.8	46.7	4617.7	575.0	-6.7	-8.3	259.0	21.1	20.7	4.0	312.6	323.3	3.6	88.5	10.7	9.4
15.9	49.8	4963.8	550.0	-9.0	-10.2	258.0	24.3	23.8	5.1	313.8	323.5	3.2	91.0	12.1	8.4
16.9	52.6	5323.3	525.0	-10.8	-12.1	259.0	26.0	25.5	5.0	315.8	324.7	2.9	89.0	13.4	8.7
18.1	55.7	5677.5	500.0	-12.9	-14.5	260.2	25.9	25.6	4.4	317.6	325.4	2.5	87.8	15.1	8.4
19.2	58.9	6087.3	475.0	-15.0	-17.2	260.4	26.0	25.6	4.3	319.6	326.3	2.1	82.8	17.4	8.4
20.5	62.3	6454.5	450.0	-17.5	-20.0	258.4	25.2	24.7	5.0	321.3	326.7	1.7	77.2	19.2	8.4
21.8	65.8	6820.3	425.0	-21.0	-24.6	262.1	26.0	25.8	3.6	322.2	326.3	1.2	72.7	21.3	8.4
23.2	68.3	7365.7	400.0	-23.9	-27.1	260.0	25.6	25.2	4.5	323.9	327.4	1.0	75.0	23.6	8.4
24.9	73.0	7873.5	375.0	-27.8	-32.5	260.5	27.2	26.8	4.5	324.8	327.0	0.7	63.9	26.0	9.4
26.2	76.3	8325.8	350.0	-31.6	-37.1	263.9	26.8	26.6	5.0	326.0	327.6	0.4	58.0	28.2	8.4
27.9	80.9	8846.1	325.0	-35.8	-41.3	258.9	26.1	25.6	5.0	327.3	328.4	0.3	50.1	30.7	9.1
29.7	85.1	9374.4	300.0	-40.1	-46.9	249.4	26.2	24.6	9.2	328.9	329.9	99.9	99.9	33.6	8.4
31.7	89.6	9925.4	275.0	-45.2	-52.9	248.2	24.5	22.1	10.7	329.8	329.9	99.9	99.9	36.5	8.1
33.9	94.6	10613.4	250.0	-51.2	-59.9	246.4	30.9	28.4	12.1	330.0	329.9	99.9	99.9	39.5	8.4
35.9	99.5	11299.1	225.0	-57.4	-67.4	243.9	31.6	28.9	12.7	330.6	329.9	99.9	99.9	42.7	8.4
38.4	105.0	12023.4	200.0	-62.7	-74.9	250.4	35.4	31.4	11.9	333.5	329.9	99.9	99.9	46.4	7.7
41.1	111.0	12850.1	175.0	-62.1	-79.9	259.1	37.4	26.9	5.2	337.5	329.9	99.9	99.9	50.1	7.4
44.5	117.7	13612.6	150.0	-58.3	-74.9	260.4	27.6	27.2	4.6	369.7	329.9	99.9	99.9	54.7	7.4
48.4	125.5	14956.0	125.0	-59.8	-79.9	262.8	27.1	26.9	3.4	386.7	329.9	99.9	99.9	59.1	7.4
53.0	134.0	16351.9	100.0	-58.1	-79.9	264.8	17.2	16.6	-4.4	415.4	329.9	99.9	99.9	65.5	7.4
58.6	143.0	18128.9	75.0	-62.9	-79.9	271.2	14.4	14.4	-0.3	441.1	329.9	99.9	99.9	72.7	7.4
64.3	152.0	20456.6	50.0	-58.1	-79.9	281.6	3.7	3.6	-0.7	506.5	329.9	99.9	99.9	78.5	8.4
70.3	163.3	25116.5	25.0	-50.1	-79.9	336.5	2.1	0.8	-1.0	641.0	329.9	99.9	99.9	78.5	8.4

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 451
DODGE CITY, KAN
24 APRIL 1975
1405 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCVP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE A2 KM	DG
0.0	13.9	791.0	919.3	14.4	12.8	359.0	7.7	1.3	-7.6	255.9	322.2	10.2	90.0	0.0	0.
99.9	95.7	904.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	15.6	970.2	900.0	12.4	11.4	354.5	11.6	1.1	-11.6	255.5	320.6	9.5	93.9	0.4 171.	0.4 171.
1.2	16.0	1206.6	875.0	11.3	10.7	354.1	11.1	1.1	-11.1	256.7	321.5	9.3	96.5	0.8 172.	0.8 172.
2.0	20.5	1449.6	850.0	11.5	11.0	5.8	7.2	-0.7	-7.2	259.5	325.8	9.8	96.6	1.3 174.	1.3 174.
2.8	22.9	1699.0	825.0	13.2	-4.2	19.2	5.6	-1.8	-5.3	303.0	312.8	3.4	29.5	1.6 178.	1.6 178.
3.5	25.5	1958.0	800.0	13.3	-12.0	30.3	4.8	-2.4	-3.9	305.6	311.3	1.9	16.0	1.7 181.	1.7 181.
4.2	28.3	2223.4	775.0	11.8	-21.0	27.6	4.9	-2.3	-4.3	306.6	309.6	0.9	8.2	1.9 185.	1.9 185.
5.1	30.8	2496.6	750.0	9.9	-30.3	2.3	5.0	-0.2	-5.0	307.4	308.7	0.4	4.0	2.2 189.	2.2 189.
6.0	33.6	2776.5	725.0	7.3	-43.6	339.8	6.0	2.1	-5.6	307.5	307.9	0.1	1.3	2.4 184.	2.4 184.
6.9	36.2	3063.6	700.0	5.0	-40.6	320.7	4.6	2.0	-4.2	308.0	308.6	0.2	2.0	2.7 181.	2.7 181.
7.8	39.0	3352.4	675.0	2.3	-35.3	320.3	2.5	1.6	-1.9	308.3	309.2	0.3	4.1	2.9 179.	2.9 179.
8.7	41.9	3661.6	650.0	-0.3	-30.7	264.8	2.8	2.8	0.3	308.6	310.1	0.5	7.9	3.0 178.	3.0 178.
9.6	44.9	3973.5	625.0	-3.0	-28.1	252.3	5.3	5.1	1.6	309.1	311.1	0.6	12.3	2.9 173.	2.9 173.
11.0	48.0	4294.4	600.0	-6.3	-26.6	250.9	6.7	6.5	1.5	309.9	311.3	0.7	18.0	2.9 164.	2.9 164.
12.0	50.8	4626.2	575.0	-9.0	-25.5	256.7	7.2	7.0	1.7	309.5	312.2	0.8	24.8	2.9 155.	2.9 155.
13.2	53.1	4966.3	550.0	-11.8	-24.0	251.9	9.7	9.6	1.7	310.1	312.8	0.8	29.6	3.1 146.	3.1 146.
14.4	57.1	5123.8	525.0	-13.4	-33.9	244.6	14.5	13.1	6.2	312.3	313.7	0.4	15.9	3.5 133.	3.5 133.
15.6	60.5	5693.8	500.0	-15.5	-37.1	239.5	18.2	15.7	9.2	314.2	315.3	0.3	13.8	4.0 115.	4.0 115.
16.9	64.0	6078.8	475.0	-18.1	-39.5	240.0	20.6	18.8	8.4	315.5	316.4	0.3	13.2	5.0 102.	5.0 102.
18.1	67.3	6479.8	450.0	-21.9	-35.2	249.3	22.8	21.3	8.1	315.7	317.6	0.6	39.4	6.4 98.	6.4 98.
19.3	70.9	6968.4	425.0	-24.5	-30.1	250.8	28.0	24.5	8.5	317.6	320.1	0.7	59.3	8.2 89.	8.2 89.
20.7	74.7	7337.0	400.0	-27.9	-37.2	247.9	25.5	27.3	11.1	318.8	320.8	0.6	60.0	10.3 85.	10.3 85.
22.0	78.7	7757.5	375.0	-31.3	-37.8	245.6	32.9	30.0	13.6	320.1	321.5	0.4	52.2	12.7 81.	12.7 81.
23.4	82.7	8282.7	350.0	-34.7	-42.0	248.4	39.8	37.0	14.6	321.9	322.9	0.3	47.0	15.6 78.	15.6 78.
25.0	86.7	8796.9	325.0	-37.8	-45.0	249.8	42.7	40.1	14.7	324.5	325.2	0.2	46.4	19.5 77.	19.5 77.
26.7	91.3	9342.7	300.0	-43.0	-49.9	250.0	48.0	45.1	16.4	324.7	325.9	99.9	99.9	24.3 75.	24.3 75.
28.6	95.9	9923.4	275.0	-47.4	-54.9	250.9	50.3	47.6	16.5	326.6	327.9	99.9	99.9	29.9 74.	29.9 74.
30.6	100.7	10549.1	250.0	-50.8	-59.0	253.9	48.5	46.7	13.4	330.6	330.6	99.9	99.9	35.8 74.	35.8 74.
32.9	104.3	11228.6	225.0	-55.7	-63.9	256.7	48.8	48.5	11.5	333.1	333.1	99.9	99.9	43.0 74.	43.0 74.
35.1	111.5	11569.9	200.0	-59.1	-68.9	259.9	50.6	48.3	15.1	335.2	335.2	99.9	99.9	49.0 74.	49.0 74.
37.9	117.5	12805.9	175.0	-59.3	-69.9	256.5	37.1	36.1	8.7	352.2	352.2	99.9	99.9	56.6 74.	56.6 74.
41.1	124.3	13777.9	150.0	-57.7	-67.9	247.6	29.8	27.6	11.3	370.7	370.7	99.9	99.9	62.7 74.	62.7 74.
45.2	131.3	14924.3	125.0	-58.7	-69.9	243.0	27.5	24.9	11.6	378.7	378.7	99.9	99.9	69.9 73.	69.9 73.
49.8	136.8	16326.2	100.0	-58.7	-69.9	252.2	25.6	24.4	7.9	414.3	414.3	99.9	99.9	77.9 73.	77.9 73.
55.5	146.3	19141.0	75.0	-60.3	-69.9	271.9	18.4	19.4	-0.6	446.5	446.5	99.9	99.9	85.5 74.	85.5 74.
63.0	154.3	20676.6	50.0	-54.0	-69.9	259.3	11.7	11.5	2.2	516.4	516.4	99.9	99.9	89.2 74.	89.2 74.
74.8	162.7	23144.6	25.0	-49.4	-69.9	65.6	2.5	-2.3	-1.1	643.1	643.1	99.9	99.9	91.9 75.	91.9 75.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE 5

STATION NO. 450
TOPEKA, KAN24 APRIL 1975
1420 GMT

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT 7 DG K	E POT 7 DG K	MX RTU GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.3	268.0	977.8	18.3	16.1	140.0	7.7	-4.9	5.9	254.9	325.9	11.9	87.0	0.0	0.
99.9	99.9	99.9	1008.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9
0.1	6.5	292.6	975.0	17.3	14.8	143.1	8.0	-4.8	6.4	294.0	322.8	11.0	85.4	0.1	34.7
0.9	6.6	513.3	950.0	13.9	12.6	147.9	8.7	-4.0	7.4	292.6	317.9	9.7	91.9	0.5	32.3
1.8	10.5	738.1	925.0	12.2	11.2	141.8	9.6	-5.0	7.5	293.0	316.9	9.1	93.6	0.9	32.5
2.6	12.5	969.4	900.0	15.6	5.3	117.0	8.7	-7.8	4.0	298.4	315.5	6.3	50.6	1.4	32.0
3.6	14.7	1209.2	875.0	15.0	1.5	102.5	6.8	-6.6	1.5	300.0	313.7	4.9	40.1	1.6	31.2
4.6	16.6	1452.8	850.0	13.1	2.1	92.2	3.9	-3.9	0.2	300.6	315.3	5.3	47.2	2.1	31.7
5.4	18.9	1702.9	825.0	11.2	1.4	46.0	3.1	-2.2	-2.2	301.1	315.5	5.1	50.9	2.2	31.3
6.6	20.9	1959.5	800.0	9.7	0.9	34.7	1.3	0.3	-1.2	302.2	316.6	5.1	54.3	2.2	29.9
7.6	23.2	2222.6	775.0	7.9	1.3	28.3	1.8	1.7	-0.5	303.0	318.4	5.5	63.2	2.1	29.9
8.7	25.5	2492.8	750.0	6.4	-3.6	28.9	3.9	3.7	-1.1	304.0	315.3	3.9	48.9	1.9	30.1
9.7	27.7	2770.1	725.0	4.9	-7.3	29.8	7.1	(.3)	-3.4	305.2	314.2	3.1	40.9	1.6	30.4
10.7	30.1	3055.4	700.0	3.7	-16.8	99.9	99.9	99.9	99.9	306.7	311.3	1.5	20.7	99.9	99.9
11.4	32.6	3349.3	675.0	1.3	-16.8	99.9	99.9	99.9	99.9	307.2	311.9	1.5	24.6	99.9	99.9
12.0	35.2	3651.5	650.0	-1.3	-16.7	99.9	99.9	99.9	99.9	307.6	311.8	1.3	25.1	99.9	99.9
14.0	37.5	3962.8	625.0	-3.5	-19.0	99.9	99.9	99.9	99.9	308.6	312.9	1.4	28.7	99.9	99.9
15.2	40.2	4283.9	600.0	-6.0	-22.3	256.9	14.4	14.1	3.3	309.3	312.7	1.1	26.1	1.4	91.0
16.5	42.7	4615.2	575.0	-9.1	-23.9	254.4	19.9	19.1	5.3	309.5	312.5	1.0	28.7	3.2	94.0
17.7	45.4	4957.3	550.0	-11.9	-23.1	252.5	19.3	18.4	5.8	310.0	313.5	1.1	38.9	4.7	91.0
19.1	48.4	5311.3	525.0	-15.1	-22.9	248.8	20.5	19.1	7.4	310.4	314.1	1.1	50.8	6.2	74.0
20.5	51.2	5679.2	500.0	-16.6	-23.1	251.0	25.7	24.3	8.3	312.9	316.7	1.2	56.9	8.1	76.0
21.7	54.3	6063.6	475.0	-18.6	-33.3	250.9	28.9	27.3	9.4	314.9	316.6	0.5	26.1	10.3	75.0
23.3	57.1	6465.0	450.0	-21.0	-37.5	250.6	31.2	29.4	10.4	316.8	318.0	0.3	21.8	13.0	74.0
24.8	60.4	6884.6	425.0	-24.3	-32.2	248.6	32.8	30.6	12.0	317.9	319.9	0.6	47.4	16.0	73.0
26.5	64.0	7323.1	400.0	-27.9	-30.9	243.7	31.6	29.6	11.0	318.8	320.5	0.5	50.9	19.3	72.0
28.2	67.3	7784.0	375.0	-31.0	-30.0	252.3	31.8	30.3	9.7	320.6	321.8	0.3	44.8	22.5	72.0
30.0	70.8	8265.2	350.0	-35.4	-43.3	250.6	31.9	30.1	10.6	321.0	321.8	0.2	43.5	25.8	72.0
31.8	74.7	8781.1	325.0	-39.3	-50.0	252.5	31.2	29.8	9.4	322.5	322.9	0.1	30.4	29.4	72.0
33.9	78.8	9323.4	300.0	-43.9	99.9	255.4	32.9	31.8	8.3	323.5	999.9	99.9	99.9	33.3	72.0
36.3	83.0	9902.7	275.0	-47.6	99.9	257.7	31.3	30.6	6.7	326.2	999.9	99.9	99.9	37.7	72.0
38.7	87.3	10526.3	250.0	-52.0	99.9	258.5	34.4	33.7	6.9	328.8	999.9	99.9	99.9	42.8	73.0
41.1	92.2	11202.5	225.0	-55.8	99.9	259.3	36.6	36.0	6.8	333.0	999.9	99.9	99.9	48.0	74.0
43.5	97.2	11947.6	200.0	-59.0	99.9	257.8	37.6	36.7	7.0	339.4	999.9	99.9	99.9	53.9	75.0
46.7	103.0	12791.3	175.0	-60.1	99.9	252.9	37.5	35.8	11.0	350.7	999.9	99.9	99.9	60.2	74.0
50.2	105.3	13746.2	150.0	-59.3	99.9	252.9	31.1	29.9	8.6	367.9	999.9	99.9	99.9	67.0	74.0
54.1	116.3	14827.8	125.0	-58.8	99.9	265.9	36.7	36.6	2.6	388.5	999.9	99.9	99.9	75.5	75.0
58.7	124.7	16302.8	100.0	-55.3	99.9	249.5	5.9	5.0	2.1	420.5	999.9	99.9	99.9	82.3	76.0
64.6	135.0	18103.7	75.0	-62.9	99.9	270.5	7.0	7.0	-0.1	441.1	999.9	99.9	99.9	87.1	75.0
73.4	146.5	20645.7	50.0	-54.5	99.9	288.7	6.4	6.0	-2.0	515.2	999.9	99.9	99.9	91.3	75.0
86.1	160.0	25113.4	25.0	-50.1	99.9	282.6	3.8	3.7	-0.8	640.5	999.9	99.9	99.9	92.2	76.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 496
FORT TOTTEN, N Y

24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	QIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.8	8.0	1012.3	10.3	13.4	999.9	99.9	99.9	99.9	291.7	316.7	9.6	73.0	999.9	919.9
0.3	5.4	112.8	1000.0	16.6	12.0	999.9	99.9	99.9	99.9	290.9	314.0	8.9	74.6	999.9	919.9
1.2	7.6	327.7	975.0	14.2	11.5	999.9	99.9	99.9	99.9	290.6	313.4	8.8	81.9	999.9	919.9
2.1	5.9	547.1	950.0	13.6	10.2	999.9	99.9	99.9	99.9	292.1	313.7	8.3	75.7	999.9	919.9
2.9	11.8	772.9	925.0	14.5	9.4	999.9	99.9	99.9	99.9	295.2	316.6	8.1	71.5	999.9	919.9
3.7	14.0	1004.0	900.0	12.4	8.6	999.9	99.9	99.9	99.9	295.4	316.6	7.9	77.6	999.9	919.9
4.5	16.0	1240.1	875.0	10.9	7.9	999.9	99.9	99.9	99.9	295.4	316.6	7.7	81.5	999.9	919.9
5.3	18.3	1432.8	850.0	11.2	5.7	999.9	99.9	99.9	99.9	295.7	317.3	6.8	69.0	999.9	919.9
6.2	20.5	1731.6	825.0	9.8	4.2	999.9	99.9	99.9	99.9	299.7	317.0	6.3	68.1	999.9	919.9
7.1	22.6	1967.1	800.0	4.2	2.8	999.9	99.9	99.9	99.9	300.7	317.0	5.9	68.4	999.9	919.9
8.1	25.2	2248.8	775.0	6.3	1.0	999.9	99.9	99.9	99.9	301.2	316.2	5.3	65.0	999.9	919.9
9.0	27.4	2517.0	750.0	4.1	-0.6	999.9	99.9	99.9	99.9	301.7	315.5	4.2	71.0	999.9	919.9
10.0	29.3	2791.9	725.0	2.1	-1.4	999.9	99.9	99.9	99.9	302.4	315.9	4.8	77.6	999.9	919.9
11.0	32.4	3074.9	700.0	0.8	-0.1	999.9	99.9	99.9	99.9	303.8	314.2	3.6	65.0	999.9	919.9
12.1	35.1	3356.7	675.0	-0.2	-13.4	999.9	99.9	99.9	99.9	305.7	311.6	2.0	35.9	999.9	919.9
13.2	37.4	3637.9	650.0	-2.0	-15.4	999.9	99.9	99.9	99.9	306.9	312.3	1.8	35.0	999.9	919.9
14.4	40.2	3978.3	625.0	-4.6	-18.3	999.9	99.9	99.9	99.9	307.4	311.7	1.4	31.6	999.9	919.9
15.5	42.7	4294.7	600.0	-6.2	-22.9	999.9	99.9	99.9	99.9	309.0	312.2	1.0	25.2	999.9	919.9
16.7	45.6	4630.3	575.0	-8.4	-24.0	999.9	99.9	99.9	99.9	310.3	313.3	0.9	26.9	999.9	919.9
17.9	48.4	4973.7	550.0	-11.1	-23.6	999.9	99.9	99.9	99.9	311.0	314.2	1.0	33.9	999.9	919.9
19.1	51.1	5329.1	525.0	-13.7	-23.6	999.9	99.9	99.9	99.9	312.0	315.5	1.1	43.0	999.9	919.9
20.4	54.1	5682.3	500.0	-16.2	-30.3	999.9	99.9	99.9	99.9	313.4	315.5	0.6	28.8	999.9	919.9
21.7	57.0	6033.3	475.0	-18.6	-23.4	999.9	99.9	99.9	99.9	315.1	319.0	1.2	65.6	999.9	919.9
23.2	60.3	6435.5	450.0	-20.2	-22.8	999.9	99.9	99.9	99.9	318.0	322.4	1.4	79.5	999.9	919.9
24.7	63.6	6907.2	425.0	-22.8	-20.8	999.9	99.9	99.9	99.9	319.8	323.4	1.1	75.1	999.9	919.9
25.2	66.7	7349.0	400.0	-25.9	-30.3	999.9	99.9	99.9	99.9	321.3	323.9	0.8	68.3	999.9	919.9
27.8	70.3	7813.1	375.0	-29.7	-34.3	999.9	99.9	99.9	99.9	322.3	324.2	0.6	64.1	999.9	919.9
29.3	73.3	8300.9	350.0	-31.7	-37.7	999.9	99.9	99.9	99.9	323.3	324.7	0.4	66.6	999.9	919.9
31.1	77.8	8815.7	325.0	-37.9	-43.2	999.9	99.9	99.9	99.9	324.4	325.4	0.3	57.1	999.9	919.9
32.9	81.7	9311.9	300.0	-42.8	-49.4	999.9	99.9	99.9	99.9	325.1	325.4	0.3	99.9	999.9	919.9
34.9	85.3	9843.5	275.0	-47.4	-50.9	999.9	99.9	99.9	99.9	326.6	325.9	99.9	99.9	999.9	919.9
36.8	90.3	10366.4	250.0	-53.0	-50.9	999.9	99.9	99.9	99.9	327.4	325.9	99.9	99.9	999.9	919.9
38.9	95.2	11237.0	225.0	-58.1	-50.9	999.9	99.9	99.9	99.9	329.5	325.9	99.9	99.9	999.9	919.9
41.5	100.2	11974.7	200.0	-58.3	-50.9	999.9	99.9	99.9	99.9	330.4	325.9	99.9	99.9	999.9	919.9
43.9	105.8	12807.1	175.0	-63.4	-50.9	999.9	99.9	99.9	99.9	335.4	325.9	99.9	99.9	999.9	919.9
47.0	112.0	13742.3	150.0	-64.1	-50.9	999.9	99.9	99.9	99.9	339.7	325.9	99.9	99.9	999.9	919.9
50.9	118.9	14685.5	125.0	-55.5	-50.9	999.9	99.9	99.9	99.9	344.5	325.9	99.9	99.9	999.9	919.9
55.6	126.7	16295.8	100.0	-57.6	-50.9	999.9	99.9	99.9	99.9	416.4	325.9	99.9	99.9	999.9	919.9
61.5	135.7	18107.1	75.0	-60.5	-50.9	999.9	99.9	99.9	99.9	446.0	325.9	99.9	99.9	999.9	919.9
69.1	144.3	20652.4	50.0	-57.0	-50.9	999.9	99.9	99.9	99.9	509.3	325.9	99.9	99.9	999.9	919.9
80.1	153.3	23093.5	25.0	-52.8	-50.9	999.9	99.9	99.9	99.9	633.3	325.9	99.9	99.9	999.9	919.9

ORIGINAL PAGE IS
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

METEOROLOGICAL RECORD

STATION NO. 510
ALBANY, N. Y.

24 APRIL 1975

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

156 16. 1

TIME MIN	CATCT	WEIGHT GGM	PRES MB	TEMP DEG C	LEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POF T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DEG
0.0	5.0	86.0	1001.9	11.1	8.8	160.0	7.2	-2.5	6.8	285.0	303.4	7.1	86.0	0.0	0.
0.1	5.7	101.9	1000.0	10.8	8.2	164.3	3.5	-0.9	3.4	284.2	302.5	6.8	83.7	0.2	35.
0.9	7.9	212.1	975.0	8.2	7.3	260.3	2.4	2.3	0.4	284.3	301.3	6.6	94.1	0.6	34.
1.6	10.1	527.6	950.0	9.7	8.7	212.9	8.3	4.5	7.0	288.0	307.4	7.5	93.5	0.9	35.
2.4	12.1	749.8	925.0	9.6	8.5	245.3	10.6	9.6	4.4	290.1	309.9	7.6	92.6	1.2	15.
3.2	14.4	977.3	900.0	8.4	7.4	257.9	14.1	13.7	2.9	291.1	310.1	7.2	93.5	1.6	34.
4.1	16.5	1211.0	875.0	9.3	8.3	263.4	14.1	14.1	1.6	294.5	315.4	7.9	93.2	2.2	40.
5.0	18.6	1451.8	850.0	9.0	7.6	264.8	12.8	12.7	1.2	298.6	317.4	7.7	90.9	2.2	58.
5.9	21.1	1699.1	825.0	7.6	5.7	261.9	14.1	14.0	2.0	297.5	316.5	7.0	87.6	3.4	63.
6.7	23.5	1952.4	800.0	5.9	3.1	259.5	14.1	13.9	2.6	298.2	314.7	6.0	82.3	4.2	64.
7.7	25.9	2212.4	775.0	5.0	1.0	267.0	13.3	13.2	0.7	299.9	314.7	5.3	75.4	4.7	67.
8.7	28.3	2470.4	750.0	3.2	-1.9	276.0	19.3	19.2	-2.0	300.6	313.2	4.5	69.2	5.4	72.
9.8	30.8	2753.4	725.0	1.1	-3.3	273.6	16.8	16.8	-1.1	301.2	312.9	4.1	72.6	6.0	76.
11.0	33.4	3035.2	700.0	0.3	-9.6	263.4	16.3	16.2	1.9	303.2	311.1	2.7	48.5	8.0	78.
12.1	35.9	3320.7	675.0	-0.8	-15.8	255.0	17.3	17.3	4.5	304.9	310.0	1.6	30.9	9.0	78.
13.2	38.6	3620.7	650.0	-3.3	-15.3	254.8	18.2	17.5	4.9	305.5	310.5	1.6	35.7	10.3	78.
14.4	41.1	3935.5	625.0	-5.8	-16.9	263.1	17.2	17.1	2.1	306.0	311.0	1.6	41.1	11.6	78.
15.6	44.0	4253.9	600.0	-8.4	-22.3	259.5	18.0	18.0	0.2	306.5	309.8	1.1	31.3	12.9	79.
16.8	46.9	4582.7	575.0	-10.9	-23.8	268.7	19.7	19.7	0.5	307.3	310.3	1.0	33.2	14.1	80.
17.9	49.9	4922.5	550.0	-13.0	-28.0	267.3	20.3	20.3	0.9	308.8	311.0	0.7	26.9	15.4	80.
19.2	52.7	5278.0	525.0	-15.3	-23.5	264.6	20.7	20.6	1.9	310.1	313.7	1.1	51.2	17.0	81.
20.3	55.7	5642.7	500.0	-18.3	-20.9	260.8	22.9	22.6	3.7	310.8	315.4	1.4	80.2	18.5	81.
21.6	58.9	6023.6	475.0	-21.0	-22.9	258.7	26.8	26.3	5.3	312.1	316.1	1.3	84.3	20.4	81.
23.2	62.1	6422.2	450.0	-22.5	-25.4	260.2	32.9	32.4	5.6	315.1	318.6	1.1	77.2	23.1	81.
24.6	65.3	6840.4	425.0	-25.1	-26.7	262.7	32.6	32.3	4.1	316.8	319.6	0.8	71.9	25.9	81.
26.0	68.7	7278.4	400.0	-27.9	-31.5	263.7	35.8	35.6	3.9	316.7	321.0	0.7	71.2	28.7	81.
27.5	72.1	7738.8	375.0	-31.5	-35.3	265.3	38.2	38.1	3.2	319.9	321.6	0.5	68.4	32.2	81.
29.2	75.9	8223.4	350.0	-35.4	-41.7	266.4	41.2	41.2	-0.0	320.9	321.9	0.3	52.1	36.3	82.
31.1	80.3	8738.3	325.0	-39.9	-53.3	270.0	43.9	43.9	-0.0	321.6	321.9	0.1	22.0	40.7	81.
32.7	83.8	9277.2	300.0	-43.6	99.9	279.8	41.5	40.9	-7.1	323.9	999.9	99.9	999.9	45.0	84.
34.6	88.3	9858.5	275.0	-46.4	99.9	288.4	55.9	53.1	-17.7	328.0	999.9	99.9	999.9	50.3	86.
37.7	92.9	10485.1	250.0	-51.4	99.9	290.1	61.9	58.1	-21.3	326.7	999.9	99.9	999.9	58.9	90.
39.5	97.4	11160.9	225.0	-57.2	99.9	290.7	58.9	55.1	-20.8	130.9	999.9	99.9	999.9	66.9	92.
41.7	102.3	11894.6	200.0	-63.4	99.9	296.5	58.6	52.5	-20.1	332.4	999.9	99.9	999.9	74.0	94.
44.0	108.3	12712.9	175.0	-60.0	99.9	289.7	35.7	33.6	-12.1	351.0	999.9	99.9	999.9	80.4	94.
47.4	114.5	13672.3	150.0	-61.1	99.9	278.6	36.8	36.4	-3.5	364.8	999.9	99.9	999.9	87.1	96.
51.2	121.5	14825.0	125.0	-56.6	99.9	290.5	29.2	27.4	-10.2	392.4	999.9	99.9	999.9	94.5	97.
55.6	129.3	16244.8	100.0	-55.7	99.9	300.3	20.9	18.0	-10.5	420.2	999.9	99.9	999.9	99.6	98.
61.2	138.0	18074.9	75.0	-58.8	99.9	301.2	3.8	2.6	-1.5	449.6	999.9	99.9	999.9	104.1	99.
68.6	147.0	20636.9	50.0	-56.2	99.9	69.3	8.7	-8.2	-3.1	511.2	999.9	99.9	999.9	106.6	99.
79.2	156.7	25110.3	25.0	-51.7	99.9	344.9	2.4	0.6	-2.4	636.4	999.9	99.9	999.9	106.4	100.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 18 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 520
PITTSBURG, PA

20 APRIL 1975
1615 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DEG
0.0	0.2	359.0	960.5	15.5	14.5	250.0	5.1	4.8	1.7	292.7	320.9	10.8	94.0	0.0	0.
00.2	90.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.6	0.3	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	9.8	523.4	950.0	15.0	15.4	999.9	99.9	99.9	99.9	298.7	325.3	11.7	98.0	99.9	99.9
1.5	11.6	749.7	925.0	13.6	13.6	999.9	99.9	99.9	99.9	298.6	322.6	10.7	101.3	99.9	99.9
2.4	13.8	980.7	900.0	12.4	12.4	999.9	99.9	99.9	99.9	298.6	322.6	10.1	101.2	99.9	99.9
3.3	15.9	1217.6	875.0	12.1	12.1	999.9	99.9	99.9	99.9	297.7	324.8	10.2	101.1	99.9	99.9
4.1	17.9	1460.4	850.0	10.2	10.2	261.9	20.0	18.8	3.5	298.1	322.9	9.3	101.1	4.1	70.
4.9	20.2	1708.8	825.0	8.4	8.0	259.4	19.2	18.9	3.7	298.6	320.8	8.2	97.3	5.0	71.
5.7	22.4	1923.5	800.0	7.2	6.8	258.8	19.1	18.7	3.7	299.9	321.1	7.8	96.9	5.9	73.
6.5	24.7	2224.7	775.0	5.8	4.6	254.5	17.4	16.8	4.7	301.0	320.0	6.9	91.6	5.8	73.
7.5	26.9	2493.1	750.0	4.6	2.5	256.0	16.5	16.9	4.7	302.4	319.6	6.2	86.2	7.8	74.
8.5	29.4	2769.1	725.0	2.7	0.7	258.4	21.4	20.9	4.3	303.1	318.9	5.6	87.0	9.2	74.
9.6	31.8	3052.6	700.0	1.2	-1.0	261.2	21.8	21.5	3.3	304.5	319.0	5.1	84.9	10.6	75.
10.7	34.3	3344.8	675.0	-0.5	-3.1	264.1	21.9	21.8	2.3	305.7	318.7	4.5	82.4	12.0	76.
11.9	36.7	3640.0	650.0	-2.7	-3.8	266.4	22.6	22.8	1.3	305.4	319.3	4.5	82.4	13.5	77.
12.8	39.3	3950.0	625.0	-3.7	-5.5	268.5	23.7	23.7	0.6	308.6	317.6	3.0	74.5	14.9	78.
13.6	41.9	4278.4	600.0	-5.4	-9.2	270.4	23.1	23.1	-0.2	310.3	319.9	3.2	74.5	16.1	79.
14.4	44.7	4611.6	575.0	-7.1	-17.8	272.4	22.7	22.7	-1.0	311.8	317.0	1.7	42.4	17.5	80.
16.1	47.6	4957.5	550.0	-8.3	-37.6	275.1	23.9	23.8	-2.1	315.2	315.1	0.3	7.2	19.2	81.
17.5	50.5	5317.5	525.0	-9.8	-38.5	271.8	23.7	23.7	-0.6	318.7	317.6	0.3	7.4	21.2	82.
18.4	53.4	5692.4	500.0	-11.9	-36.3	271.5	24.5	24.4	-0.7	318.5	319.6	0.4	12.2	23.2	83.
20.1	56.3	6087.3	475.0	-14.3	-28.0	273.8	22.4	22.4	-1.5	320.4	323.1	0.8	29.9	24.9	84.
21.5	58.6	6490.5	450.0	-17.9	-27.8	263.7	21.5	21.5	2.4	320.8	323.7	0.9	42.1	26.7	85.
23.0	63.0	6915.1	425.0	-21.3	-27.2	260.1	23.7	23.1	4.1	321.7	324.9	1.0	58.7	28.8	86.
24.5	64.3	7359.8	400.0	-24.8	-30.3	269.2	24.5	24.5	0.3	322.8	325.4	0.8	60.1	31.0	87.
25.9	66.9	7826.2	375.0	-28.3	-33.9	277.2	24.3	24.0	-3.1	325.1	326.3	0.4	53.3	35.7	88.
27.7	73.5	8316.9	350.0	-32.5	-38.7	279.9	24.3	24.0	-4.2	326.9	326.3	0.4	58.5	37.2	89.
29.6	78.5	8835.2	325.0	-36.2	-43.7	279.3	31.6	31.4	-5.2	328.7	327.6	0.2	45.6	38.6	90.
31.6	81.5	9386.0	300.0	-40.2	-49.6	282.9	35.8	34.9	-8.0	328.6	329.9	99.9	99.9	42.7	91.
33.6	85.3	9973.3	275.0	-45.1	-59.9	274.8	43.9	43.9	-3.7	329.9	329.9	99.9	99.9	47.6	92.
35.0	90.6	10601.8	250.0	-51.2	-69.9	271.3	48.0	48.0	-1.1	330.6	329.9	99.9	99.9	52.4	93.
37.4	95.3	11277.0	225.0	-57.4	-79.9	272.3	46.5	46.5	-1.8	330.6	329.9	99.9	99.9	58.4	94.
40.4	100.4	12009.6	200.0	-64.0	-90.9	274.5	49.3	49.3	-3.9	331.4	329.9	99.9	99.9	66.5	95.
42.7	106.8	12626.0	175.0	-68.4	-98.9	291.8	26.2	26.4	-9.6	333.7	329.9	99.9	99.9	71.9	96.
45.9	113.3	13778.5	150.0	-59.0	-99.9	280.2	23.7	23.3	-6.2	337.2	329.9	99.9	99.9	76.5	97.
49.5	120.7	14928.1	125.0	-59.0	-99.9	263.7	24.7	24.5	-3.2	328.2	329.9	99.9	99.9	82.0	98.
54.4	129.0	16345.2	100.0	-55.0	-99.9	283.2	15.0	14.6	-3.4	421.5	329.9	99.9	99.9	86.9	99.
60.0	138.3	18148.6	75.0	-62.7	-99.9	300.8	15.5	13.3	-7.9	441.5	329.9	99.9	99.9	93.5	99.
67.2	146.3	20866.8	50.0	-56.4	-99.9	337.2	5.1	2.0	-4.7	510.8	329.9	99.9	99.9	96.5	99.
78.4	159.3	25114.7	25.0	-50.4	-59.9	270.4	4.4	4.4	-0.0	648.1	329.9	99.9	99.9	95.5	99.

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 526
BUFFALO, N. Y.24 APRIL 1975
1237 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	CEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE NM	195 26.0	0
0.0	5.5	219.0	983.1	11.7	11.7	230.0	5.1	3.9	3.3	227.4	310.0	0.0	100.0	0.0	0.0	0.
00.0	95.9	95.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	0.2	297.4	975.0	12.5	11.3	247.6	10.3	13.2	5.9	288.8	311.3	0.7	92.9	0.3	66.	66.
1.1	6.2	505.0	950.0	12.3	12.0	240.2	14.4	13.2	5.8	290.9	315.1	9.3	97.7	0.7	67.	67.
1.4	10.2	730.1	925.0	11.5	11.1	247.1	14.7	13.6	5.7	292.3	315.9	9.1	97.6	1.4	66.	66.
2.7	12.0	955.4	900.0	10.6	10.3	250.0	14.9	14.0	5.1	293.6	316.7	8.8	97.8	2.2	67.	67.
3.6	14.1	1194.4	875.0	9.6	9.1	257.8	15.0	14.7	3.2	294.9	317.1	8.4	96.8	3.0	65.	65.
4.5	15.3	1434.9	850.0	7.6	6.4	267.6	14.3	14.3	0.7	295.1	314.7	7.3	94.3	3.8	72.	72.
5.4	18.1	1400.8	825.0	6.4	5.6	265.5	15.4	15.4	1.2	296.2	315.0	7.0	95.0	4.7	75.	75.
6.3	20.3	1933.0	800.0	4.5	3.4	263.2	13.8	13.7	1.6	296.8	313.5	6.1	92.4	5.5	76.	76.
7.2	22.3	2191.4	775.0	2.8	1.3	263.9	11.7	11.6	1.2	297.5	312.6	5.5	90.2	5.1	77.	77.
8.2	24.6	2454.4	750.0	1.0	-0.3	263.5	11.0	11.0	0.1	298.3	312.2	5.0	91.0	6.4	78.	78.
9.4	26.8	2724.9	725.0	0.2	-0.7	274.0	11.2	11.2	-0.8	300.3	314.4	5.0	94.1	7.5	79.	79.
10.6	29.2	3010.4	700.0	-0.6	-1.3	275.4	10.8	10.7	-1.0	302.5	316.5	5.0	94.7	8.2	81.	81.
11.5	31.6	3300.6	675.0	-2.4	-3.2	278.8	11.4	11.3	-0.9	303.6	316.2	4.5	94.2	9.0	82.	82.
12.9	34.2	3559.8	650.0	-3.8	-4.7	280.6	12.0	12.0	0.3	305.2	317.2	4.2	93.4	9.8	83.	83.
14.0	36.5	3909.4	625.0	-4.9	-5.8	283.9	12.3	12.3	0.9	307.3	318.9	4.0	93.3	10.7	83.	83.
15.2	39.1	4230.1	600.0	-6.0	-6.9	285.0	11.4	11.3	0.8	309.6	320.9	3.8	93.6	11.5	83.	83.
16.5	41.7	4561.6	575.0	-9.9	-15.6	273.3	12.5	12.5	-0.7	308.6	315.0	2.1	85.2	12.4	84.	84.
17.4	44.5	4903.1	550.0	-11.9	-18.1	269.2	13.3	13.3	0.2	310.2	315.4	1.7	60.6	13.5	85.	85.
18.0	47.4	5258.4	525.0	-13.6	-18.6	265.5	18.9	18.9	1.5	312.3	317.5	1.7	65.9	14.7	85.	85.
20.4	50.3	5527.8	500.0	-16.4	-22.2	269.8	20.1	20.1	0.1	313.2	317.3	1.3	60.2	15.3	85.	85.
21.4	52.2	6010.7	475.0	-20.2	-36.2	269.7	22.1	22.1	0.1	313.8	315.0	0.6	36.2	16.0	86.	86.
23.1	56.1	6408.1	450.0	-23.5	-60.9	265.2	20.4	20.3	1.7	313.6	313.7	0.0	1.0	19.2	86.	86.
24.4	58.4	6824.6	425.0	-25.2	-60.9	273.0	23.3	23.3	-1.2	316.6	316.7	0.0	2.0	21.5	86.	86.
25.4	62.9	7262.9	400.0	-27.5	-62.5	270.0	25.5	25.3	-3.6	319.1	319.2	0.0	2.0	23.6	87.	87.
27.4	65.3	7723.9	375.0	-31.1	-58.5	280.6	26.4	26.0	-4.9	320.3	320.5	0.0	4.8	26.0	88.	88.
29.1	70.0	8209.7	350.0	-34.4	-57.4	286.7	33.5	31.6	-11.3	322.3	322.5	0.0	7.5	29.6	90.	90.
30.4	73.7	8725.2	325.0	-37.6	-53.5	290.5	38.1	35.7	-13.3	324.7	325.0	0.1	13.4	31.9	92.	92.
32.4	77.7	9272.2	300.0	-41.9	99.9	282.0	42.2	41.3	-6.4	326.3	999.9	99.9	99.9	35.7	94.	94.
34.1	81.8	9854.9	275.0	-46.7	99.9	276.8	48.1	47.8	-5.7	327.0	999.9	99.9	99.9	40.7	94.	94.
35.9	86.3	10479.0	250.0	-52.3	99.9	276.0	48.5	48.3	-5.1	328.3	999.9	99.9	99.9	45.8	94.	94.
37.7	91.2	11152.1	225.0	-57.5	99.9	276.5	54.5	54.1	-6.1	330.3	999.9	99.9	99.9	51.5	95.	95.
39.4	96.4	11895.8	200.0	-62.4	99.9	280.5	52.1	50.1	-12.9	334.0	999.9	99.9	99.9	58.0	95.	95.
41.9	102.3	12701.0	175.0	-62.7	99.9	283.9	41.3	40.1	-9.9	346.5	999.9	99.9	99.9	64.3	94.	94.
44.5	108.7	13662.5	150.0	-59.1	99.9	265.3	23.3	23.2	1.9	368.3	999.9	99.9	99.9	68.3	96.	96.
47.3	115.9	14806.2	125.0	-59.4	99.9	274.4	33.7	33.6	-2.6	367.4	999.9	99.9	99.9	73.3	96.	96.
51.4	124.7	16240.4	100.0	-53.2	99.9	298.2	31.9	28.1	-15.1	424.9	999.9	99.9	99.9	79.7	97.	97.
55.4	135.7	18046.0	75.0	-58.8	99.9	291.8	17.4	16.2	-6.5	449.7	999.9	99.9	99.9	85.0	98.	98.
59.4	148.0	20527.0	50.0	-55.1	99.9	47.6	8.7	-8.0	-3.3	513.7	999.9	99.9	99.9	92.5	98.	98.
00.9	59.9	99.9	25.0	59.9	59.9	99.9	99.9	99.9	99.9	513.7	999.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

0 PT SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 PT TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 532
PEORIA, ILL26 APRIL 1975
1420 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U CORP M/SEC	V CORP M/SEC	POT Y DEG K	E POT Y DEG K	WIND CM/KG	RM PCT	RANGE KM	AZ DEG
0.0	5.6	200.0	985.3	15.6	14.0	280.0	4.1	4.0	-0.7	291.3	317.8	10.2	90.0	0.0	0
0.9	9.9	99.9	1000.7	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	6.5	297.0	675.0	14.9	12.0	290.1	6.3	5.6	-2.0	291.5	318.1	10.3	92.0	0.3	93
1.0	8.6	512.5	950.0	13.1	12.6	287.0	7.9	7.6	-2.3	291.7	316.9	9.7	96.8	0.4	94
1.0	10.6	737.9	925.0	12.0	11.4	280.5	11.4	11.2	-2.1	292.8	318.9	9.2	96.6	1.0	106
2.6	12.6	567.7	900.0	11.3	10.8	277.6	10.9	10.8	-1.5	292.4	318.4	9.1	96.5	1.5	107
3.4	14.9	1203.4	875.0	10.7	10.0	278.2	9.0	8.9	-1.3	295.0	319.6	8.8	95.3	2.0	94
4.1	16.6	1445.5	850.0	10.1	9.5	287.6	7.1	6.8	-2.2	297.9	321.6	8.0	96.4	2.4	94
5.0	19.2	1893.7	825.0	8.5	7.9	295.0	6.9	6.2	-3.0	298.6	320.6	8.1	96.1	2.7	174
5.9	21.3	1948.1	800.0	6.9	6.3	313.6	7.5	5.4	-5.2	298.5	319.9	7.5	95.9	3.1	104
6.9	23.6	2206.7	775.0	5.1	1.3	324.2	7.4	4.3	-6.0	300.0	315.2	5.4	76.3	3.5	104
7.9	25.9	2476.6	750.3	4.9	-1.7	333.1	6.4	2.9	-5.7	302.4	315.3	4.5	62.3	3.7	112
8.7	28.4	2752.8	725.0	3.5	-0.7	318.9	4.5	2.9	-3.4	303.6	311.1	2.6	37.0	4.0	116
9.7	30.9	3036.3	700.0	1.6	-14.1	295.9	2.9	2.5	-1.2	305.5	308.5	1.3	21.4	4.2	116
10.7	32.6	3328.2	675.0	-0.5	-21.4	313.6	2.3	1.7	-1.6	305.2	308.4	1.0	18.0	4.3	116
11.7	35.0	3628.6	650.0	-2.5	-22.0	276.4	1.7	1.6	-0.2	306.2	309.4	1.0	20.6	4.4	116
12.8	37.6	3938.4	625.0	-4.8	-19.2	253.9	1.6	1.6	0.5	307.1	311.3	1.3	31.3	4.5	116
14.0	41.2	4258.2	600.0	-7.1	-29.5	351.0	1.1	0.2	-1.1	308.0	309.8	0.5	14.7	4.6	116
15.2	43.0	4568.3	575.0	-9.6	-32.4	48.6	1.1	-0.9	-0.8	308.2	310.3	0.4	13.4	4.6	116
16.3	47.0	4930.3	550.0	-11.4	-38.2	283.3	0.8	0.0	-0.2	310.5	311.4	0.3	8.7	4.6	116
17.4	50.0	5285.7	525.0	-13.7	-20.9	258.3	4.5	4.4	0.9	312.1	316.5	1.4	54.5	4.7	116
18.6	52.8	5615.5	500.0	-15.8	-18.6	261.6	9.0	8.9	1.3	315.0	319.5	1.8	78.7	5.1	112
19.9	55.9	6041.6	475.0	-17.1	-20.5	276.6	17.3	17.2	-2.0	317.0	322.0	1.6	74.8	6.1	116
21.1	59.1	6445.2	450.0	-20.0	-25.1	281.6	20.4	20.2	-4.1	318.2	321.7	1.1	62.5	7.7	107
22.9	62.7	6866.7	425.0	-23.2	-29.1	275.0	19.7	19.6	-1.7	319.4	322.1	0.8	58.1	8.5	106
24.4	66.1	7306.4	400.0	-25.9	-33.4	263.7	24.9	24.9	2.7	321.4	323.4	0.6	48.9	11.6	107
25.0	69.9	7772.8	375.0	-29.0	-36.6	254.4	29.0	27.9	7.6	323.2	324.7	0.4	47.7	14.1	94
27.7	73.7	8243.0	350.0	-32.6	-39.4	245.4	29.0	26.4	11.9	325.6	326.0	0.4	50.2	17.5	93
29.1	77.8	8783.1	325.0	-37.3	-43.4	245.5	31.1	28.3	12.7	328.2	328.1	0.2	52.9	19.3	94
31.2	82.0	9327.1	300.0	-42.2	-49.9	240.1	34.0	29.5	10.9	325.9	329.9	99.9	99.9	22.5	94
33.2	86.4	9900.1	275.0	-47.4	-55.9	242.1	37.2	32.9	17.4	326.6	329.9	99.9	99.9	26.4	94
35.5	91.4	10532.5	250.0	-52.7	-59.9	243.1	37.8	33.7	17.1	327.7	329.9	99.9	99.9	31.3	94
37.6	96.9	11203.2	225.0	-58.8	-66.6	245.4	46.2	42.0	19.2	328.4	329.9	99.9	99.9	36.7	94
40.2	102.0	11934.7	200.0	-61.9	-69.9	252.8	40.9	39.0	12.1	330.7	329.9	99.9	99.9	43.7	94
42.8	108.3	12761.5	175.0	-63.1	-69.9	253.6	26.4	25.6	6.6	345.0	329.9	99.9	99.9	48.4	94
46.2	115.5	13717.7	150.0	-60.3	-69.9	268.3	28.2	28.1	1.8	368.2	329.9	99.9	99.9	55.2	94
50.2	125.5	14663.8	125.0	-57.1	-69.9	257.3	21.9	21.4	4.8	391.7	329.9	99.9	99.9	61.5	94
55.3	131.0	16273.7	100.0	-57.3	-69.9	265.1	15.6	15.6	1.3	417.0	329.9	99.9	99.9	67.9	94
61.2	136.7	19067.7	75.0	-61.5	-69.9	267.2	12.9	12.9	0.6	448.0	329.9	99.9	99.9	72.6	94
69.3	145.0	20593.4	50.0	-58.0	-69.9	264.0	1.3	1.2	0.1	508.9	329.9	99.9	99.9	74.7	94
81.5	198.3	25035.2	25.0	-51.9	-69.9	300.3	4.0	3.5	-2.0	635.7	329.9	99.9	99.9	74.7	94

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE MEAN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 553

STATION NO. 553
OHAMA, NEB26 APRIL 1975
1500 GMT

163 14. 0

TIME MIN	CNCT	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T DEG K	E POT T DEG K	MR RTO CM/KG	RM PCT	RANGE M	AZ DEG
0.0	7.5	400.0	964.2	12.2	10.6	40.0	2.6	-1.7	-2.0	269.4	311.2	8.4	98.0	0.7	0
0.0	95.0	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	95.0	95.0	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	8.3	524.6	950.0	11.5	10.7	100.7	2.9	-2.8	0.5	94.9	999.9	99.9	99.9	99.9	99.9
1.4	10.9	747.4	925.0	10.2	9.6	67.9	4.7	-4.7	-0.2	290.8	312.1	8.1	95.7	0.4	21.0
2.2	12.3	976.1	900.0	10.6	9.9	119.9	1.6	-1.4	0.8	263.5	316.2	8.6	95.6	0.4	21.0
3.2	15.9	1211.5	875.0	10.4	9.7	237.0	1.5	1.3	0.8	295.7	318.9	8.7	95.7	0.5	25.7
4.1	17.9	1422.9	850.0	9.2	8.5	121.3	0.7	-0.3	0.6	296.8	318.9	8.2	95.2	0.4	25.7
5.1	20.3	1697.9	825.0	10.3	-9.7	32.6	2.3	-1.2	-2.0	295.8	306.3	2.2	23.4	0.5	25.7
6.1	22.9	1855.6	800.0	9.7	-10.3	40.3	2.3	-1.5	-1.8	301.7	308.2	2.2	23.3	0.5	25.7
7.1	25.3	2219.2	775.0	9.0	-10.5	48.3	3.0	-2.3	-2.0	302.7	309.3	2.2	23.4	0.5	25.7
8.2	27.7	2407.6	750.0	5.8	-8.3	48.6	2.5	-1.9	-1.7	303.2	311.4	2.7	23.6	0.4	24.4
9.2	30.4	2762.6	725.0	3.5	-9.5	19.0	1.5	-0.5	-1.4	303.6	311.2	2.6	23.6	1.1	21.0
10.2	32.1	3047.2	700.0	0.7	-9.9	323.0	1.6	0.9	-1.3	303.6	311.2	2.6	23.6	1.1	21.0
11.3	35.4	3338.2	675.0	-1.7	-10.0	294.6	1.9	1.8	-0.8	304.1	311.9	2.7	23.2	1.1	21.0
12.3	38.0	3617.3	650.0	-4.4	-9.8	260.8	1.9	1.8	-0.7	304.3	312.6	2.8	23.0	1.0	22.0
13.7	41.4	3885.3	625.0	-6.8	-9.2	306.4	1.7	1.4	-1.0	305.0	313.0	2.3	23.0	1.0	21.0
15.0	44.6	4263.0	600.0	-9.0	-13.0	274.2	2.6	2.6	-0.2	306.0	313.0	2.3	23.0	1.0	21.0
16.4	47.7	4591.4	575.0	-11.1	-15.6	229.4	3.6	2.7	2.3	307.3	313.3	2.0	23.0	0.9	19.0
17.7	50.8	4911.6	550.0	-13.0	-18.3	240.3	7.7	6.7	3.6	308.8	313.9	1.6	23.0	0.9	19.0
18.1	54.0	5244.6	525.0	-15.5	-22.1	240.0	4.5	7.5	4.2	309.5	313.8	1.2	23.0	0.9	19.0
20.2	57.1	5631.8	500.0	-17.8	-24.7	252.9	7.4	7.4	2.2	311.3	312.7	0.4	21.0	1.2	19.0
21.5	60.6	6022.3	475.0	-20.0	-26.7	245.2	10.4	10.7	0.9	312.2	313.4	0.3	22.2	1.0	19.0
23.1	64.2	6437.7	450.0	-23.6	-29.9	268.7	15.4	15.4	0.3	313.6	314.2	0.2	13.6	3.2	19.0
24.6	67.7	6846.3	425.0	-26.1	-32.6	269.5	16.4	16.5	0.1	315.2	315.6	0.0	13.0	4.6	19.0
26.2	71.6	7283.0	400.0	-28.3	-34.1	259.1	20.4	20.0	4.2	316.1	316.2	0.0	13.0	6.3	19.0
27.0	75.5	7742.6	375.0	-32.0	-38.1	248.4	23.6	21.9	6.7	314.2	316.7	0.1	13.0	8.6	19.0
28.7	79.3	8225.9	350.0	-36.1	-44.3	244.2	25.9	23.3	11.3	320.1	320.8	0.1	13.0	11.2	19.0
31.7	84.0	8736.1	325.0	-40.2	-49.9	242.7	29.5	26.2	13.6	321.3	320.8	0.2	13.0	13.2	19.0
33.8	88.6	9277.4	300.0	-44.6	-54.9	242.1	29.9	27.2	14.4	322.5	320.8	0.2	13.0	15.2	19.0
36.0	93.6	9853.6	275.0	-49.6	-59.9	241.2	29.9	27.2	14.4	323.5	320.8	0.2	13.0	17.2	19.0
38.3	98.5	10462.7	250.0	-55.1	-64.9	243.5	31.0	27.7	17.4	324.2	320.8	0.2	13.0	19.2	19.0
40.8	104.0	11138.5	225.0	-56.9	-69.9	256.0	37.9	16.8	9.2	313.3	320.8	0.2	13.0	21.2	19.0
43.6	110.2	11881.7	200.0	-57.8	-74.9	256.7	35.3	16.8	9.2	313.3	320.8	0.2	13.0	23.2	19.0
46.6	116.5	12727.4	175.0	-57.0	-79.9	253.6	34.7	16.8	9.2	313.3	320.8	0.2	13.0	25.2	19.0
50.0	123.9	13706.9	150.0	-55.8	-79.9	247.4	31.9	16.8	9.2	313.3	320.8	0.2	13.0	27.2	19.0
54.2	131.3	14806.7	125.0	-57.5	-84.9	252.0	33.6	16.8	9.2	313.3	320.8	0.2	13.0	29.2	19.0
58.9	138.3	16293.5	100.0	-55.2	-89.9	269.1	31.9	16.8	9.2	313.3	320.8	0.2	13.0	31.2	19.0
64.0	147.1	18117.0	75.0	-59.1	-94.9	246.3	21.1	17.1	10.4	320.8	320.8	0.2	13.0	33.2	19.0
72.9	156.0	20890.0	50.0	-54.0	-99.9	52.0	5.3	-4.3	-3.2	314.5	320.8	0.2	13.0	35.2	19.0
80.6	165.1	25184.5	25.0	-49.8	-99.9	51.0	5.3	-4.3	-3.2	314.5	320.8	0.2	13.0	37.2	19.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 562
NORTH PLATTE, NEB

24 APRIL 1975
1450 GMT

TIME MIN	CATCY	HEIGHT GM	PRES MB	TEMP DEG C	CEV PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.2	13.7	847.0	914.7	11.7	9.0	350.0	3.6	0.6	-3.5	293.3	315.1	8.3	87.0	0.0	0
99.9	99.9	1000.0	999.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.5	15.1	982.0	900.0	11.4	7.1	999.9	99.9	99.9	99.9	294.1	313.0	7.1	74.9	999.9	999.9
1.3	17.3	1218.5	875.0	10.7	3.7	999.9	99.9	99.9	99.9	295.7	311.3	5.7	62.1	999.9	999.9
2.0	15.7	1650.2	850.0	10.4	1.1	999.9	99.9	99.9	99.9	297.7	311.3	4.9	52.3	999.9	999.9
2.8	22.0	1708.5	825.0	9.7	-1.3	310.2	6.3	4.8	-4.1	255.4	311.3	4.2	46.4	1.2	14.3
3.6	24.5	1943.1	800.0	8.5	-2.0	274.2	4.3	4.3	-0.3	300.7	312.5	4.1	47.5	1.5	11.5
4.5	26.9	2225.4	775.0	6.7	-3.5	271.5	4.9	4.9	-0.1	301.5	312.5	3.8	48.1	1.6	13.0
5.3	29.5	2494.1	750.0	5.2	-5.9	274.8	8.0	7.9	-0.7	302.6	312.1	3.3	44.5	1.9	12.5
6.0	32.1	2769.6	725.0	2.8	-5.5	269.1	9.0	5.0	0.1	302.9	313.1	3.5	54.6	2.2	11.9
7.0	34.9	3052.3	700.0	0.0	-8.5	272.5	8.7	8.7	-0.5	302.9	311.3	2.9	52.7	2.5	11.6
7.8	37.4	3342.9	675.0	-2.0	-10.8	277.7	9.2	9.2	-1.2	303.7	311.0	2.5	51.0	3.1	11.1
8.7	40.2	3641.5	650.0	-4.7	-12.2	274.8	9.4	9.4	-0.8	303.9	310.8	2.3	55.6	3.6	11.0
9.8	42.9	3944.9	625.0	-7.1	-13.8	262.1	9.7	9.6	1.3	304.5	310.8	2.1	54.8	4.2	10.7
10.6	45.9	4266.9	600.0	-8.5	-11.7	255.3	9.4	8.6	3.9	306.6	314.3	2.6	77.8	4.5	10.3
11.8	48.9	4595.8	575.0	-10.8	-13.5	239.6	10.3	8.9	5.2	307.6	314.7	2.3	80.3	5.2	9.8
12.8	51.7	4936.3	550.0	-13.5	-16.6	244.1	12.1	10.9	5.3	308.3	314.1	1.9	77.2	5.6	9.4
13.7	55.0	5285.2	525.0	-16.6	-21.6	248.8	15.3	14.3	5.5	308.6	312.6	1.3	65.2	6.3	9.1
14.7	58.3	5653.1	500.0	-19.6	-26.0	250.2	16.4	15.4	5.6	309.2	312.1	0.9	56.5	7.2	8.7
15.9	61.3	6032.6	475.0	-21.6	-33.2	245.6	15.7	14.3	6.5	311.2	313.0	0.5	36.9	8.3	8.5
17.2	64.7	6429.1	450.0	-24.6	-46.6	246.4	14.9	13.6	5.9	312.3	312.7	0.1	10.9	9.4	8.3
18.5	68.0	6842.3	425.0	-27.9	-49.9	245.1	14.8	13.4	6.2	313.2	313.6	0.1	10.0	10.6	8.1
19.5	71.5	7274.8	400.0	-31.6	-52.6	237.0	17.5	14.7	9.5	313.9	314.1	0.2	10.4	11.7	7.7
21.3	75.3	7728.2	375.0	-35.2	-45.5	238.5	19.7	16.8	10.3	315.0	315.6	0.2	33.7	13.3	7.6
22.8	79.3	8206.0	350.0	-38.5	-43.2	236.0	21.9	18.1	12.2	316.8	317.6	0.2	60.5	15.1	7.4
24.2	83.2	8710.9	325.0	-42.9	99.9	232.8	23.4	18.6	14.1	317.5	999.9	99.9	999.9	16.9	7.2
25.7	87.2	9245.0	300.0	-47.3	99.9	235.5	23.2	19.1	13.1	318.8	999.9	99.9	999.9	18.9	7.0
27.3	91.9	9814.9	275.0	-51.8	99.9	233.8	24.8	20.1	14.7	320.2	999.9	99.9	999.9	21.1	6.4
29.1	96.4	10424.6	250.0	-56.0	99.9	232.5	26.6	21.1	16.2	322.8	999.9	99.9	999.9	23.8	6.7
31.2	101.4	11093.4	225.0	-57.7	99.9	244.5	27.7	25.0	11.9	330.1	999.9	99.9	999.9	27.2	6.5
33.7	107.0	11839.2	200.0	-56.3	99.9	250.3	29.4	27.7	9.9	343.6	999.9	99.9	999.9	31.7	6.5
36.5	113.2	12685.8	175.0	-58.8	99.9	247.5	20.5	19.0	7.9	356.1	999.9	99.9	999.9	35.0	6.6
39.7	119.3	13669.3	150.0	-55.2	99.9	247.0	21.2	19.5	8.3	375.1	999.9	99.9	999.9	39.3	6.6
43.7	126.3	14830.2	125.0	-56.5	99.9	253.1	17.3	16.6	5.0	392.6	999.9	99.9	999.9	43.8	6.7
49.0	134.7	16247.8	100.0	-57.1	99.9	253.5	19.2	18.4	5.5	417.5	999.9	99.9	999.9	49.9	6.7
54.9	142.7	18070.4	75.0	-57.3	99.9	257.5	14.3	13.2	5.5	452.9	999.9	99.9	999.9	56.5	6.8
62.5	151.3	20655.3	50.0	-51.8	99.9	273.4	7.1	7.1	-0.4	521.5	999.9	95.9	999.9	62.7	6.8
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAU...

STATION NO. 606
PORTLAND, ME24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E PUT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.3	20.0	1013.0	5.6	5.6	120.0	5.1	-4.4	2.5	278.4	292.7	5.6	100.0	0.0	0.0
0.4	6.4	125.9	1000.0	5.3	5.3	128.5	6.6	-6.7	5.4	279.2	293.3	5.6	100.0	0.2	297.0
1.0	9.9	332.5	975.0	3.8	3.8	137.9	11.2	-7.5	8.3	279.6	292.8	5.2	101.5	0.5	300.0
1.4	11.1	543.5	950.0	3.3	3.3	153.1	15.4	-7.0	13.7	281.2	294.8	5.1	101.5	1.1	3.4
2.0	13.6	760.2	925.0	3.4	3.4	999.9	99.9	99.9	99.9	283.5	297.3	5.3	101.4	999.9	99.9
3.5	15.5	981.3	900.0	4.5	4.5	999.9	99.9	99.9	99.9	286.9	302.2	5.9	101.6	999.9	99.9
4.4	18.4	1213.6	875.0	5.3	5.3	999.9	99.9	99.9	99.9	290.1	307.0	6.4	101.7	999.9	99.9
5.2	20.8	1451.0	850.0	5.1	5.1	999.9	99.9	99.9	99.9	292.3	308.7	6.5	101.7	999.9	99.9
6.0	23.4	1695.1	825.0	4.5	4.5	999.9	99.9	99.9	99.9	294.2	311.4	6.4	101.6	999.9	99.9
6.9	25.8	1945.6	800.0	3.2	3.2	999.9	99.9	99.9	99.9	295.4	311.8	6.1	101.4	999.9	99.9
7.9	28.6	2202.7	775.0	1.7	1.7	219.2	15.0	9.5	11.6	296.3	311.6	5.6	101.2	6.3	6.0
8.5	31.3	2466.6	750.0	-0.0	-0.0	225.4	13.4	9.6	9.4	297.2	311.3	5.1	101.0	7.0	11.0
9.5	34.2	2738.0	725.0	-1.3	-1.3	226.6	12.0	8.7	8.2	298.6	312.0	4.8	100.8	7.6	15.0
10.7	36.9	3019.1	700.0	-2.0	-2.0	227.1	10.1	7.4	6.9	300.9	312.2	4.7	100.7	8.1	17.0
11.6	39.8	3306.6	675.0	-3.6	-3.9	229.4	10.2	7.7	6.6	301.9	314.0	4.2	99.0	8.6	19.0
12.5	42.4	3604.2	650.0	-5.7	-7.7	241.7	12.1	10.6	5.7	302.9	312.5	3.3	85.4	9.1	21.0
13.4	45.4	3911.0	625.0	-7.3	-9.1	256.0	13.4	13.0	3.2	304.5	313.5	3.1	87.1	9.6	24.0
14.6	48.5	4224.3	600.0	-9.2	-10.1	263.4	16.0	15.8	1.8	305.8	314.6	3.0	92.9	10.1	29.0
15.6	51.4	4556.3	575.0	-11.7	-23.4	267.1	18.3	18.3	0.9	306.4	314.1	1.2	43.2	10.8	33.0
16.8	54.6	4894.2	550.0	-15.1	-47.5	278.3	18.4	18.2	-2.7	306.2	306.5	0.1	4.3	11.5	37.0
18.1	57.7	5244.3	525.0	-17.3	-60.9	280.6	17.7	17.4	-3.1	307.6	307.7	0.0	1.0	12.3	40.0
19.3	61.1	5608.4	500.0	-19.2	-60.7	275.6	18.7	18.6	-1.8	309.6	309.6	0.0	1.2	13.0	50.0
20.6	64.6	5988.4	475.0	-21.2	-63.4	272.5	21.7	21.5	-2.8	311.7	311.8	0.0	1.0	14.2	54.0
21.9	68.0	6365.2	450.0	-23.7	-65.9	283.1	26.2	25.5	-8.0	313.4	313.5	0.0	1.0	15.3	54.0
23.1	71.4	6801.5	425.0	-25.9	-66.5	279.9	31.3	30.9	-5.4	315.7	315.8	0.0	1.0	17.1	54.0
24.4	75.3	7237.4	400.0	-29.6	-68.9	275.1	30.2	30.1	-2.7	316.5	316.5	0.0	1.0	19.3	57.0
25.9	79.2	7654.6	375.0	-33.2	-61.0	277.5	30.2	30.0	-3.9	317.6	317.7	0.0	4.2	21.7	71.0
27.5	83.2	8175.4	350.0	-37.6	-55.9	283.4	26.2	25.4	-6.1	318.0	318.2	0.1	12.7	24.0	74.0
29.2	87.2	8681.8	325.0	-41.8	-59.9	286.6	31.6	30.2	-9.0	319.0	319.0	99.9	999.9	26.4	78.0
31.0	91.7	9218.6	300.0	-46.5	-64.5	284.2	41.4	40.1	-10.2	319.9	319.9	99.9	999.9	30.1	81.0
32.9	96.2	9790.4	275.0	-51.0	-69.9	287.9	41.3	39.3	-12.7	321.4	321.4	99.9	999.9	34.5	84.0
35.0	101.0	10404.6	250.0	-54.4	-74.9	292.1	39.9	36.8	-15.5	323.2	323.2	99.9	999.9	38.4	86.0
37.0	106.3	11073.4	225.0	-58.6	-79.9	297.7	36.1	31.9	-16.8	328.7	328.7	99.9	999.9	43.0	90.0
39.4	111.8	11809.0	200.0	-60.7	-84.9	295.3	32.0	29.0	-13.7	336.6	336.6	99.9	999.9	47.4	93.0
42.5	117.5	12639.6	175.0	-59.7	-89.9	279.7	27.9	27.5	-4.7	351.4	351.4	99.9	999.9	53.1	94.0
46.0	124.3	13615.6	150.0	-54.5	-84.9	284.1	27.7	26.2	-9.1	376.1	376.1	99.9	999.9	59.8	96.0
50.3	131.3	14787.6	125.0	-54.6	-84.9	284.0	18.8	18.2	-4.5	396.1	396.1	99.9	999.9	64.9	97.0
55.3	139.0	16215.3	100.0	-54.9	-84.9	296.3	16.4	14.7	-7.3	421.6	421.6	99.9	999.9	70.8	98.0
61.3	147.0	18045.4	75.0	-55.1	-84.9	295.5	10.9	9.8	-4.7	457.5	457.5	99.9	999.9	75.9	100.0
68.5	156.0	20643.3	50.0	-53.8	-84.9	338.0	1.9	0.7	-1.7	516.6	516.6	99.9	999.9	76.7	100.0
81.9	165.5	25120.3	25.0	-49.9	-84.9	102.2	9.9	-9.3	2.0	641.5	641.5	99.9	999.9	76.5	101.0

ORIGINAL PAU...
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 637
FLINT, MICH24 APRIL 1975
1515 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CORR M/SEC	PUT Y DG K	E POT Y DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.2	236.0	982.1	9.4	6.7	20.0	3.1	-1.1	-2.9	284.8	301.0	6.3	83.0	0.0	0.
09.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.7	296.2	975.0	6.2	4.8	17.8	3.0	-0.9	-2.9	284.1	295.6	5.6	78.9	0.1	25.0
0.9	6.7	510.1	950.0	6.1	4.7	22.2	3.8	-1.4	-3.5	284.1	298.8	5.6	90.4	0.3	131.
1.6	10.3	729.4	925.0	4.5	4.0	29.7	4.4	-2.2	-3.6	284.7	299.3	5.5	96.1	0.5	139.
2.5	12.0	551.9	900.0	6.5	6.1	32.2	4.9	3.0	-4.0	289.1	306.4	6.6	97.5	0.6	139.
3.3	15.2	1184.9	875.0	8.5	6.1	295.6	6.1	7.3	-3.5	293.5	311.5	6.8	84.7	0.8	173.
4.1	17.4	1424.9	850.0	8.0	4.8	292.1	7.9	7.4	-3.0	295.4	312.6	6.4	80.2	1.1	153.
5.0	19.8	1671.6	825.0	7.9	4.5	285.6	7.5	7.2	-2.0	297.8	315.4	6.4	78.6	1.4	142.
5.9	21.9	1925.1	800.0	6.1	2.7	281.4	7.9	7.7	-1.5	299.4	314.4	5.8	78.8	1.7	114.
6.9	24.4	2185.5	775.0	5.8	-0.5	268.1	9.7	9.7	0.3	300.7	314.1	4.8	64.1	2.1	125.
7.9	26.6	2453.7	750.0	4.6	-4.5	271.3	11.2	11.2	-0.3	302.0	312.5	3.6	51.4	2.7	116.
8.9	29.1	2729.0	725.0	3.0	-10.4	274.1	10.0	10.0	-0.7	303.1	310.2	2.4	36.4	3.4	112.
9.9	31.7	3012.5	700.0	1.4	-15.6	269.3	8.6	8.6	0.1	304.2	309.2	1.6	26.9	3.9	109.
10.9	34.3	3304.3	675.0	-0.2	-20.3	270.5	8.0	8.0	-0.1	305.5	309.1	1.1	20.2	4.3	107.
11.7	36.8	3605.5	650.0	-1.6	-26.1	277.3	8.8	8.8	-1.1	307.2	309.4	0.7	13.4	4.8	100.
13.0	39.6	3916.4	625.0	-3.1	-28.1	271.0	12.4	12.4	-0.2	308.9	310.9	0.6	12.4	5.5	104.
14.1	42.2	4238.6	600.0	-5.4	-29.9	265.7	13.2	13.2	1.0	309.9	311.7	0.5	12.4	6.3	104.
15.2	45.1	4570.7	575.0	-8.1	-31.9	265.7	11.5	11.4	0.9	310.5	312.0	0.5	12.6	7.1	100.
16.3	48.1	4913.6	550.0	-11.4	-34.3	266.6	10.7	10.7	0.6	310.6	311.9	0.4	12.9	7.9	99.
17.6	51.0	5268.7	525.0	-13.5	-37.1	260.4	11.5	11.4	1.9	312.1	313.2	0.3	11.6	8.6	97.
18.4	54.1	5638.7	500.0	-14.6	-38.8	261.0	13.9	13.7	2.2	316.8	316.2	0.3	10.6	9.5	94.
20.2	57.1	6025.5	475.0	-17.1	-40.5	259.5	15.2	15.2	0.1	318.7	317.6	0.2	10.9	10.7	94.
21.6	60.5	6429.0	450.0	-19.5	-41.1	258.6	17.8	17.8	0.1	318.7	317.6	0.2	12.6	12.1	94.
23.1	64.7	6851.5	425.0	-22.3	-42.7	274.9	16.4	19.3	-1.6	320.4	321.1	0.2	13.5	13.9	94.
24.7	67.5	7294.1	400.0	-25.8	-43.2	282.2	22.2	21.7	-4.7	321.4	322.2	0.2	17.8	15.7	90.
26.1	71.0	7757.9	375.0	-29.6	-44.2	276.6	22.7	22.6	-2.6	322.1	322.8	0.2	23.1	17.7	95.
27.8	75.3	8246.6	350.0	-32.7	-45.7	264.1	27.9	27.8	2.9	324.6	325.9	0.4	55.1	20.0	95.
29.5	79.2	8764.3	325.0	-36.9	-43.1	264.1	33.7	33.5	3.5	325.7	326.7	0.3	52.0	23.1	93.
31.3	83.3	9313.4	300.0	-41.1	99.9	261.1	34.7	38.3	6.0	327.5	327.5	99.9	99.9	27.1	92.
33.3	87.8	9807.4	275.0	-46.6	99.9	256.5	39.8	38.7	9.3	327.8	327.8	99.9	99.9	31.4	89.
35.5	92.8	10223.8	250.0	-51.4	99.9	254.1	46.8	45.0	12.8	329.7	329.7	99.9	99.9	37.2	97.
37.6	97.9	11199.9	225.0	-57.0	99.9	250.9	46.5	43.9	15.2	331.2	331.2	99.9	99.9	43.2	85.
40.7	103.3	11936.9	200.0	-61.9	99.9	256.2	50.5	49.0	12.3	334.7	334.7	99.9	99.9	49.8	83.
42.6	109.7	12757.4	175.0	-67.0	99.9	271.8	34.0	34.0	-1.1	346.0	346.0	99.9	99.9	56.8	84.
45.6	116.0	13718.0	150.0	-71.1	99.9	268.2	23.8	23.8	0.7	371.8	371.8	99.9	99.9	61.9	84.
49.4	124.0	14677.2	125.0	-76.4	99.9	261.3	25.8	25.8	2.3	392.9	392.9	99.9	99.9	67.1	84.
53.8	132.5	16297.9	100.0	-84.7	99.9	255.6	25.0	29.8	2.3	422.1	422.1	99.9	99.9	74.3	84.
59.6	141.7	18135.9	75.0	-96.9	99.9	285.1	14.3	13.8	-3.7	453.8	453.8	99.9	99.9	82.3	86.
67.0	151.7	20691.3	50.0	-95.5	99.9	302.2	7.1	6.0	-3.8	512.9	512.9	99.9	99.9	86.0	86.
78.4	173.5	25161.1	25.0	-90.2	99.9	58.5	0.7	-0.7	0.1	640.5	640.5	99.9	99.9	86.4	87.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 645
GREEN BAY, WIS

24 APRIL 1975
1415 GMT

TIME MIN	CNCT	HEIGHT GPN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.4	210.0	987.6	6.1	1.1	20.0	4.1	-1.4	-3.9	280.8	291.7	4.2	70.0	0.0	0
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	7.6	317.0	975.0	5.3	1.2	15.0	4.8	-1.2	-4.7	281.1	292.2	4.3	74.5	0.1	100
1.3	5.6	528.6	950.0	3.1	1.2	14.7	5.1	-1.3	-4.9	280.9	292.3	4.4	87.0	0.3	190
2.2	11.3	784.2	925.0	1.3	0.4	20.4	6.4	-2.3	-5.9	281.2	292.3	4.3	94.0	0.6	190
3.0	13.4	964.4	900.0	-0.3	-0.9	26.2	7.3	-3.2	-6.5	281.7	292.1	4.0	95.1	1.0	190
3.9	15.4	1189.9	875.0	-0.2	-6.2	17.1	6.0	-1.8	-5.7	280.0	291.5	2.8	65.2	1.3	200
4.8	17.4	1423.4	850.0	3.0	-11.2	1.5	5.9	-0.2	-5.8	289.5	295.0	1.9	34.2	1.6	190
5.7	19.6	1655.9	825.0	4.0	-9.2	354.9	5.1	0.5	-5.1	293.1	300.2	2.5	40.5	1.9	190
6.7	21.5	1916.0	800.0	4.1	-7.3	317.4	4.0	2.7	-2.9	295.8	303.7	2.8	43.1	2.1	190
7.6	23.9	2173.9	775.0	2.9	-9.1	313.5	6.4	4.7	-4.4	297.3	304.5	2.5	41.0	2.3	190
8.6	25.9	2439.6	750.0	3.4	-28.6	314.2	6.3	4.5	-4.4	300.4	301.9	0.5	7.3	2.6	170
9.6	28.1	2713.5	725.0	2.0	-23.5	295.6	7.3	6.6	-3.1	301.7	303.2	0.5	7.7	2.6	170
10.6	30.5	2995.4	700.0	-0.1	-30.8	281.4	9.3	9.1	-1.8	302.4	303.8	0.4	7.7	3.1	160
11.7	32.9	3285.3	675.0	-1.8	-31.9	275.8	10.2	10.1	-1.0	303.6	304.9	0.4	7.8	3.4	150
12.9	35.3	3584.8	650.0	-3.4	-32.9	274.0	9.8	9.8	-0.7	305.1	306.3	0.4	8.0	3.6	140
14.0	37.7	3893.3	625.0	-6.0	-34.6	277.4	8.9	8.8	-1.1	305.6	306.7	0.3	8.2	4.2	130
15.1	40.3	4211.3	600.0	-8.6	-36.3	281.1	8.2	8.1	-1.6	308.1	307.1	0.3	8.5	4.7	130
16.4	42.9	4539.3	575.0	-11.1	-38.0	281.5	9.3	9.1	-1.9	307.0	307.8	0.2	8.7	5.2	130
17.6	45.6	4879.3	550.0	-13.3	-39.4	282.2	12.1	11.9	-2.6	308.3	309.1	0.2	8.9	5.9	120
18.9	48.4	5231.9	525.0	-15.8	-41.1	281.8	13.9	13.6	-2.8	309.4	310.1	0.2	9.2	6.5	120
20.2	51.1	5597.7	500.0	-18.4	-42.9	276.5	14.9	14.8	-1.7	310.6	311.2	0.2	9.4	7.9	120
21.5	54.1	5978.4	475.0	-20.9	-44.7	269.1	16.3	16.3	0.3	312.1	312.6	0.1	9.6	9.9	110
22.9	57.0	6376.9	450.0	-22.2	-45.6	270.7	20.2	20.2	-0.2	315.3	315.9	0.1	9.9	10.4	110
24.3	60.3	6794.5	425.0	-25.3	-47.8	276.9	23.0	22.8	-2.8	316.5	316.9	0.1	10.1	12.2	110
26.0	63.7	7231.4	400.0	-29.0	-50.5	279.8	24.9	24.6	-4.2	317.2	317.6	0.1	10.4	14.5	100
27.6	67.3	7689.8	375.0	-32.2	-49.5	261.1	28.2	27.6	-5.4	318.9	319.3	0.1	15.9	17.1	100
29.3	70.4	8173.1	350.0	-35.9	-48.3	277.8	30.6	30.3	-4.1	320.2	320.7	0.1	26.4	20.9	100
31.1	74.3	8683.4	325.0	-39.9	-49.7	269.0	29.5	29.5	0.0	321.6	321.9	99.9	99.9	23.4	100
33.0	78.3	9225.6	300.0	-43.5	-49.9	261.4	34.9	34.5	5.2	324.0	324.0	99.9	99.9	26.7	100
35.0	82.3	9805.4	275.0	-47.9	-49.9	252.6	43.6	41.6	13.1	325.9	325.9	99.9	99.9	31.9	90
37.1	86.9	10424.2	250.0	-52.1	-49.9	244.4	49.6	48.4	19.7	328.6	328.6	99.9	99.9	36.1	90
39.8	91.9	11103.1	225.0	-56.7	-49.9	248.3	53.2	49.5	7.8	331.7	331.7	99.9	99.9	43.5	80
42.3	97.0	11844.1	200.0	-59.8	-49.9	255.1	41.9	41.2	3.1	338.0	338.0	99.9	99.9	50.7	80
45.1	102.8	12580.8	175.0	-56.9	-49.9	263.8	28.5	28.4	3.1	350.0	350.0	99.9	99.9	56.1	80
48.1	106.7	13615.5	150.0	-57.2	-49.9	262.1	25.8	25.5	2.5	371.6	371.6	99.9	99.9	61.2	80
51.8	111.3	14615.4	125.0	-54.6	-49.9	265.7	25.6	25.3	1.9	395.0	395.0	99.9	99.9	66.9	80
56.1	125.7	16250.6	100.0	-53.2	-49.9	259.0	26.4	25.9	5.0	424.9	424.9	99.9	99.9	73.0	80
61.5	136.0	18099.3	75.0	-58.9	-49.9	286.1	19.1	18.4	-5.3	449.3	449.3	99.9	99.9	80.2	80
66.0	147.0	20880.9	50.0	-52.4	-49.9	345.3	1.4	0.4	-1.4	520.0	520.0	99.9	99.9	84.0	80
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
9 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
99 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 654
MURON. S D24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WX RTO GM/HC	RM PCT	RANGE KM	AZ DG
0.0	9.4	392.0	966.1	7.8	5.6	180.0	3.1	0.0	3.1	284.5	299.8	5.9	86.0	0.0	0
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	10.6	531.2	950.0	8.2	6.2	178.2	8.0	-0.8	7.9	286.3	302.6	5.3	87.5	0.2	0
1.3	13.2	751.4	925.0	7.5	4.5	177.7	9.0	-0.4	9.0	287.7	302.8	5.7	81.3	0.5	35.7
2.0	15.5	976.8	900.0	5.8	4.5	176.1	8.5	-0.6	8.5	288.3	303.8	5.9	91.4	0.9	35.8
2.8	17.8	1207.2	875.0	4.5	4.2	184.3	6.4	0.5	6.4	289.2	304.8	5.9	98.0	1.3	35.7
3.8	20.3	1442.5	850.0	3.9	3.7	208.2	6.4	3.0	5.6	291.0	306.6	5.9	98.6	1.6	0
4.6	22.6	1687.9	825.0	6.9	2.3	245.9	8.6	7.8	3.5	296.6	311.7	5.5	72.7	1.9	8
5.5	25.2	1541.0	800.0	6.1	0.9	254.9	7.6	7.3	2.0	298.3	312.5	5.1	69.0	2.1	19
6.4	27.7	2200.7	775.0	4.6	-0.0	265.4	9.4	9.3	0.7	299.3	313.1	4.9	72.1	2.4	29
7.2	30.3	2467.5	750.0	3.1	-2.0	254.1	8.4	8.0	2.3	300.5	312.9	4.4	69.1	2.7	37
8.1	33.1	2741.9	725.0	1.5	-4.0	245.2	7.7	6.9	3.2	301.6	312.9	3.9	66.8	3.0	41
9.1	35.7	3023.5	700.0	-1.0	-5.2	241.8	7.7	6.8	3.7	301.9	312.6	3.7	72.8	3.5	43
10.0	38.4	3313.0	675.0	-3.2	-5.3	242.4	8.0	7.1	3.7	302.6	314.4	4.1	91.5	3.9	45
11.0	41.1	3610.9	650.0	-5.5	-7.3	241.3	9.3	8.2	4.5	303.1	313.0	3.4	87.5	4.3	47
11.9	44.0	3917.5	625.0	-7.9	-9.1	240.4	10.0	9.0	4.3	303.7	312.7	3.1	90.4	4.9	49
13.1	47.3	4233.6	600.0	-10.4	-13.0	251.4	9.9	9.4	3.1	304.3	311.3	2.3	81.2	5.5	51
14.1	50.1	4560.4	575.0	-12.7	-15.6	254.4	10.1	9.7	2.7	305.4	311.3	2.0	78.7	6.1	53
15.3	53.1	4898.3	550.0	-15.2	-22.7	248.7	10.4	9.6	4.1	306.2	309.7	1.1	52.4	6.8	56
16.4	56.0	5248.4	525.0	-17.4	-26.9	237.8	9.8	8.3	5.2	307.6	310.6	1.0	51.6	7.5	58
17.8	58.4	5612.2	500.0	-20.3	-28.6	227.0	10.8	7.9	7.4	308.3	311.0	0.8	55.4	8.3	56
19.1	62.9	5990.1	475.0	-23.2	-32.6	224.8	12.5	8.8	8.9	309.3	311.0	0.5	41.7	9.3	55
20.5	66.1	6383.7	450.0	-26.1	-33.0	230.0	11.5	9.3	6.7	310.4	312.2	0.5	51.9	10.2	54
21.8	69.7	6795.1	425.0	-28.6	-42.7	240.8	13.0	12.1	4.8	312.2	312.7	0.1	15.2	11.1	54
23.2	73.2	7226.5	400.0	-31.8	-43.2	247.7	16.9	15.6	6.4	313.7	314.4	0.2	31.1	12.3	56
24.8	77.2	7479.7	375.0	-35.2	-48.3	241.7	21.5	19.9	10.2	314.9	315.4	0.1	24.6	14.1	57
26.3	80.9	8157.5	350.0	-38.3	-64.4	240.4	23.8	18.4	11.2	317.0	317.1	0.0	4.9	16.4	58
28.0	85.1	8662.4	325.0	-42.7	99.9	240.8	28.5	22.5	9.7	317.8	309.9	99.9	99.9	18.9	59
29.8	89.4	9157.7	300.0	-46.9	99.9	244.2	27.9	25.1	12.2	319.3	309.9	99.9	99.9	21.7	60
31.7	94.0	9768.3	275.0	-51.6	59.9	242.8	26.8	23.5	12.2	320.6	309.9	99.9	99.9	24.8	60
33.6	98.8	10380.7	250.0	-56.2	99.9	243.6	27.6	26.7	12.2	322.5	309.9	99.9	99.9	27.9	61
35.7	103.9	11045.3	225.0	-58.4	99.9	241.6	30.0	26.4	14.3	329.0	309.9	99.9	99.9	31.6	61
38.4	109.5	11790.1	200.0	-54.9	99.9	256.7	24.0	23.3	5.5	315.8	309.9	99.9	99.9	36.2	62
41.4	115.4	12642.0	175.0	-55.3	99.9	242.0	22.0	19.4	10.4	338.7	309.9	99.9	99.9	40.0	62
44.7	122.0	13226.9	150.0	-54.2	99.9	246.0	22.7	21.0	8.5	376.7	309.9	99.9	99.9	44.7	63
48.6	129.3	14794.2	125.0	-54.2	99.9	257.2	22.7	21.8	4.9	366.9	309.9	99.9	99.9	50.1	63
53.4	136.7	16232.6	100.0	-53.7	99.9	269.8	19.4	19.4	0.1	423.9	309.9	99.9	99.9	55.3	65
59.4	144.3	18094.8	75.0	-52.6	99.9	204.4	11.4	4.7	10.4	482.7	309.9	99.9	99.9	60.4	66
67.3	152.7	20698.5	50.0	-52.6	99.9	254.8	5.1	4.9	1.3	519.5	309.9	99.9	99.9	62.3	68
78.9	161.0	23203.8	25.0	-50.5	99.9	99.9	99.9	99.9	99.9	639.5	309.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 655
ST CLOUD, MINN24 APRIL 1975
1433 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.3	316.0	978.7	6.8	4.3	80.0	3.6	-3.5	-0.6	282.4	296.1	5.3	84.0	0.0	0.
99.9	55.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.6	367.2	975.0	6.5	4.3	99.4	3.6	-3.6	0.6	282.4	296.1	5.3	85.6	0.1	317.
0.7	8.6	560.1	950.0	4.8	4.0	113.5	4.4	-4.0	1.7	282.8	296.7	5.4	94.1	0.3	265.
1.3	10.6	777.1	925.0	2.9	2.8	91.1	5.3	-5.3	0.1	282.9	296.1	5.1	100.1	0.4	272.
1.9	12.7	998.7	900.0	1.5	1.5	95.8	6.9	-6.9	0.7	283.7	296.1	4.8	102.1	0.7	263.
2.5	14.5	1226.4	875.0	2.5	1.3	114.3	6.5	-5.9	2.7	287.0	299.7	4.8	91.8	0.9	274.
3.3	17.0	1461.1	850.0	2.0	-1.3	104.4	5.3	-5.1	1.3	288.8	299.9	4.1	78.8	1.2	279.
3.9	19.3	1702.2	825.0	1.2	-1.6	99.7	5.6	-5.6	1.0	290.4	301.6	4.1	61.5	1.4	278.
4.7	21.4	1949.4	800.0	-0.1	-2.4	116.5	2.4	-2.2	1.1	291.5	302.6	4.1	85.2	1.6	279.
5.4	23.8	2203.8	775.0	1.7	-18.7	309.9	2.0	1.6	-1.3	293.8	299.2	1.1	20.3	1.8	290.
6.2	26.0	2468.3	750.0	1.9	-18.7	308.3	3.4	2.7	-2.1	298.7	302.3	1.2	19.9	1.5	276.
6.9	28.5	2740.6	725.0	-0.4	-19.5	298.9	4.3	3.4	-2.1	298.1	302.5	1.1	21.2	1.3	276.
7.7	31.0	3020.2	700.0	-2.0	-22.1	292.0	5.1	4.8	-1.9	300.4	303.3	0.9	19.6	1.1	268.
8.6	33.7	3308.3	675.0	-4.4	-10.7	283.4	6.1	5.9	-1.4	301.1	308.4	2.5	61.6	0.8	261.
9.5	36.1	3604.6	650.0	-6.3	-12.8	273.0	6.0	6.0	-0.3	302.1	308.5	2.2	59.9	0.5	248.
10.3	38.3	3910.5	625.0	-8.0	-18.3	276.1	3.5	3.5	-0.4	303.4	307.9	1.4	43.3	0.3	223.
11.3	41.3	4226.5	600.0	-9.9	-41.6	10.7	5.0	-0.9	-0.9	305.6	305.2	0.2	5.4	0.3	206.
12.3	44.2	4553.1	575.0	-12.6	-34.8	317.2	3.8	2.6	-2.8	305.2	306.3	0.3	13.6	0.7	196.
13.1	47.1	4890.3	550.0	-15.5	-30.9	280.5	11.6	11.4	-2.1	305.7	307.4	0.5	25.2	0.8	177.
14.3	50.1	5240.1	525.0	-17.7	-36.1	275.7	24.8	24.7	-2.5	307.1	308.2	0.4	18.3	1.4	125.
15.4	53.1	5603.1	500.0	-20.6	-41.1	282.5	12.2	11.9	-2.6	310.0	310.7	0.2	16.6	4.2	109.
16.5	56.2	5980.9	475.0	-22.6	-49.4	291.8	11.6	10.8	4.3	311.2	311.5	0.1	8.5	5.0	109.
17.7	59.4	6375.5	450.0	-24.5	-52.2	258.4	14.2	12.5	-6.7	312.4	312.6	0.1	6.0	6.0	110.
19.3	62.9	6737.7	425.0	-28.6	-54.3	287.3	16.3	15.6	-8.8	312.8	313.1	0.1	9.2	7.2	110.
20.3	66.3	7218.5	400.0	-32.4	-54.3	280.3	14.6	14.6	-8.6	313.0	313.2	0.1	13.6	8.5	109.
21.7	70.0	7665.5	375.0	-36.7	-54.5	271.3	18.2	18.2	-8.4	313.7	313.7	99.9	99.9	9.4	107.
23.2	73.7	8143.5	350.0	-40.8	99.9	271.3	18.2	18.2	-8.4	313.7	313.7	99.9	99.9	11.7	108.
24.7	77.4	8643.1	325.0	-45.0	99.9	266.0	25.7	25.6	1.8	313.7	313.7	99.9	99.9	14.7	100.
26.5	81.3	9174.0	300.0	-47.6	99.9	264.5	27.9	27.8	2.7	313.7	313.7	99.9	99.9	17.7	97.
28.5	86.3	9744.9	275.0	-50.8	99.9	261.9	28.1	27.9	4.0	313.7	313.7	99.9	99.9	21.4	94.
30.6	91.0	10300.5	250.0	-54.8	99.9	252.4	30.7	29.3	9.3	320.7	320.7	99.9	99.9	25.4	89.
32.6	95.8	11027.9	225.0	-58.4	99.9	250.4	34.7	32.7	11.7	320.7	320.7	99.9	99.9	30.4	87.
35.5	101.3	11769.4	200.0	-58.3	99.9	256.5	26.3	25.5	6.1	320.5	320.5	99.9	99.9	34.6	86.
38.5	107.5	12605.6	175.0	-58.5	99.9	247.5	26.7	24.7	10.2	323.4	323.4	99.9	99.9	40.4	83.
42.0	114.5	13508.8	150.0	-52.8	99.9	257.6	22.3	21.7	4.8	378.0	378.0	99.9	99.9	45.0	83.
45.9	121.7	14758.2	125.0	-55.1	99.9	258.8	22.3	21.9	4.3	396.2	396.2	99.9	99.9	49.9	84.
50.6	130.0	16189.9	100.0	-52.4	99.9	268.4	15.3	15.3	0.4	426.5	426.5	99.9	99.9	55.7	82.
56.3	135.5	18048.6	75.0	-54.4	99.9	250.1	18.8	17.7	6.4	458.8	458.8	99.9	99.9	59.0	82.
63.5	150.0	20425.4	50.0	-56.2	99.9	246.0	4.6	4.2	1.9	511.0	511.0	99.9	99.9	59.6	82.
74.7	161.5	25116.1	25.0	-52.5	99.9	351.7	8.5	0.9	-6.4	634.0	634.0	99.9	99.9	59.6	82.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 662
RAPID CITY, S D

24 APRIL 1975
1415 GMT

TIME MIN	CNTCT	WEIGHT GPM	PHES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT Y DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	15.6	96.0	900.1	8.3	4.7	120.0	4.1	-3.6	2.0	290.2	306.7	6.0	78.0	0.0	0.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	15.6	96.0	900.0	8.3	4.6	99.9	99.9	99.9	99.9	290.9	306.7	5.9	77.5	99.9	99.9
0.7	18.0	1200.2	875.0	8.1	-0.1	99.9	99.9	99.9	99.9	292.7	304.6	4.3	56.2	99.9	99.9
1.5	20.5	1438.9	850.0	6.2	-1.0	99.9	99.9	99.9	99.9	293.1	304.6	4.2	50.1	99.9	99.9
2.4	22.9	1622.7	825.0	4.0	-1.4	290.0	10.8	9.8	-4.6	293.6	304.6	4.4	60.8	1.5	125.
3.1	25.4	1922.3	800.0	1.8	-1.2	290.0	13.3	12.5	-4.5	293.6	305.6	4.4	95.2	2.2	120.
3.9	27.9	2167.3	775.0	-0.7	-1.4	292.2	18.4	17.0	-7.0	293.6	305.6	4.5	95.2	3.2	118.
4.7	30.7	2448.7	750.0	-2.8	-2.9	297.3	20.5	18.2	-5.4	294.1	305.5	4.1	99.5	4.2	112.
5.5	33.3	2716.7	725.0	-4.8	-4.9	300.4	19.5	16.8	-9.9	294.7	304.9	3.7	99.0	4.2	112.
6.3	37.0	2992.4	700.0	-5.8	-6.7	295.8	19.1	17.2	-8.3	296.5	305.9	3.3	93.5	5.1	119.
7.1	39.8	3277.2	675.0	-7.2	-8.5	290.7	19.2	18.0	-6.8	298.0	306.5	3.0	90.5	6.1	118.
7.9	41.4	3570.5	650.0	-9.6	-10.3	289.5	20.1	19.9	-6.7	298.4	306.1	2.7	95.1	7.0	117.
8.7	44.4	3872.7	625.0	-11.1	-12.3	286.2	21.7	20.8	-6.1	300.0	307.0	2.4	91.3	7.9	116.
9.4	47.4	4125.9	600.0	-12.2	-15.2	281.0	22.6	22.2	-4.3	302.2	307.6	1.8	72.0	8.9	114.
10.2	50.4	4510.1	575.0	-14.8	-18.0	275.4	22.7	22.6	-2.3	302.8	307.7	1.6	76.4	10.0	113.
11.0	53.5	4844.8	550.0	-17.7	-19.5	271.3	22.9	22.9	-0.5	303.2	307.7	1.5	85.9	10.9	111.
11.8	56.3	5191.1	525.0	-20.4	-21.9	268.4	22.9	22.9	0.6	304.0	307.9	1.3	88.1	12.1	104.
13.0	59.9	5550.7	500.0	-22.8	-24.5	278.3	22.5	22.5	-0.1	305.3	308.6	1.0	85.7	13.6	102.
14.9	63.4	5925.1	475.0	-25.5	-26.6	270.3	25.5	25.2	-3.7	306.5	308.9	0.8	74.7	16.2	104.
16.7	66.7	6315.5	450.0	-27.9	-35.1	281.5	24.3	23.8	-4.9	308.2	309.6	0.4	49.8	14.9	104.
17.9	70.4	6723.7	425.0	-31.3	-40.0	282.0	23.2	22.7	-4.8	308.9	309.9	0.3	41.6	20.6	104.
19.0	74.0	7150.2	400.0	-34.6	-46.9	284.8	23.4	22.6	-6.0	309.9	310.4	0.1	27.3	22.1	104.
20.2	77.9	7598.5	375.0	-37.3	-59.9	288.6	24.6	23.3	-7.9	312.1	312.2	0.0	7.4	23.9	104.
21.7	81.9	8071.3	350.0	-41.0	99.9	284.1	25.3	23.0	-10.3	313.5	999.9	99.9	99.9	24.9	105.
23.8	86.0	8573.2	325.0	-43.6	99.9	273.6	19.4	19.4	-1.2	316.6	999.9	99.9	99.9	24.9	105.
25.4	90.6	9106.5	300.0	-47.0	99.9	258.0	24.5	24.0	5.1	319.2	999.9	99.9	99.9	31.1	103.
26.9	95.3	9691.8	275.0	-46.4	99.9	252.5	15.0	14.3	4.5	328.0	999.9	99.9	99.9	32.7	102.
28.9	100.2	10311.9	250.0	-48.7	99.9	256.9	17.9	17.5	4.1	332.2	999.9	99.9	99.9	34.4	101.
31.3	105.4	10998.3	225.0	-51.8	99.9	258.4	20.5	25.9	5.3	339.2	999.9	99.9	99.9	36.9	99.
33.4	111.0	11757.7	200.0	-54.7	99.9	264.4	20.2	20.2	0.2	346.2	999.9	99.9	99.9	40.0	97.
35.6	117.0	12609.9	175.0	-55.3	99.9	276.2	16.5	16.4	-1.8	358.6	999.9	99.9	99.9	42.5	97.
38.7	124.0	13597.6	150.0	-56.2	99.9	231.8	24.8	18.7	14.7	373.3	999.9	99.9	99.9	45.1	95.
42.2	131.3	14750.4	125.0	-53.8	99.9	234.5	20.1	19.4	5.4	397.6	999.9	99.9	99.9	49.9	92.
46.6	139.3	16186.9	100.0	-55.5	99.9	235.1	18.2	17.6	4.7	420.5	999.9	99.9	99.9	54.1	91.
52.5	147.3	18040.5	75.0	-50.2	99.9	233.8	5.1	4.1	3.0	467.7	999.9	99.9	99.9	58.4	89.
59.8	155.7	20164.4	50.0	-54.2	99.9	272.9	4.2	4.2	-0.2	515.9	999.9	99.9	99.9	59.6	89.
70.7	164.0	21171.6	25.0	-50.8	99.9	333.7	1.3	0.6	-1.2	638.7	999.9	99.9	99.9	59.5	89.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER24 APRIL 1975
1402 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.9	183.0	997.0	21.1	16.9	200.0	4.2	1.4	3.9	296.2	329.3	12.3	77.0	0.0	0.
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	7.8	373.1	975.0	19.3	16.6	202.4	10.7	4.1	9.8	296.2	328.5	12.3	84.6	0.4	15.
1.6	5.9	596.2	950.0	17.0	16.0	212.2	13.3	7.1	11.2	296.2	328.0	12.3	94.1	0.9	21.
2.4	12.0	823.4	925.0	14.7	14.0	216.8	15.1	9.1	12.1	295.8	324.6	11.0	96.0	1.6	28.
3.2	14.3	1055.8	900.0	14.4	13.5	224.2	18.6	13.0	13.4	297.8	326.8	10.9	94.5	2.4	32.
3.9	16.4	1294.3	875.0	13.3	11.8	230.0	20.4	15.6	13.1	298.9	325.8	10.0	90.8	3.3	36.
4.8	16.7	1577.2	850.0	12.4	10.3	233.0	20.0	16.0	12.1	300.3	325.6	9.3	87.4	4.3	40.
5.8	20.9	1777.4	825.0	11.0	9.5	238.2	20.4	16.6	12.0	301.4	326.2	9.1	90.4	5.4	43.
6.6	23.3	2044.1	800.0	9.4	7.8	239.7	21.5	17.3	12.7	302.3	325.2	8.4	89.9	6.5	45.
7.6	25.7	2308.9	775.0	7.9	6.2	239.1	18.9	16.2	9.7	303.3	324.7	7.7	89.0	7.6	46.
8.5	28.1	2578.9	750.0	5.7	3.8	247.0	15.7	14.5	6.1	303.7	322.5	6.7	87.6	8.7	48.
9.6	30.7	2856.0	725.0	4.1	3.0	252.2	15.0	14.3	4.6	304.9	321.4	6.6	92.5	9.5	50.
10.6	33.3	3141.9	700.0	4.8	-18.3	251.3	20.8	19.7	6.7	307.9	312.0	1.3	17.0	10.4	53.
11.7	35.8	3438.3	675.0	4.4	-16.7	250.5	26.7	25.2	8.9	310.8	315.6	1.5	20.0	12.0	55.
12.9	38.6	3744.0	650.0	1.8	-11.2	253.6	28.5	27.3	6.1	311.4	319.0	2.5	37.4	13.9	57.
14.0	41.2	4056.3	625.0	-0.4	-8.9	258.6	28.9	27.8	7.7	312.5	323.5	3.7	61.4	15.7	59.
15.2	44.1	4385.5	600.0	-1.8	-6.4	254.9	24.7	23.8	6.4	314.5	326.5	4.0	70.8	17.8	61.
16.5	47.0	4722.8	575.0	-4.4	-14.7	254.9	23.1	22.5	5.2	315.1	321.8	2.1	44.0	17.4	62.
17.8	50.1	5071.1	550.0	-7.7	-19.6	262.2	20.1	19.9	2.7	315.0	319.8	1.5	39.2	21.1	64.
19.1	53.0	5431.2	525.0	-10.6	-25.4	261.1	22.1	21.8	3.4	315.8	318.8	0.9	28.2	22.6	65.
20.3	55.1	5804.0	500.0	-14.3	-25.5	259.5	25.4	25.0	4.6	315.7	319.8	1.0	38.0	24.2	66.
21.1	56.4	6191.4	475.0	-16.0	-30.1	260.1	28.1	27.7	4.9	318.1	318.2	0.0	1.0	25.5	67.
22.8	62.9	6596.4	450.0	-18.8	-31.9	262.9	21.3	21.1	2.6	319.5	319.6	0.0	1.0	27.7	68.
24.3	65.2	7019.5	425.0	-22.0	-33.9	259.6	24.3	23.9	4.4	320.8	320.8	0.0	1.0	25.7	69.
25.9	70.0	7462.5	400.0	-24.9	-35.9	260.1	24.3	24.3	1.7	322.5	322.6	0.0	1.0	31.9	70.
27.6	73.7	7924.9	375.0	-28.1	-37.9	260.8	23.1	23.1	0.1	324.3	324.4	0.0	1.0	34.2	71.
29.3	77.7	8420.5	350.0	-31.9	-40.4	268.2	23.9	25.8	0.8	325.6	325.7	0.0	1.0	36.6	72.
31.0	81.8	8938.9	325.0	-36.6	-43.6	264.1	27.0	26.8	2.8	326.1	326.1	0.0	1.0	39.5	73.
32.7	86.0	9487.5	300.0	-41.4	-46.9	265.7	29.5	29.4	2.2	327.0	327.0	99.9	99.9	42.0	74.
34.4	90.8	10072.4	275.0	-46.1	-50.9	272.5	26.9	26.9	-0.2	328.5	328.5	99.9	99.9	45.0	75.
36.4	95.7	10668.9	250.0	-51.2	-54.9	271.0	26.5	26.5	-0.5	330.0	330.0	99.9	99.9	48.1	76.
37.7	101.0	11376.4	225.0	-55.1	-58.9	275.4	23.9	23.8	-2.3	330.0	330.0	99.9	99.9	51.9	77.
41.1	106.8	12121.9	200.0	-59.4	-62.9	282.9	29.5	28.7	-6.6	338.8	338.8	99.9	99.9	54.7	79.
43.5	113.0	12951.7	175.0	-62.2	-66.9	267.0	19.6	19.5	1.0	347.3	347.3	99.9	99.9	57.7	80.
46.6	120.0	13908.1	150.0	-60.1	-64.9	262.7	38.2	37.9	4.8	366.6	366.6	99.9	99.9	63.5	82.
49.8	127.0	15043.2	125.0	-61.9	-66.9	271.5	30.8	30.8	-0.8	382.6	382.6	99.9	99.9	67.4	81.
53.9	136.3	16403.6	100.0	-66.8	-69.9	274.4	22.6	22.6	-0.9	398.6	398.6	99.9	99.9	74.7	82.
58.8	145.0	18142.2	75.0	-66.5	-69.9	285.4	1.3	1.4	-0.4	433.5	433.5	99.9	99.9	79.7	82.
65.3	155.0	20627.2	50.0	-57.9	-57.9	304.9	5.2	-3.4	-4.0	507.1	507.1	99.9	99.9	81.1	83.
76.0	165.3	25067.3	25.0	-51.2	-51.2	278.4	5.6	5.5	-0.8	638.0	638.0	99.9	99.9	80.4	84.

ORIGINAL PAGE IS
OF POOR QUALITY

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

Sounding Data

24 April 1975

1800 GMT

ORIGINAL PAGE IS

ORIGINAL PAGE IS

STATION NO. 208
CHARLESTON, SC24 APRIL 1975
1800 GMT

TIME MIN	CATCY	HEIGHT GFN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ CG
0.0	4.6	13.0	1021.0	24.3	13.8	210.0	8.2	4.1	7.1	297.0	323.1	9.8	52.0	0.0	0.
0.4	6.1	194.4	1000.0	22.2	12.0	205.4	9.2	3.9	8.3	296.5	320.1	8.9	52.5	0.3	24.
1.0	8.1	413.8	975.0	20.4	11.7	208.0	8.8	4.1	7.7	296.9	320.6	8.9	57.3	0.6	25.
1.7	10.2	637.5	950.0	18.0	11.2	213.9	8.9	5.0	7.4	296.7	320.3	8.9	64.5	0.9	27.
2.2	12.2	845.1	925.0	15.5	10.3	218.4	8.8	5.6	6.8	296.3	319.0	8.5	71.1	1.2	28.
3.0	14.4	1096.9	900.0	12.9	9.2	226.3	7.8	5.7	5.4	295.8	317.7	8.2	78.7	1.6	32.
4.1	16.3	1333.3	875.0	11.2	8.4	228.1	7.2	5.1	5.1	295.4	317.7	7.9	82.8	2.0	37.
5.0	18.6	1575.3	850.0	10.6	7.6	228.2	6.7	5.0	4.5	293.9	312.0	5.1	53.7	2.4	38.
5.9	20.7	1824.2	825.0	10.1	2.5	240.9	5.5	4.8	2.7	300.0	315.5	5.6	59.2	2.8	40.
7.0	23.0	2079.6	800.0	9.3	-0.1	241.6	5.1	4.5	2.4	301.4	309.0	2.6	28.3	3.0	42.
8.1	25.3	2342.3	775.0	8.4	-1.9	243.0	6.3	5.6	2.9	303.4	315.8	4.3	46.3	3.4	44.
9.1	27.6	2613.2	750.0	7.5	0.1	246.5	7.1	6.6	2.6	305.4	320.1	5.1	59.2	3.8	46.
10.2	30.0	2891.8	725.0	5.9	-1.4	257.8	7.4	7.2	1.6	308.6	320.3	4.8	59.2	4.2	48.
11.2	32.5	3178.9	700.0	4.5	-3.1	261.1	6.3	6.2	1.3	308.1	320.8	4.4	57.6	4.7	52.
12.3	35.1	3474.8	675.0	3.1	-4.8	265.7	6.0	6.0	0.6	309.6	321.3	4.0	55.8	5.2	55.
13.5	37.4	3779.9	650.0	1.1	-6.4	276.0	9.1	9.1	-0.9	310.7	321.6	3.7	57.2	5.6	59.
14.9	40.1	4055.2	625.0	0.1	-8.7	287.9	11.6	11.0	-3.6	313.0	322.6	3.2	51.5	6.2	64.
16.2	42.7	4421.0	600.0	-2.7	-11.1	292.1	12.6	11.7	-4.7	313.4	321.7	2.7	52.2	7.0	70.
17.5	45.5	4756.9	575.0	-5.2	-13.3	292.0	10.9	10.1	-4.1	314.0	318.7	1.5	32.4	7.8	75.
19.0	48.4	5104.4	550.0	-7.9	-21.5	302.8	11.2	9.4	-6.0	314.9	318.9	1.2	32.3	8.4	79.
20.3	51.3	5463.9	525.0	-10.9	-21.5	304.5	13.8	11.4	-7.8	315.5	319.7	1.3	41.2	9.2	83.
21.7	54.4	5837.4	500.0	-12.2	-35.4	306.8	12.0	9.9	-6.7	318.2	319.5	0.4	12.5	10.8	88.
23.2	57.4	6229.1	475.0	-14.6	-37.2	306.8	12.1	9.7	-7.3	319.9	321.1	0.3	12.5	10.8	91.
24.8	60.7	6635.8	450.0	-17.0	-38.9	302.9	12.0	10.1	-6.5	321.8	322.9	0.3	12.8	11.9	94.
26.4	64.1	7061.5	425.0	-20.8	-41.5	313.6	10.6	7.6	-7.2	322.5	323.3	0.2	13.3	12.7	97.
28.2	67.4	7506.8	400.0	-24.5	-43.4	308.0	10.6	8.6	-6.2	323.1	323.8	0.2	13.7	13.7	99.
30.1	71.0	7973.1	375.0	-28.2	-47.1	295.0	13.8	12.5	-5.8	324.2	324.8	0.1	14.2	14.9	101.
32.0	74.8	8463.8	350.0	-32.6	-50.5	293.4	16.2	14.9	-6.4	324.7	325.1	0.1	14.7	16.8	102.
34.2	79.0	8981.6	325.0	-36.1	-53.2	290.3	17.8	16.7	-6.2	326.6	327.1	0.1	15.1	18.6	104.
36.2	83.0	9532.5	300.0	-40.2	-56.9	292.2	19.0	17.6	-7.2	328.8	329.9	99.9	99.9	21.1	104.
38.4	87.2	10119.7	275.0	-45.6	-59.9	292.3	19.4	18.4	-7.6	329.2	329.9	99.9	99.9	23.6	105.
40.9	91.8	10747.3	250.0	-51.0	-63.9	285.2	19.5	19.0	-4.1	330.2	329.9	99.9	99.9	24.7	106.
43.8	96.9	11427.6	225.0	-55.3	-67.9	278.0	18.6	18.4	-2.9	333.7	329.9	99.9	99.9	25.8	106.
46.5	102.0	12169.5	200.0	-60.5	-72.9	276.3	22.5	22.3	-2.5	337.0	329.9	99.9	99.9	33.1	104.
49.6	106.0	12956.4	175.0	-62.0	-76.9	281.7	24.2	28.6	-5.9	347.7	329.9	99.9	99.9	38.1	104.
53.2	114.3	13958.0	150.0	-59.1	-99.9	288.5	29.6	28.1	-9.4	368.3	329.9	99.9	99.9	44.1	103.
57.4	121.5	15055.3	125.0	-62.7	-99.9	292.1	23.2	21.5	-8.8	381.3	329.9	99.9	99.9	50.5	105.
62.2	126.7	16448.5	100.0	-65.2	-99.9	278.0	13.7	13.6	-1.0	394.1	329.9	99.9	99.9	56.4	105.
68.2	138.3	18158.8	75.0	-68.2	-99.9	318.1	13.8	9.9	-11.0	429.9	329.9	99.9	99.9	61.9	105.
74.8	147.3	20648.0	50.0	-60.0	-99.9	138.1	9.9	-0.6	0.6	502.1	329.9	99.9	99.9	62.1	106.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA24 APRIL 1975
1730 GMT

TIME MIN	CNTCT	WEIGHT GPH	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MX RTO CM/SEC	OM PCT	RANGF KM	AZ DC
0.0	4.3	0.0	1021.2	28.6	15.2	140.0	6.2	-4.0	4.7	301.4	330.3	10.7	44.0	0.0	0
0.8	6.0	193.1	1000.0	45.2	11.6	160.5	6.3	-2.1	5.9	299.5	322.9	8.6	42.8	0.4	330
1.6	8.2	414.8	975.0	23.0	11.3	148.8	4.8	-2.5	4.1	299.5	323.0	8.7	47.7	0.7	337
2.4	10.4	640.8	950.0	21.1	10.8	143.3	5.6	-3.4	4.3	299.8	323.2	8.6	51.5	0.9	334
3.2	12.5	876.9	925.0	18.9	10.1	136.7	5.8	-3.0	4.3	299.8	322.7	8.4	56.5	1.2	332
4.0	14.7	1105.5	900.0	16.6	9.6	129.3	5.6	-4.6	3.1	299.7	322.5	8.4	63.4	1.3	330
4.7	17.1	1345.0	875.0	14.4	8.9	102.9	7.4	-7.2	1.7	299.9	322.2	8.2	69.1	1.6	321
5.6	19.5	1586.7	850.0	12.7	7.7	106.6	7.3	-7.0	2.1	300.5	322.0	7.9	72.1	2.0	313
6.7	21.7	1840.3	825.0	10.8	-12.7	121.9	7.6	-6.5	4.0	302.3	307.6	1.7	15.6	2.4	310
7.6	24.1	2057.5	800.0	11.3	-13.8	122.5	6.5	-5.5	2.5	303.4	306.3	1.6	15.7	2.9	309
8.4	26.4	2361.7	775.0	9.7	-15.0	108.3	4.2	-4.0	1.3	304.4	309.1	1.5	15.8	3.1	308
9.7	29.0	2632.8	750.0	8.2	-16.1	74.6	3.8	-3.7	-1.0	305.6	310.1	1.4	15.9	3.3	305
10.8	31.7	2912.8	725.0	6.2	-16.1	33.2	2.4	-1.3	-2.0	308.7	313.4	1.5	15.9	3.4	302
11.8	34.4	3202.0	700.0	7.9	-17.3	4.7	3.1	-0.3	-3.1	311.4	315.9	1.4	14.8	3.4	300
12.9	36.8	3501.2	675.0	6.7	-14.9	358.3	3.2	0.1	-3.2	313.4	319.0	1.8	19.6	3.3	298
14.1	35.7	3805.8	650.0	4.6	-11.1	336.1	4.1	1.7	-3.8	314.5	322.3	2.5	31.1	3.1	293
15.2	42.3	4128.4	625.0	2.7	-8.6	336.2	6.2	2.7	-5.6	315.9	325.7	3.2	43.1	2.5	289
16.4	45.2	4457.4	600.0	0.2	-9.0	343.4	9.6	2.8	-5.2	316.7	326.7	3.2	50.0	2.5	279
17.6	48.3	4752.2	575.0	-2.1	-11.4	345.7	10.8	2.7	-10.5	317.8	326.5	2.8	49.0	2.3	265
18.8	51.1	5169.4	550.0	-6.0	-13.0	340.3	9.1	3.0	-8.5	319.6	327.7	2.5	49.3	2.4	243
20.2	54.3	5515.4	525.0	-5.9	-16.4	324.3	7.9	4.6	-6.4	321.5	328.0	2.9	43.1	2.5	220
21.6	57.3	5856.0	500.0	-6.7	-20.0	311.7	7.3	5.4	-4.8	322.6	327.7	1.6	39.2	2.6	213
23.1	60.6	6291.0	475.0	-12.2	-21.3	308.2	7.6	5.9	-6.7	323.0	327.8	1.5	46.4	2.7	198
24.6	64.0	6701.9	450.0	-15.4	-22.9	317.1	8.1	5.5	-5.6	324.0	328.5	1.3	52.4	3.0	186
26.3	67.3	7131.0	425.0	-18.7	-26.9	312.4	8.7	6.4	-5.9	325.0	328.4	1.0	48.4	3.5	177
27.7	70.8	7580.4	400.0	-21.7	-28.4	309.1	11.7	9.1	-7.4	326.2	329.9	0.9	54.4	4.3	164
29.4	74.5	8053.8	375.0	-24.3	-33.2	296.0	12.8	11.5	-5.6	329.5	331.6	0.6	43.1	5.3	150
31.2	78.4	8533.3	350.0	-28.2	-36.7	284.7	13.0	12.3	-4.1	330.7	332.4	0.5	43.5	6.4	145
33.2	82.3	9080.9	325.0	-32.2	-43.4	272.4	16.9	15.7	-6.4	332.2	333.2	0.2	31.4	7.7	141
35.3	86.5	9640.6	300.0	-37.0	-47.4	265.9	17.9	15.5	-8.9	333.2	333.9	0.2	32.9	9.7	135
37.2	91.0	10236.2	275.0	-42.1	-59.9	303.0	19.0	15.9	-10.3	334.3	333.9	99.9	99.9	11.9	133
39.3	95.6	10874.8	250.0	-47.3	-69.9	298.8	18.1	16.3	-7.9	335.7	335.7	99.9	99.9	14.2	131
41.6	100.4	11562.7	225.0	-53.1	-99.9	295.7	22.2	20.0	-9.6	337.1	337.1	99.9	99.9	16.7	128
44.2	105.3	12311.6	200.0	-58.7	-99.9	291.3	31.6	29.4	-11.5	339.2	339.2	99.9	99.9	20.9	125
47.1	111.3	13134.6	175.0	-64.1	-99.9	293.7	30.0	28.0	-10.6	344.1	344.1	99.9	99.9	26.6	122
50.4	117.5	14095.4	150.0	-60.9	-99.9	294.2	21.4	19.5	-8.8	345.2	345.2	99.9	99.9	31.4	121
54.2	124.7	15217.1	125.0	-65.2	-99.9	283.1	18.5	18.1	-4.2	346.9	346.9	99.9	99.9	35.7	119
59.6	132.3	16557.4	100.0	-71.3	-99.9	282.1	14.1	13.8	-3.0	350.0	350.0	99.9	99.9	40.1	117
63.9	140.3	18242.9	75.0	-72.3	-99.9	333.6	7.5	3.3	-6.7	421.3	421.3	99.9	99.9	43.9	114
71.4	148.0	20727.0	50.0	-60.9	-99.9	134.0	3.3	-2.3	2.3	500.0	500.0	99.9	99.9	43.7	120
82.7	158.0	29125.3	25.0	-51.3	-99.9	25.6	6.6	-2.8	-5.8	637.1	637.1	99.9	99.9	44.6	121

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 213
WAYCROSS, GA24 APRIL 1975
1805 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCOMP M/SEC	POT V DG K	E POT T DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	3.2	44.0	1016.4	27.9	10.1	180.0	4.1	0.0	4.1	300.7	321.0	7.7	33.0	0.0	0.
0.3	5.1	187.2	1000.0	24.5	14.4	175.3	4.0	-0.4	4.7	299.1	326.9	10.4	53.5	0.2	34.
1.2	6.8	408.5	975.0	22.3	12.1	181.1	6.5	0.1	6.5	250.8	323.4	9.1	52.4	0.4	15.
2.2	6.8	633.7	950.0	20.1	11.3	180.0	5.4	0.8	5.3	294.7	322.6	8.9	57.1	0.9	10.
3.1	10.9	863.3	925.0	18.1	11.4	180.4	4.2	0.8	4.2	299.0	323.8	9.2	65.1	1.0	10.
4.0	12.8	1057.5	900.0	16.1	11.3	181.8	4.9	0.1	4.9	299.3	324.7	9.4	73.5	1.3	10.
4.9	15.0	1336.6	875.0	13.7	10.4	197.4	5.7	1.7	5.4	299.1	323.9	9.1	80.4	1.6	8.
5.7	17.0	1580.9	850.0	12.0	9.2	227.4	5.3	3.9	5.6	299.9	323.3	8.6	82.9	1.8	12.
6.7	19.3	1831.5	825.0	11.7	7.0	248.5	2.5	2.3	0.9	302.0	323.2	7.7	73.5	2.0	18.
7.6	21.4	2086.9	800.0	11.7	-42.0	216.1	2.7	1.6	2.2	303.6	304.0	0.1	1.1	2.1	19.
8.5	23.7	2352.7	775.0	11.1	-20.3	230.3	3.6	2.8	2.3	305.6	309.0	1.0	9.3	2.3	20.
9.5	25.3	2626.4	750.0	9.5	-2.2	263.5	3.4	3.6	0.4	307.4	320.1	4.4	44.0	2.4	23.
10.5	26.5	2907.0	725.0	7.6	-3.9	291.0	4.5	4.6	-1.8	308.3	319.9	4.0	43.8	2.5	30.
11.4	31.0	3195.2	700.0	6.0	-5.2	293.7	5.4	4.9	-2.3	309.6	320.6	3.7	44.2	2.5	36.
12.6	33.6	3492.5	675.0	4.1	-5.9	298.2	6.3	5.5	-3.0	310.7	321.6	3.7	48.4	2.6	45.
13.5	36.1	3798.9	650.0	2.7	-5.7	300.0	5.9	5.1	-2.9	312.5	324.0	3.8	53.8	2.8	52.
14.8	38.9	4115.2	625.0	0.6	-0.2	301.9	7.2	6.1	-3.8	313.6	325.2	3.6	60.0	2.9	62.
15.7	41.5	4441.7	600.0	-2.3	-5.7	311.2	8.8	7.3	-4.8	313.5	326.4	4.2	77.6	3.2	59.
16.8	44.4	4778.6	575.0	-4.7	-7.5	311.7	9.2	6.9	-6.1	314.9	326.4	3.8	80.6	3.5	77.
17.0	47.5	5127.6	550.0	-6.9	-10.4	313.9	7.7	5.5	-5.3	316.3	326.0	3.2	76.3	3.9	85.
18.2	50.5	5489.3	525.0	-9.2	-10.1	297.0	7.9	7.1	-3.6	317.5	324.1	2.1	57.6	4.3	89.
20.6	52.5	5805.9	500.0	-10.7	-25.0	281.9	10.1	9.8	-2.6	320.0	323.4	1.0	29.7	5.0	94.
21.8	54.7	6158.5	475.0	-13.3	-23.6	281.9	12.7	12.4	-2.6	321.6	326.0	1.3	46.1	5.8	93.
23.1	60.1	6558.1	450.0	-16.6	-20.2	290.2	15.5	14.5	-5.4	322.6	328.1	1.7	73.3	6.9	95.
24.6	64.3	7043.2	425.0	-20.0	-21.4	296.8	18.0	14.5	-6.7	323.5	328.9	1.5	88.1	9.2	94.
26.1	67.7	7543.2	400.0	-22.8	-30.8	297.8	18.1	16.0	-8.5	325.4	327.9	0.7	47.7	9.7	101.
27.6	71.4	8012.4	375.0	-25.7	-39.3	291.2	20.2	18.8	-7.3	327.5	328.8	0.4	26.3	11.4	103.
29.2	75.7	8516.8	350.0	-29.6	-42.9	284.7	20.6	19.9	-5.2	328.8	329.7	0.2	26.0	13.4	104.
31.2	80.1	9033.3	325.0	-34.1	-42.5	278.8	18.6	18.5	-1.5	329.6	330.6	0.3	41.8	15.7	103.
32.0	84.8	9567.7	300.0	-38.5	-48.4	274.8	17.3	17.2	-1.5	331.0	331.5	0.2	34.3	17.6	102.
34.0	86.6	10180.0	275.0	-43.9	99.9	277.9	19.5	19.4	-2.7	331.7	999.9	99.9	99.9	19.4	102.
37.2	95.7	12812.6	250.0	-49.1	99.9	275.1	21.0	20.9	-1.5	333.1	999.9	99.9	99.9	22.4	101.
39.8	100.6	14966.7	225.0	-54.3	99.9	278.7	28.0	27.6	-4.7	335.3	999.9	99.9	99.9	26.3	101.
42.5	105.7	17246.3	200.0	-58.0	99.9	273.2	27.6	27.5	-1.5	341.0	999.9	99.9	99.9	30.9	100.
45.3	113.2	19578.8	175.0	-60.9	99.9	275.8	28.6	28.2	-1.5	349.4	999.9	99.9	99.9	36.4	96.
48.9	120.3	21039.0	150.0	-60.5	99.9	274.5	23.4	23.4	-2.7	365.9	999.9	99.9	99.9	41.2	96.
50.1	128.3	23172.2	125.0	-62.5	99.9	281.0	23.4	23.0	-4.5	381.9	999.9	99.9	99.9	47.4	95.
50.0	136.3	25267.7	100.0	-69.9	99.9	288.9	13.6	12.9	-4.4	362.7	999.9	99.9	99.9	52.3	100.
62.7	144.0	28239.9	75.0	-68.1	99.9	290.7	12.8	12.0	-4.5	430.2	999.9	99.9	99.9	54.3	101.
71.9	152.0	20373.5	50.0	-58.4	99.9	210.0	0.9	0.5	-0.7	503.1	999.9	99.9	99.9	56.7	102.
84.4	160.0	25180.8	25.0	-52.1	99.9	39.2	5.7	-3.6	-4.4	636.8	999.9	99.9	99.9	59.7	103.

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 220
APALACHICOLA, FLA24 APRIL 1975
1715 GMT

162 14. 0

TIME MIN	CNTCT	WEIGHT G/M	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MX RTD CM/SEC	RM PCT	RANGE KM	AZ DEG
0.0	4.5	11.0	1021.8	23.6	10.7	150.0	5.2	-2.6	4.5	250.7	331.8	13.4	74.0	0.0	0.
0.4	6.2	100.9	1000.0	21.1	17.1	171.4	10.3	-1.5	10.2	295.9	328.3	12.4	78.0	0.3	344.
1.1	8.4	414.1	975.0	19.7	14.5	183.0	10.5	0.6	10.5	250.4	324.7	10.7	71.0	0.8	351.
2.1	10.5	622.3	950.0	19.1	13.7	154.4	6.8	1.7	6.6	290.0	325.9	10.5	70.9	1.2	356.
2.9	12.7	871.4	925.0	17.9	12.4	185.0	4.5	0.8	4.4	259.9	325.3	9.9	70.4	1.4	1.
3.8	15.0	1102.6	900.0	16.0	11.5	172.3	4.5	-0.4	4.5	299.2	324.9	9.5	74.7	1.6	0.
4.5	17.1	1344.9	875.0	14.5	10.0	182.4	4.3	0.6	4.3	300.1	324.1	8.9	74.4	1.9	360.
5.4	19.5	1585.9	850.0	13.0	7.3	190.9	3.4	0.7	3.4	300.8	321.8	7.7	68.6	2.0	1.
6.3	21.7	1840.8	825.0	13.6	-4.4	159.9	1.7	-0.6	1.6	303.4	313.2	3.4	28.6	2.2	1.
7.3	24.2	2090.9	800.0	12.7	1.9	214.7	0.9	0.5	0.7	305.4	321.1	5.5	47.8	2.2	1.
8.1	26.5	2365.8	775.0	10.9	0.5	229.2	2.0	1.5	1.3	308.2	320.9	5.1	48.7	2.3	2.
9.0	28.1	2638.3	750.0	8.9	-2.0	236.3	3.3	2.7	1.8	308.8	319.7	4.4	46.4	2.4	5.
10.1	31.7	2916.7	725.0	6.5	-11.8	242.2	3.2	2.8	1.5	309.0	315.5	2.1	22.3	2.5	9.
11.0	34.3	3208.3	700.0	7.2	-8.0	245.1	2.9	4.9	0.2	310.9	319.9	3.0	33.0	2.6	12.
12.3	36.8	3506.1	675.0	5.3	-17.7	313.6	3.7	2.7	-2.6	311.7	316.3	1.4	17.4	2.6	17.
13.1	38.4	3813.3	650.0	3.4	-6.8	350.3	6.5	1.1	-6.4	313.3	324.0	3.5	47.0	2.4	22.
14.1	42.1	4135.3	625.0	0.7	-9.3	349.2	7.2	1.4	-7.1	313.6	322.8	3.0	47.2	1.9	28.
15.3	45.0	4456.7	600.0	-1.6	-12.0	326.4	7.4	2.9	-6.8	315.5	321.9	2.4	42.0	1.6	40.
16.5	47.9	4799.3	575.0	-3.9	-10.6	326.9	9.7	5.3	-6.1	315.8	324.8	2.9	58.6	1.5	59.
17.7	50.8	5144.8	550.0	-5.4	-12.9	324.7	13.1	7.5	-10.7	317.6	326.1	2.7	70.5	2.5	107.
18.8	53.9	5507.8	525.0	-8.5	-16.0	315.4	14.1	8.3	-11.0	318.5	327.0	2.2	66.2	3.4	116.
20.1	56.4	5884.7	500.0	-10.9	-16.0	315.5	13.4	9.4	-5.6	320.0	327.0	2.2	66.2	3.4	116.
21.4	60.0	6276.9	475.0	-13.6	-18.7	311.5	14.3	10.8	-9.5	321.4	327.3	1.8	65.2	4.5	126.
22.9	63.4	6696.2	450.0	-16.4	-22.1	307.5	14.9	11.8	-6.1	322.8	327.5	1.4	60.8	5.7	123.
24.4	66.6	7114.1	425.0	-19.4	-26.3	255.9	16.6	14.4	-6.3	324.2	327.7	1.0	54.2	7.2	123.
26.0	70.1	7562.4	400.0	-21.9	-31.9	280.0	16.2	15.4	-5.0	325.8	328.8	0.7	39.9	8.7	121.
27.7	73.7	8033.9	375.0	-25.5	-37.9	297.7	18.4	16.3	-8.6	327.8	329.2	0.4	30.3	10.5	119.
29.4	77.4	8530.7	350.0	-29.1	-42.6	303.2	21.6	18.7	-10.9	328.5	330.4	0.2	25.6	12.5	120.
31.2	81.3	9035.5	325.0	-32.1	-46.3	295.0	23.4	21.2	-8.9	330.9	331.6	0.2	24.9	14.9	117.
33.1	85.6	9612.8	300.0	-38.1	-49.9	292.7	23.1	21.3	-8.9	331.3	331.6	99.9	99.9	17.6	116.
35.2	90.8	10203.8	275.0	-43.3	-49.9	299.1	26.4	23.0	-12.8	332.4	332.4	99.9	99.9	20.3	116.
37.5	94.8	10839.4	250.0	-48.0	-49.9	298.4	36.4	32.0	-17.3	336.7	336.7	99.9	99.9	25.0	119.
40.2	96.6	11528.5	225.0	-53.5	-49.9	296.9	51.5	45.7	-23.3	340.4	340.4	99.9	99.9	31.6	118.
42.8	104.3	12276.1	200.0	-58.3	-49.9	287.0	33.5	32.1	-5.8	348.4	348.4	99.9	99.9	37.6	117.
45.6	110.4	13126.3	175.0	-61.4	-49.9	290.4	31.7	29.6	-11.2	348.4	348.4	99.9	99.9	43.4	116.
48.9	116.8	14063.6	150.0	-61.6	-49.9	301.6	29.9	25.5	-11.7	363.9	363.9	99.9	99.9	49.2	116.
52.9	124.3	15185.0	125.0	-65.8	-49.9	287.3	23.0	22.0	-6.9	375.8	375.8	99.9	99.9	54.7	116.
57.2	132.0	16526.7	100.0	-67.9	-49.9	307.5	18.5	14.7	-11.2	356.5	356.5	99.9	99.9	61.6	116.
62.7	140.7	18237.3	7.0	-69.0	-49.9	306.5	10.2	8.2	-6.1	428.4	428.4	99.9	99.9	64.8	116.
70.1	150.3	20706.9	50.0	-58.5	-49.9	58.2	7.8	-7.7	1.1	508.4	508.4	99.9	99.9	65.3	117.
82.4	166.3	25134.7	25.0	-52.1	-49.9	345.4	0.4	0.1	-0.3	635.2	635.2	99.9	99.9	65.4	118.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 0 BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 226
CENTERVILLE, ALA

24 APRIL 1975
1815 GMT

TIME MIN	CATCY	WEIGHT GPM	PRES MB	TEMP NG C	DEW PT DG C	CTR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT V DG K	E POT V DG K	WR RTO GM/KG	RM PCT	159	30.0	0
0.0	6.2	140.0	1002.4	24.0	18.2	200.0	7.7	2.6	7.2	298.7	233.7	13.3	70.0		0.0	0.
0.1	6.4	161.0	1000.0	23.6	17.7	199.8	8.6	2.9	8.1	298.5	232.5	12.9	69.3		0.1	5.
0.2	6.9	381.5	975.0	20.7	16.2	197.3	9.9	2.9	9.4	297.6	229.1	12.0	75.5		0.7	19.
2.0	11.0	655.8	950.0	18.3	14.3	203.0	12.3	5.0	11.2	297.2	325.9	18.8	77.5		1.3	14.
2.9	13.5	834.8	925.0	17.7	12.1	216.6	13.3	7.9	10.7	296.7	324.7	9.7	69.7		2.0	23.
4.0	15.8	1059.0	900.0	16.5	10.6	219.8	16.0	10.2	12.3	299.7	323.9	8.9	68.0		2.9	28.
5.0	18.3	1314.5	875.0	14.9	9.7	226.9	15.5	11.3	10.6	300.4	324.0	8.7	71.0		3.9	31.
6.0	20.8	1512.8	850.0	13.5	10.7	236.9	14.2	11.9	7.7	301.5	327.6	9.6	83.6		4.7	35.
7.0	23.3	1805.0	825.0	12.0	8.4	239.4	16.1	13.9	8.2	302.4	325.5	8.4	78.7		5.5	39.
8.0	25.8	2062.5	800.0	10.8	0.2	240.0	20.2	17.5	10.1	303.3	317.3	6.9	48.5		6.5	42.
9.2	28.4	2327.0	775.0	10.1	-1.2	253.3	20.4	19.5	5.9	305.2	318.3	4.9	45.5		7.9	47.
10.4	31.2	2630.1	750.0	10.3	-6.8	258.8	23.8	23.3	4.3	308.1	317.2	3.1	26.3		9.3	52.
11.6	34.3	2931.3	725.0	9.3	-11.9	258.1	20.8	20.4	4.3	310.0	316.4	2.1	20.9		10.6	56.
12.5	36.6	3171.3	700.0	6.0	-11.0	255.1	19.4	18.8	5.0	311.7	318.9	2.4	24.6		11.8	54.
13.7	39.5	3470.4	675.0	6.2	-10.8	252.4	19.2	18.3	5.8	312.9	320.5	2.5	26.4		13.1	59.
14.8	42.1	3778.1	650.0	3.4	-11.7	251.4	21.2	20.1	6.8	313.1	320.5	2.4	34.1		14.5	61.
16.2	45.1	4055.0	625.0	1.2	-13.6	254.6	19.9	15.1	5.3	314.0	320.6	2.1	31.7		16.0	62.
17.9	48.2	4421.8	600.0	-1.8	-12.8	261.0	21.0	20.7	3.1	314.3	321.7	2.4	42.0		18.1	64.
19.5	51.1	4756.8	575.0	-4.8	-10.4	267.7	20.1	20.1	0.8	314.6	324.0	3.0	44.5		19.6	65.
20.0	54.3	5103.1	550.0	-0.3	-12.1	272.5	19.6	19.6	-0.9	316.9	325.3	2.7	62.6		21.6	67.
22.3	57.3	5465.8	525.0	-10.1	-13.7	273.4	18.7	18.7	-1.1	316.5	324.5	2.5	75.1		23.6	64.
23.8	60.7	5843.9	500.0	-13.3	-21.3	274.7	21.6	21.5	-1.8	316.9	321.4	1.4	50.7		24.5	71.
25.1	64.1	6232.6	475.0	-15.1	-36.4	275.4	20.6	20.3	-3.4	319.3	320.5	0.3	14.1		26.3	74.
26.6	67.4	6639.4	450.0	-17.7	-38.4	279.4	20.5	20.2	-3.3	320.9	322.0	0.3	14.3		27.0	74.
28.5	70.9	7014.6	425.0	-20.6	-40.7	276.5	20.1	20.0	-2.3	322.5	323.4	0.3	14.6		30.1	76.
30.4	74.6	7517.0	400.0	-24.2	-43.4	280.0	21.1	20.8	-1.1	323.5	324.2	0.2	14.9		32.1	78.
32.5	78.6	7977.3	375.0	-27.8	-46.2	277.4	23.7	23.7	-1.4	324.0	325.4	0.2	15.2		34.7	79.
34.9	82.5	8465.7	350.0	-31.5	-49.2	275.4	20.4	20.3	-1.8	326.1	326.6	0.1	15.5		37.3	80.
36.8	86.4	8949.2	325.0	-35.8	-52.6	274.3	25.4	25.3	-1.9	327.3	327.6	0.1	15.8		40.3	82.
38.0	90.8	9543.5	300.0	-40.2	99.9	274.3	24.5	24.4	-1.8	328.7	329.9	99.9	99.9		43.5	82.
41.4	95.5	10124.6	275.0	-45.0	99.9	279.4	22.5	27.2	-3.7	330.0	330.9	99.9	99.9		47.1	83.
43.9	100.2	10757.7	250.0	-50.4	99.9	277.4	25.0	25.5	-5.4	331.2	329.9	99.9	99.9		50.7	85.
46.7	105.4	11438.8	225.0	-54.6	99.9	262.4	29.2	28.6	-6.3	334.5	329.9	99.9	99.9		55.2	86.
48.6	110.6	12166.2	200.0	-58.2	99.9	250.7	21.7	20.3	-7.7	340.6	329.9	99.9	99.9		58.8	87.
50.0	116.5	13027.2	175.0	-61.1	99.9	262.3	35.0	24.9	-7.3	349.0	329.9	99.9	99.9		63.9	88.
53.8	121.3	13984.5	150.0	-59.1	99.9	272.4	35.8	15.7	-1.5	348.3	329.9	99.9	99.9		71.1	84.
60.9	130.3	15123.5	125.0	-61.1	99.9	265.9	24.5	24.5	1.7	348.3	329.9	99.9	99.9		78.3	85.
65.8	134.0	16467.6	100.0	-66.2	99.9	270.9	23.4	23.4	-0.4	355.6	329.9	99.9	99.9		85.7	89.
75.0	144.3	18220.7	75.0	-69.8	99.9	273.8	18.4	18.4	-1.2	426.5	329.9	99.9	99.9		91.4	85.
80.4	155.7	20710.5	50.0	-58.2	99.9	222.1	4.0	3.2	2.5	506.4	329.9	99.9	99.9		92.1	85.
90.9	99.9	99.9	23.0	99.9	99.9	99.9	99.9	99.9	56.9	99.9	99.9	99.9	99.9		99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 232
ROOTHVILLE, LA24 APRIL 1975
1726 GMT

162 17.0

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCOMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.6	1.0	1019.0	25.6	23.3	170.0	6.7	-1.2	6.6	299.6	346.6	16.0	87.0	0.0	0.
0.8	6.2	166.6	1000.0	23.5	21.4	160.9	10.3	-3.4	9.8	298.8	341.3	16.3	86.1	0.4	336.
1.6	6.5	38.9	975.0	21.2	19.9	167.8	11.6	-2.5	11.4	298.5	338.3	15.2	92.4	1.0	341.
2.5	10.8	613.2	950.0	20.0	18.3	176.6	12.5	-0.7	15.5	298.4	336.7	14.1	89.9	1.6	346.
3.4	13.3	643.6	925.0	19.2	14.0	180.1	11.1	0.0	11.1	300.4	329.8	10.9	71.6	2.3	350.
4.2	15.6	1079.4	900.0	18.3	12.2	181.8	11.4	0.4	11.4	301.7	328.8	10.0	67.4	2.8	356.
5.2	18.0	1320.6	875.0	17.2	9.9	195.5	7.7	2.0	7.4	302.9	327.0	8.8	61.9	3.4	358.
6.2	20.5	1568.2	850.0	16.7	6.6	196.9	6.5	1.9	6.2	304.6	324.8	7.2	51.3	3.7	357.
7.2	23.0	1822.3	825.0	16.0	3.6	201.9	6.0	2.3	5.6	306.3	323.4	6.0	43.5	4.1	357.
8.3	25.5	2082.9	800.0	14.0	0.7	211.6	5.9	3.1	5.0	306.7	321.2	5.0	40.2	4.4	1.
9.2	28.1	2343.8	775.0	12.6	-1.9	215.0	5.8	3.3	4.8	307.9	320.6	4.3	36.7	4.7	3.
10.3	30.9	2624.5	750.0	11.7	-5.0	209.7	5.0	2.5	4.4	308.8	320.2	3.5	30.5	5.0	5.
11.3	33.6	2907.9	725.0	11.8	-14.7	208.3	2.4	1.1	2.1	312.6	317.9	1.7	14.2	5.3	7.
12.3	36.1	3206.2	700.0	10.4	-18.1	12.6	0.9	-0.2	-6.9	314.2	318.4	1.3	11.7	5.3	7.
13.4	39.0	3501.1	675.0	8.0	-16.8	54.7	0.9	-0.7	-1.5	315.4	319.6	1.5	15.3	5.2	6.
14.6	41.7	3810.9	650.0	5.5	-17.6	343.2	1.3	0.4	-1.2	315.4	320.1	1.5	16.9	5.2	6.
15.8	44.6	4129.4	625.0	2.4	-17.2	308.9	1.1	0.9	-0.7	315.4	320.5	1.6	21.9	5.0	7.
17.1	47.0	4457.5	600.0	-0.6	-15.1	270.8	1.2	1.2	-0.0	315.6	321.9	2.0	32.4	5.0	8.
18.2	50.6	4796.1	575.0	-3.4	-11.6	246.2	2.3	2.1	0.9	316.3	324.8	2.7	53.1	5.1	9.
19.5	53.6	5145.3	550.0	-5.7	-12.3	245.9	4.4	4.1	1.8	317.7	326.1	2.7	59.2	5.2	11.
20.8	56.6	5509.3	525.0	-8.4	-15.9	258.1	6.8	6.6	1.4	318.5	325.2	2.1	55.0	5.5	15.
22.1	59.3	5886.0	500.0	-11.2	-17.7	260.1	8.9	8.8	1.5	319.6	325.7	1.9	58.6	5.7	21.
23.6	63.3	6279.2	475.0	-12.5	-27.3	261.3	12.7	12.5	1.9	322.5	325.4	0.9	27.7	6.3	25.
24.4	66.5	6689.7	450.0	-15.7	-29.2	265.7	13.0	12.9	1.0	323.6	326.2	0.7	30.0	6.9	35.
26.4	70.0	7117.9	425.0	-19.1	-28.0	268.0	13.9	13.9	0.5	324.6	327.6	0.9	44.9	7.6	42.
27.9	73.5	7566.5	400.0	-22.0	-35.5	270.2	18.2	18.2	-0.1	326.3	328.0	0.5	28.1	8.7	49.
29.5	77.3	8037.8	375.0	-25.8	-35.5	274.1	20.9	20.8	-1.5	327.4	329.1	0.5	39.7	10.2	57.
31.1	81.1	8533.7	350.0	-29.9	-40.4	277.3	20.4	20.2	-2.6	328.4	329.6	0.3	34.6	11.4	65.
32.7	85.3	9057.4	325.0	-34.3	-45.4	283.8	21.8	21.2	-5.2	329.4	330.1	0.2	31.1	13.5	68.
34.9	89.4	9613.2	300.0	-37.4	-45.2	284.4	30.8	29.8	-7.6	332.6	333.5	0.2	43.4	16.1	75.
37.1	94.0	10209.4	275.0	-41.6	99.9	282.2	30.6	29.9	-6.4	335.0	335.9	99.9	99.9	20.1	81.
39.2	98.6	10848.6	250.0	-47.4	99.9	276.1	31.2	31.0	-3.3	335.6	336.9	99.9	99.9	23.7	86.
41.4	103.4	11536.3	225.0	-53.2	99.9	277.4	32.1	31.8	-4.1	336.9	337.9	99.9	99.9	27.4	85.
43.4	109.0	12283.0	200.0	-59.6	99.9	286.9	32.6	31.2	-6.5	338.4	339.9	99.9	99.9	32.3	86.
46.7	114.7	13110.0	175.0	-63.5	99.9	282.7	25.8	25.2	-5.7	343.2	343.9	99.9	99.9	37.1	91.
49.9	121.0	14060.6	150.0	-61.0	99.9	274.6	35.3	35.1	-2.8	345.0	345.9	99.9	99.9	42.7	91.
53.5	127.8	15155.8	125.0	-64.6	99.9	259.6	22.4	22.0	4.1	378.0	378.9	99.9	99.9	49.0	91.
58.0	135.7	16536.4	100.0	-69.1	99.9	271.9	13.1	13.1	-0.4	384.2	384.9	99.9	99.9	54.1	91.
63.7	143.3	18233.8	75.0	-70.0	99.9	280.0	11.9	11.7	-2.1	428.2	428.9	99.9	99.9	57.8	91.
71.5	152.0	20717.8	50.0	-58.8	99.9	311.5	3.5	2.6	-2.3	503.1	503.9	99.9	99.9	58.5	92.
84.8	162.0	25163.4	25.0	-50.6	99.9	32.4	4.9	-2.6	-4.2	639.2	639.9	99.9	99.9	58.1	98.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTU GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.3	100.0	1006.0	27.8	19.3	210.0	6.2	3.1	5.4	302.4	340.3	14.2	66.0	0.0	0.
0.2	4.9	153.0	1000.0	25.8	19.1	196.5	9.1	2.6	8.7	300.8	336.0	13.2	62.5	0.2	360.
1.0	6.7	375.4	975.0	23.3	16.7	190.7	9.5	1.8	9.4	300.3	333.2	12.4	66.3	0.6	6.
1.9	6.3	601.7	950.0	21.2	15.9	167.9	10.3	3.2	9.8	300.3	332.5	12.0	71.5	1.1	9.
2.5	11.0	832.3	925.0	19.0	15.8	203.8	11.7	4.7	10.7	300.4	333.4	12.4	82.0	1.5	12.
3.3	13.3	1067.7	900.0	16.8	14.1	208.3	11.1	5.3	5.8	300.3	330.7	11.3	84.1	2.0	17.
4.3	15.5	1367.7	875.0	14.7	12.5	215.8	13.0	7.6	10.6	300.5	328.7	10.5	86.6	2.7	19.
5.1	17.7	1552.8	850.0	14.2	8.0	238.9	14.7	12.6	7.6	302.1	324.2	8.1	67.5	3.3	25.
6.1	20.1	1805.5	825.0	14.5	2.9	251.5	18.8	17.9	6.0	304.7	321.0	5.7	45.5	4.1	35.
7.1	22.3	2065.1	800.0	13.0	1.6	247.0	19.6	18.1	7.7	305.7	321.0	5.4	45.8	5.1	42.
8.2	24.7	2331.6	775.0	12.9	-2.4	256.6	19.7	19.2	4.6	308.2	320.3	4.1	34.5	6.3	47.
9.1	27.0	2606.7	750.0	12.6	-6.8	266.9	17.5	17.5	1.0	310.7	319.9	3.1	25.1	7.2	53.
10.0	29.5	2890.2	725.0	10.7	-8.9	265.7	15.1	15.1	1.1	311.5	319.7	2.7	24.2	7.9	57.
11.1	32.1	3181.3	700.0	8.9	-10.6	251.9	15.0	14.2	4.6	312.7	320.1	2.4	23.9	8.9	59.
12.2	34.9	3480.9	675.0	6.6	-10.6	241.9	16.2	14.3	7.6	313.3	321.1	2.5	28.1	9.8	60.
13.2	37.4	3790.0	650.0	5.1	-10.5	244.6	17.1	15.5	7.3	315.1	323.4	2.7	31.3	10.8	60.
14.4	40.2	4106.5	625.0	2.4	-12.9	255.3	16.2	15.7	4.1	315.4	322.5	2.3	31.3	12.0	61.
15.4	43.2	4436.4	600.0	-0.8	-14.8	264.4	15.9	15.8	1.6	315.5	321.8	2.0	33.7	12.9	62.
16.7	46.0	4724.6	575.0	-3.8	-11.1	263.8	19.6	19.5	2.1	315.9	324.7	2.9	56.7	14.2	64.
17.9	49.0	5122.5	550.0	-7.3	-12.6	262.5	19.2	18.0	2.5	315.8	324.0	2.0	65.5	15.5	67.
19.2	52.0	5494.7	525.0	-9.6	-11.9	266.5	18.3	18.3	1.1	317.2	326.2	2.9	83.0	17.0	67.
20.4	55.2	5860.0	500.0	-12.7	-14.7	268.6	20.1	20.1	0.5	317.6	325.5	2.5	85.1	18.3	69.
21.9	58.4	6299.8	475.0	-15.0	-23.2	269.5	21.8	21.8	0.2	319.5	323.9	1.3	54.3	19.9	71.
23.3	62.0	6657.3	450.0	-17.2	-34.6	269.9	20.7	20.7	0.0	321.6	323.2	0.4	20.3	21.7	72.
24.7	65.6	7082.9	425.0	-20.7	-37.4	267.1	19.9	19.9	1.0	322.4	323.7	0.4	20.3	23.5	74.
26.3	69.3	7528.6	400.0	-23.7	-39.9	266.3	20.5	20.5	1.3	324.1	325.2	0.3	20.7	25.2	75.
28.0	73.0	7996.5	375.0	-27.5	-43.7	263.0	20.6	20.4	2.5	325.2	326.0	0.2	20.9	27.3	75.
29.7	77.2	8468.6	350.0	-32.0	-46.7	263.9	23.1	22.9	2.5	325.6	326.2	0.2	21.2	29.4	76.
31.4	81.3	9007.3	325.0	-36.4	-50.5	262.4	22.6	22.4	2.9	326.5	326.9	0.1	21.5	32.0	76.
33.4	85.7	9557.5	300.0	-40.7	99.9	268.0	23.9	23.9	0.8	328.0	999.9	99.9	99.9	34.3	77.
35.4	90.6	10143.5	275.0	-45.7	99.3	273.1	25.6	25.6	-1.4	329.0	999.9	99.9	99.9	37.3	78.
37.5	95.0	10771.6	250.0	-50.6	99.9	275.3	28.4	28.2	-2.6	330.6	999.9	99.9	99.9	40.7	78.
39.9	101.0	11451.5	225.0	-54.7	99.9	279.3	30.8	30.4	-5.0	336.6	999.9	99.9	99.9	45.3	78.
42.7	107.0	12199.6	200.0	-58.1	99.9	281.2	25.8	25.3	-5.0	340.7	999.9	99.9	99.9	49.9	83.
45.5	113.3	13037.0	175.0	-60.2	99.9	264.1	29.8	29.6	3.1	353.9	999.9	99.9	99.9	54.1	84.
48.8	120.3	14004.2	150.0	-60.2	99.9	272.4	27.6	27.5	-1.2	368.4	999.9	99.9	99.9	60.1	84.
52.6	128.0	15130.9	125.0	-63.7	99.9	273.9	27.6	27.5	-1.9	378.6	999.9	99.9	99.9	66.6	85.
57.1	136.7	16483.9	100.0	-68.0	99.9	266.4	22.0	22.0	1.4	396.3	999.9	99.9	99.9	73.6	85.
62.7	145.0	18206.8	75.0	-67.8	99.9	281.4	13.2	13.0	-2.6	430.7	999.9	99.9	99.9	78.4	85.
70.4	154.3	20705.5	50.0	-57.7	99.9	326.1	8.5	4.8	-7.1	507.7	999.9	99.9	99.9	80.5	85.
82.4	164.0	25150.5	25.0	-50.5	99.9	254.9	3.7	3.6	1.0	639.5	999.9	99.9	99.9	81.4	86.

ORIGINAL PAGE IS
OF POOR QUALITY

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 • BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 • BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
3.0	3.5	5.0	1017.3	26.7	22.3	160.0	8.6	-3.0	8.3	300.7	345.4	17.0	77.0	0.0	0.
0.6	4.7	157.0	1000.0	25.4	21.3	170.6	12.4	-2.0	12.2	300.7	343.5	16.2	78.1	0.6	352.
1.8	6.4	375.1	975.0	22.0	19.9	173.4	12.1	-1.4	12.0	299.3	339.2	15.2	87.9	1.3	351.
2.7	8.3	608.9	950.0	20.2	17.3	185.1	14.9	1.3	12.8	298.5	336.7	13.6	87.7	2.0	357.
3.4	10.3	835.9	925.0	20.8	13.5	188.0	16.5	2.3	12.3	302.0	330.6	10.6	63.0	2.7	357.
4.3	12.1	1072.6	900.0	19.5	10.5	190.9	12.9	2.4	12.7	302.8	327.3	8.9	56.0	3.5	0.
5.3	14.2	1318.7	875.0	17.3	9.7	186.9	12.4	1.5	12.3	303.0	326.9	8.7	60.9	4.2	2.
6.2	16.1	1561.8	850.0	15.6	7.9	189.1	13.2	2.1	13.1	303.6	325.5	7.9	60.2	4.9	2.
7.2	18.2	1815.1	825.0	14.8	5.2	196.4	13.4	3.8	12.9	305.1	324.1	6.8	52.8	5.7	4.
8.3	20.3	2075.3	800.0	13.8	4.2	205.3	12.2	5.2	11.0	306.7	325.1	6.5	52.1	6.4	6.
9.2	22.4	2342.6	775.0	12.7	-0.7	209.2	14.3	7.0	12.5	308.1	321.9	4.8	39.8	7.1	8.
10.1	24.7	2617.9	750.0	13.5	-13.8	216.1	12.6	7.4	10.2	311.4	316.9	1.7	13.6	7.9	10.
11.1	26.8	2902.5	725.0	12.6	-12.7	223.4	11.1	7.7	8.1	313.6	319.8	2.0	15.9	8.4	13.
12.1	29.3	3196.0	700.0	11.0	-10.1	219.9	11.8	7.6	9.0	315.0	322.9	2.5	21.6	9.0	15.
13.1	31.8	3498.0	675.0	8.8	-11.8	218.1	11.8	7.3	9.2	315.8	323.0	2.3	21.8	9.7	17.
14.1	34.3	3802.7	650.0	6.2	-11.7	218.3	11.1	6.9	8.7	316.3	323.8	2.4	26.3	10.3	1.
15.1	36.9	4128.7	625.0	3.6	-13.9	230.2	8.9	6.8	5.7	318.8	323.4	2.1	26.4	10.9	1.
16.2	39.5	4458.6	600.0	0.8	-16.2	245.7	7.5	6.8	3.1	317.3	323.0	1.8	26.5	11.3	21.
17.3	42.1	4798.6	575.0	-2.0	-19.6	237.2	8.0	6.7	4.3	317.8	322.4	1.4	24.7	11.8	23.
18.6	45.0	5150.9	550.0	-4.1	-11.7	226.7	10.2	6.6	7.7	318.5	329.4	2.8	55.4	12.3	28.
19.7	48.0	5515.6	525.0	-7.6	-13.2	224.5	10.1	7.1	7.2	319.6	327.9	2.6	64.1	12.9	28.
21.0	51.0	5893.5	500.0	-10.5	-20.5	243.4	9.6	8.6	4.3	320.4	325.3	1.5	43.5	13.6	28.
22.3	54.3	6288.6	475.0	-12.9	-28.3	255.4	13.1	12.7	3.3	322.0	324.7	0.8	26.3	14.2	29.
23.5	57.4	6698.6	450.0	-16.0	-25.5	250.3	15.6	14.7	5.3	323.3	326.8	1.1	43.3	15.1	38.
24.9	60.9	7128.0	425.0	-19.7	-33.7	251.2	17.2	16.3	5.6	323.8	327.2	0.5	37.0	17.5	38.
26.4	64.7	7571.7	400.0	-22.9	-33.6	254.3	20.3	19.5	5.6	325.2	327.2	0.6	37.0	17.5	38.
28.1	68.3	8040.9	375.0	-27.0	-46.0	261.2	20.6	20.3	3.1	325.8	328.7	0.3	23.3	19.1	42.
30.0	72.2	8538.3	350.0	-29.7	-62.6	264.4	20.1	20.0	1.9	328.6	328.6	0.0	2.4	20.9	48.
31.9	76.4	9060.2	325.0	-34.0	-56.0	274.7	23.0	23.0	-1.9	329.7	330.0	0.1	8.7	22.6	50.
33.7	80.7	9617.4	300.0	-36.8	-46.7	276.0	31.6	31.4	-3.3	333.4	234.1	0.2	34.8	24.7	51.
35.5	85.5	10214.1	275.0	-41.4	96.9	273.6	34.9	34.8	-2.2	335.3	999.9	99.9	999.9	27.9	50.
37.6	90.4	10853.7	250.0	-46.7	99.9	274.8	33.8	33.7	-2.9	336.6	999.9	99.9	999.9	31.4	68.
39.7	95.6	11543.2	225.0	-52.7	99.9	276.7	36.5	36.3	-4.3	337.8	999.9	99.9	999.9	35.4	68.
42.1	101.5	12293.2	200.0	-58.8	99.9	281.2	36.9	36.2	-7.2	339.7	999.9	99.9	999.9	40.0	72.
44.9	108.3	13123.3	175.0	-63.5	99.9	291.1	45.0	41.9	-16.2	346.9	999.9	99.9	999.9	46.1	77.
47.9	114.8	14072.7	150.0	-61.9	99.9	286.6	32.7	32.6	2.0	363.5	999.9	99.9	999.9	51.2	80.
51.7	122.3	15203.6	125.0	-62.9	99.9	256.1	18.2	17.7	4.4	361.1	999.9	99.9	999.9	57.7	81.
55.9	120.3	16556.2	100.0	-68.4	99.9	270.7	14.5	14.5	-0.2	395.6	999.9	99.9	999.9	62.9	81.
61.4	138.8	18273.8	75.0	-68.0	99.9	261.6	15.9	15.7	2.3	430.5	999.9	99.9	999.9	66.6	81.
69.4	147.3	20778.9	50.0	-59.6	99.9	53.5	0.8	-0.6	-0.5	503.1	999.9	99.9	999.9	68.3	81.
61.8	156.3	25232.3	25.0	-51.8	99.9	319.0	4.1	2.7	-3.1	635.6	999.9	99.9	999.9	68.4	81.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 248
SHREVEPORT, LA

24 APRIL 1975
1601 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WV/KG	RH PCT	RANGE KM	AZ DG
0.0	9.2	79.0	1005.4	27.2	16.8	190.0	7.2	1.3	7.1	301.5	334.0	12.1	53.0	0.0	0.0
0.1	4.6	126.8	1000.0	27.0	17.0	180.6	10.2	0.1	10.2	301.8	334.0	12.3	54.4	0.2	7.0
1.0	6.3	350.3	975.0	25.1	16.0	176.6	9.8	-0.2	9.8	302.0	333.8	11.8	57.0	0.7	5.0
1.8	6.3	578.2	950.0	23.3	15.9	194.6	7.7	1.9	7.4	302.5	335.0	12.1	63.2	1.0	5.0
2.8	10.3	810.5	925.0	20.9	14.3	200.5	9.7	3.4	9.0	302.2	332.4	11.2	66.2	1.5	10.0
3.9	12.2	1047.2	900.0	19.2	12.8	212.0	11.4	6.0	9.7	302.7	331.0	10.4	66.4	2.2	15.0
4.9	14.3	1259.1	875.0	17.7	8.6	215.7	15.4	9.0	12.5	303.2	325.5	8.1	55.3	2.9	19.0
5.7	16.3	1537.0	850.0	17.4	7.2	224.2	18.5	12.9	13.3	303.4	326.5	7.5	51.2	3.8	24.0
6.6	18.5	1791.6	825.0	15.6	7.4	227.0	20.0	14.6	13.6	306.2	328.3	7.9	58.2	4.7	32.0
7.5	20.6	2022.3	800.0	14.0	3.5	225.8	19.5	14.0	13.6	306.9	324.4	6.2	49.1	5.9	37.0
8.7	22.7	2319.4	775.0	12.5	1.2	237.4	18.6	15.8	10.1	308.0	323.5	5.4	45.9	7.1	35.0
9.9	25.1	2554.0	750.0	11.7	-7.3	252.0	16.6	15.8	4.9	305.7	318.5	4.9	25.6	8.3	40.0
11.0	27.3	2976.4	725.0	9.9	-15.0	246.8	11.7	10.8	4.6	310.5	315.7	1.7	15.8	9.2	44.0
12.1	25.7	3167.5	700.0	9.8	-16.1	213.0	7.3	4.0	5.1	313.5	318.4	1.6	14.4	9.7	44.0
13.3	32.2	3458.4	675.0	8.2	-19.1	206.4	9.4	4.3	8.6	318.5	319.0	1.3	12.6	10.2	43.0
14.6	34.9	3778.3	650.0	6.1	-19.7	223.0	12.1	8.2	8.9	316.7	321.0	1.3	13.7	11.1	42.0
15.8	27.2	4058.0	625.0	3.6	-14.5	230.5	12.3	9.5	7.8	316.7	321.0	1.3	16.5	12.0	43.0
17.1	40.0	4427.3	600.0	0.7	-22.7	239.7	13.4	11.6	6.8	317.0	320.4	1.0	15.3	12.9	43.0
18.5	42.5	4767.2	575.0	-2.6	-23.9	252.9	13.7	13.1	6.8	317.1	320.3	1.0	17.5	14.0	45.0
20.0	43.3	5117.4	550.0	-5.7	-29.4	259.2	14.5	13.9	2.6	317.3	319.6	0.7	14.7	15.1	44.0
21.4	48.3	5479.9	525.0	-8.7	-37.2	253.2	14.5	13.9	4.2	317.9	319.0	0.3	7.8	16.1	50.0
23.0	51.1	5855.4	500.0	-12.0	-39.9	245.5	16.8	15.3	6.8	318.3	319.2	0.2	7.6	17.5	51.0
24.5	54.2	6246.3	475.0	-14.1	-43.0	250.8	21.4	20.2	7.1	320.5	321.2	0.2	20.6	19.1	53.0
26.1	57.1	6654.5	450.0	-16.8	-45.9	251.9	21.3	20.2	6.6	322.0	322.5	0.1	5.9	21.3	55.0
27.8	60.4	7081.2	425.0	-19.6	-47.5	254.1	18.0	17.3	4.9	323.9	324.3	0.1	6.3	23.2	56.0
29.6	64.2	7528.1	400.0	-23.3	-45.8	254.0	19.2	18.4	5.3	324.6	325.0	0.1	6.7	25.0	56.0
31.4	67.4	7997.1	375.0	-27.1	-52.1	258.8	20.6	20.2	4.0	325.7	326.0	0.1	7.1	27.0	56.0
33.3	71.0	8490.5	350.0	-30.6	-54.4	259.5	18.4	18.1	3.4	327.4	327.7	0.1	7.6	29.0	61.0
35.3	75.0	9012.6	325.0	-34.8	-57.2	262.2	27.2	26.9	3.7	328.6	328.8	0.0	8.1	31.9	63.0
37.7	79.2	9565.0	300.0	-39.7	99.9	268.4	25.0	25.0	0.5	329.3	999.9	99.9	999.9	34.9	65.0
40.0	83.5	10134.8	275.0	-44.5	99.9	268.1	31.2	31.1	2.1	330.8	999.9	99.9	999.9	38.7	67.0
42.4	88.0	10767.3	250.0	-48.9	99.9	277.1	35.4	35.2	-4.4	333.3	999.9	99.9	999.9	42.9	69.0
45.0	93.2	11471.1	225.0	-54.5	99.9	275.1	41.6	41.5	-3.7	335.1	999.9	99.9	999.9	48.7	73.0
47.9	98.5	12217.2	200.0	-59.7	99.9	279.1	40.1	39.6	-6.3	336.3	999.9	99.9	999.9	54.7	77.0
50.9	104.3	13042.9	175.0	-63.9	99.9	281.5	37.8	37.1	-7.5	344.4	999.9	99.9	999.9	62.0	79.0
54.6	111.0	13994.6	150.0	-60.1	99.9	260.8	28.5	28.1	4.5	365.5	999.9	99.9	999.9	69.5	86.0
58.7	116.7	15131.7	125.0	-62.2	99.9	268.6	31.0	31.0	0.8	365.3	999.9	99.9	999.9	76.0	90.0
63.5	127.7	16454.2	100.0	-67.3	99.9	269.5	22.0	22.0	0.2	372.7	999.9	99.9	999.9	84.4	81.0
69.8	138.0	18225.9	75.0	-68.1	99.9	271.8	9.2	9.2	-0.3	430.2	999.9	99.9	999.9	89.4	81.0
78.4	148.7	20719.6	50.0	-55.7	99.9	283.1	12.8	12.5	-2.9	512.2	999.9	99.9	999.9	92.8	81.0
92.3	159.5	25171.5	25.0	-51.1	99.9	7.5	3.2	-0.4	-3.1	637.8	999.9	99.9	999.9	92.1	83.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 255
VICTORIA, TEX24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	OIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.1	33.0	1009.6	29.5	21.4	180.0	11.3	0.0	11.3	304.0	347.4	16.2	62.0	0.0	0.
0.2	4.9	119.1	1000.0	26.9	19.5	999.9	99.9	99.9	99.9	302.1	340.8	14.5	64.0	999.9	999.
0.7	6.8	341.7	975.0	24.7	18.8	999.9	99.9	99.9	99.9	301.9	333.9	14.5	70.1	999.9	999.
1.5	9.0	509.3	950.0	22.4	17.8	999.9	99.9	99.9	99.9	301.8	338.2	13.7	75.3	999.9	999.
2.2	11.0	801.2	925.0	20.4	17.2	188.7	14.1	2.1	13.9	301.9	338.2	13.5	82.3	1.4	1.
3.1	13.3	1037.9	900.0	18.8	12.6	190.3	19.2	3.4	18.9	302.3	330.4	10.3	67.4	2.3	4.
4.0	15.5	1279.9	875.0	18.1	8.9	187.9	18.9	2.6	18.7	303.8	328.5	8.2	54.8	3.5	6.
4.8	17.8	1527.7	850.0	17.3	4.0	182.0	15.5	0.6	15.5	305.1	322.2	6.1	41.6	4.3	6.
5.6	20.2	1782.0	825.0	15.8	-0.7	177.2	16.5	-0.8	16.4	305.9	318.6	4.4	32.4	5.0	5.
6.4	22.5	2043.0	800.0	15.9	-0.7	182.8	15.9	0.8	15.9	308.4	316.5	2.7	18.9	5.8	4.
7.4	25.3	2312.6	775.0	16.7	-14.4	189.1	15.6	2.5	15.4	312.0	317.1	1.6	10.6	6.7	4.
8.4	27.3	2595.8	750.0	15.8	-18.9	188.7	13.5	2.1	13.4	313.9	317.9	1.2	8.2	7.7	5.
9.4	30.0	2877.6	725.0	15.5	-17.9	185.0	10.3	0.9	10.3	316.6	320.7	1.3	8.5	8.4	5.
10.3	32.7	3174.1	700.0	14.1	-18.0	187.2	7.1	0.9	7.0	318.3	322.6	1.3	9.2	8.9	5.
11.2	35.4	3479.4	675.0	11.7	-7.8	197.4	4.0	1.2	4.8	319.1	325.0	3.2	25.3	9.1	5.
12.3	38.0	3793.1	650.0	6.7	-6.7	223.0	6.2	4.2	4.5	319.3	330.3	3.6	32.9	9.3	6.
13.4	41.7	4116.1	625.0	6.0	-8.1	237.3	6.5	5.5	5.5	319.7	330.0	3.3	35.6	9.7	6.
14.4	45.5	4448.5	600.0	2.6	-10.5	243.3	6.4	5.7	5.7	319.5	328.4	2.9	37.3	9.9	10.
15.5	48.7	4790.8	575.0	-0.7	-10.7	260.2	6.4	6.3	6.1	319.5	328.7	3.0	46.9	10.1	12.
16.7	51.8	5143.9	550.0	-3.8	-18.2	267.0	6.2	6.2	6.2	319.8	325.2	1.7	31.5	10.3	5.
17.9	54.8	5509.1	525.0	-7.1	-20.8	251.3	6.2	5.9	5.9	320.1	325.6	1.4	32.3	10.4	17.
19.1	58.9	5887.5	500.0	-9.9	-24.3	249.9	8.4	7.9	7.9	321.1	324.7	1.1	29.0	10.7	19.
20.4	58.3	6281.2	475.0	-12.2	-32.0	246.1	13.7	12.5	5.5	322.8	324.7	0.5	17.3	11.3	22.
21.7	62.3	6692.1	450.0	-15.6	-32.4	250.3	16.0	15.1	5.4	323.6	325.6	0.6	22.0	12.2	24.
23.0	66.3	7121.1	425.0	-18.7	-31.4	245.9	17.1	15.6	7.0	325.1	327.3	0.6	31.4	13.2	30.
24.5	70.1	7570.9	400.0	-20.8	-43.5	254.2	20.9	20.2	5.7	328.0	324.7	0.2	10.8	14.5	34.
25.8	72.5	8045.3	375.0	-23.8	-38.8	264.0	22.4	22.3	2.3	330.0	331.3	0.4	24.7	15.7	34.
27.4	77.3	8545.2	350.0	-27.7	-35.5	272.7	25.0	25.9	-1.2	331.5	333.3	0.5	46.6	17.3	44.
29.2	82.0	9074.0	325.0	-31.7	-38.7	272.7	25.9	25.9	-1.2	332.9	334.4	0.4	49.3	19.1	50.
31.1	85.4	9635.9	300.0	-35.7	-47.6	274.9	27.7	27.6	-2.4	335.0	335.7	0.2	27.9	21.4	56.
33.1	91.3	10233.9	275.0	-40.9	-49.9	271.7	30.9	30.9	-0.9	336.0	336.9	99.9	999.9	24.4	61.
35.1	96.3	10874.0	250.0	-46.6	-49.9	268.6	32.7	32.7	6.9	336.8	336.9	99.9	999.9	27.4	61.
37.3	101.6	11563.9	225.0	-52.6	-59.9	271.2	31.4	31.4	-0.6	337.9	337.9	99.9	999.9	31.7	64.
39.6	107.9	12312.1	200.0	-59.3	-59.9	279.1	37.5	37.0	-5.9	338.9	338.9	99.9	999.9	36.2	71.
42.3	114.0	13137.5	175.0	-65.5	-59.9	286.4	42.3	40.6	-12.0	341.9	339.9	99.9	999.9	41.8	76.
45.0	120.5	14077.4	150.0	-65.7	-59.9	272.3	27.4	27.3	-1.1	350.9	350.9	99.9	999.9	46.9	80.
48.6	128.3	15186.0	125.0	-66.4	-59.9	265.4	23.9	23.9	0.0	374.8	365.6	99.9	999.9	53.6	84.
52.9	136.7	16528.5	100.0	-68.9	-59.9	265.2	16.1	16.1	1.3	394.6	394.6	99.9	999.9	58.9	86.
58.0	144.7	18247.1	75.0	-68.6	-59.9	243.6	10.5	9.4	4.6	429.0	429.0	99.9	999.9	62.5	86.
64.7	153.0	20730.1	50.0	-58.5	-59.9	47.2	5.3	-3.9	-3.6	505.7	505.7	99.9	999.9	64.2	87.
75.9	162.3	25166.3	25.0	-50.6	-59.9	64.4	1.3	-1.1	-0.5	636.2	636.2	99.9	999.9	62.5	81.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 260
STEPHENVILLE, TEX24 APRIL 1975
1715 GMT

TIME MIN	CMTCT	HEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POY T DG K	E POT T DG K	MK RTU GM/KG	RM PCT	RANGE KM	AZ DG
0.0	9.7	359.0	964.8	27.8	17.3	200.0	8.8	3.0	8.3	305.8	341.4	13.1	53.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	10.8	536.2	950.0	26.5	17.5	199.3	11.4	3.8	10.7	306.0	343.1	13.6	58.7	0.3	1.0
0.9	13.3	770.8	925.0	23.5	15.9	195.0	12.4	4.0	11.7	305.0	338.7	12.4	62.2	0.6	1.7
1.6	15.6	1005.8	900.0	21.3	13.9	195.0	16.1	5.5	15.2	305.0	335.7	11.2	62.6	1.1	1.8
2.5	17.9	1253.5	875.0	19.3	13.0	207.1	18.9	8.6	18.9	305.4	335.0	10.8	66.6	2.0	2.0
3.1	20.4	1503.5	850.0	19.9	9.6	210.4	19.1	9.7	18.5	305.3	333.4	9.0	51.8	3.0	2.3
4.1	22.8	1760.5	825.0	19.1	7.5	213.5	13.4	7.4	11.1	305.8	332.4	7.9	46.9	3.9	2.5
5.1	25.3	2024.9	800.0	17.8	7.8	211.8	8.3	4.4	7.1	311.2	325.0	8.3	51.9	4.5	2.6
6.1	27.8	2225.9	775.0	16.0	6.1	207.8	6.8	3.2	6.0	312.1	324.1	7.7	51.9	4.9	2.6
7.1	30.4	2573.9	750.0	14.2	1.6	203.1	8.3	3.3	7.7	312.7	324.5	5.7	42.3	5.4	2.6
8.2	33.2	2859.1	725.0	12.4	-1.4	195.9	8.6	2.3	8.3	313.7	327.9	4.8	38.5	5.9	2.6
9.2	35.8	3152.4	700.0	10.9	-7.9	197.6	10.7	3.2	10.2	315.0	324.3	3.0	25.9	6.2	2.6
10.3	38.6	3454.3	675.0	8.7	-8.8	205.7	13.3	5.8	12.0	315.7	324.7	2.9	27.9	7.2	2.6
11.3	41.2	3765.0	650.0	6.0	-6.4	211.5	14.2	7.4	12.1	316.3	327.4	3.7	40.4	6.1	2.6
12.4	44.2	4082.4	625.0	3.8	-2.0	219.0	16.2	10.2	12.6	317.5	333.4	5.3	65.9	9.1	2.6
13.5	47.1	4415.9	600.0	0.8	-1.5	223.1	18.0	12.3	13.2	317.8	334.9	5.7	64.4	10.2	2.6
14.6	50.2	4756.8	575.0	-1.9	-8.8	225.5	20.0	14.3	14.0	318.2	329.2	3.6	61.5	11.4	2.7
15.8	53.1	5103.0	550.0	-4.2	-21.7	235.0	20.6	16.9	11.8	318.2	323.2	1.2	24.1	12.7	3.0
17.0	56.1	5473.7	525.0	-7.3	-21.4	243.5	22.3	20.0	10.0	319.8	324.1	1.3	31.4	14.1	3.0
18.3	59.4	5851.1	500.0	-11.1	-21.1	247.4	23.1	21.3	8.9	319.6	324.2	1.4	43.4	15.7	3.0
19.7	62.9	6242.9	475.0	-13.2	-50.9	247.4	20.6	14.0	7.9	321.6	321.9	0.1	2.5	17.4	4.1
21.3	66.1	6622.5	450.0	-15.5	-51.8	245.4	20.2	16.4	8.4	323.6	323.9	0.1	2.5	19.1	4.1
22.8	69.8	7031.2	425.0	-18.8	-53.1	244.1	20.2	18.1	8.8	324.8	325.0	0.1	2.5	20.8	4.1
24.6	73.3	7530.2	400.0	-21.9	-54.4	242.4	22.3	21.3	6.6	326.5	325.7	0.1	3.4	22.9	4.1
26.2	77.2	8002.0	375.0	-25.6	-56.2	254.2	24.1	23.2	6.6	327.7	327.9	0.0	3.8	25.0	5.0
27.4	81.0	8457.8	350.0	-29.9	-58.5	257.7	22.8	22.2	4.8	328.4	328.6	0.0	4.2	26.9	5.2
28.5	85.1	9021.2	325.0	-34.3	-61.0	255.5	27.3	26.4	6.8	329.4	329.5	0.0	4.7	29.4	5.2
31.2	89.4	9575.9	300.0	-39.1	-64.1	257.5	25.9	25.3	5.6	330.3	329.9	99.9	99.9	31.9	5.2
33.0	94.0	10167.1	275.0	-43.1	-67.9	260.8	29.5	29.1	4.7	332.7	329.9	99.9	99.9	35.0	5.2
35.0	98.4	10802.7	250.0	-47.8	-69.9	261.9	37.4	37.0	5.3	333.0	329.9	99.9	99.9	38.9	6.2
37.5	103.9	11487.5	225.0	-53.2	-69.9	260.9	45.3	44.7	7.2	333.0	329.9	99.9	99.9	44.4	6.2
40.3	109.5	12238.0	200.0	-58.9	-69.9	269.0	43.2	43.2	0.7	334.5	329.9	99.9	99.9	51.6	6.2
43.1	115.4	13065.3	175.0	-64.2	-69.9	264.8	56.4	54.2	5.1	334.0	329.9	99.9	99.9	59.6	6.2
46.3	121.8	14013.6	150.0	-61.9	-69.9	255.5	43.6	42.2	10.9	323.5	329.9	99.9	99.9	67.2	7.1
50.8	129.7	15150.6	125.0	-60.8	-69.9	264.2	30.7	30.6	3.1	385.0	329.9	99.9	99.9	76.6	7.2
55.6	137.9	16528.2	100.0	-66.5	-69.9	263.9	20.8	18.7	9.1	393.3	329.9	99.9	99.9	83.1	7.2
61.2	146.7	18270.5	75.0	-64.9	-69.9	264.1	11.5	11.4	1.2	437.0	329.9	99.9	99.9	90.1	7.2
69.3	153.0	20759.1	50.0	-58.2	-69.9	226.8	8.7	6.4	6.0	506.5	329.9	99.9	99.9	92.1	7.2
81.6	161.3	25273.1	25.0	-51.0	-69.9	59.0	2.4	-2.0	-1.2	636.4	329.9	99.9	99.9	92.5	7.2

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 5 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 201
DEL RIO, TEX24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DU
0.0	P.7	314.0	974.1	26.2	19.1	130.0	4.1	-3.1	2.6	303.6	342.4	14.5	65.0	0.0	0.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	10.9	533.9	550.0	22.7	17.7	140.8	5.1	-2.8	4.2	302.1	339.4	13.6	73.2	0.2	32.2
1.7	13.3	765.9	925.0	20.6	17.7	140.8	4.5	-2.6	3.6	303.3	339.4	13.9	83.2	0.5	32.2
2.5	15.7	1002.8	900.0	18.5	17.1	138.5	3.4	-2.3	2.6	302.4	339.4	13.8	91.8	0.7	32.3
3.3	18.1	1244.5	875.0	16.8	15.4	170.2	1.4	-0.2	1.4	302.9	337.4	12.8	92.0	0.9	32.2
4.1	20.5	1493.9	850.0	21.1	10.1	294.9	4.5	4.0	-1.9	309.5	335.8	9.4	50.4	0.8	32.2
5.1	23.0	1751.8	825.0	15.8	5.7	291.8	6.3	5.9	-2.4	310.4	330.5	7.0	39.8	0.5	34.8
6.0	25.6	2016.4	800.0	18.7	-2.2	288.7	7.5	7.2	-2.4	311.6	323.8	4.1	24.4	0.5	36.2
6.9	28.2	2287.4	775.0	17.3	-36.2	274.0	7.1	7.0	-0.5	312.5	313.3	0.2	1.4	0.7	6.7
7.9	31.0	2566.0	750.0	16.8	-30.6	250.9	7.1	6.9	1.6	314.8	315.4	0.2	1.0	1.1	7.2
8.0	33.8	2853.6	725.0	15.3	-40.6	250.6	9.1	8.6	3.0	316.2	316.7	0.1	1.0	1.6	7.3
9.3	36.3	3149.1	700.0	13.1	-41.9	240.0	8.6	7.4	4.3	317.0	317.5	0.1	1.0	2.1	7.1
10.9	39.3	3452.7	675.0	10.7	-37.6	219.7	9.1	5.8	7.0	317.6	318.9	0.4	3.2	2.6	6.8
12.0	42.0	3765.1	650.0	7.6	-14.4	210.5	11.8	6.0	10.2	317.8	323.9	1.9	19.1	3.2	6.0
13.0	44.9	4026.5	625.0	5.1	-18.9	211.5	11.9	6.2	10.2	318.4	322.9	1.4	15.7	3.4	5.2
14.1	48.0	4417.6	600.0	2.1	-15.0	213.3	12.2	6.7	10.2	318.8	325.1	2.0	26.7	4.6	5.1
15.2	50.9	4759.2	575.0	-1.0	-12.0	222.1	13.9	9.3	10.3	319.1	327.4	2.6	42.8	5.5	4.8
16.3	54.0	5111.8	550.0	-4.1	-19.2	232.2	14.5	11.4	6.9	319.4	324.3	1.5	29.5	6.4	4.8
17.7	57.1	5476.7	525.0	-6.9	-32.1	245.2	17.3	15.7	7.3	320.1	321.9	0.5	11.3	7.7	5.0
19.0	60.6	5855.7	500.0	-9.5	-37.9	251.3	17.7	16.8	5.7	321.4	322.5	0.3	8.0	9.0	5.1
20.2	63.0	6245.5	475.0	-12.7	-41.4	257.7	19.6	19.1	4.2	322.2	322.9	0.2	6.9	10.2	5.0
21.6	67.3	6660.6	450.0	-14.9	-43.0	256.0	23.0	22.3	5.4	324.5	325.3	0.2	8.7	11.9	5.0
23.0	70.8	7090.0	425.0	-18.3	-58.7	256.9	21.7	21.1	4.9	325.5	325.6	0.0	1.8	13.8	6.1
24.6	74.6	7540.3	400.0	-20.8	-48.3	256.7	21.1	20.6	4.9	327.9	329.4	0.1	8.2	15.7	6.3
26.2	78.5	8014.1	375.0	-24.5	-31.6	262.3	25.3	25.1	3.4	329.2	331.7	0.7	51.6	17.8	6.5
28.0	82.3	8513.4	350.0	-27.8	-37.5	261.3	31.7	31.3	4.8	331.2	332.8	0.4	38.8	20.9	6.6
29.9	86.3	9041.0	325.0	-32.3	-39.0	261.2	31.0	30.6	4.4	332.1	333.5	0.4	51.5	24.3	7.0
32.0	90.8	9601.0	300.0	-36.3	-46.7	256.5	30.4	29.5	7.6	334.2	334.9	0.2	33.0	26.0	7.1
34.0	95.4	10159.2	275.0	-40.8	-99.9	254.7	31.1	30.0	6.2	336.6	336.6	99.9	99.9	31.6	7.1
36.2	102.2	10839.6	250.0	-46.7	99.9	254.2	33.6	33.3	5.1	338.0	338.0	99.9	99.9	36.2	7.2
38.6	108.3	11530.4	225.0	-52.3	99.9	261.3	31.7	31.3	4.8	338.4	338.4	99.9	99.9	40.9	7.2
41.6	110.5	12351.3	200.0	-58.6	99.9	261.1	40.0	39.5	6.1	340.0	340.0	99.9	99.9	46.9	7.4
44.3	116.5	13109.3	175.0	-64.7	99.9	260.6	46.1	45.5	7.5	343.3	343.3	99.9	99.9	53.5	7.5
47.3	123.3	14041.4	150.0	-66.7	99.9	274.4	38.4	38.3	-3.9	345.1	345.1	99.9	99.9	61.3	7.6
50.4	130.3	15148.2	125.0	-66.0	99.9	258.4	28.2	27.6	5.7	375.5	375.5	99.9	99.9	67.4	7.7
55.1	137.7	16591.7	100.0	-65.3	99.9	254.5	16.0	15.4	4.3	373.8	373.8	99.9	99.9	73.6	7.7
60.5	145.3	18156.4	75.0	-67.9	99.9	261.0	17.2	17.0	2.7	430.6	430.6	99.9	99.9	79.5	7.6
68.1	154.3	20703.2	50.0	-57.8	99.9	306.3	1.8	-1.1	-1.5	507.3	507.3	99.9	99.9	81.2	7.6
79.7	164.0	25132.1	25.0	-52.6	99.9	77.5	4.7	-4.6	-1.0	633.5	633.5	99.9	99.9	80.1	7.7

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 205
MIDLAND, TEX

24 APRIL 1975
1715 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	12.4	673.0	912.3	28.9	-0.3	300.0	4.1	3.6	-2.0	310.7	322.8	4.1	15.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	13.5	952.9	900.0	26.2	-1.4	286.6	9.1	8.6	-2.9	319.0	320.3	3.8	16.2	0.1	13.5
1.1	15.7	1239.4	875.0	24.0	-3.4	295.6	8.1	7.3	-3.5	309.2	319.3	3.4	16.0	0.5	12.3
2.0	16.0	1491.2	850.0	21.6	-4.4	301.6	5.6	4.8	-2.9	309.3	319.0	3.3	17.0	0.2	12.3
2.9	20.4	1749.6	825.0	19.1	-5.3	303.8	5.2	4.3	-2.9	309.2	318.6	3.1	18.6	1.2	14.3
3.5	25.7	2011.4	800.0	16.6	-5.4	278.0	4.1	4.1	-0.6	309.2	319.5	3.1	20.9	1.4	12.6
4.5	25.2	2280.1	775.0	14.0	-4.9	241.2	3.7	3.2	1.8	309.4	319.6	3.4	25.6	1.5	11.6
5.5	27.6	2555.3	750.0	11.4	-4.9	234.5	6.5	5.3	3.8	309.4	320.0	3.6	31.4	1.7	17.5
6.4	32.2	2836.1	725.0	11.2	-18.7	241.3	8.2	7.2	3.7	311.9	315.7	1.2	40.5	2.0	7.6
7.4	32.9	3129.3	700.0	8.8	-20.8	251.3	10.4	9.9	3.3	312.3	315.7	1.0	10.3	2.5	7.6
8.3	35.5	3428.6	675.0	6.6	-22.6	245.8	12.2	11.1	5.0	313.1	316.1	0.9	10.2	3.1	7.6
9.4	36.2	3736.7	650.0	4.4	-24.3	236.9	13.5	11.3	7.4	314.0	316.7	0.8	10.2	3.3	7.6
10.5	40.9	4054.2	625.0	1.7	-26.1	235.2	15.1	12.4	8.6	314.4	316.8	0.7	10.5	4.6	7.6
11.6	43.9	4392.1	600.0	0.5	-26.9	243.4	18.6	16.6	8.3	316.8	319.1	0.7	10.6	5.4	7.3
12.9	46.9	4722.7	575.0	-0.7	-30.1	243.6	23.5	21.0	10.5	319.3	321.1	0.5	8.6	7.4	7.2
14.1	48.5	5075.9	550.0	-3.2	-31.7	237.6	24.7	20.8	13.2	320.3	321.0	0.5	8.8	9.2	6.6
15.4	52.8	5442.0	525.0	-6.2	-33.6	235.5	24.2	20.0	13.7	321.0	322.5	0.4	9.2	11.0	7.7
16.7	55.9	5821.0	500.0	-9.5	-35.8	235.5	25.0	20.6	14.2	321.5	322.8	0.4	9.5	13.0	7.5
18.3	55.1	6214.4	475.0	-13.0	-36.2	237.6	23.9	20.2	12.8	321.8	322.9	0.3	9.5	15.1	6.6
19.7	52.6	6624.6	450.0	-15.8	-40.1	240.2	23.7	20.6	11.8	323.3	324.2	0.3	10.2	17.2	6.3
21.2	60.0	7052.4	425.0	-18.9	-42.3	243.2	24.2	21.6	10.9	324.7	325.5	0.2	10.6	19.3	6.3
22.6	65.6	7501.2	400.0	-22.3	-44.7	248.0	24.0	22.2	9.0	325.9	326.6	0.2	11.0	21.4	6.3
24.2	73.2	7971.6	375.0	-26.2	-47.4	253.8	25.4	24.3	7.1	326.9	327.4	0.1	11.4	23.7	6.6
25.8	77.3	8466.5	350.0	-30.4	-50.5	254.1	28.5	27.4	7.8	327.8	328.2	0.1	11.8	26.3	6.6
27.7	81.2	8959.8	325.0	-34.6	-53.6	252.3	28.5	27.1	6.7	328.9	329.2	0.1	12.3	29.3	6.6
29.6	85.6	9542.2	300.0	-38.5	-48.7	251.9	34.1	32.5	10.6	331.0	331.6	0.1	33.2	33.0	6.7
31.5	90.0	10136.5	275.0	-42.4	99.9	252.0	43.0	40.9	13.3	333.8	999.9	99.9	99.9	37.5	6.7
33.6	95.2	10773.5	250.0	-47.7	99.9	251.9	39.6	37.7	12.3	335.2	999.9	99.9	99.9	42.6	6.8
35.9	100.2	11461.4	225.0	-52.8	99.9	261.2	47.6	47.0	7.3	337.6	999.9	99.9	99.9	46.3	6.8
38.3	105.8	12210.0	200.0	-59.4	99.9	262.7	47.7	47.3	5.9	338.6	999.9	99.9	99.9	55.3	7.1
40.8	111.6	13037.6	175.0	-63.9	99.9	261.0	51.8	51.1	6.1	344.5	999.9	99.9	99.9	61.6	7.2
43.3	116.3	13966.1	150.0	-60.8	99.9	259.9	36.1	35.6	6.3	365.4	999.9	99.9	99.9	71.5	7.3
47.7	125.3	15116.5	125.0	-63.7	99.9	254.3	33.4	32.1	5.0	374.7	999.9	99.9	99.9	77.9	7.3
52.3	134.0	15986.5	100.0	-65.6	99.9	244.5	28.9	26.0	12.4	400.9	999.9	99.9	99.9	85.8	7.3
59.1	142.3	18244.3	75.0	-63.9	99.9	243.5	7.1	6.9	-1.6	439.0	999.9	99.9	99.9	91.9	7.4
64.1	151.3	20708.6	50.0	-55.8	99.9	258.6	6.4	6.3	1.3	512.1	999.9	99.9	99.9	98.2	7.4
70.5	160.3	25242.8	25.0	-50.4	99.9	87.5	2.6	-2.6	-0.1	634.9	999.9	99.9	99.9	98.8	7.5

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE
OF POOR QUALITY

STATION NO. 304
HATTENAS, NC

24 APRIL 1975
1800 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MK RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.4	4.0	1021.7	23.2	14.7	220.3	7.2	4.6	5.3	295.9	323.4	10.4	59.0	0.0	0
0.6	6.1	190.1	1000.0	20.3	11.5	219.1	16.1	10.2	12.5	294.6	317.3	8.6	57.0	0.7	30
1.6	6.1	400.0	985.0	18.2	10.3	218.1	18.6	11.5	14.7	294.6	316.1	8.1	59.8	1.5	10
2.5	16.2	630.0	950.0	16.1	7.3	215.1	19.3	11.1	15.8	294.5	312.6	6.8	55.6	2.5	30
3.3	12.2	854.3	925.0	14.3	6.5	215.4	18.2	10.6	14.9	294.9	312.6	6.6	59.2	3.4	30
4.2	18.5	1087.3	900.0	12.6	5.2	221.5	17.4	11.5	13.0	295.4	312.1	6.2	60.5	4.4	10
5.1	18.5	1323.3	875.0	11.7	7.7	225.6	17.0	11.2	11.9	295.3	303.3	2.4	24.9	5.2	30
6.0	16.7	1565.0	850.0	10.4	7.6	233.1	14.1	11.3	8.4	297.3	304.7	2.5	27.5	6.1	40
6.8	20.8	1813.2	825.0	9.5	3.6	236.1	11.5	9.6	6.4	299.4	316.1	6.1	67.1	6.7	40
7.8	23.2	2068.4	800.0	8.3	3.0	238.4	9.0	7.7	4.7	300.7	317.3	5.9	69.3	7.3	40
8.6	25.3	2330.3	775.0	6.5	2.6	232.9	9.0	7.2	5.4	301.6	318.3	6.0	76.1	7.8	40
9.9	30.3	2559.2	750.0	5.6	1.2	231.1	9.8	7.6	6.2	303.3	319.1	5.6	73.5	8.4	40
10.9	36.8	2875.6	725.0	4.8	1.5	242.0	9.8	6.7	4.6	305.4	319.0	4.8	63.7	9.3	40
12.0	22.3	3142.2	700.0	3.4	1.4	249.2	9.7	9.1	3.4	307.8	318.1	3.9	56.2	10.1	40
12.9	38.5	3456.7	675.0	1.5	5.9	263.6	9.5	9.5	1.0	307.8	318.6	3.6	57.6	10.1	40
13.9	38.0	3755.5	650.0	0.9	8.6	279.9	11.4	11.2	2.0	308.3	317.4	3.1	55.7	10.5	50
15.0	40.5	4072.2	625.0	1.8	14.8	287.1	14.5	13.8	4.3	313.6	316.6	1.9	36.5	10.9	50
16.1	43.5	4396.7	600.0	2.6	22.0	283.0	15.0	14.6	3.4	313.2	316.7	1.1	20.7	11.6	50
17.4	46.4	4732.1	575.0	3.8	24.9	287.2	15.3	14.6	4.5	313.3	316.1	0.9	20.4	12.4	60
18.6	49.4	5078.6	550.0	8.2	26.9	294.3	16.2	14.8	6.7	315.9	317.0	0.8	20.6	13.2	70
19.9	52.3	5432.4	525.0	10.5	23.3	305.1	15.2	12.4	8.7	315.9	317.0	1.1	34.5	14.3	70
21.3	55.4	5812.8	500.0	12.1	41.8	299.4	12.9	11.2	6.3	318.3	319.0	0.2	6.3	14.6	70
22.8	58.5	6202.8	475.0	15.0	43.7	291.2	13.7	12.7	4.9	318.3	319.9	0.2	6.5	15.5	70
24.2	62.0	6609.3	450.0	18.0	44.1	285.8	13.2	12.7	3.6	320.5	321.1	0.2	8.0	16.5	70
25.8	65.4	7034.0	425.0	21.1	37.3	283.9	13.8	13.4	3.3	321.9	323.2	0.4	21.9	17.7	80
27.3	69.0	7478.3	400.0	24.8	41.5	282.9	14.4	14.0	3.2	322.8	323.7	0.2	19.3	18.9	80
28.9	72.5	7946.1	375.0	27.1	42.5	298.3	10.4	9.1	4.9	325.7	326.6	0.2	21.4	20.3	80
30.4	76.5	8435.8	350.0	30.7	47.2	309.1	7.7	9.9	4.8	327.3	327.8	0.1	17.8	20.5	90
32.7	80.6	8961.5	325.0	35.2	50.8	287.7	9.6	9.2	2.9	328.1	328.5	0.1	18.4	21.4	90
34.1	84.6	9513.9	300.0	39.9	59.9	266.0	12.5	11.2	5.5	329.1	329.9	99.9	99.9	22.7	90
35.3	89.3	10101.2	275.0	45.1	59.9	321.9	14.4	6.9	11.3	329.9	329.9	99.9	99.9	23.7	90
36.3	94.2	10730.8	250.0	50.2	99.9	341.3	18.1	5.8	17.1	331.5	329.9	99.9	99.9	24.6	90
40.4	99.3	11410.4	225.0	55.2	99.9	334.7	17.3	7.4	15.6	334.0	329.9	99.9	99.9	25.7	90
42.9	104.3	12151.4	200.0	60.5	94.9	310.8	17.9	13.5	11.7	337.0	329.9	99.9	99.9	27.5	100
45.7	110.6	12973.0	175.0	64.8	90.9	295.2	19.1	16.7	9.4	342.1	329.9	99.9	99.9	30.4	100
48.4	117.3	13918.7	150.0	62.2	99.9	289.4	33.0	31.0	11.2	342.5	329.9	99.9	99.9	35.6	100
52.0	125.0	15056.8	125.0	59.8	99.9	280.0	31.1	30.7	5.4	386.7	329.9	99.9	99.9	42.3	100
56.2	133.0	16436.2	100.0	62.0	99.3	298.1	21.9	19.3	10.3	408.0	329.9	99.9	99.9	49.5	100
61.0	141.3	18187.0	75.0	65.0	99.3	319.3	8.2	5.4	6.3	436.6	329.9	99.9	99.9	53.6	100
66.3	156.5	23699.6	40.0	57.4	99.9	116.0	8.9	0.8	0.4	508.2	329.9	99.9	99.9	51.6	100
70.8	161.5	25147.0	25.0	49.9	99.9	267.4	1.0	1.0	0.0	641.5	329.9	99.9	99.9	53.7	100

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 311
ATHENS, GA24 APRIL 1975
1800 GMT

TIME MIN	CNCTY	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR CG	SPD M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E PUT T DG K	MR RTO GM/KG	CM PCT	RANGE KM	AZ DG
0.0	6.8	246.0	991.5	23.9	16.2	210.0	6.2	3.1	5.4	299.4	233.7	11.8	62.0	0.0	0.
99.0	6.8	59.9	1000.0	59.9	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	6.4	391.7	975.0	21.2	11.4	221.3	9.8	6.5	7.3	257.7	321.1	8.7	53.4	0.3	4.0
1.4	10.5	616.5	950.0	19.8	11.5	233.7	9.1	6.3	6.6	298.5	322.7	9.0	58.5	0.7	4.3
1.0	12.8	645.5	925.0	17.2	10.6	247.6	9.1	6.7	6.1	298.1	321.5	8.7	65.0	1.1	4.5
2.5	15.1	1076.9	900.0	15.1	10.1	225.0	9.2	6.5	6.5	298.2	321.5	8.7	71.9	1.4	4.5
3.2	17.3	1317.1	875.0	12.6	9.5	232.7	9.8	7.8	5.9	298.0	321.0	8.6	81.3	1.8	4.5
4.1	15.7	1560.1	850.0	10.9	7.5	243.3	11.4	10.2	5.1	294.6	319.5	7.7	79.7	2.3	4.2
5.1	22.0	1804.9	825.0	9.2	6.6	241.2	12.6	11.0	6.1	293.3	317.7	7.5	83.6	3.0	5.0
5.9	28.5	2364.9	800.0	10.2	6.0	244.8	15.5	14.0	6.6	303.0	323.4	7.4	75.4	3.7	5.0
6.6	26.9	2329.1	775.0	9.5	2.6	241.3	15.9	14.0	7.6	303.8	321.7	6.0	62.1	4.5	5.0
7.7	25.4	2601.0	750.0	7.9	1.4	235.4	17.5	14.5	9.3	305.6	321.9	5.7	63.5	5.4	5.0
8.7	32.1	2879.8	725.0	5.4	0.3	234.8	17.9	14.6	10.4	306.1	321.6	5.4	69.7	6.5	4.0
9.7	34.3	3155.9	700.0	3.9	-6.2	239.6	17.7	15.3	6.5	307.3	317.4	4.0	47.5	7.6	5.0
10.8	37.3	3461.7	675.0	3.8	-4.6	249.7	18.8	17.6	6.5	310.4	322.3	3.4	54.0	8.7	5.0
11.7	40.1	3767.5	650.0	2.0	-6.1	255.3	19.5	18.9	4.9	311.7	322.9	3.7	54.9	9.9	5.0
12.7	42.6	4082.9	625.0	-0.3	-7.1	263.7	18.9	18.8	2.1	312.5	323.3	3.6	60.3	10.9	7.0
13.8	45.8	4409.4	600.0	-2.7	-9.0	272.3	19.1	19.1	-0.8	313.3	323.1	3.2	61.4	12.0	6.0
15.0	48.7	4744.5	575.0	-5.4	-9.2	276.4	18.6	18.5	-2.1	314.0	324.1	3.3	75.0	13.2	7.0
16.2	51.6	5092.1	550.0	-7.8	-10.5	274.0	17.9	17.8	-1.4	315.2	324.8	3.1	80.7	14.3	6.0
17.4	54.6	5452.5	525.0	-10.5	-14.5	277.0	18.2	18.1	-2.4	316.0	323.4	2.4	72.5	15.6	7.0
18.7	57.6	5826.5	500.0	-13.1	-17.4	276.4	19.3	18.2	-0.9	317.3	323.5	1.9	69.8	16.4	7.0
20.0	60.9	6215.9	475.0	-15.5	-21.0	272.6	19.9	19.9	-0.9	318.9	323.8	1.5	62.9	18.3	7.0
21.4	64.4	6622.0	450.0	-18.2	-26.3	269.8	22.7	22.7	0.1	320.4	323.7	1.0	49.3	19.9	7.0
22.7	67.6	7047.4	425.0	-20.3	-43.9	278.2	22.0	21.8	-3.1	322.6	323.5	0.2	10.1	21.7	7.0
24.3	71.3	7492.6	400.0	-23.9	-46.4	281.1	22.4	22.0	-4.3	323.9	324.4	0.1	10.4	23.5	7.0
25.7	74.9	7960.1	375.0	-27.6	-49.1	284.3	23.5	22.8	-5.8	325.0	325.5	0.1	10.7	25.5	7.0
27.4	78.7	8431.1	350.0	-31.4	-51.8	286.5	22.3	21.4	-6.3	326.4	326.7	0.1	11.1	27.6	7.0
29.2	82.1	8973.0	325.0	-35.8	-55.2	286.7	20.7	19.8	-5.9	327.2	327.5	0.1	11.5	29.9	7.0
31.1	86.4	9524.1	300.0	-40.2	-59.9	287.1	17.4	18.6	-5.1	328.7	328.9	99.9	99.9	32.0	7.0
33.1	90.9	10111.3	275.0	-45.3	-64.9	289.5	17.0	18.0	-5.7	330.6	329.9	99.9	99.9	33.7	7.0
35.4	95.3	10739.8	250.0	-50.7	-69.9	288.3	16.3	18.5	-5.1	332.8	329.9	99.9	99.9	34.2	7.0
37.8	100.3	11417.9	225.0	-56.1	-74.9	287.0	17.4	18.7	-5.1	335.5	329.9	99.9	99.9	36.2	7.0
40.1	105.6	12154.7	200.0	-60.2	-79.9	284.0	20.4	19.8	-4.9	337.4	329.9	99.9	99.9	40.8	7.0
42.7	111.3	12986.3	175.0	-62.4	-84.9	259.0	22.5	22.1	4.3	340.9	329.9	99.9	99.9	44.3	7.0
45.6	117.3	13846.0	150.0	-57.8	-89.9	274.5	38.0	37.8	-3.0	370.4	329.9	99.9	99.9	49.4	7.0
48.2	124.3	15093.6	125.0	-56.9	-90.3	276.5	25.7	25.6	-2.3	380.5	329.9	99.9	99.9	51.5	7.0
53.7	132.3	16466.1	100.0	-60.7	-90.3	284.0	14.2	13.8	-3.4	390.2	329.9	99.9	99.9	60.0	7.0
58.2	140.0	18155.7	75.0	-64.6	-90.3	304.4	6.6	5.4	-3.7	437.6	329.9	99.9	99.9	67.5	7.0
60.7	148.3	20702.8	50.0	-59.3	-90.3	354.1	3.6	0.4	-3.6	503.9	329.9	99.9	99.9	67.5	7.0
70.1	157.5	25140.0	25.0	-51.2	-90.3	206.5	1.3	0.6	1.2	637.7	329.9	99.9	99.9	67.9	7.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC24 APRIL 1975
1721 GMT

152 24. 0

TIME MIN	CATCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CUMP M/SEC	V CUMP M/SEC	POT V DG K	E PJT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.4	275.0	985.9	24.4	15.6	220.0	9.3	6.0	7.1	300.3	330.8	11.4	58.0	0.0	0.0
99.9	99.3	99.9	1000.0	94.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	8.4	372.1	975.0	22.2	11.9	219.4	7.1	4.5	5.5	298.7	322.9	9.0	52.1	0.3	3.4
0.8	10.7	597.1	950.0	19.7	11.4	225.5	6.4	4.5	5.9	298.4	322.5	9.0	58.8	0.5	3.6
1.3	12.9	826.1	925.0	17.4	10.8	227.7	11.0	6.2	7.4	299.3	322.1	8.8	64.9	0.7	4.3
1.7	15.3	1059.5	900.0	14.7	10.2	226.7	12.2	6.6	8.7	297.8	321.3	8.7	74.7	1.0	4.4
2.1	17.5	1297.5	875.0	12.7	11.1	216.2	11.5	7.3	8.9	298.2	323.8	9.6	90.3	1.3	4.4
2.5	19.9	1540.3	850.0	10.2	9.9	226.6	10.6	7.5	7.6	298.0	324.3	9.1	98.1	1.6	4.2
3.2	22.1	1769.0	825.0	8.6	8.4	236.1	14.5	12.1	6.0	298.8	321.6	8.4	98.5	2.0	4.5
4.0	24.6	2042.8	800.0	6.9	-6.2	239.4	21.8	18.7	11.2	298.9	306.9	2.8	34.4	3.1	4.5
4.9	26.9	2304.7	775.0	7.8	-1.2	241.1	21.8	19.5	9.9	302.8	315.7	4.5	53.0	4.2	5.2
5.7	29.4	2575.1	750.0	7.2	-1.1	249.9	20.2	18.9	7.1	305.0	318.5	4.7	55.4	5.3	5.5
6.6	32.0	2853.2	725.0	5.3	-2.4	256.7	18.7	18.4	3.7	305.8	319.6	4.4	57.6	6.3	5.4
7.5	34.7	3135.7	700.0	4.1	-3.5	267.7	18.9	18.8	0.8	307.6	319.9	4.2	57.4	7.2	6.2
8.5	37.2	3414.6	675.0	2.9	-4.9	268.6	20.1	20.1	0.5	309.4	321.1	3.9	56.4	8.2	6.5
9.5	40.0	3739.0	650.0	0.4	-7.0	268.3	21.1	21.1	0.6	309.9	323.3	3.5	57.5	9.3	6.4
10.4	42.6	4053.1	625.0	-1.4	-7.8	268.2	22.2	22.2	0.7	311.2	321.4	3.4	61.6	10.5	7.1
11.5	45.4	4377.0	600.0	-4.0	-8.7	267.2	21.6	21.6	1.0	311.9	321.9	3.3	69.9	11.9	7.2
12.6	48.4	4711.8	575.0	-5.7	-12.5	267.0	18.3	18.3	1.0	313.6	321.4	2.5	58.6	13.2	7.4
13.9	51.3	5055.2	550.0	-7.8	-18.7	271.7	18.8	18.8	-0.6	315.0	320.0	1.6	41.0	14.6	7.6
15.0	54.3	5419.9	525.0	-10.8	-19.3	271.4	19.2	19.2	-1.1	315.6	323.6	1.6	49.7	15.8	7.7
16.3	57.3	5792.3	500.0	-13.3	-18.7	273.0	20.2	20.2	-0.5	317.0	322.6	1.7	63.3	17.2	7.8
17.5	60.6	6180.4	475.0	-16.3	-22.0	274.4	20.2	20.2	-1.5	318.0	322.4	1.4	60.8	18.6	8.5
19.7	64.3	6595.8	450.0	-19.1	-25.1	280.5	23.9	23.9	0.6	319.3	322.9	1.1	58.8	20.2	8.2
20.0	67.1	7005.4	425.0	-21.4	-27.5	272.1	21.3	21.3	-0.8	321.6	324.3	0.9	57.8	22.0	8.1
21.6	70.7	7453.0	400.0	-25.5	-31.1	278.5	22.4	22.2	-3.3	321.9	324.3	0.7	56.9	24.1	8.1
23.4	74.3	7918.5	375.0	-28.2	-38.0	280.8	19.6	16.3	-3.1	324.2	324.2	0.0	1.0	26.2	8.4
25.0	78.3	8405.9	350.0	-31.9	-59.1	275.2	13.5	13.4	-1.5	325.6	325.6	0.0	5.3	27.4	8.5
27.0	82.2	8928.5	325.0	-36.2	-62.5	275.9	16.1	16.0	-1.7	326.7	326.8	0.0	4.7	29.3	8.5
28.9	86.2	9475.3	300.0	-40.6	59.9	287.0	17.3	16.6	-2.1	328.2	959.9	99.9	99.9	31.0	8.6
30.7	90.6	10065.5	275.0	-45.7	99.9	281.4	17.4	17.1	-3.4	329.1	994.9	99.9	99.9	32.3	8.7
32.9	95.3	10692.1	250.0	-51.1	99.9	280.6	21.8	21.4	-4.0	330.1	999.9	99.9	99.9	35.5	8.7
35.0	100.2	11359.4	225.0	-56.9	99.9	287.8	17.9	17.0	-5.8	331.3	999.9	99.9	99.9	37.7	8.9
37.3	105.3	12104.7	200.0	-63.2	99.9	283.4	24.8	24.2	-5.8	332.8	999.9	99.9	99.9	40.4	9.0
40.0	111.2	12924.5	175.0	-62.7	99.9	285.1	31.9	-7.8	-8.3	346.5	999.9	99.9	99.9	44.7	9.2
43.0	117.3	13655.9	150.0	-59.2	99.9	291.5	33.2	30.9	-12.2	368.1	999.9	99.9	99.9	51.0	9.4
46.3	124.7	15317.7	125.0	-62.5	99.9	271.0	21.3	21.5	-0.4	381.8	999.9	99.9	99.9	55.9	9.5
50.6	132.3	16359.9	100.0	-65.3	99.9	276.9	47.0	26.9	-2.8	401.7	999.9	99.9	99.9	62.7	9.5
56.2	140.3	18144.5	75.0	-63.7	99.9	304.7	7.8	6.4	-4.5	439.4	999.9	99.9	99.9	67.3	9.5
63.8	148.7	20663.2	50.0	-58.6	99.9	47.1	1.5	-1.1	-1.1	504.9	999.9	99.9	99.9	68.2	9.4
75.9	157.7	25115.9	25.0	-50.6	99.9	999.9	99.9	99.9	99.9	639.7	999.9	99.9	99.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 327
NASHVILLE, TENN

24 APRIL 1975
1715 GMT

TIME MIN	CATCT	HEIGHT GEM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MR MTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.5	180.0	992.0	25.2	17.4	190.0	7.7	1.3	7.6	300.8	334.8	12.7	62.0	0.0	0.0
0.9	5.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	56.9	999.9	99.9	99.9	99.9	99.9
0.4	6.8	331.4	975.0	22.4	17.4	59.9	99.9	99.9	99.9	236.5	231.8	12.9	73.2	99.9	99.9
1.1	5.0	557.0	950.0	20.2	15.2	99.9	99.9	99.9	99.9	296.2	329.9	11.5	72.8	99.9	99.9
2.0	11.0	786.7	925.0	18.1	14.8	99.9	99.9	99.9	99.9	299.3	330.1	11.5	81.2	99.9	99.9
3.0	13.3	1021.3	900.0	16.4	13.2	99.9	99.9	99.9	99.9	259.9	329.4	10.7	81.3	99.9	99.9
3.9	15.5	1261.2	875.0	14.9	11.5	236.8	23.6	19.7	15.5	300.6	327.1	9.8	80.0	4.5	4.2
4.9	17.7	1506.4	850.0	13.2	10.5	238.7	26.5	22.6	13.7	301.3	326.8	9.4	83.2	5.6	4.6
5.6	20.1	1757.4	825.0	11.4	8.7	243.5	25.7	23.0	11.5	301.8	325.4	8.6	83.4	7.1	4.6
6.5	22.3	2014.8	800.0	10.5	7.9	251.7	27.6	26.2	8.7	303.4	326.5	8.4	83.5	9.4	5.1
7.4	24.9	2279.7	775.0	10.0	6.8	257.2	27.2	26.5	6.0	305.8	331.4	9.2	82.1	9.7	5.1
8.3	27.1	2552.2	750.0	8.3	6.2	256.7	25.8	25.1	5.9	306.6	329.0	8.0	86.7	11.2	5.6
9.2	29.7	2832.1	725.0	6.4	3.4	257.8	24.0	23.4	5.1	307.3	324.5	6.6	81.2	12.4	6.0
10.2	32.3	3119.3	700.0	4.0	-2.2	261.0	22.4	22.2	3.5	307.7	324.7	5.9	80.9	13.7	6.7
11.3	35.0	3414.4	675.0	2.4	-14.0	257.6	20.0	25.4	5.6	310.3	316.6	4.8	71.1	15.1	6.4
12.4	37.6	3718.9	650.0	1.0	-17.4	252.3	26.9	25.6	8.2	312.1	317.0	1.6	26.6	16.5	6.4
13.5	40.4	4033.6	625.0	-0.5	-16.7	247.9	30.6	28.3	11.5	313.0	319.4	1.7	33.5	20.6	6.7
14.4	43.2	4356.6	600.0	-2.9	-24.7	251.7	29.1	27.6	9.1	315.3	317.4	0.6	12.5	22.7	6.7
15.8	46.1	4694.8	575.0	-4.0	-27.6	255.3	29.0	28.0	7.4	316.5	319.8	0.7	16.7	24.7	6.7
17.1	49.1	5044.0	550.0	-6.5	-29.7	258.5	30.9	30.3	6.2	316.9	319.0	0.6	17.5	26.9	6.4
18.3	52.1	5405.3	525.0	-9.6	-32.2	261.6	35.0	34.7	5.1	317.2	319.0	0.5	18.1	28.2	6.2
19.4	55.4	5779.7	500.0	-13.0	-36.8	264.9	32.2	32.1	2.9	320.1	321.3	0.3	12.9	32.1	7.1
20.9	58.7	6165.3	475.0	-14.4	-34.5	268.0	24.0	24.6	0.9	322.0	323.6	0.5	20.2	34.4	7.1
22.2	62.3	6577.2	450.0	-16.9	-34.5	263.0	27.0	26.8	2.9	323.1	324.1	0.3	15.8	36.4	7.1
23.7	65.8	7037.6	425.0	-20.2	-42.3	272.9	20.8	20.8	-1.0	324.1	324.9	0.2	16.2	38.4	7.1
25.4	69.5	7449.7	400.0	-23.8	-45.2	276.2	22.4	22.3	-0.0	325.2	325.9	0.2	16.5	40.4	7.1
27.3	73.3	7917.7	375.0	-27.4	-48.0	281.1	19.3	18.9	-3.7	326.0	326.3	0.1	16.9	42.4	7.1
29.1	77.5	8411.1	350.0	-30.9	-51.4	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	44.4	7.1
30.4	81.7	8932.3	325.0	-35.3	-51.4	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	46.4	7.1
32.7	86.2	9484.4	300.0	-40.0	-55.3	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	48.4	7.1
35.0	91.3	10073.0	275.0	-44.6	-59.9	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	50.4	7.1
37.2	96.0	10704.4	250.0	-49.5	-64.6	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	52.4	7.1
39.7	101.4	11366.9	225.0	-55.3	-69.9	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	54.4	7.1
42.3	107.4	12127.7	200.0	-61.3	-75.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	56.4	7.1
45.2	113.7	12944.4	175.0	-66.4	-80.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	58.4	7.1
48.0	120.7	13816.0	150.0	-72.3	-85.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	60.4	7.1
51.0	126.3	15052.3	125.0	-78.1	-90.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	62.4	7.1
53.2	132.5	16436.3	100.0	-83.4	-95.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	64.4	7.1
56.3	140.5	18194.7	75.0	-88.0	-100.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	66.4	7.1
60.3	148.3	20712.9	50.0	-92.5	-105.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	68.4	7.1
72.7	152.3	23712.9	25.0	-98.0	-110.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	70.4	7.1
85.0	162.0	25180.0	25.0	-100.0	-112.0	281.1	19.3	18.9	99.9	326.1	326.3	0.1	17.1	72.4	7.1

ORIGINAL PAGE IS
OF POOR QUALITY

9 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 300
LITTLE ROCK, ARK26 APRIL 1975
1805 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	WZ RTO CM/KG	RM PCT	RANGE KM	AL DEG
0.0	5.6	75.0	1005.4	24.4	18.3	240.0	4.1	3.6	2.1	298.9	334.1	13.4	69.0	0.0	0.
0.2	5.9	126.3	1000.0	24.0	19.0	241.6	1.4	1.6	0.4	298.9	333.7	13.2	69.4	0.1	12.
3.0	6.1	347.9	975.0	22.4	14.0	224.5	2.5	1.9	1.6	255.5	335.2	13.5	76.0	0.2	21.
1.0	10.3	573.0	950.0	20.4	17.3	223.4	6.3	4.3	4.6	259.6	336.7	13.3	82.8	0.4	33.
2.4	12.4	802.9	925.0	18.2	16.7	230.7	9.4	7.2	5.9	259.6	336.3	13.1	91.2	0.4	41.
3.4	14.7	1038.7	900.0	16.2	15.2	233.1	11.1	8.9	6.7	299.9	332.4	12.2	93.6	1.3	45.
4.3	16.9	1278.6	875.0	15.1	14.1	240.7	11.3	10.5	4.2	301.0	332.3	11.7	93.9	1.9	50.
5.2	19.2	1524.4	850.0	13.8	12.8	254.4	10.8	10.4	2.9	302.0	331.8	11.0	93.9	2.5	55.
6.1	21.4	1776.4	825.0	12.5	11.6	249.9	12.3	11.6	4.2	303.2	331.8	10.5	94.3	3.1	59.
6.9	23.8	2034.9	800.0	11.3	10.6	253.6	13.1	12.6	3.7	305.6	332.3	10.1	95.3	3.7	61.
7.8	26.1	2300.0	775.0	9.4	2.8	246.9	17.9	16.5	7.0	305.9	325.0	6.1	62.5	4.6	61.
8.9	28.4	2571.5	750.0	10.3	0.4	236.3	20.0	16.6	11.1	306.4	323.7	5.3	59.3	5.9	63.
10.2	31.4	2834.9	725.0	9.0	-13.3	231.5	17.0	13.3	10.6	306.6	315.5	1.9	19.1	7.3	60.
11.3	34.1	3143.9	700.0	6.7	-45.8	241.1	13.5	11.9	6.5	309.9	310.2	0.1	1.0	8.4	60.
12.5	36.6	3441.1	675.0	4.7	-47.0	247.2	12.7	11.7	4.9	310.9	311.2	0.1	1.0	9.2	63.
13.5	39.4	3747.1	650.0	2.6	-46.4	253.0	15.1	14.5	4.4	311.5	312.1	0.1	1.0	10.0	61.
15.7	42.1	4062.9	625.0	0.8	-49.5	259.9	19.6	19.3	3.4	313.4	313.6	0.1	1.0	11.2	62.
15.3	45.1	4365.1	600.0	-1.5	-50.9	264.7	23.4	23.2	2.4	314.3	314.5	0.1	1.0	12.6	65.
17.2	48.1	4726.6	575.0	-3.4	-52.1	265.8	27.8	27.8	2.1	316.0	316.2	0.1	1.0	14.6	62.
18.5	51.1	5076.2	550.0	-6.0	-53.7	266.2	29.6	29.6	1.9	316.9	317.1	0.0	1.0	16.9	70.
19.7	54.4	5439.3	525.0	-8.9	-55.6	266.9	32.0	32.0	0.1	317.6	317.8	0.0	1.0	18.9	72.
21.0	57.4	5813.6	500.0	-12.0	-57.5	268.8	27.7	27.7	0.6	318.4	318.5	0.0	1.0	21.2	74.
22.3	60.9	6204.8	475.0	-13.4	-58.5	268.5	25.3	24.8	5.1	321.1	321.2	0.0	1.0	24.2	75.
23.7	64.5	6613.2	450.0	-17.1	-60.5	266.1	24.5	23.7	5.9	321.7	321.8	0.0	1.0	25.1	75.
25.0	68.3	7039.5	425.0	-20.2	-61.4	254.9	23.6	23.4	4.4	323.0	323.0	0.0	1.2	27.6	75.
27.0	71.6	7485.6	400.0	-23.8	-60.9	260.4	25.7	25.3	4.3	324.0	324.1	0.0	1.8	30.1	76.
29.0	75.7	7952.9	375.0	-28.0	-61.4	264.1	26.9	26.8	2.8	324.5	324.6	0.0	2.4	33.1	71.
30.7	79.8	8445.1	350.0	-31.1	-62.2	265.2	23.5	23.4	2.8	325.2	325.3	0.0	2.9	35.7	77.
32.5	84.0	8965.4	325.0	-35.5	-63.8	263.1	24.2	24.0	2.9	326.2	326.3	0.0	3.6	38.2	78.
34.3	88.2	9518.6	300.0	-39.7	-65.9	269.0	21.6	21.6	0.6	329.4	329.5	99.9	99.9	40.5	78.
36.3	92.0	10137.0	275.0	-44.5	-69.9	268.2	22.1	22.1	0.7	330.7	330.7	99.9	99.9	43.5	79.
38.5	96.2	10738.1	250.0	-49.3	-69.9	271.5	22.2	22.2	-0.6	332.6	332.6	99.9	99.9	46.1	76.
40.8	103.3	11421.1	225.0	-54.7	-69.9	270.2	24.1	24.1	1.2	334.7	334.7	99.9	99.9	49.7	76.
43.6	109.3	12169.4	200.0	-58.3	-69.9	270.0	26.0	26.0	-0.0	340.5	340.5	99.9	99.9	53.8	61.
46.3	115.5	12999.9	175.0	-63.1	-69.9	260.9	26.5	26.1	4.2	345.7	345.7	99.9	99.9	57.5	61.
49.6	122.7	13920.2	150.0	-62.1	-69.9	262.7	33.2	34.9	4.5	363.2	363.2	99.9	99.9	63.7	61.
53.6	130.3	15076.8	125.0	-61.6	-69.9	262.5	33.2	32.9	4.3	363.5	363.5	99.9	99.9	71.6	62.
58.0	138.3	16456.0	100.0	-61.5	-69.9	273.8	20.7	20.7	-1.6	408.9	408.9	99.9	99.9	80.2	62.
63.2	146.7	18205.0	75.0	-60.9	-69.9	248.7	13.4	12.4	4.9	432.6	432.6	99.9	99.9	83.0	62.
70.9	155.7	20722.0	50.0	-58.1	-69.9	325.2	4.7	2.7	-3.9	506.7	506.7	99.9	99.9	87.5	62.
81.7	164.5	23163.1	25.0	-52.0	-69.9	72.7	0.7	-0.5	-1.6	633.6	633.6	99.9	99.9	85.9	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 18 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 349
MONTHLY . MO

24 APRIL 1975
1800 GMT

TIME MIN	C.TCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	ME RTO CM/MS	RH PCT	RANGE NM	AZ DG
00.0	00.0	639.0	760.2	20.5	13.9	140.0	5.7	-3.7	4.4	258.5	326.5	10.5	68.0	0.6	0.
00.9	00.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.9	00.9	975.0	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.3	00.3	530.3	950.0	19.4	13.6	149.1	10.6	-3.4	9.1	298.3	325.9	10.4	68.9	0.3	312.
1.0	10.9	759.3	925.0	17.1	12.4	161.3	13.1	-4.2	12.4	258.1	324.4	9.9	73.4	0.9	333.
1.8	13.1	903.5	900.0	17.1	13.8	161.8	14.0	0.4	14.0	300.6	330.4	11.1	81.0	1.4	319.
2.7	15.3	1236.3	875.0	16.3	13.2	209.2	14.2	6.9	12.4	302.1	331.4	11.0	82.1	2.1	351.
3.7	17.5	1481.2	850.0	15.3	10.8	223.7	14.7	10.1	10.6	303.5	329.9	9.7	74.4	2.7	4.
4.7	19.9	1738.0	825.0	13.5	9.1	222.2	15.3	10.3	11.4	304.0	328.4	8.9	74.7	3.5	14.
5.6	22.0	1952.8	800.0	11.8	7.4	224.1	17.0	11.8	12.2	304.8	327.4	8.1	70.2	4.3	19.
6.6	24.5	2258.6	775.0	11.7	9.5	244.7	16.9	15.3	7.2	307.1	321.9	5.1	46.2	5.1	25.
7.5	26.4	2513.4	750.0	12.2	-11.5	249.7	19.0	17.4	6.6	310.1	316.6	2.1	17.8	5.9	33.
8.6	28.3	2816.0	725.0	10.1	-12.9	249.3	19.1	17.9	6.8	310.9	316.8	1.9	18.3	6.9	34.
9.7	32.7	3136.1	700.0	7.8	-14.0	246.4	21.2	19.4	6.5	311.3	317.1	1.8	19.6	8.1	43.
10.9	34.7	3404.4	675.0	5.1	-14.0	248.1	20.6	19.1	7.7	311.5	317.2	1.8	22.5	9.4	47.
12.0	37.2	3710.7	650.0	2.1	-15.4	251.7	20.6	19.5	6.5	311.5	317.1	1.8	26.0	10.7	50.
13.1	40.1	4025.5	625.0	-0.9	-17.9	251.2	20.6	19.0	6.5	311.6	316.3	1.5	28.1	12.1	52.
14.3	42.7	4345.8	600.0	-3.2	-20.0	254.5	19.8	19.1	5.1	312.5	316.7	1.3	25.8	13.3	54.
15.5	45.7	4694.7	575.0	-6.4	-22.1	265.4	20.7	20.6	1.7	312.6	316.2	1.1	27.4	14.7	57.
16.7	48.8	5030.4	550.0	-9.1	-25.1	268.3	23.2	23.2	0.7	313.4	316.3	0.9	25.9	16.0	60.
17.9	51.4	5390.2	525.0	-9.9	-30.6	261.6	28.1	27.8	0.1	316.6	318.5	0.6	16.4	17.8	62.
19.3	54.0	5765.0	500.0	-12.0	-33.1	250.6	29.1	27.5	1.7	318.5	320.1	0.5	15.7	20.1	64.
20.7	56.1	6155.1	475.0	-15.4	-36.3	249.4	31.9	29.6	11.7	318.9	320.2	0.4	14.7	22.5	64.
22.1	61.6	6591.7	450.0	-18.0	-37.0	249.2	32.5	30.4	11.5	320.0	321.9	0.4	12.0	25.3	65.
23.7	65.1	6986.0	425.0	-21.5	-37.2	254.9	33.4	32.2	8.7	321.5	322.8	0.4	22.5	28.4	66.
25.2	68.7	7429.2	400.0	-25.6	-41.3	254.6	33.6	33.7	7.8	321.7	322.6	0.3	21.3	31.5	67.
27.0	72.5	7894.3	375.0	-29.2	-44.6	258.4	31.6	31.1	6.4	322.9	324.8	0.5	59.2	34.4	68.
28.4	76.7	8392.1	350.0	-32.9	-49.8	259.4	35.1	35.5	6.6	324.4	325.6	0.3	49.7	38.3	69.
30.4	80.3	8901.1	325.0	-36.8	-45.3	257.0	35.1	34.2	7.9	325.9	326.6	0.2	48.4	42.5	70.
32.4	85.3	9450.4	300.0	-41.2	-49.9	256.7	37.8	36.8	6.7	327.3	326.9	99.9	99.9	46.3	71.
34.6	90.9	10035.0	275.0	-46.3	-49.9	262.2	31.2	30.9	4.3	328.2	329.9	99.9	99.9	51.1	71.
36.6	95.2	10602.8	250.0	-50.3	-49.3	259.7	39.8	39.1	7.1	331.3	329.9	99.9	99.9	55.7	72.
38.7	100.5	11341.1	225.0	-55.7	-49.9	264.3	33.3	33.2	3.3	333.2	329.9	99.9	99.9	61.7	73.
42.1	105.3	12082.9	200.0	-60.5	-49.9	260.6	32.1	31.7	5.3	337.0	329.9	99.9	99.9	68.1	74.
44.7	112.3	12939.1	175.0	-64.6	-49.9	260.3	31.5	31.0	5.4	336.3	329.9	99.9	99.9	71.5	74.
47.9	116.8	13408.6	150.0	-60.0	-49.9	254.1	30.2	29.0	8.3	336.0	329.9	99.9	99.9	77.3	74.
51.6	127.7	15010.2	125.0	-59.1	-49.9	258.0	29.8	29.3	5.8	338.0	329.9	99.9	99.9	84.5	75.
56.1	136.6	16399.4	100.0	-60.3	-49.9	263.7	25.0	24.9	2.7	411.3	329.9	99.9	99.9	91.2	75.
62.0	144.3	18199.3	75.0	-66.1	-49.9	262.7	12.1	12.0	1.5	436.4	329.9	99.9	99.9	96.5	75.
68.6	153.0	20702.1	50.0	-57.7	-49.9	319.7	7.4	5.6	-8.8	507.6	329.9	99.9	99.9	99.7	76.
81.6	161.7	25170.1	25.0	-50.5	-49.9	321.4	4.6	2.9	-3.6	639.7	329.9	99.9	99.9	101.5	77.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE ON TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 363
AMARILLO, TEX

24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD CM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.2	1095.0	887.0	22.5	-3.7	340.0	5.1	1.7	-4.8	306.4	316.1	3.3	17.0	0.0	0.
99.9	99.9	1000.0	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	14.2	1212.8	875.0	20.4	-3.3	10.5	4.6	-0.8	-4.5	305.5	315.5	3.4	20.0	0.2	15.5
1.0	16.1	1461.4	850.0	17.6	-5.5	355.0	4.6	0.4	-4.6	305.0	313.8	3.0	25.2	0.3	17.6
1.8	18.3	1715.9	825.0	16.7	-7.2	339.9	4.7	1.6	-4.4	306.6	314.7	2.7	18.7	0.5	16.6
2.5	20.4	1976.5	800.0	14.3	-9.1	336.2	3.3	1.3	-3.1	306.7	313.9	2.4	18.9	0.7	16.5
3.3	22.5	2243.1	775.0	12.2	-10.7	310.7	4.7	3.6	-3.1	307.2	313.8	2.2	19.0	0.9	16.1
4.1	24.7	2516.6	750.0	10.3	-12.2	283.4	5.8	5.6	-1.3	308.0	314.1	2.0	19.1	1.1	15.1
4.9	26.8	2747.0	725.0	7.8	-14.1	256.4	7.9	7.6	1.9	308.3	313.7	1.8	19.3	1.3	13.8
5.8	29.2	3065.0	700.0	5.7	-13.6	231.2	9.2	8.7	3.0	309.0	314.9	1.9	23.3	1.5	12.3
6.6	31.7	3380.8	675.0	2.9	-15.2	254.2	9.4	9.1	2.6	309.1	314.5	1.7	24.9	1.8	11.0
7.7	34.2	3694.8	650.0	0.4	-15.1	260.0	10.2	10.0	1.8	309.6	315.2	1.6	30.1	2.4	10.2
8.6	36.5	3998.0	625.0	-2.0	-17.5	259.7	11.5	11.3	2.1	310.4	315.2	1.6	29.3	3.0	9.8
9.7	39.1	4321.6	600.0	-3.4	-24.6	258.5	14.0	13.8	2.8	312.2	315.1	0.9	17.5	3.7	9.4
10.8	41.6	4657.2	575.0	-5.1	-25.3	252.1	17.5	16.6	5.4	314.0	316.2	0.6	14.2	4.7	9.0
11.9	44.3	5005.3	550.0	-6.6	-29.3	247.8	21.2	19.6	6.0	316.3	318.4	0.6	14.3	6.0	8.4
13.0	47.1	5367.0	525.0	-8.6	-30.9	246.5	23.6	21.6	9.4	318.1	320.0	0.5	14.5	7.4	8.2
14.1	50.1	5743.0	500.0	-11.7	-33.2	242.8	27.1	24.1	12.4	318.7	320.3	0.5	14.7	9.0	7.9
15.2	52.9	6133.7	475.0	-14.8	-35.6	241.9	28.5	25.1	13.4	319.7	321.0	0.4	15.0	10.7	7.4
16.4	55.8	6540.7	450.0	-17.9	-28.7	244.2	29.9	26.9	13.0	320.8	323.5	0.8	38.4	12.7	7.4
17.6	58.3	6955.7	425.0	-21.0	-29.7	247.5	30.8	28.5	11.8	322.1	324.7	0.8	45.1	15.0	7.3
19.0	62.3	7410.3	400.0	-24.9	-34.1	248.8	31.7	29.6	11.5	322.9	325.4	0.5	41.7	17.6	7.2
20.4	65.6	7877.5	375.0	-28.5	-37.1	249.6	34.2	32.1	11.9	323.9	325.4	0.4	43.0	20.4	7.2
22.0	69.1	8366.6	350.0	-32.7	-40.6	249.4	35.2	32.9	12.4	324.6	325.7	0.3	44.7	23.6	7.1
23.6	72.6	8883.9	325.0	-37.1	-43.9	246.1	35.9	32.8	14.5	325.5	326.3	0.2	46.5	27.2	7.1
25.4	76.6	9432.5	300.0	-41.2	-49.9	246.0	35.9	32.8	14.6	327.3	329.9	99.9	99.9	30.7	7.0
27.3	80.6	10018.0	275.0	-45.7	-54.7	247.9	37.3	34.5	14.0	329.1	331.4	99.9	99.9	35.1	7.0
29.2	85.0	10646.1	250.0	-50.2	-59.9	247.4	38.0	35.1	14.6	331.4	334.1	99.9	99.9	39.3	7.0
31.2	89.6	11327.0	225.0	-55.1	-64.9	249.8	44.8	42.0	15.5	334.1	339.1	99.9	99.9	44.4	7.0
33.7	94.6	12071.2	200.0	-55.2	-69.9	253.0	41.9	40.1	12.3	339.1	348.5	99.9	99.9	50.1	7.0
36.5	100.0	12901.6	175.0	-61.5	-74.9	249.5	43.8	41.0	15.4	348.5	359.9	99.9	99.9	55.7	7.0
39.7	106.0	13863.8	150.0	-58.8	-79.9	266.0	21.3	21.3	1.5	368.8	387.4	99.9	99.9	64.5	7.0
43.5	112.7	15039.2	125.0	-59.4	-84.9	255.0	38.8	37.5	9.8	387.4	412.0	99.9	99.9	70.9	7.1
48.1	120.7	16406.3	100.0	-59.9	-89.9	253.4	23.9	22.9	6.8	412.0	446.4	99.9	99.9	78.7	7.2
53.4	130.0	18202.3	75.0	-60.4	-94.9	254.7	35.3	34.0	9.3	446.4	499.9	99.9	99.9	85.4	7.2
60.4	141.0	20729.0	50.0	-54.3	-99.9	72.3	14.8	-14.1	-4.5	915.6	999.9	99.9	99.9	90.9	7.2
71.2	154.0	25197.6	25.0	-51.9	-99.9	238.4	8.5	7.2	4.4	835.4	999.9	99.9	99.9	92.6	7.3

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 402
WALLOPS ISLAND, VA

24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	WEIGHT GP	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E PUT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.9	4.0	1015.6	13.3	10.5	99.9	99.9	99.9	99.9	286.2	306.4	7.9	83.0	999.9	999.9
0.4	5.5	136.3	1000.0	18.6	12.6	99.9	99.9	99.9	99.9	293.0	317.3	9.3	68.1	999.9	999.9
1.2	7.6	354.4	975.0	19.3	12.8	99.9	99.9	99.9	99.9	295.9	321.3	9.6	66.0	999.9	999.9
1.8	9.9	577.4	950.0	17.3	11.6	99.9	99.9	99.9	99.9	296.0	320.1	9.1	69.3	999.9	999.9
2.7	11.3	804.7	925.0	16.4	9.6	99.9	99.9	99.9	99.9	297.1	319.1	8.2	64.6	999.9	999.9
3.5	14.1	1035.1	900.0	17.5	8.2	99.9	99.9	99.9	99.9	300.6	321.4	7.6	54.3	999.9	999.9
4.1	16.1	1275.2	875.0	15.4	7.0	99.9	99.9	99.9	99.9	303.8	320.6	7.2	50.2	999.9	999.9
4.9	18.5	1524.7	850.0	13.6	6.4	99.9	99.9	99.9	99.9	301.7	321.3	7.1	60.5	999.9	999.9
5.5	20.7	1776.0	825.0	11.7	5.5	99.9	99.9	99.9	99.9	301.9	321.6	6.9	65.5	999.9	999.9
6.2	23.1	2032.9	800.0	9.9	4.9	99.9	99.9	99.9	99.9	302.6	321.6	6.8	71.2	999.9	999.9
7.1	25.4	2276.3	775.0	7.5	4.7	99.9	99.9	99.9	99.9	302.8	322.7	6.9	82.2	999.9	999.9
7.8	27.8	2565.8	750.0	5.4	4.2	99.9	99.9	99.9	99.9	303.3	322.7	6.9	91.7	999.9	999.9
8.7	30.4	2842.5	725.0	3.4	2.2	99.9	99.9	99.9	99.9	304.0	321.5	6.2	91.7	999.9	999.9
9.5	33.1	3126.8	700.0	1.7	0.7	99.9	99.9	99.9	99.9	305.1	321.4	5.8	93.1	999.9	999.9
10.5	35.6	3415.8	675.0	0.0	-1.8	99.9	99.9	99.9	99.9	306.3	323.7	5.0	87.7	999.9	999.9
11.3	38.3	3721.9	650.0	-1.4	-4.1	99.9	99.9	99.9	99.9	307.9	320.6	4.4	81.9	999.9	999.9
12.2	41.0	4033.4	625.0	-3.7	-5.7	99.9	99.9	99.9	99.9	308.7	320.5	4.0	86.3	999.9	999.9
13.2	43.7	4354.6	600.0	-5.9	-7.1	99.9	99.9	99.9	99.9	309.8	320.9	3.7	90.8	999.9	999.9
14.3	46.9	4687.0	575.0	-8.8	-18.1	99.9	99.9	99.9	99.9	309.8	315.0	1.7	48.3	999.9	999.9
15.3	50.0	5029.8	550.0	-11.0	-22.3	99.9	99.9	99.9	99.9	311.1	314.8	1.2	38.0	999.9	999.9
16.4	52.9	5386.2	525.0	-12.7	-21.6	99.9	99.9	99.9	99.9	313.3	317.5	1.3	47.1	999.9	999.9
17.4	55.9	5758.8	500.0	-13.2	-21.4	99.9	99.9	99.9	99.9	317.0	321.5	1.4	50.2	999.9	999.9
18.6	58.3	6144.8	475.0	-14.5	-26.8	99.9	99.9	99.9	99.9	320.1	323.1	0.9	34.1	999.9	999.9
19.7	62.7	6550.1	450.0	-17.5	-31.1	99.9	99.9	99.9	99.9	321.3	323.4	0.6	29.1	999.9	999.9
21.1	66.1	6942.1	425.0	-20.2	-34.6	99.9	99.9	99.9	99.9	323.1	324.8	0.5	26.1	999.9	999.9
22.5	70.0	7427.8	400.0	-24.3	-35.9	99.9	99.9	99.9	99.9	323.4	325.0	0.4	33.1	999.9	999.9
24.0	73.7	7895.1	375.0	-28.1	-39.0	99.9	99.9	99.9	99.9	324.4	325.6	0.3	34.0	999.9	999.9
25.4	77.8	8385.8	350.0	-32.3	-44.5	99.9	99.9	99.9	99.9	325.1	325.8	0.2	28.5	999.9	999.9
27.1	81.8	8904.5	325.0	-36.5	-49.7	99.9	99.9	99.9	99.9	326.3	326.7	0.1	24.0	999.9	999.9
28.3	86.2	9454.0	300.0	-41.1	-59.4	99.9	99.9	99.9	99.9	327.5	999.9	99.9	999.9	999.9	999.9
30.9	91.0	10038.2	275.0	-46.2	-69.9	99.9	99.9	99.9	99.9	328.3	999.9	99.9	999.9	999.9	999.9
32.5	95.9	10664.5	250.0	-51.4	-79.9	99.9	99.9	99.9	99.9	329.6	999.9	99.9	999.9	999.9	999.9
34.7	101.0	11339.4	225.0	-57.9	-89.9	99.9	99.9	99.9	99.9	329.6	999.9	99.9	999.9	999.9	999.9
36.6	106.8	12073.2	200.0	-62.4	-99.9	99.9	99.9	99.9	99.9	333.9	999.9	99.9	999.9	999.9	999.9
38.0	112.8	12890.3	175.0	-64.8	-99.9	99.9	99.9	99.9	99.9	343.0	999.9	99.9	999.9	999.9	999.9
41.7	119.3	13829.0	150.0	-64.2	-99.9	99.9	99.9	99.9	99.9	359.5	999.9	99.9	999.9	999.9	999.9
45.4	126.7	14956.4	125.0	-58.1	-99.9	99.9	99.9	99.9	99.9	389.8	999.9	99.9	999.9	999.9	999.9
48.7	134.7	16364.5	100.0	-60.9	-99.9	99.9	99.9	99.9	99.9	410.1	999.9	99.9	999.9	999.9	999.9
52.0	142.3	18134.7	75.0	-63.3	-99.9	99.9	99.9	99.9	99.9	440.3	999.9	99.9	999.9	999.9	999.9
55.0	150.3	20654.8	50.0	-57.6	-99.9	99.9	99.9	99.9	99.9	507.9	999.9	99.9	999.9	999.9	999.9
61.8	158.7	25100.1	25.0	-51.3	-99.9	99.9	99.9	99.9	99.9	637.7	999.9	99.9	999.9	999.9	999.9

ORIGINAL PAGE IS
OF POOR QUALITY

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
• BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 405
STERLING, VA

24 APRIL 1975
1736 GMT

165 14. 0

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.9	85.0	1001.7	23.9	14.6	210.0	8.2	4.1	7.1	298.3	326.3	10.5	50.0	0.0	0.
0.1	6.1	99.8	1000.0	23.6	99.9	53.2	11.0	-8.8	-6.6	296.7	999.9	99.9	999.9	1.0	24.
0.7	6.5	319.3	975.0	21.9	99.9	56.6	6.5	-5.4	-3.6	297.2	999.9	99.9	999.9	0.8	14.
1.3	10.8	543.2	950.0	19.6	99.9	208.9	5.9	2.9	5.2	298.1	999.9	99.9	999.9	0.8	14.
2.1	13.2	772.2	925.0	17.5	11.5	213.5	10.9	6.0	9.1	298.5	323.4	9.3	68.0	1.3	21.
3.0	15.6	1005.8	900.0	15.1	11.2	221.5	11.6	7.7	8.7	298.3	323.4	9.4	72.5	1.9	27.
3.8	18.0	1243.9	875.0	13.0	10.6	229.8	13.9	10.6	9.0	298.5	323.3	9.3	85.8	2.5	31.
4.7	20.5	1477.7	850.0	11.5	9.5	246.2	17.6	15.1	7.1	299.4	323.7	9.0	88.8	3.2	34.
5.7	23.0	1737.6	825.0	11.3	9.6	260.1	19.0	16.7	3.3	301.6	324.9	8.5	83.5	4.2	47.
6.9	25.6	1995.2	800.0	11.0	6.3	264.1	18.6	18.5	1.9	303.9	324.8	7.5	73.0	5.3	56.
8.0	28.1	2254.9	775.0	9.5	4.9	260.8	16.8	16.6	2.7	304.9	324.6	7.0	73.0	6.4	71.
9.0	30.9	2531.3	750.0	7.3	3.5	257.3	16.7	16.3	3.7	305.4	324.0	6.6	76.9	7.3	61.
9.8	31.7	2610.0	725.0	5.5	2.5	256.8	17.1	16.7	3.9	306.3	324.2	6.3	81.1	8.1	74.
10.7	34.4	3056.3	700.0	3.2	1.5	258.1	18.6	16.2	3.8	306.8	324.2	6.1	88.6	9.7	77.
11.5	36.1	3390.3	675.0	1.1	-0.3	257.7	20.2	15.8	4.3	307.6	323.8	5.7	92.4	10.0	87.
12.4	41.9	3653.4	650.0	-0.8	-1.7	254.4	21.2	20.4	5.7	308.7	323.8	5.2	94.0	11.3	94.
13.4	44.9	4001.4	625.0	-2.2	-5.9	248.3	23.6	21.9	8.7	310.4	322.1	4.0	76.0	12.3	67.
14.4	47.9	4329.5	600.0	-4.7	-9.3	248.3	26.4	24.6	9.8	311.1	320.6	3.2	70.2	14.0	67.
15.7	50.8	4663.4	575.0	-7.0	-11.6	249.7	27.9	26.1	9.7	312.1	320.3	2.7	68.4	15.0	67.
17.0	58.0	5008.6	550.0	-9.2	-13.2	250.2	26.8	23.3	9.1	313.4	321.2	2.5	73.1	18.1	74.
18.2	57.1	5367.7	525.0	-11.0	-15.4	252.5	24.7	23.5	7.4	315.4	322.3	2.2	70.2	20.2	67.
19.3	60.5	5741.6	500.0	-13.0	-19.0	250.4	20.9	20.6	3.7	317.4	322.9	1.7	60.4	21.6	67.
20.4	63.9	6131.0	475.0	-15.2	-22.9	265.8	19.2	15.1	1.4	319.2	323.4	1.3	52.0	22.9	70.
21.6	67.1	6517.7	450.0	-17.9	-24.5	265.6	18.8	18.7	1.4	320.8	324.7	1.2	56.4	24.2	71.
22.9	70.6	6813.1	425.0	-20.9	-26.7	264.6	20.4	20.3	1.9	322.2	325.6	1.0	56.4	25.7	72.
24.4	74.3	7405.4	400.0	-24.1	-29.6	267.2	20.4	20.4	0.8	323.8	326.5	0.8	59.8	27.5	73.
25.9	78.2	7876.3	375.0	-27.4	-33.9	267.2	19.7	17.7	1.0	325.3	327.3	0.6	53.9	29.3	73.
27.6	82.3	8363.9	350.0	-31.1	-38.6	270.6	23.2	23.2	-0.2	326.8	328.1	0.4	47.1	31.3	73.
29.2	86.0	8895.5	325.0	-35.5	-43.1	269.8	24.7	24.7	0.1	327.7	328.6	0.3	45.3	33.5	71.
30.9	90.5	9441.4	300.0	-40.3	-49.9	276.4	25.2	25.0	-2.8	328.6	999.9	99.9	999.9	35.1	77.
32.7	95.1	10024.0	275.0	-45.9	-56.9	278.7	23.6	23.3	-3.6	329.7	999.9	99.9	999.9	36.1	78.
34.5	99.8	10654.4	250.0	-51.6	-64.0	282.4	26.4	25.8	-5.7	329.3	999.9	99.9	999.9	40.4	73.
36.6	104.8	11328.2	225.0	-58.0	-71.1	283.6	30.5	24.6	-7.1	329.6	999.9	99.9	999.9	44.1	92.
38.9	110.4	12059.2	200.0	-64.8	-78.1	287.1	40.1	38.3	-11.8	330.1	999.9	99.9	999.9	48.9	64.
41.5	116.0	12878.3	175.0	-64.0	-84.0	283.2	20.5	19.9	-4.7	348.3	999.9	99.9	999.9	52.1	82.
44.9	122.9	13817.7	150.0	-62.7	-99.9	282.6	25.8	25.1	-5.6	362.0	999.9	99.9	999.9	57.6	97.
48.7	130.3	14657.1	125.0	-59.2	-99.9	269.4	27.7	27.7	0.3	387.8	999.9	99.9	999.9	63.4	94.
53.8	137.7	16362.4	100.0	-57.4	-99.9	286.7	15.1	14.5	-4.3	410.8	999.9	99.9	999.9	70.3	73.
59.4	145.7	18139.2	75.0	-65.2	-99.9	315.1	13.4	9.4	-9.5	438.3	999.9	99.9	999.9	74.5	73.
67.8	154.7	20666.8	50.0	-57.2	-99.9	346.2	5.2	1.2	-5.0	504.9	999.9	99.9	999.9	75.6	94.
74.8	164.5	25101.3	25.0	-51.9	-99.9	224.5	2.2	-0.8	-2.0	635.6	999.9	99.9	999.9	76.1	73.

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF FOUR QUALITY

STATION NO. 425
HUNTINGTON, WVA

24 APRIL 1975
1730 GMT

139 76.0

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX P/T GM AG	RH PCT	RANGE KM	AZ DG
0.0	6.1	246.0	981.4	18.3	16.1	270.0	10.3	10.3	0.0	294.6	325.4	11.8	87.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.2	8.7	302.3	975.0	17.9	16.1	295.2	11.7	10.6	-5.0	294.8	325.8	11.9	88.9	0.2	31.
0.9	10.9	524.8	950.0	17.1	13.2	301.5	12.3	10.5	-6.4	296.1	326.4	11.6	88.5	0.5	12.
1.6	13.4	753.0	925.0	16.4	13.7	270.9	12.3	12.3	-0.2	297.5	326.0	10.7	93.9	1.0	121.
2.3	15.7	986.4	900.0	14.8	13.7	249.2	16.2	15.1	5.8	298.2	327.6	11.0	93.1	1.6	103.
3.0	18.2	1224.8	875.0	13.4	13.0	240.6	13.4	11.6	6.6	299.2	328.1	10.8	97.0	2.0	33.
3.9	20.5	1469.1	850.0	12.0	11.5	240.2	18.1	15.7	9.0	300.1	327.2	10.1	96.3	2.6	82.
4.7	23.1	1719.1	825.0	10.4	11.7	237.4	20.5	17.3	11.1	300.8	325.2	9.0	92.6	3.7	77.
6.1	25.6	1975.5	800.0	9.2	5.8	243.0	23.3	20.8	10.6	301.9	321.9	7.3	79.2	5.5	71.
7.7	28.2	2238.1	775.0	7.3	3.7	241.1	27.5	24.0	13.3	302.5	320.5	6.5	78.0	7.7	64.
9.0	30.9	2507.4	750.0	4.7	1.4	245.0	29.0	26.3	12.2	303.4	319.2	5.7	79.2	10.3	67.
10.5	33.7	2783.1	725.0	2.2	-1.3	247.4	29.5	27.2	11.4	303.5	316.2	4.8	77.9	12.8	67.
11.7	36.2	3065.8	700.0	0.5	-2.2	245.6	26.9	24.5	11.1	303.7	317.0	4.7	81.6	14.7	67.
12.9	39.1	3356.1	675.0	-1.4	-3.9	244.5	25.6	23.3	11.0	304.6	316.9	4.3	83.4	16.7	67.
14.5	41.5	3658.9	650.0	0.1	-1.5	247.3	24.1	22.0	10.9	309.7	325.1	5.3	89.4	19.1	67.
16.0	44.5	3974.0	625.0	-0.8	-2.7	248.7	23.7	22.1	8.6	312.1	326.9	5.0	87.3	21.7	67.
17.6	47.8	4298.6	600.0	-3.4	-6.4	248.2	29.9	27.7	11.1	312.7	324.5	4.0	79.9	24.2	67.
19.0	50.7	4634.5	575.0	-5.0	-9.7	247.7	26.1	24.2	9.9	314.5	324.2	3.2	69.4	26.6	67.
20.7	53.8	4983.0	550.0	-6.7	-12.2	246.7	28.3	26.0	11.2	316.4	324.8	2.7	64.9	29.3	67.
22.4	56.9	5345.1	525.0	-8.9	-14.7	248.3	27.1	25.2	10.0	318.0	325.3	2.3	62.5	32.0	67.
24.1	60.1	5722.0	500.0	-10.9	-16.9	248.5	32.5	30.2	11.9	319.9	326.4	2.0	61.4	35.1	67.
26.0	63.6	6114.6	475.0	-13.4	-19.4	248.5	30.4	28.3	11.1	321.5	327.2	1.7	60.5	34.9	67.
27.4	66.9	6524.6	450.0	-15.6	-21.6	246.1	32.3	29.5	13.1	323.7	329.7	1.5	59.9	41.5	57.
28.9	70.4	6953.6	425.0	-18.5	-24.6	248.6	35.7	33.3	13.0	325.3	329.9	99.9	99.9	44.4	57.
30.5	74.0	7402.9	400.0	-21.6	-27.9	256.3	31.2	30.3	7.4	327.0	329.9	99.9	99.9	47.7	68.
32.6	78.0	7875.1	375.0	-25.0	-30.9	260.9	32.0	31.6	5.1	328.5	329.9	99.9	99.9	51.5	56.
34.2	81.8	8373.1	350.0	-28.7	-34.9	260.8	30.6	30.2	4.9	330.1	329.9	99.9	99.9	54.6	56.
36.1	85.9	8999.7	325.0	-32.4	-38.9	262.8	33.7	31.0	3.9	332.0	329.9	99.9	99.9	58.1	70.
38.1	90.2	9456.1	300.0	-37.5	-43.9	258.8	33.2	32.5	6.4	332.6	329.9	99.9	99.9	61.7	71.
40.0	95.3	10051.8	275.0	-42.6	-48.9	260.7	34.5	34.1	5.6	333.5	329.9	99.9	99.9	65.6	71.
42.0	99.6	10697.5	250.0	-48.3	-54.9	264.8	33.7	33.6	-0.2	334.3	329.9	99.9	99.9	69.7	72.
44.1	104.9	11371.0	225.0	-54.8	-60.9	270.4	36.5	36.5	-0.2	335.5	329.9	99.9	99.9	74.0	73.
46.4	110.4	12112.3	200.0	-61.4	-67.9	269.8	27.2	27.2	0.1	335.5	329.9	99.9	99.9	78.2	74.
48.9	116.3	12928.8	175.0	-65.1	-71.9	272.0	30.3	30.0	-4.2	332.6	329.9	99.9	99.9	82.1	75.
51.7	123.3	13880.6	150.0	-60.3	-66.9	280.8	26.3	25.8	-4.9	316.2	329.9	99.9	99.9	86.7	76.
55.0	130.3	15025.0	125.0	-57.2	-63.9	260.2	26.7	26.3	4.5	361.4	329.9	99.9	99.9	91.8	77.
59.1	138.0	16429.2	100.0	-59.1	-65.9	278.3	15.3	15.1	-2.2	413.7	329.9	99.9	99.9	98.1	77.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN °C 10 DEG
* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 429
DAYTON, OHIO

24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP CG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MR RTO GM/KS	RH PCT	RANGE KM	AZ LG
0.0	8.2	298.0	974.6	16.2	14.4	300.0	3.1	2.7	-1.5	292.9	320.6	10.7	89.0	0.3	5.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.0	99.0	99.0	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	10.5	915.5	950.0	14.6	13.0	303.0	8.4	7.0	-4.6	293.4	319.4	10.0	89.8	6.2	12.2
1.9	12.7	741.1	925.0	13.2	11.7	307.4	5.7	4.6	-3.5	294.0	318.7	9.4	90.7	0.6	12.4
2.7	15.2	971.3	900.0	11.2	10.0	300.5	5.0	4.3	-2.5	294.2	317.0	8.6	92.6	1.1	12.5
3.7	17.4	1266.9	875.0	10.3	9.2	281.4	5.1	5.0	-1.0	295.5	317.9	8.4	93.0	1.2	12.6
4.6	19.3	1448.0	850.0	8.9	7.9	271.7	6.0	6.0	-0.2	296.5	317.6	7.9	93.3	1.5	11.0
5.5	22.2	1855.2	825.0	7.4	6.3	247.0	5.0	4.6	4.0	297.4	317.1	7.3	92.5	1.7	11.0
6.4	25.7	1948.6	800.0	6.4	4.6	253.9	6.9	6.6	1.9	298.9	317.2	6.7	87.9	1.9	13.4
7.3	27.0	2209.3	775.0	5.8	4.0	246.6	8.4	7.7	3.3	300.9	317.2	6.6	89.4	2.3	9.7
8.1	29.7	2477.9	750.0	5.1	2.7	250.6	10.0	9.5	3.3	302.9	320.4	6.2	84.5	2.7	9.7
9.7	32.3	2754.8	725.0	3.8	1.3	256.5	11.7	11.4	2.7	304.4	320.8	5.8	83.7	3.3	9.0
10.0	35.1	3039.1	700.0	1.5	0.1	257.6	13.8	13.5	3.0	304.9	320.6	5.5	90.2	4.3	9.4
11.2	37.7	3332.2	675.0	0.2	-0.9	257.9	15.6	15.3	3.3	306.5	321.8	5.3	92.7	5.0	4.0
12.3	40.4	3634.5	650.0	-1.3	-2.3	260.2	17.1	16.8	2.9	308.1	322.5	5.0	92.6	6.1	4.4
13.4	43.1	3947.0	625.0	-2.2	-6.1	265.7	16.5	16.5	1.2	310.4	321.9	3.9	75.1	7.1	4.4
14.8	46.0	4271.9	600.0	-2.0	-9.3	271.0	14.1	14.1	-0.2	315.2	323.8	3.1	56.8	8.5	4.5
16.1	49.1	4609.2	575.0	-4.4	-11.3	270.1	15.6	15.6	-0.0	315.2	323.8	2.8	56.3	9.7	4.5
17.4	51.9	4958.4	550.0	-6.6	-13.7	272.0	17.1	17.1	-0.6	316.6	324.1	2.4	56.8	10.9	4.6
18.9	55.1	5323.8	525.0	-8.4	-15.5	267.7	22.3	22.2	0.9	318.6	325.4	2.2	56.2	12.7	4.7
20.2	58.0	5697.7	500.0	-10.9	-18.1	267.3	21.7	21.6	1.0	319.9	325.8	1.8	55.4	14.5	4.7
21.6	61.3	6090.1	475.0	-13.2	-21.6	269.7	22.8	22.8	0.1	321.8	326.5	1.4	49.2	16.4	4.7
23.2	64.7	6499.6	450.0	-16.4	-25.0	272.5	25.1	25.0	-1.1	322.7	326.4	1.1	47.1	18.6	4.7
24.8	67.9	6927.1	425.0	-19.4	-28.7	271.1	26.4	26.4	-0.5	324.1	327.0	0.8	43.3	21.1	4.8
26.6	71.4	7374.8	400.0	-23.1	-31.1	267.2	26.3	26.2	1.3	325.0	327.4	0.7	47.4	23.3	4.8
28.2	75.0	7843.9	375.0	-26.4	-34.4	261.2	24.9	24.6	3.8	326.6	328.5	0.5	46.8	26.5	4.8
30.1	78.0	8338.7	350.0	-30.3	-38.9	252.5	26.9	25.6	6.1	327.9	329.3	0.4	42.4	29.2	4.7
31.9	82.8	8861.4	325.0	-34.4	-43.1	251.7	30.0	28.5	9.4	329.2	330.1	0.3	40.6	32.2	4.5
33.9	86.8	9416.2	300.0	-38.7	-47.2	243.4	26.0	23.2	11.7	330.7	331.4	0.2	39.9	34.6	4.4
35.9	91.2	10007.2	275.0	-43.7	-51.9	241.3	30.4	27.6	14.6	332.0	332.9	99.9	99.9	36.3	4.2
39.0	95.8	10639.9	250.0	-49.3	-59.9	240.3	39.4	34.3	19.5	332.7	332.9	99.9	99.9	42.5	4.0
40.2	100.7	11320.5	225.0	-55.8	-66.3	238.3	38.7	32.9	20.1	333.0	333.9	99.9	99.9	47.1	4.0
42.6	106.3	12059.9	200.0	-61.9	-72.9	241.5	30.5	28.8	14.6	334.2	334.2	99.9	99.9	51.4	4.0
45.3	111.5	12874.0	175.0	-65.7	-79.9	259.5	32.6	32.1	6.0	341.6	341.6	99.9	99.9	58.1	4.0
48.3	117.5	13826.1	150.0	-60.7	-99.9	274.1	25.3	25.2	-1.8	365.6	365.6	99.9	99.9	63.1	4.0
52.2	124.7	14970.1	125.0	-57.4	-99.9	999.9	99.9	99.9	99.9	391.0	391.0	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 433
SALEM, ILL24 APRIL 1975
1756 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	CEW PT DG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V CCNP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	5.4	175.0	990.3	18.9	15.4	360.0	5.7	0.0	-5.7	294.4	323.6	11.2	80.0	9.0	3.0
99.9	55.9	99.9	1300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9
0.4	6.5	308.7	975.0	17.0	13.7	351.9	3.9	0.6	-3.9	293.6	320.2	10.2	81.0	0.2	1.3
1.2	8.5	525.9	950.0	14.9	13.1	351.2	4.2	0.4	-4.2	293.7	319.9	10.0	86.7	0.3	1.7
1.9	10.4	755.6	925.0	13.0	11.7	348.1	3.2	0.7	-3.1	293.9	318.6	9.4	91.7	2.5	17.5
2.6	12.3	985.8	900.0	11.4	10.4	293.2	1.6	1.5	-0.6	294.4	317.8	8.9	93.4	6.5	17.5
3.5	14.4	1221.6	875.0	10.9	9.2	242.9	3.5	3.1	1.6	296.3	317.8	8.9	89.4	0.0	10.4
4.3	16.3	1463.8	850.0	10.4	6.4	244.7	7.7	7.0	3.3	298.0	317.4	7.1	76.3	6.5	17.4
5.1	18.5	1712.2	825.0	9.3	4.6	244.3	11.6	10.7	4.7	299.2	317.0	6.5	72.2	6.5	10.7
5.9	20.6	1967.3	800.0	8.0	3.2	244.7	14.3	12.9	6.1	300.5	317.3	6.1	71.8	1.4	9.0
6.7	22.4	2228.8	775.0	6.3	1.3	245.7	16.1	14.7	6.6	301.3	316.6	5.5	70.4	2.1	9.1
7.5	25.1	2457.9	750.0	6.0	-1.0	249.3	17.0	15.9	6.0	303.7	317.2	4.8	60.9	2.9	7.7
8.5	27.2	2776.1	725.0	6.9	-5.8	258.7	17.9	17.6	3.5	307.5	317.6	3.4	39.8	3.9	7.4
9.4	29.6	3063.7	700.0	5.4	-9.7	267.7	18.6	18.8	0.8	308.8	316.7	2.6	32.6	4.9	7.4
10.2	32.1	3355.7	675.0	3.6	-11.9	273.0	19.7	19.7	-1.0	309.9	316.9	2.3	31.1	5.8	7.0
11.2	34.6	3645.4	650.0	1.8	-14.3	276.9	21.1	20.9	-2.5	311.2	317.3	1.9	24.1	7.0	4.3
12.2	37.0	3940.2	625.0	-0.2	-18.4	277.1	23.0	22.8	-3.2	312.4	316.9	1.4	23.7	8.2	4.5
13.3	39.7	4300.1	600.0	-1.9	-24.4	280.3	24.6	24.2	-4.4	314.0	316.9	0.9	15.8	9.4	4.7
14.4	42.1	4642.6	575.0	-4.2	-25.8	284.1	25.4	24.7	-6.2	315.2	317.9	0.8	16.6	11.4	4.5
15.6	45.0	4991.6	550.0	-6.7	-30.5	282.5	27.8	27.2	-6.0	316.2	318.0	0.5	12.9	13.3	4.1
16.8	47.9	5353.6	525.0	-8.7	-31.6	278.5	29.0	28.7	-4.3	318.3	319.8	0.5	13.6	15.3	3.6
17.2	50.7	5723.4	500.0	-12.1	-33.9	275.0	29.0	28.9	-2.5	318.3	319.8	0.4	14.3	17.8	3.1
18.5	53.6	6115.3	475.0	-15.1	-27.8	272.5	29.4	29.4	-1.3	319.4	322.1	0.8	32.7	19.9	4.3
20.8	56.6	6525.9	450.0	-17.9	-31.2	267.1	31.7	31.7	1.6	320.7	323.0	0.7	32.0	22.4	4.5
22.0	59.9	6950.4	425.0	-21.3	-33.6	265.1	32.7	32.5	2.8	321.6	323.5	0.5	32.0	24.7	4.2
23.4	63.1	7394.3	400.0	-25.1	-36.6	263.5	35.5	35.3	4.0	322.3	323.8	0.4	33.3	27.3	4.1
24.9	66.5	7866.6	375.0	-28.4	-43.6	262.7	36.0	33.8	4.3	323.9	324.7	0.2	21.4	30.4	4.1
26.3	70.1	8350.4	350.0	-33.0	-47.3	262.2	36.4	34.4	1.7	324.2	324.3	0.1	21.9	33.4	4.0
27.8	73.9	8860.7	325.0	-37.3	-50.2	265.2	36.2	34.1	2.9	325.2	325.6	0.1	24.3	36.4	4.0
29.5	77.3	9414.5	300.0	-41.8	59.9	262.7	33.1	31.6	9.4	326.4	326.4	99.9	99.9	40.3	4.0
31.5	81.8	10000.0	275.0	-45.6	99.9	268.1	33.8	31.4	12.5	329.2	329.2	99.9	99.9	43.6	4.7
33.5	86.2	10627.8	250.0	-50.8	99.9	269.4	33.9	31.7	11.9	330.5	329.9	99.9	99.9	47.9	4.5
35.4	91.0	11303.6	225.0	-56.2	99.9	262.3	37.6	37.2	5.0	332.5	332.5	99.9	99.9	51.7	4.5
37.9	96.0	12045.0	200.0	-61.7	99.9	262.7	43.9	43.5	5.6	335.1	335.1	99.9	99.9	57.3	4.5
40.6	101.3	12876.3	175.0	-60.4	99.9	266.4	31.6	31.6	2.0	350.2	350.2	99.9	99.9	63.5	4.5
44.0	107.5	13836.8	150.0	-58.1	99.9	263.2	33.4	33.2	4.0	370.1	370.1	99.9	99.9	69.9	4.4
47.9	114.3	14951.2	125.0	-59.7	99.9	255.0	23.5	22.8	5.7	366.9	366.9	99.9	99.9	76.5	4.4
52.8	122.0	16376.7	100.0	-58.8	99.9	276.9	27.2	27.0	-3.3	414.1	414.1	99.9	99.9	83.5	4.3
58.5	131.0	18159.2	75.0	-60.4	99.9	263.1	10.9	10.8	1.3	446.3	446.3	99.9	99.9	89.0	4.3
66.4	142.0	20700.6	50.0	-56.3	99.9	261.5	11.8	11.7	1.8	510.8	510.8	99.9	99.9	92.4	4.3
99.9	99.9	99.9	25.0	59.9	99.9	99.9	99.9	99.9	59.9	99.9	999.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 451
DODGE CITY, KAN

24 APRIL 1975
1730 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PUT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.2	791.0	921.2	13.9	12.3	10.0	8.8	-1.5	-8.7	265.2	321.1	9.8	98.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
0.8	15.2	987.3	900.0	12.2	10.4	17.8	13.2	-4.0	-12.5	295.2	318.7	8.8	98.7	0.0	0.0
1.6	17.4	1224.1	875.0	12.1	10.6	13.9	12.4	-3.0	-12.1	297.5	322.2	9.2	90.7	1.2	13.9
2.5	19.9	1467.9	850.0	13.0	11.6	30.9	6.7	-3.5	-5.8	301.1	328.7	10.2	91.3	1.7	19.9
3.2	22.1	1719.1	825.0	11.3	9.8	40.0	6.8	-4.4	-5.2	301.7	327.0	9.3	90.8	2.0	22.2
4.2	25.7	1976.1	800.0	11.2	7.2	31.7	3.1	-1.6	-2.6	304.1	326.4	8.0	76.8	2.3	26.4
5.1	28.3	2281.5	775.0	11.3	-3.5	93.2	1.3	-1.3	0.1	306.5	317.7	3.8	35.1	2.4	20.5
5.9	29.6	2514.8	750.0	9.5	-8.0	175.9	1.7	-0.1	1.6	307.3	315.7	2.8	28.1	2.3	20.1
6.8	32.2	2794.6	725.0	7.1	-16.7	219.0	1.5	1.0	1.2	307.5	311.9	1.4	16.4	2.2	20.7
7.7	35.0	3081.6	700.0	5.0	-19.3	225.2	2.9	2.0	2.0	308.1	311.8	1.2	15.2	2.2	23.9
8.6	37.4	3376.8	675.0	2.6	-25.6	229.5	4.8	3.4	3.4	308.6	310.9	0.7	10.3	2.3	23.4
9.6	40.2	3680.2	650.0	-0.3	-24.0	229.5	6.6	5.0	4.3	308.7	311.4	0.8	14.7	1.6	19.9
10.7	42.9	3982.2	625.0	-3.0	-24.4	231.4	7.6	5.9	4.7	309.1	311.8	0.8	17.2	1.3	14.9
11.7	45.9	4313.8	600.0	-6.0	-24.6	243.7	8.2	7.3	3.6	309.3	312.1	0.9	21.2	1.0	16.9
12.8	48.9	4645.5	575.0	-8.5	-23.2	252.4	10.5	10.0	3.2	310.1	313.4	1.0	29.4	1.1	13.9
13.8	51.7	4988.8	550.0	-10.9	-23.7	245.2	13.8	12.5	5.8	311.3	314.6	1.0	33.7	1.6	11.4
15.0	54.8	5345.0	525.0	-12.9	-31.4	243.1	16.4	14.6	7.4	312.9	314.6	0.5	18.6	2.4	9.0
16.2	57.8	5715.3	500.0	-15.9	-34.1	246.2	19.5	17.9	7.9	314.1	315.6	0.4	18.5	3.7	8.4
17.4	61.1	6100.1	475.0	-18.4	-33.5	247.8	22.3	20.7	8.4	315.2	316.8	0.5	25.0	5.2	7.4
18.7	64.9	6501.3	450.0	-21.5	-32.7	254.0	25.2	24.2	7.0	316.3	318.1	0.5	35.2	7.0	7.4
20.0	67.9	6920.2	425.0	-24.5	-30.5	256.2	27.9	27.1	6.7	317.6	320.0	0.7	57.1	9.1	7.4
21.4	71.2	7355.1	400.0	-27.7	-42.2	252.1	30.3	28.8	9.3	318.9	319.8	0.2	23.4	11.4	7.4
22.7	75.0	7819.1	375.0	-31.5	-43.3	249.9	32.9	30.9	11.3	319.8	320.6	0.2	30.0	13.7	7.4
24.3	78.0	8304.7	350.0	-34.6	-42.2	248.2	39.7	36.8	14.7	322.0	323.0	0.3	45.4	17.3	7.4
25.7	82.6	8818.5	325.0	-38.4	-47.2	247.5	44.0	40.7	16.8	323.7	324.3	0.2	38.6	21.0	7.2
27.3	88.9	9364.0	300.0	-42.5	99.9	249.3	48.3	45.2	17.1	325.5	324.9	0.9	99.9	25.4	7.2
29.2	91.4	9845.6	275.0	-47.3	99.9	247.1	50.5	46.5	19.7	326.7	325.9	99.9	99.9	31.1	7.1
31.1	96.0	10365.3	250.0	-51.8	99.9	249.6	50.5	47.4	17.6	329.1	329.9	99.9	99.9	36.8	7.1
33.3	101.0	11245.9	225.0	-55.5	99.9	250.6	44.2	41.7	14.7	333.5	333.5	99.9	99.9	43.0	7.1
35.7	106.4	11990.0	200.0	-55.0	99.9	247.7	41.7	38.6	15.8	339.3	339.3	99.9	99.9	49.0	7.1
39.4	115.3	12829.9	175.0	-56.9	99.9	257.6	33.6	32.3	9.3	356.0	356.0	99.9	99.9	55.7	7.1
41.5	118.5	13604.3	150.0	-57.8	99.9	257.6	30.7	30.0	6.6	370.5	370.5	99.9	99.9	61.6	7.1
45.1	125.5	14952.4	125.0	-58.1	99.9	252.9	33.4	31.9	9.8	389.9	389.9	99.9	99.9	68.2	7.1
50.0	132.3	16361.0	100.0	-57.4	99.9	251.1	24.4	23.1	7.9	416.9	416.9	99.9	99.9	76.8	7.1
55.9	141.3	18177.4	75.0	-58.4	99.9	260.1	8.8	8.7	1.5	450.5	450.5	99.9	99.9	82.9	7.1
63.8	149.7	20720.9	50.0	-56.6	99.9	279.5	10.4	10.3	-1.7	510.1	510.1	99.9	99.9	87.1	7.1
75.3	158.5	25159.1	25.0	-50.2	99.9	46.1	2.0	-1.4	-1.4	640.5	640.5	99.9	99.9	88.9	7.1

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 456
TOPEKA, KAN24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RH PCT	PANGE KM	AZ DG
0.0	6.3	268.0	978.5	20.6	17.2	40.0	3.6	-2.3	-2.8	297.3	330.8	12.8	81.0	0.0	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.3	290.0	975.0	19.8	15.8	42.9	3.3	-2.3	-2.4	296.7	327.6	11.7	77.4	0.0	315
0.8	8.5	522.1	950.0	17.0	13.0	53.6	1.9	-1.5	-1.1	295.8	322.1	10.0	77.3	0.1	224
1.5	10.4	749.2	925.0	14.9	12.7	125.2	1.3	-1.1	0.8	295.7	322.2	10.0	87.3	0.2	234
2.3	12.3	980.9	900.0	12.9	11.8	172.8	4.0	-0.5	4.0	296.1	321.9	9.7	92.5	0.2	254
3.1	14.4	1218.9	875.0	14.9	7.4	180.0	7.0	-0.0	7.0	300.3	320.6	7.4	60.5	0.3	374
4.0	16.4	1463.8	850.0	13.9	3.7	157.1	5.3	-2.0	4.8	301.5	317.9	5.9	50.0	0.7	314
4.8	18.5	1713.2	825.0	12.4	3.5	153.7	3.9	-1.7	3.5	302.5	319.3	6.0	54.7	0.9	334
5.6	20.6	1972.8	800.0	10.6	7.2	196.4	3.5	1.2	3.3	303.5	325.7	6.0	79.9	1.0	314
6.3	22.7	2237.3	775.0	9.1	6.7	212.0	5.5	2.9	4.6	304.6	326.8	8.0	84.8	1.2	344
7.3	25.0	2508.3	750.0	6.5	3.9	207.7	5.3	2.4	4.7	304.5	323.5	6.8	83.2	1.4	354
8.4	27.2	2786.4	725.0	4.9	-1.2	204.2	4.1	1.7	3.8	305.4	319.3	4.8	64.8	1.7	14
9.1	29.5	3072.2	700.0	3.4	-5.4	211.5	3.6	1.9	3.1	306.7	317.4	3.7	52.7	1.4	24
10.2	32.0	3366.7	675.0	2.4	-12.5	233.8	4.6	3.7	2.7	308.6	315.2	2.2	32.3	2.0	74
11.2	34.5	3670.5	650.0	-0.0	-13.4	232.2	6.7	5.3	4.1	309.2	315.6	2.1	35.5	2.2	144
12.3	36.9	3983.0	625.0	-2.7	-14.8	232.4	9.3	7.4	5.7	309.6	315.5	1.9	38.6	2.7	204
13.4	39.5	4305.4	600.0	-5.3	-16.3	236.7	12.5	10.4	6.9	310.2	315.7	1.8	41.7	3.3	244
14.6	42.0	4637.9	575.0	-8.0	-19.0	238.3	13.8	11.7	7.2	310.8	315.5	1.5	40.6	4.2	344
15.8	44.9	4981.4	550.0	-10.8	-22.0	244.2	14.7	13.3	6.4	311.3	315.1	1.2	39.2	5.1	374
16.9	47.5	5336.9	525.0	-13.7	-23.0	246.8	17.9	16.4	7.0	312.0	315.6	1.1	45.2	6.1	444
19.1	50.5	5706.0	500.0	-16.3	-25.8	251.0	22.5	21.3	7.3	313.3	316.3	0.9	43.6	7.4	444
19.4	53.5	6090.5	475.0	-18.2	-30.1	253.4	25.0	24.0	7.2	315.4	317.6	0.7	34.4	9.2	514
20.5	56.4	6492.5	450.0	-21.0	-34.0	254.4	26.3	25.3	7.1	316.8	318.4	0.5	29.4	10.9	574
22.1	59.7	6911.1	425.0	-25.1	-38.2	256.7	28.5	25.8	6.1	316.8	319.3	0.4	38.5	13.1	604
23.4	62.0	7345.1	400.0	-28.3	-35.9	260.0	28.1	27.7	4.9	318.1	319.7	0.4	47.7	15.2	634
25.0	66.4	7809.2	375.0	-31.6	-37.5	254.4	32.6	31.4	8.5	319.7	321.1	0.4	55.7	18.0	674
26.5	70.2	8204.3	350.0	-34.8	-40.8	256.1	35.2	37.0	9.2	321.8	322.9	0.3	53.6	21.2	674
28.2	73.7	8607.8	325.0	-38.6	-47.5	257.5	43.3	42.2	9.3	323.4	324.0	0.2	38.2	25.2	674
30.0	77.3	9352.8	300.0	-42.9	99.9	257.7	46.3	45.2	9.8	325.0	325.0	99.9	99.9	30.2	704
31.2	81.9	9934.2	275.0	-47.1	99.9	258.6	48.0	47.0	9.5	327.0	327.0	99.9	99.9	35.7	714
34.1	86.2	10560.7	250.0	-51.1	99.9	256.6	44.9	43.7	10.4	330.1	330.1	99.9	99.9	41.7	724
36.3	91.2	11240.8	225.0	-54.9	99.9	252.3	42.8	41.6	10.1	334.4	334.4	99.9	99.9	47.4	734
39.6	96.3	11989.1	200.0	-58.8	99.9	252.3	34.8	33.2	10.6	342.9	342.9	99.9	99.9	53.5	734
41.4	102.3	12825.7	175.0	-59.9	99.9	257.7	31.9	31.2	6.8	351.0	351.0	99.9	99.9	60.1	734
44.6	108.5	13787.8	150.0	-60.4	99.9	255.1	33.1	30.0	8.5	366.0	366.0	99.9	99.9	65.4	734
48.3	115.5	14932.1	125.0	-55.9	99.9	99.9	99.9	99.9	99.9	393.8	393.8	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 486
FORT TUTTEN, N.Y.

24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.3	4.8	8.0	1011.6	14.1	14.6	999.9	99.9	99.9	99.9	289.7	316.4	10.6	91.0	999.9	999.9
0.5	5.7	106.6	1000.0	14.1	14.7	999.9	99.9	99.9	99.9	290.7	318.1	10.6	91.4	999.9	999.9
1.1	7.7	222.2	975.0	15.4	14.0	999.9	99.9	99.9	99.9	292.0	318.9	10.4	91.1	999.9	999.9
2.0	9.3	542.4	950.0	14.1	12.7	999.9	99.9	99.9	99.9	292.8	318.3	9.8	91.4	999.9	999.9
2.7	11.9	767.4	925.0	12.6	11.3	999.9	99.9	99.9	99.9	293.4	317.3	9.1	91.8	999.9	999.9
3.6	14.1	997.8	900.0	12.1	11.0	999.9	99.9	99.9	99.9	295.2	319.5	9.2	92.7	999.9	999.9
4.4	16.1	1234.1	875.0	11.3	10.2	999.9	99.9	99.9	99.9	296.7	320.6	9.0	92.7	999.9	999.9
5.3	18.4	1476.4	850.0	9.9	8.6	999.9	99.9	99.9	99.9	297.6	319.9	8.3	91.1	999.9	999.9
6.2	20.5	1724.5	825.0	8.6	7.2	999.9	99.9	99.9	99.9	298.8	319.9	7.8	90.7	999.9	999.9
7.2	22.7	1978.9	800.0	6.8	5.6	999.9	99.9	99.9	99.9	299.4	318.9	7.2	91.8	999.9	999.9
8.0	25.1	2239.4	775.0	5.1	3.9	999.9	99.9	99.9	99.9	300.2	318.3	6.6	92.0	999.9	999.9
8.9	27.3	2507.1	750.0	3.5	2.3	999.9	99.9	99.9	99.9	301.1	317.9	6.0	91.9	999.9	999.9
9.9	29.3	2781.9	725.0	1.9	0.8	999.9	99.9	99.9	99.9	302.3	318.0	5.6	92.0	999.9	999.9
10.9	32.3	3065.1	700.0	0.6	-0.4	999.9	99.9	99.9	99.9	303.8	318.9	5.3	92.8	999.9	999.9
12.0	34.9	3257.0	675.0	-0.3	-1.5	999.9	99.9	99.9	99.9	306.0	320.6	5.1	91.5	999.9	999.9
12.9	37.3	3458.6	650.0	-2.0	-3.4	999.9	99.9	99.9	99.9	307.3	320.6	4.6	90.1	999.9	999.9
14.0	40.0	3659.8	625.0	-3.9	-6.5	999.9	99.9	99.9	99.9	308.4	319.5	3.8	82.6	999.9	999.9
15.0	42.4	3861.6	600.0	-5.6	-9.3	999.9	99.9	99.9	99.9	310.1	319.7	3.2	75.6	999.9	999.9
16.0	45.2	4064.2	575.0	-7.7	-16.0	999.9	99.9	99.9	99.9	311.2	317.1	1.9	51.2	999.9	999.9
17.1	48.1	4266.5	550.0	-10.2	-16.7	999.9	99.9	99.9	99.9	312.2	317.1	1.9	50.0	999.9	999.9
18.3	50.9	4468.5	525.0	-11.4	-13.4	999.9	99.9	99.9	99.9	315.0	323.0	2.6	85.3	999.9	999.9
19.5	54.0	4670.0	500.0	-13.6	-15.1	999.9	99.9	99.9	99.9	316.7	324.1	2.4	88.5	999.9	999.9
20.7	56.9	4871.3	475.0	-16.6	-19.0	999.9	99.9	99.9	99.9	317.6	323.3	1.8	81.5	999.9	999.9
22.0	60.1	5072.4	450.0	-19.1	-22.1	999.9	99.9	99.9	99.9	319.4	324.1	1.4	76.7	999.9	999.9
23.4	63.4	5273.6	425.0	-22.1	-25.7	999.9	99.9	99.9	99.9	320.8	323.6	0.8	54.3	999.9	999.9
24.9	66.7	5474.8	400.0	-26.5	-28.9	999.9	99.9	99.9	99.9	322.9	320.5	0.0	1.0	999.9	999.9
26.3	70.3	5676.0	375.0	-29.1	-32.7	999.9	99.9	99.9	99.9	324.6	325.4	0.2	28.3	999.9	999.9
27.9	73.3	5877.2	350.0	-32.7	-35.5	999.9	99.9	99.9	99.9	325.6	326.5	0.2	50.8	999.9	999.9
29.5	77.9	6078.4	325.0	-37.0	-41.1	999.9	99.9	99.9	99.9	327.5	327.5	99.9	99.9	999.9	999.9
31.3	81.7	6279.6	300.0	-41.1	-44.7	999.9	99.9	99.9	99.9	328.9	328.9	99.9	99.9	999.9	999.9
33.3	85.9	6480.8	275.0	-45.8	-48.9	999.9	99.9	99.9	99.9	329.7	329.7	99.9	99.9	999.9	999.9
35.4	90.4	6681.9	250.0	-51.4	-51.4	999.9	99.9	99.9	99.9	331.3	331.3	99.9	99.9	999.9	999.9
37.7	95.3	6883.0	225.0	-56.9	-56.9	999.9	99.9	99.9	99.9	334.1	334.1	99.9	99.9	999.9	999.9
40.1	100.4	7084.1	200.0	-62.3	-62.3	999.9	99.9	99.9	99.9	336.1	336.1	99.9	99.9	999.9	999.9
42.8	106.0	7285.2	175.0	-65.6	-65.6	999.9	99.9	99.9	99.9	337.7	337.7	99.9	99.9	999.9	999.9
45.6	112.0	7486.3	150.0	-64.1	-64.1	999.9	99.9	99.9	99.9	339.7	339.7	99.9	99.9	999.9	999.9
48.0	119.3	7687.4	125.0	-57.2	-57.2	999.9	99.9	99.9	99.9	341.4	341.4	99.9	99.9	999.9	999.9
51.1	126.7	7888.5	100.0	-58.9	-58.9	999.9	99.9	99.9	99.9	413.9	413.9	99.9	99.9	999.9	999.9
54.6	135.7	8089.6	75.0	-60.1	-60.1	999.9	99.9	99.9	99.9	447.0	447.0	99.9	99.9	999.9	999.9
58.8	144.3	8290.7	50.0	-57.1	-57.1	999.9	99.9	99.9	99.9	509.1	509.1	99.9	99.9	999.9	999.9
59.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	999.9	999.9

* BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 518
ALBANY, N.Y.

24 APRIL 1975
1715 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM HALF MINUTE VALUES

164 23. 1

TIME MIN	CNTCT	WEIGHT GEV	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DEG K	E POT Y DEG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.8	86.0	1000.8	11.5	10.2	170.0	5.2	-0.9	5.1	255.6	305.7	7.9	92.0	0.0	C.
0.1	5.9	92.7	1000.0	11.5	9.5	172.0	4.0	-0.0	4.0	285.6	304.9	7.5	27.7	0.1	350.
0.9	8.3	304.6	975.0	11.6	10.1	202.7	4.1	1.6	3.8	287.9	308.6	8.0	90.5	0.5	354.
1.7	10.6	523.1	550.0	12.7	11.1	216.6	8.3	4.9	6.6	251.2	314.1	8.8	90.2	0.9	6.
2.5	13.3	746.8	925.0	11.0	9.8	230.0	9.0	7.7	4.6	291.6	313.3	8.3	92.7	1.2	20.
3.3	15.5	975.9	900.0	10.2	8.6	260.0	10.3	10.1	1.8	293.1	313.9	7.9	89.9	1.5	34.
4.1	17.8	1210.5	875.0	9.3	7.4	263.4	10.5	10.5	1.2	294.5	314.2	7.4	87.6	1.9	46.
5.0	20.4	1451.1	850.0	8.4	6.8	265.6	11.2	11.1	0.9	295.9	315.5	7.3	89.4	2.4	54.
5.9	22.9	1697.5	825.0	6.7	5.5	265.1	13.1	13.1	1.1	296.6	315.2	6.9	91.6	2.9	51.
6.8	25.5	1950.1	800.0	5.0	2.1	257.2	13.5	13.2	3.0	297.2	312.6	6.6	81.5	3.7	62.
7.9	28.1	2208.9	775.0	3.7	0.8	246.5	11.0	10.1	4.4	258.5	313.0	5.2	91.3	4.4	56.
9.0	30.7	2474.6	750.0	1.9	-1.3	236.4	18.7	15.5	10.3	259.2	312.2	4.7	79.6	5.0	66.
10.1	33.7	2747.5	725.0	0.2	-3.1	233.8	25.0	20.2	14.8	300.3	312.1	4.2	77.5	7.0	63.
11.0	36.1	3031.1	700.0	2.9	-0.6	237.7	21.1	17.8	11.3	306.4	321.4	5.3	78.0	8.2	61.
12.4	39.0	3324.9	675.0	0.7	-1.8	242.5	21.5	12.1	9.9	307.0	321.4	5.0	83.3	9.8	61.
13.5	41.7	3627.2	650.0	-1.4	-3.6	243.3	19.7	17.0	8.9	307.9	321.1	4.5	85.4	11.3	62.
14.9	44.7	3938.7	625.0	-3.9	-5.7	244.6	17.0	15.3	7.3	308.5	320.3	4.0	86.9	12.6	62.
16.0	47.8	4260.4	600.0	-5.6	-7.4	250.1	19.1	17.0	6.1	310.1	320.9	3.7	86.9	13.9	62.
17.1	50.7	4593.3	575.0	-7.7	-9.8	255.0	19.9	18.2	5.1	311.3	320.9	3.2	85.3	15.2	63.
18.4	53.6	4937.0	550.0	-10.0	-11.9	257.3	23.4	22.8	5.1	312.5	321.1	2.8	86.1	16.7	64.
19.6	56.9	5295.2	525.0	-12.6	-14.9	258.3	22.4	21.9	4.5	313.5	320.6	2.3	83.2	18.4	66.
21.3	60.1	5666.3	500.0	-15.2	-17.5	253.5	23.7	22.8	6.8	318.7	320.7	1.9	82.6	20.2	67.
22.4	63.6	6052.5	475.0	-17.6	-19.8	253.4	28.2	27.0	8.1	316.4	321.7	1.7	82.8	22.4	67.
23.7	66.9	6455.4	450.0	-20.1	-22.4	261.4	30.8	30.0	6.7	318.1	322.6	1.4	81.8	24.7	69.
25.1	70.4	6877.2	425.0	-22.9	-24.8	261.1	30.9	30.5	4.8	319.7	323.6	1.2	84.6	27.2	69.
26.5	74.0	7318.6	400.0	-26.1	-28.6	260.3	31.9	31.4	5.5	321.1	324.2	0.9	79.2	29.8	70.
28.5	78.0	7782.0	375.0	-30.3	-32.8	261.4	31.5	31.2	4.7	321.4	324.4	0.3	31.9	31.3	71.
29.8	81.3	8265.9	350.0	-33.1	-35.1	273.4	39.2	38.2	-2.3	324.0	324.9	0.2	31.9	34.1	74.
31.3	85.9	8787.0	325.0	-37.0	-38.4	283.5	34.0	36.9	-8.9	323.6	326.2	0.1	29.0	39.4	75.
32.9	90.2	9335.0	300.0	-41.5	-42.9	286.0	40.3	38.2	-17.6	326.9	326.9	99.9	99.9	42.0	77.
35.7	94.8	9919.3	275.0	-46.5	-48.9	290.1	47.8	43.7	-19.4	327.9	326.9	99.9	99.9	48.4	83.
37.7	99.6	10544.6	250.0	-52.0	-54.9	290.1	60.6	58.7	-20.8	328.2	326.9	99.9	99.9	54.5	86.
39.5	104.6	11219.1	225.0	-57.3	-59.9	289.5	61.7	59.2	-20.6	330.7	326.9	99.9	99.9	60.4	89.
41.8	110.2	11953.8	200.0	-63.0	-65.9	297.2	53.4	47.5	-28.4	333.1	326.9	99.9	99.9	68.1	91.
44.5	115.6	12767.0	175.0	-63.8	-65.9	287.9	41.1	38.1	-12.6	344.4	326.9	99.9	99.9	75.0	94.
47.3	122.0	13727.8	150.0	-59.8	-61.9	271.8	30.9	30.9	-1.0	367.0	326.9	99.9	99.9	103.0	94.
51.0	129.3	14840.5	125.0	-54.2	-56.9	291.1	22.1	20.7	-8.0	398.8	326.9	99.9	99.9	87.3	95.
56.4	137.3	16309.6	100.0	-54.9	-56.9	292.5	13.3	12.3	-5.1	421.6	326.9	99.9	99.9	92.7	96.
63.6	145.7	18134.9	75.0	-58.4	-60.9	270.1	13.9	13.9	-0.0	450.5	326.9	99.9	99.9	94.7	96.
73.0	156.0	20702.7	50.0	-56.3	-58.9	94.9	11.2	-11.1	1.3	510.7	326.9	99.9	99.9	103.3	97.
87.1	167.0	25166.6	25.0	-50.2	-50.9	99.9	99.9	99.9	99.9	640.3	326.9	99.9	99.9	99.9	99.9.

° BY SPEC MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

° BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 520
PITTSBURGH, PA

26 APRIL 1975
1715 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MAX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.4	359.0	907.8	15.3	13.8	230.0	5.2	4.0	3.3	202.5	319.4	10.4	91.0	0.0	0.
00.9	99.9	99.9	1000.0	95.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
01.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
01.5	10.0	516.8	950.0	14.6	13.0	232.9	10.0	8.0	6.0	293.4	320.9	10.5	94.6	0.2	61.
1.5	12.0	742.3	925.0	13.1	12.5	245.2	11.0	11.0	5.4	294.0	320.0	9.9	96.3	0.9	60.
2.6	14.4	573.0	900.0	12.1	11.1	231.5	11.0	8.6	6.8	295.2	319.8	9.3	93.9	1.7	56.
3.6	16.5	1209.3	875.0	11.2	10.0	241.4	11.5	10.1	5.5	296.6	320.2	8.9	92.6	2.4	57.
4.6	18.9	1421.3	850.0	9.8	8.7	246.4	11.4	10.4	4.6	297.5	319.9	8.3	93.0	3.0	54.
5.4	21.1	1696.5	825.0	8.9	7.9	248.5	11.3	12.4	4.9	299.1	320.9	8.1	92.5	3.6	40.
6.1	23.6	1954.4	800.0	7.5	6.4	247.9	14.2	13.1	5.3	300.1	320.8	7.6	92.7	4.2	61.
6.9	25.3	2215.9	775.0	6.3	5.3	250.0	15.3	14.4	5.2	301.6	321.6	7.3	93.5	4.9	52.
7.6	28.4	2484.8	750.0	4.8	3.8	250.7	17.3	16.3	5.7	302.6	321.3	6.7	93.5	5.6	63.
8.5	31.1	2760.9	725.0	2.8	1.9	249.2	17.7	16.5	6.3	303.3	320.3	6.1	93.9	6.5	64.
9.5	33.8	3044.4	700.0	0.6	-0.1	249.0	15.8	14.7	5.6	303.9	319.2	5.4	94.8	7.5	65.
10.6	36.2	3336.2	675.0	0.1	-0.6	249.6	13.5	12.9	3.8	306.4	322.0	5.5	95.4	8.5	65.
12.3	39.1	3638.4	650.0	-1.5	-2.5	249.3	14.3	13.4	5.0	307.9	322.1	4.9	92.2	9.4	67.
13.2	41.6	3950.4	625.0	-2.5	-4.5	248.8	16.3	15.2	5.9	310.1	323.2	4.5	88.0	10.9	67.
14.6	44.6	4274.0	600.0	-4.4	-6.9	248.7	18.8	17.5	6.8	311.5	322.8	3.8	82.3	12.1	67.
15.7	47.6	4608.4	575.0	-6.5	-9.8	248.3	18.4	17.6	5.3	312.7	322.3	3.2	77.4	13.4	67.
16.0	50.6	4955.0	550.0	-8.3	-12.3	248.8	18.4	17.8	4.8	314.5	322.8	2.7	72.8	14.7	64.
18.2	53.4	5314.7	525.0	-10.6	-14.9	254.4	18.7	18.1	4.7	315.9	323.1	2.3	70.9	16.1	64.
19.4	56.9	5688.8	500.0	-12.7	-17.7	254.5	18.3	17.7	4.9	317.7	323.8	1.9	65.9	17.4	64.
20.7	60.3	6075.7	475.0	-15.3	-20.0	248.7	23.2	21.6	8.4	319.2	324.5	1.4	67.1	18.5	64.
22.0	63.7	6485.8	450.0	-17.6	-23.2	243.8	24.8	22.2	10.9	321.2	325.6	1.3	62.0	20.9	62.
23.4	67.1	6911.1	425.0	-20.6	-26.1	250.4	25.5	24.1	6.4	322.7	326.2	1.1	61.3	23.0	64.
24.8	70.8	7357.1	400.0	-23.7	-30.2	254.5	24.4	23.5	6.5	324.2	326.8	0.8	55.1	25.0	64.
26.3	74.7	7825.6	375.0	-27.4	-33.8	255.0	27.3	26.4	7.1	325.3	327.4	0.6	53.8	27.1	70.
27.6	78.7	8318.8	350.0	-31.1	-38.4	259.8	26.8	26.4	4.7	326.7	328.2	0.4	48.4	29.4	70.
29.1	82.8	8839.3	325.0	-35.6	-42.9	266.2	27.1	27.0	1.8	327.6	328.6	0.3	46.3	31.9	71.
30.7	87.9	9390.7	300.0	-40.3	-49.9	260.4	30.3	29.9	5.1	328.6	329.9	99.9	99.9	34.5	74.
32.5	91.9	9977.6	275.0	-45.5	-54.5	260.4	28.4	28.0	4.7	329.3	329.9	99.9	99.9	37.8	73.
34.4	96.6	10605.1	250.0	-51.2	-59.9	261.2	31.6	33.2	5.2	330.0	329.9	99.9	99.9	41.3	74.
36.5	101.4	11280.7	225.0	-57.1	-65.1	258.8	36.3	35.6	7.0	331.1	329.9	99.9	99.9	45.7	74.
38.9	107.4	12014.2	200.0	-64.1	-72.9	256.4	43.8	42.6	10.3	331.3	329.9	99.9	99.9	50.8	74.
41.2	113.8	12820.7	175.0	-67.7	-79.3	259.3	35.5	35.1	-5.7	336.2	329.9	99.9	99.9	56.3	75.
44.2	120.7	13762.2	150.0	-63.6	-79.9	280.2	23.9	23.5	-4.2	342.3	329.9	99.9	99.9	60.8	74.
48.1	128.3	14902.0	125.0	-58.5	-79.9	272.9	28.6	28.5	-1.5	349.0	329.9	99.9	99.9	66.4	74.
53.0	136.7	16315.0	100.0	-55.5	-79.9	274.4	19.5	19.5	-1.5	420.5	329.9	99.9	99.9	74.1	81.
59.1	145.7	18116.7	75.0	-62.5	-90.9	297.0	5.5	4.9	-2.5	441.6	329.9	99.9	99.9	77.7	82.
67.2	156.0	20633.8	50.0	-57.1	-99.9	304.8	3.3	-1.7	-2.8	509.0	329.9	99.9	99.9	79.4	83.
79.0	167.0	25045.2	25.0	-53.8	-99.9	50.7	4.0	-3.1	-2.5	630.0	329.9	99.9	99.9	79.3	83.

BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 524
BUFFALO, N Y

24 APRIL 1975
1715 GMT

160 19. 0

TIME MIN	CATCY	WEIGHT GEN	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MR PTO CM/KC	RM PCT	RANGE KM	AZ DG
0.0	5.9	218.0	982.7	11.7	11.7	260.0	5.7	5.6	267.4	310.1	8.8	100.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.4	294.2	975.0	12.0	11.3	278.2	5.8	5.7	288.4	310.7	8.7	95.5	0.1	97.
0.4	8.4	502.2	950.0	11.4	11.0	275.6	6.5	6.4	289.9	312.5	8.7	96.9	0.2	98.
1.5	10.3	725.3	925.0	10.4	10.0	255.8	9.3	9.2	241.1	313.0	8.4	97.4	0.5	93.
2.3	12.3	953.5	900.0	9.6	9.3	255.0	12.1	11.7	242.5	314.0	8.2	97.7	1.1	93.
2.9	14.4	1187.7	875.0	8.8	8.5	260.1	10.7	10.5	295.3	315.2	8.0	97.6	1.5	87.
3.7	16.3	1427.8	850.0	7.7	7.3	262.0	9.6	9.6	295.3	315.6	7.6	97.2	2.0	81.
4.5	18.5	1674.0	825.0	6.4	5.8	265.4	10.7	10.6	296.3	315.4	7.1	95.8	2.4	82.
5.2	20.6	1926.6	800.0	5.4	3.7	268.6	10.6	10.6	297.7	315.4	6.3	88.8	2.9	83.
6.0	22.8	2185.8	775.0	4.0	2.4	267.1	10.9	10.9	298.9	315.1	5.9	88.9	3.4	84.
6.8	25.2	2452.1	750.0	2.3	-0.4	268.7	11.2	11.2	295.8	313.6	5.0	82.0	3.9	84.
7.6	27.3	2726.0	725.0	1.4	-2.1	269.5	12.0	12.0	301.6	314.5	4.5	77.1	4.5	85.
8.5	29.7	3008.1	700.0	0.2	-4.7	267.7	12.6	12.6	303.2	314.3	3.9	69.5	5.2	85.
9.5	32.3	3259.2	675.0	-1.6	-8.4	272.4	13.9	13.9	308.3	314.6	3.5	69.5	5.9	86.
10.3	34.8	3509.7	650.0	-2.9	-10.5	275.3	14.5	14.5	307.1	312.7	2.7	60.4	6.7	86.
11.2	37.1	3902.0	625.0	-4.6	-12.9	278.0	15.1	15.0	308.6	308.8	0.0	1.0	7.4	89.
12.3	39.9	4224.0	600.0	-6.5	-15.4	277.0	15.1	15.0	308.6	308.8	0.0	1.0	8.4	89.
13.3	42.4	4559.3	575.0	-8.7	-18.2	275.2	16.1	16.0	308.6	309.9	0.0	1.0	9.3	90.
14.4	45.2	4901.8	550.0	-11.5	-21.2	273.5	16.9	16.8	310.4	310.5	0.0	1.0	10.3	90.
15.4	48.2	5257.1	525.0	-13.2	-24.7	270.3	18.7	18.7	312.6	312.6	0.0	1.1	11.4	92.
16.6	51.0	5627.9	500.0	-14.6	-27.5	269.6	20.6	20.6	315.2	315.3	0.0	1.2	12.7	90.
17.7	54.1	6014.4	475.0	-17.4	-31.7	268.9	24.8	24.8	310.3	316.5	0.0	1.5	14.5	90.
18.9	57.3	6417.3	450.0	-19.9	-34.1	267.5	24.1	24.1	318.2	315.3	0.0	1.8	16.1	90.
20.3	60.4	6839.6	425.0	-22.3	-36.7	271.6	24.8	24.8	320.3	320.4	0.0	2.1	18.2	90.
21.7	64.0	7281.9	400.0	-25.8	-39.8	283.9	21.7	23.0	321.4	321.5	0.0	2.4	20.1	90.
23.1	67.4	7746.5	375.0	-29.1	-43.1	283.7	27.6	27.6	323.0	323.1	0.0	2.8	22.1	92.
24.6	71.3	8235.4	350.0	-32.6	-45.4	274.0	34.6	34.6	325.9	325.3	0.2	3.9	24.9	93.
26.1	75.2	8753.8	325.0	-36.8	-48.8	275.9	36.1	35.9	327.0	326.7	0.2	39.9	26.2	93.
27.9	79.3	9302.7	300.0	-41.4	-52.9	271.1	43.3	43.3	327.0	326.7	0.2	39.9	28.2	93.
29.5	83.6	9874.5	275.0	-46.2	-56.9	268.5	46.0	45.9	328.3	326.7	0.2	39.9	30.3	93.
31.5	88.2	10512.7	250.0	-52.0	-60.9	265.5	45.0	44.9	328.3	326.7	0.2	39.9	32.4	92.
33.6	93.5	11197.4	225.0	-57.3	-64.9	261.9	53.0	52.5	330.7	326.7	0.2	39.9	34.5	91.
35.6	98.3	11922.0	200.0	-62.6	-68.9	267.9	53.1	53.1	333.6	326.7	0.2	39.9	36.6	90.
38.1	105.0	12736.4	175.0	-66.6	-72.9	280.0	40.5	38.9	336.6	326.7	0.2	39.9	38.7	90.
40.9	111.7	13683.4	150.0	-60.3	-66.9	261.7	34.1	34.1	340.1	326.7	0.2	39.9	40.8	90.
44.2	119.3	14627.7	125.0	-54.5	-60.9	271.7	27.9	27.9	343.6	326.7	0.2	39.9	42.9	91.
48.3	128.3	15656.2	100.0	-54.2	-54.9	289.9	30.0	28.2	346.6	326.7	0.2	39.9	45.0	92.
53.1	138.5	16887.6	75.0	-57.6	-48.9	243.1	2.9	2.5	349.6	326.7	0.2	39.9	47.1	92.
59.4	149.3	20645.4	50.0	-57.1	-48.9	346.3	4.3	0.8	352.2	326.7	0.2	39.9	49.2	93.
68.6	161.0	25097.1	25.0	-51.7	-48.9	60.7	5.1	-4.7	355.1	326.7	0.2	39.9	51.3	94.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGL
OF POOR QUALITY

STATION NO. 532
PEORIA, ILL26 APRIL 1975
1716 GMT

105 10. 0

TIME MIN	CNTCT	HEIGHT GPH	PRES MB	TEMP DG C	DEW PT CG C	DIR DG	SPED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO CM/KG	RM PCY	RANGE KM	AZ DG
0.0	5.6	200.0	947.2	17.2	15.0	320.0	4.6	3.0	-3.5	292.9	321.3	11.0	87.0	0.0	0.
0.5	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.0	6.5	306.6	975.0	16.9	15.4	308.2	2.7	2.1	-1.7	253.7	323.4	11.4	90.9	0.1	131.
1.2	6.6	527.0	950.0	14.7	15.1	312.0	4.8	3.5	-3.2	293.5	321.5	10.8	96.6	0.3	130.
2.1	10.6	752.7	925.0	13.3	12.6	310.4	5.4	4.1	-3.5	294.3	320.8	10.1	96.4	0.6	133.
3.0	12.7	984.4	900.0	12.2	11.7	310.1	5.2	4.0	-3.4	295.4	320.9	9.6	96.3	0.9	131.
4.0	16.9	1220.5	875.0	10.6	9.6	305.9	5.2	4.2	-3.1	296.1	319.5	8.6	93.7	1.1	131.
4.6	16.9	1462.3	850.0	9.3	8.9	315.7	6.7	4.7	-3.0	297.0	319.8	8.5	97.3	1.5	131.
5.0	16.3	1710.0	825.0	7.8	7.0	305.7	6.2	6.6	-3.0	297.0	318.5	7.7	94.5	1.9	131.
6.0	21.4	1962.7	800.0	6.9	2.3	300.5	9.1	7.4	-3.0	298.2	318.9	5.7	72.9	2.4	124.
7.0	23.8	2224.5	775.0	6.0	-1.7	299.8	8.0	6.9	-3.0	300.8	313.2	4.4	57.7	3.0	128.
9.0	26.1	2492.8	750.0	5.1	-11.0	295.6	7.3	6.6	-3.2	302.4	308.4	3.0	27.7	3.5	127.
10.2	28.7	2768.4	725.0	2.8	-7.0	285.0	7.2	7.0	-3.0	302.9	311.6	2.0	46.9	4.0	125.
11.3	31.3	3051.8	700.0	1.5	-8.6	271.8	6.8	6.8	-0.2	304.5	313.8	2.9	47.5	4.4	121.
12.4	33.9	3163.5	675.0	-0.5	-22.0	260.7	5.0	4.9	-0.9	305.2	308.2	1.0	17.7	4.8	114.
13.4	36.4	3643.8	650.0	-2.8	-17.0	262.5	4.3	4.1	-1.4	305.9	310.7	1.5	32.5	5.3	114.
14.8	39.3	3953.2	625.0	-5.3	-19.7	271.7	5.4	5.4	-0.2	306.5	310.5	1.3	31.1	5.6	117.
16.0	41.9	4272.3	600.0	-7.4	-27.0	265.3	4.8	4.8	0.4	307.6	309.9	0.7	19.5	5.7	115.
17.3	44.8	4602.5	575.0	-9.3	-34.0	263.9	4.9	4.9	0.5	309.1	310.4	0.4	12.0	6.0	114.
18.6	46.0	4944.4	550.0	-11.0	-21.0	258.7	7.7	7.4	2.0	310.2	314.3	1.3	46.3	6.4	111.
19.9	50.9	5200.8	525.0	-11.9	-20.3	270.5	12.2	12.2	-0.1	310.3	318.9	1.4	49.5	7.1	104.
21.4	54.3	5673.7	500.0	-13.5	-28.8	279.7	15.9	15.7	-2.7	316.7	319.0	0.7	26.1	8.3	106.
22.9	57.4	6061.9	475.0	-16.2	-60.2	280.6	17.6	17.5	-3.3	317.9	318.0	0.0	1.0	9.2	102.
24.4	61.0	6466.0	450.0	-19.3	-68.2	281.2	19.6	19.2	-3.0	318.9	319.0	0.0	1.0	11.5	105.
26.0	64.7	6888.5	425.0	-22.2	-64.1	274.1	23.4	23.3	-1.7	320.4	320.5	0.0	1.0	13.5	104.
27.6	68.3	7330.9	400.0	-26.2	-66.7	272.3	24.5	24.5	-1.0	320.9	320.9	0.0	1.0	15.9	102.
29.5	72.2	7793.9	375.0	-30.1	-68.2	267.4	24.8	24.8	1.1	321.7	321.7	0.0	1.0	18.7	101.
31.4	76.3	8281.4	350.0	-33.9	-71.7	263.4	27.7	27.6	3.2	323.0	324.3	0.0	1.0	21.6	94.
33.5	80.7	8796.1	325.0	-38.0	-59.5	254.8	26.5	26.1	4.7	324.2	324.3	0.0	8.6	24.8	90.
35.4	85.3	9341.9	300.0	-42.6	99.9	253.8	29.7	28.5	8.3	325.3	325.3	99.9	99.9	27.9	94.
37.2	90.2	9922.5	275.0	-46.1	99.9	248.6	34.9	31.5	15.0	325.5	325.5	99.9	99.9	30.9	91.
39.6	95.4	10545.2	250.0	-52.2	99.9	235.9	35.6	28.5	20.0	328.4	328.4	99.9	99.9	35.4	86.
42.0	101.3	11219.5	225.0	-57.2	99.9	243.6	37.7	33.8	16.0	330.9	329.9	99.9	99.9	39.7	83.
44.6	107.0	11960.4	200.0	-60.3	99.9	253.3	39.6	37.0	11.1	337.4	329.9	99.9	99.9	45.3	81.
47.6	113.5	12795.2	175.0	-59.7	99.9	258.5	32.4	31.9	5.9	351.4	329.9	99.9	99.9	51.3	81.
51.0	129.7	13764.6	150.0	-57.3	99.9	260.9	27.2	28.0	4.3	371.3	329.9	99.9	99.9	58.1	80.
55.0	128.7	14914.0	125.0	-56.0	99.9	250.3	21.9	20.6	7.4	393.6	329.9	99.9	99.9	63.7	80.
59.9	137.9	16335.9	100.0	-57.3	99.9	264.6	17.6	17.5	1.7	417.0	329.9	99.9	99.9	70.8	80.
65.6	145.3	18138.7	75.0	-62.7	99.9	258.7	16.3	16.0	3.2	441.5	329.9	99.9	99.9	77.3	79.
74.1	154.7	20692.9	50.0	-56.2	99.9	268.6	5.7	5.7	0.5	511.1	329.9	99.9	99.9	80.7	80.
87.7	164.7	25167.9	25.0	-60.8	99.9	98.3	3.6	-3.4	0.5	644.8	329.9	99.9	99.9	80.6	90.

ORIGINAL PAGE IS
OF POOR QUALITY0 PV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 553
OMAHA, MO24 APRIL 1975
1715 GMT

156 22. 0

TIME MIN	CATCY	HEIGHT GEN	PRES MB	TEMP DG C	DEW PT DG C	QIR DG	SPEED M/SEC	U COMP M/SEC	V CME M/SEC	POT T DG K	E POT T DG K	MR RTO CM/RC	RM PCT	RANGE KM	AZ DG
0.0	7.2	400.0	965.2	13.4	11.8	40.0	3.6	-2.3	-2.9	290.7	314.2	9.1	90.0	0.1	0.
0.9	95.9	90.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	8.3	538.2	950.0	13.4	12.4	7.2	2.6	-0.3	-2.6	292.0	317.0	9.6	94.0	0.2	23.4
1.3	10.5	759.8	925.0	12.1	11.5	40.0	1.2	-0.9	-0.9	293.0	317.2	9.3	95.7	0.3	22.7
2.0	12.6	980.0	905.0	12.1	11.5	280.4	1.8	1.8	-0.3	293.3	320.4	9.5	95.8	0.3	24.4
2.9	14.9	1225.2	875.0	11.2	9.3	267.4	3.8	3.8	0.1	290.5	318.8	8.3	86.6	0.2	1.4
3.8	16.9	1467.0	850.0	10.0	5.3	235.3	5.5	4.5	3.1	297.5	315.1	6.5	71.0	0.3	1.4
4.6	19.1	1714.7	825.0	9.5	-5.1	214.3	3.5	2.0	2.9	298.1	308.2	3.2	35.1	0.4	7.0
5.5	21.3	1971.1	800.0	10.1	-8.9	156.3	0.5	-0.2	0.5	302.4	313.5	3.9	35.8	0.4	7.0
6.4	23.6	2236.3	775.0	8.4	-8.2	133.5	1.5	-1.1	1.0	303.4	313.9	3.6	40.7	0.4	7.0
7.4	25.9	2504.5	750.0	7.1	-8.4	140.2	4.0	-2.5	3.0	304.6	312.6	2.7	32.3	0.4	1.1
8.5	28.4	2782.2	725.0	4.7	-8.9	142.8	3.7	-2.3	3.0	305.1	315.0	3.4	45.8	0.5	7.0
9.7	30.9	3067.1	700.0	2.3	-8.4	160.9	2.7	0.0	2.7	305.4	315.3	3.4	52.5	0.7	35.0
10.4	33.5	3350.8	675.0	-0.3	-7.9	229.1	3.0	2.3	2.0	305.7	315.0	3.2	56.9	0.3	1.1
11.6	35.9	3650.8	650.0	-2.4	-8.2	243.0	3.4	3.1	1.6	306.6	316.0	3.2	64.6	1.0	1.4
13.1	38.6	3970.9	625.0	-4.8	-10.7	235.2	4.7	3.9	2.7	307.2	315.2	2.7	62.5	1.2	2.4
14.2	41.0	4230.8	600.0	-7.1	-11.7	232.1	6.2	4.9	3.8	308.2	316.0	2.6	69.7	1.6	7.0
15.4	43.9	4621.2	575.0	-9.4	-13.1	245.3	8.4	7.7	3.6	309.2	315.6	2.1	63.1	2.0	7.0
16.6	46.9	4944.1	550.0	-11.3	-22.7	256.3	9.4	9.1	2.2	310.7	314.3	1.1	38.4	2.1	4.0
17.3	49.9	5319.0	525.0	-14.3	-26.4	263.9	10.7	10.6	1.1	311.3	314.0	0.7	35.0	3.2	5.1
18.2	52.6	5645.9	500.0	-17.2	-28.0	271.8	14.7	14.7	-0.5	312.1	314.6	0.8	38.3	4.1	5.1
20.5	55.7	6069.2	475.0	-20.2	-33.4	275.1	14.3	14.3	-1.3	313.0	314.6	0.5	29.7	5.7	7.0
23.5	58.9	6467.6	450.0	-22.5	-43.9	268.5	15.0	15.0	0.9	314.9	315.4	0.5	5.9	6.3	7.0
25.2	61.8	6944.8	425.0	-25.6	-44.4	264.8	16.5	16.5	1.5	316.2	316.8	0.2	15.2	7.9	7.0
26.7	64.3	7321.2	400.0	-29.3	-37.2	264.3	14.2	14.1	1.8	316.9	316.2	0.4	46.0	9.5	7.0
28.4	67.0	7778.3	375.0	-33.1	-39.8	264.5	19.2	19.1	1.9	317.8	319.0	0.3	56.0	11.2	7.0
29.4	72.0	8260.0	350.0	-34.6	-42.8	259.7	21.3	21.0	3.9	319.3	320.2	0.2	52.4	13.4	7.0
30.1	77.0	8769.2	325.0	-40.2	-59.9	249.2	21.6	20.2	7.7	321.2	999.9	99.9	999.9	15.6	7.0
32.2	81.0	9309.7	300.0	-44.5	58.3	251.6	24.1	23.3	6.0	322.6	999.9	99.9	999.9	18.7	7.0
34.1	85.3	9837.1	275.0	-48.8	99.9	254.3	24.4	24.2	7.4	324.6	999.9	99.9	999.9	21.0	7.0
36.3	89.8	10507.6	250.0	-53.3	99.9	254.4	34.2	33.0	6.9	326.9	999.9	99.9	999.9	24.7	7.0
38.7	95.3	11144.1	225.0	-54.6	99.9	251.2	29.3	27.8	7.4	334.9	999.9	99.9	999.9	29.2	7.0
41.1	120.2	11932.6	200.0	-57.2	99.9	262.7	35.1	34.8	4.4	342.2	999.9	99.9	999.9	34.3	7.0
44.2	106.3	12777.3	175.0	-55.2	99.9	257.7	36.2	35.3	7.7	350.8	999.9	99.9	999.9	40.7	7.0
47.4	112.7	13762.9	150.0	-56.4	99.9	245.7	35.6	34.4	14.6	372.2	999.9	99.9	999.9	46.5	7.0
51.1	120.0	14920.6	125.0	-56.1	99.9	247.1	29.8	27.5	11.6	393.4	999.9	99.9	999.9	53.6	7.0
55.6	128.5	16361.4	100.0	-52.1	99.9	259.6	18.1	1.68	3.3	425.9	999.9	99.9	999.9	61.3	7.0
61.2	138.3	19204.8	75.0	-58.0	99.9	237.9	20.0	18.9	10.6	451.4	999.9	99.9	999.9	67.4	7.0
64.9	146.7	22731.3	50.0	-53.1	99.9	237.9	3.9	2.2	3.3	510.4	999.9	99.9	999.9	72.5	7.0
81.7	160.5	25206.9	25.0	-47.4	99.9	78.9	8.2	-0.0	-1.6	648.6	999.9	99.9	999.9	71.0	7.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 1 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 1
 OF POOR QUALITY

STATION NO. 562
NORTH PLATTE, NEB

24 APRIL 1975
1715 GMT

TIME MIN	CNTCT	WEIGHT GFW	PRES MB	TEMP DG C	CEW PT DG C	T DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MK RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	14.8	247.0	915.7	18.3	-0.0	321.0	5.1	3.3	-3.9	259.4	311.2	4.2	29.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	16.0	994.3	900.0	16.5	-4.1	327.9	3.9	2.1	-3.3	258.9	307.9	3.1	24.0	0.2	0.2
1.4	18.6	1232.9	875.0	14.3	-4.5	319.2	4.8	3.1	-3.6	299.0	308.0	3.1	27.0	0.4	0.4
2.3	21.1	1476.1	850.0	11.5	-4.9	330.2	6.2	3.1	-5.4	298.6	307.5	3.1	31.3	0.7	0.7
3.2	23.8	1724.6	825.0	9.4	-4.5	331.0	5.4	2.5	-4.8	299.0	308.5	3.3	37.1	1.0	1.0
4.1	26.2	1972.7	800.0	7.0	-4.8	308.2	4.8	3.8	-3.0	299.0	308.6	3.4	42.9	1.3	1.3
5.0	29.1	2239.4	775.0	6.8	-15.5	259.0	5.6	5.5	1.1	301.3	305.8	1.5	16.6	1.5	1.5
5.9	31.9	2507.4	750.0	4.3	-16.0	276.4	8.0	7.9	-0.9	301.5	305.9	1.5	20.9	1.7	1.7
6.7	34.9	2782.2	725.0	2.5	-19.2	283.2	11.9	11.6	-2.7	302.3	305.9	1.2	18.3	2.2	2.2
7.5	37.5	3064.7	700.0	0.4	-13.5	280.0	14.6	14.4	-2.6	303.2	309.0	1.9	38.6	2.8	2.8
8.4	40.4	3353.5	675.0	-1.6	-11.4	266.4	12.3	12.2	0.8	304.3	311.2	2.4	47.1	3.6	3.6
9.4	43.4	3654.6	650.0	-4.4	-12.4	266.4	14.4	14.4	0.8	304.3	311.2	2.4	53.5	4.3	4.3
10.3	46.4	3962.1	625.0	-6.6	-13.3	265.2	11.9	11.8	1.0	305.1	311.7	2.2	59.0	4.9	4.9
11.4	49.6	4280.1	600.0	-8.8	-16.3	260.3	13.3	13.3	1.0	306.1	311.6	1.8	54.6	5.7	5.7
12.5	52.6	4608.6	575.0	-10.7	-25.6	260.3	14.6	14.4	2.5	307.5	310.2	0.8	28.9	6.5	6.5
13.5	55.7	4949.0	550.0	-13.0	-41.6	264.4	15.0	15.0	1.5	308.6	309.4	0.2	8.5	7.4	7.4
14.7	59.0	5331.5	525.0	-15.7	-47.3	270.1	15.0	15.0	-0.0	309.5	309.9	0.1	4.6	8.5	8.5
15.8	62.5	5667.8	500.0	-18.3	-48.6	278.1	16.0	15.8	-2.1	310.6	311.0	0.1	4.9	9.5	9.5
17.0	65.9	6044.3	475.0	-21.2	-50.2	284.1	17.2	16.7	-4.2	311.6	311.9	0.1	5.3	10.7	10.7
18.0	69.5	6444.4	450.0	-24.9	-52.3	278.6	16.2	16.0	-2.4	311.9	312.2	0.1	5.8	11.8	11.8
19.3	73.0	6857.1	425.0	-28.1	-54.2	266.5	16.6	16.5	1.0	313.0	313.2	0.1	6.2	13.0	13.0
20.7	77.0	7285.5	400.0	-31.2	-56.1	252.0	16.8	16.0	5.2	314.3	314.5	0.0	6.5	14.3	14.3
22.0	80.9	7747.9	375.0	-34.7	-58.3	231.9	19.4	18.5	6.0	315.5	315.7	0.0	7.0	15.6	15.6
23.5	85.0	8221.3	350.0	-39.0	-56.6	248.9	20.1	18.7	7.2	316.1	316.3	0.0	13.3	17.3	17.3
24.1	89.2	8725.4	325.0	-43.0	-59.9	248.9	21.2	21.4	9.1	317.5	317.5	99.9	99.9	19.2	19.2
26.8	93.9	9259.6	300.0	-47.6	-59.9	243.9	22.0	19.7	9.7	318.3	318.3	99.9	99.9	21.3	21.3
28.5	98.3	9828.4	275.0	-52.3	-59.9	242.1	23.8	21.0	11.1	319.6	319.6	99.9	99.9	23.5	23.5
30.5	103.2	10441.3	250.0	-55.3	-59.9	231.1	25.7	22.2	13.0	323.9	323.9	99.9	99.9	26.3	26.3
32.5	108.5	11130.0	225.0	-58.0	-59.9	245.7	26.3	23.8	11.1	332.7	332.7	99.9	99.9	29.4	29.4
35.1	114.0	11600.6	200.0	-56.4	-59.9	250.0	26.0	24.4	8.9	343.4	343.4	99.9	99.9	33.4	33.4
38.1	120.3	12710.4	175.0	-53.2	-59.9	258.2	21.2	21.6	11.2	358.8	358.8	99.9	99.9	37.3	37.3
41.3	126.8	13659.7	150.0	-54.9	-59.9	259.8	21.9	21.6	3.9	375.5	375.5	99.9	99.9	42.2	42.2
45.6	134.3	14865.9	125.0	-57.3	-59.9	246.6	17.4	16.8	4.6	391.2	391.2	99.9	99.9	44.9	44.9
50.4	141.7	16278.0	100.0	-55.9	-59.9	253.1	17.8	17.0	5.2	419.8	419.8	99.9	99.9	52.6	52.6
56.7	149.7	18110.2	75.0	-56.4	-59.9	243.6	16.3	14.6	7.3	454.7	454.7	99.9	99.9	59.1	59.1
64.5	158.7	20700.0	50.0	-54.2	-59.9	259.1	9.3	8.6	3.3	515.8	515.8	99.9	99.9	64.7	64.7
77.1	168.3	25206.4	25.0	-50.0	-59.9	99.9	99.9	99.9	99.9	641.2	641.2	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 606
PERTLAND, ME26 APRIL 1975
1715 GMT

TIME MIN	CNCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ FC
0.0	5.5	20.0	1009.7	6.1	6.1	50.0	2.6	-2.0	-1.7	279.2	294.1	5.9	100.0	0.0	0
0.3	6.3	99.5	1000.0	6.7	5.6	99.9	99.9	99.9	99.9	280.6	295.2	5.7	92.4	999.9	99.9
0.6	6.6	307.1	975.0	5.1	5.1	99.9	99.9	99.9	99.9	281.0	295.4	5.7	100.0	999.9	99.9
1.5	10.8	510.4	950.0	5.2	5.2	99.9	99.9	99.9	99.9	283.2	298.2	5.8	101.0	999.9	99.9
2.3	12.3	739.5	925.0	7.5	7.3	99.9	99.9	99.9	99.9	287.9	306.1	7.0	98.5	999.9	99.9
3.0	15.7	966.1	900.0	9.9	7.1	99.9	99.9	99.9	99.9	292.6	311.4	7.1	82.9	999.9	99.9
4.6	20.6	1200.5	875.0	9.9	4.7	246.7	8.6	7.9	3.4	294.9	311.5	6.1	70.1	1.3	10.5
5.4	23.1	1441.6	850.0	9.0	4.2	255.2	9.2	8.9	2.4	296.4	313.0	6.1	71.7	1.7	30.5
6.2	25.6	1684.6	825.0	7.6	3.6	264.4	12.3	12.2	1.1	297.4	314.0	6.0	75.7	2.2	7.5
7.0	28.1	1941.9	800.0	6.0	2.7	264.9	13.8	13.7	1.2	298.3	314.4	5.8	79.0	2.4	9.1
8.0	30.9	2201.4	775.0	4.1	2.4	268.9	15.1	15.1	0.3	299.0	315.8	6.1	91.3	3.6	7.5
8.9	33.7	2467.8	750.0	2.3	0.9	269.7	16.4	16.4	0.1	299.7	314.9	5.5	90.5	4.4	10.5
9.9	36.3	2741.3	725.0	0.3	-1.2	272.7	17.6	17.6	-0.8	300.4	314.0	4.9	90.2	5.4	9.0
10.9	39.2	3022.2	700.0	-1.8	-2.5	273.1	17.6	17.8	-0.9	301.1	314.0	4.6	94.7	6.5	7.1
11.9	42.0	3310.7	675.0	-3.3	-5.2	270.8	18.1	18.1	-0.3	301.7	312.9	3.9	91.4	7.5	7.1
12.9	45.0	3608.6	650.0	-5.7	-18.7	270.9	18.6	18.6	-0.3	305.4	309.5	1.3	29.1	8.7	9.1
13.9	48.0	3917.4	625.0	-7.5	-25.1	271.2	18.5	18.5	-0.4	305.9	308.5	0.8	19.9	9.4	9.1
14.9	51.0	4236.2	600.0	-10.2	-25.8	267.0	20.2	20.2	1.1	307.5	309.9	0.8	21.4	10.4	9.1
15.9	54.3	4565.7	575.0	-12.5	-26.6	264.9	22.0	21.9	2.0	308.1	310.6	0.8	24.6	12.2	9.1
16.9	57.3	4906.7	550.0	-15.0	-27.9	266.0	21.5	21.5	1.5	309.4	311.6	0.7	26.2	13.7	9.0
17.9	60.8	5260.0	525.0	-16.8	-36.8	266.0	18.4	18.3	1.3	310.3	311.4	0.3	13.6	15.1	9.0
18.6	64.3	5627.5	500.0	-19.9	-43.6	269.3	18.5	18.5	0.2	312.5	313.0	0.2	7.7	16.4	9.0
19.3	67.7	6010.5	475.0	-22.9	-34.2	270.5	18.4	18.8	-0.2	313.4	314.9	0.4	27.1	18.1	9.0
20.9	71.3	6409.1	450.0	-24.6	-28.5	265.3	21.7	21.7	1.8	314.4	317.1	0.8	59.9	19.6	9.0
21.9	75.2	6826.6	425.0	-27.7	-29.4	266.9	27.6	27.6	1.5	317.5	323.2	0.8	64.1	21.6	9.0
22.9	79.2	7265.4	400.0	-31.3	-32.6	265.9	32.0	32.0	0.1	319.0	321.1	0.6	62.8	24.1	9.0
23.9	83.2	7726.1	375.0	-36.0	-36.5	272.9	36.0	36.0	-1.8	320.1	321.7	0.4	59.7	27.1	9.0
24.9	87.4	8210.1	350.0	-40.3	-41.5	271.3	34.4	34.4	-0.8	320.1	321.1	0.3	56.3	30.1	9.0
25.9	91.2	8720.4	325.0	-45.5	99.0	271.7	36.9	36.9	-1.1	321.1	323.9	99.9	99.9	33.3	9.0
26.9	95.0	9260.1	300.0	-49.7	99.9	275.0	37.2	37.2	-3.2	321.2	323.9	99.9	99.9	37.2	9.0
27.9	98.9	9834.4	275.0	-53.3	99.9	282.9	37.2	36.3	-8.3	323.3	323.9	99.9	99.9	42.0	9.1
28.9	101.6	10453.4	250.0	-57.5	99.9	282.9	42.6	40.6	-12.7	326.9	326.9	99.9	99.9	46.4	9.0
29.9	107.2	11125.0	225.0	-59.8	99.9	286.8	37.2	33.2	-16.8	329.8	329.8	99.9	99.9	51.7	9.0
30.9	113.0	11862.2	200.0	-59.8	99.9	290.2	36.1	33.9	-12.5	338.0	338.0	99.9	99.9	56.9	9.0
31.9	119.0	12695.2	175.0	-59.7	99.9	286.3	28.6	26.3	-9.0	331.4	331.4	99.9	99.9	61.5	9.0
32.9	125.6	13664.2	150.0	-57.5	99.9	285.0	14.9	33.7	-4.0	371.0	331.4	99.9	99.9	67.3	9.0
33.9	132.7	14725.1	125.0	-55.9	99.9	279.3	23.6	23.3	-3.8	393.8	331.4	99.9	99.9	73.4	9.0
34.9	139.8	16257.9	100.0	-53.3	99.9	288.8	16.8	15.9	-5.4	424.8	331.4	99.9	99.9	79.4	9.0
35.9	146.8	18056.2	75.0	-57.1	99.9	288.4	12.1	11.5	-3.8	453.3	331.4	99.9	99.9	83.9	9.0
36.9	154.0	20678.6	50.0	-53.0	99.9	46.6	3.0	-2.2	-2.0	518.6	331.4	99.9	99.9	87.6	10.1
37.9	160.8	25174.0	25.0	-49.8	99.9	168.8	1.9	-0.4	1.8	642.1	331.4	99.9	99.9	87.4	10.1

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 637
FLINT, MICH24 APRIL 1975
1800 GMT

159 19. 0

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGF A7 KM	DG
0.0	5.7	236.0	983.7	9.4	5.6	20.0	5.1	-1.7	-4.8	28.6	289.7	5.8	77.0	0.0	3.6
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	6.4	305.4	975.0	7.1	3.8	350.8	6.2	1.0	-6.1	282.9	296.3	5.2	79.7	0.2	14.5
1.2	8.5	522.6	950.0	5.1	4.1	356.7	5.6	0.3	-5.0	283.0	297.1	5.4	93.7	0.4	17.4
1.9	10.5	740.0	925.0	3.6	3.0	3.7	4.7	-0.3	-4.7	283.7	247.1	5.2	95.9	0.6	17.9
2.6	12.7	962.4	900.0	3.6	2.2	339.9	3.3	1.1	-3.1	285.9	299.0	5.0	90.1	0.8	19.0
3.4	15.0	1192.1	875.0	5.2	1.6	256.7	6.1	5.4	-2.7	289.8	303.0	4.9	77.5	0.9	17.1
4.2	17.0	1430.0	850.0	7.1	3.1	280.1	8.3	4.2	-1.5	294.3	309.9	5.7	76.4	1.1	15.4
5.0	19.2	1676.0	825.0	6.8	3.5	272.1	9.0	9.0	-0.3	296.6	313.0	6.0	79.4	1.4	13.4
5.9	21.5	1525.9	800.0	5.8	3.2	273.0	9.5	9.4	-0.5	298.1	314.7	6.1	83.7	1.8	12.4
6.8	24.0	2188.5	775.0	4.7	2.5	280.5	10.0	9.9	-1.8	299.6	310.1	6.0	86.0	2.2	12.0
7.7	26.3	2456.1	750.0	4.5	-9.6	288.0	10.1	9.6	-3.1	301.8	309.1	2.5	34.9	2.9	11.4
8.6	28.8	2731.3	725.0	2.7	-11.8	285.1	10.1	9.8	-2.6	302.7	309.0	2.1	33.5	3.3	11.7
9.5	31.4	3014.2	700.0	0.6	-12.4	281.9	10.9	10.7	-2.3	303.4	309.6	2.1	37.1	3.8	11.4
10.3	34.0	3305.0	675.0	-1.4	-16.0	278.9	10.7	10.6	-1.7	305.3	309.3	1.6	31.8	4.4	11.7
11.4	36.3	3625.0	650.0	-2.7	-25.0	277.9	9.8	9.7	-1.4	306.0	308.5	0.8	15.9	5.0	11.7
12.2	39.1	3914.7	625.0	-4.6	-29.5	283.1	10.7	10.4	-2.4	307.2	308.9	0.5	12.1	5.5	11.6
13.4	41.7	4235.1	600.0	-6.2	-35.0	282.9	12.1	11.8	-2.7	308.0	310.1	0.3	8.1	6.3	11.6
14.4	44.6	4565.5	575.0	-8.6	-37.1	280.5	11.2	11.0	-2.0	308.9	310.8	0.3	7.9	7.9	11.7
15.9	47.6	4508.7	550.0	-12.0	-37.5	270.0	12.2	12.2	0.0	309.9	310.8	0.3	9.8	7.9	11.7
16.9	50.5	5263.2	525.0	-14.1	-42.3	264.8	13.2	13.1	1.2	311.5	311.5	0.2	7.0	8.9	11.7
18.1	53.4	5632.5	500.0	-15.3	-47.0	267.6	13.0	13.0	0.6	314.4	314.8	0.1	4.6	9.4	11.3
19.3	56.4	6016.3	475.0	-17.6	-43.5	271.0	13.1	13.1	-0.2	316.1	316.7	0.2	8.3	10.6	11.7
20.5	59.6	6421.6	450.0	-19.7	-44.3	263.8	14.2	14.1	1.5	319.4	319.0	0.2	9.1	11.6	11.7
21.9	63.0	6843.0	425.0	-22.7	-46.4	257.5	14.4	14.1	3.1	319.8	320.3	0.1	9.4	12.7	9.7
23.2	66.3	7284.1	400.0	-26.9	-42.1	248.9	14.8	13.8	5.3	320.0	320.8	0.2	22.0	13.7	9.7
24.5	69.7	7743.9	375.0	-30.8	-38.1	243.9	18.5	16.6	8.1	320.8	322.1	0.4	45.5	14.7	9.7
26.0	73.3	8234.2	350.0	-32.9	-37.1	251.0	28.0	26.4	9.1	320.4	320.0	0.4	65.4	16.7	9.7
27.7	77.3	8751.1	325.0	-37.3	-42.3	256.8	32.4	31.6	7.4	325.2	326.2	0.3	59.6	19.7	9.7
29.4	81.3	9299.2	300.0	-41.7	-49.9	253.9	39.5	38.4	6.6	326.6	326.9	0.3	99.9	23.2	9.7
31.5	85.7	9883.8	275.0	-45.9	-49.9	247.3	41.6	38.4	16.0	328.8	328.9	0.3	99.9	28.3	9.7
33.7	90.4	10513.3	250.0	-51.5	-49.9	248.2	41.4	38.4	15.3	329.5	329.9	0.3	99.9	31.5	9.7
35.9	95.3	11185.5	225.0	-57.2	-49.9	255.7	45.0	43.6	11.1	330.9	330.9	0.3	99.9	39.0	9.7
38.3	100.5	11923.7	200.0	-60.6	-49.9	250.1	42.3	41.1	10.2	336.8	336.9	0.3	99.9	45.9	9.7
41.4	106.5	12747.1	175.0	-62.2	-49.9	250.0	32.8	30.8	11.2	347.4	347.9	0.3	99.9	52.8	9.7
44.8	112.8	13712.1	150.0	-57.1	-49.9	263.9	27.8	27.6	3.0	371.7	371.7	0.3	99.9	59.3	9.7
48.9	120.2	14867.0	125.0	-53.7	-49.9	263.1	25.7	25.5	3.1	394.1	394.1	0.3	99.9	65.4	9.7
53.5	128.3	16295.5	100.0	-52.6	-49.9	259.5	24.4	24.0	4.4	426.2	426.9	0.3	99.9	72.4	9.7
58.9	134.0	18124.9	75.0	-55.7	-49.9	306.9	9.7	7.7	-5.8	447.8	447.8	0.3	99.9	80.3	9.7
64.6	148.7	20682.4	50.0	-56.6	-49.9	0.7	2.6	-0.0	-2.6	510.3	510.3	0.3	99.9	83.4	9.7
70.3	160.3	25147.9	25.0	-50.9	-49.9	247.4	2.8	2.8	0.1	638.9	638.9	0.3	99.9	84.3	9.7

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 645
GREEN PAV. WJS24 APRIL 1975
1715 GMT

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0-0	7-0	210.0	589.8	7.2	2.9	20.0	4.1	-1.4	-3.9	281.5	294.2	4.8	74.0	0.0	0.
9-9	9-0	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	90.
9-5	8-3	325.7	975.7	6.3	3.7	999.9	99.9	99.9	99.9	285.4	295.4	5.1	83.2	99.9	90.
1-4	10-4	537.9	950.0	3.6	2.6	999.9	99.9	99.9	99.9	281.4	294.0	4.9	93.4	99.9	90.
2-3	12-3	753.6	925.0	1.2	1.2	5.9	4.7	-0.5	-4.7	281.1	292.9	4.5	100.3	0.5	20.
3-0	15-3	974.0	900.0	0.0	0.0	10.6	6.1	-1.1	-6.0	282.1	293.3	4.3	101.0	0.9	20.
3-8	17-3	1200.7	875.0	3.0	-5.0	18.6	6.3	-2.0	-6.0	282.3	295.6	3.1	57.9	1.1	20.
4-7	23-2	1437.2	850.0	5.9	-6.2	0.4	5.2	-0.1	-5.2	292.6	300.5	2.8	41.9	1.4	10.
5-7	22-6	1481.0	825.0	4.7	-7.1	353.5	5.5	0.6	-5.5	293.9	301.6	2.7	42.0	1.6	10.
6-5	25-2	1931.1	800.0	2.8	-8.4	340.3	5.5	1.9	-5.2	294.5	302.9	3.0	50.8	1.9	10.
7-6	27-7	2188.2	775.0	2.4	-9.0	312.5	6.8	5.0	-4.6	296.8	306.4	3.4	57.9	2.2	10.
8-6	30-3	2452.8	750.0	2.5	-4.4	305.2	7.0	5.7	-4.1	298.3	309.5	0.1	1.0	2.5	10.
9-4	33-1	2726.0	725.0	1.2	-4.2	292.6	7.6	7.1	-2.9	300.8	301.0	0.1	1.0	2.8	10.
10-7	35-3	3007.1	700.0	-0.5	-5.3	282.2	9.2	8.9	-1.9	301.9	302.1	0.1	1.0	3.0	10.
11-9	39-6	3253.5	675.0	-1.9	-5.2	278.7	11.0	10.9	-1.7	303.5	303.7	0.0	1.0	3.3	10.
13-1	41-3	3595.5	650.0	-3.9	-31.5	265.3	10.8	10.8	0.1	304.6	306.0	0.4	9.5	4.0	10.
14-1	44-3	3903.5	625.0	-6.3	-32.5	266.4	10.9	10.9	0.7	305.3	306.6	0.4	10.3	4.5	10.
15-5	47-3	4221.4	600.0	-8.6	-38.2	278.3	12.1	12.1	-0.9	306.1	306.8	0.2	6.3	5.1	10.
16-4	50-4	4550.1	575.0	-10.7	-40.8	273.0	14.9	14.8	-1.9	307.4	308.0	0.2	6.3	6.1	10.
18-0	53-3	4890.1	550.0	-13.1	-39.3	273.0	15.5	15.5	-0.8	308.5	309.3	0.2	6.9	7.2	10.
19-4	56-4	5242.5	525.0	-16.2	-39.9	267.3	15.7	15.7	0.8	309.0	309.7	0.2	10.9	8.3	10.
20-8	59-4	5638.1	500.0	-18.3	-40.0	261.0	17.4	17.2	2.7	310.7	311.5	0.2	12.7	9.6	10.
22-2	63-3	5989.9	475.0	-21.2	-38.4	268.7	18.3	18.2	1.7	311.7	312.7	0.3	19.5	10.9	10.
23-6	66-5	6386.2	450.0	-23.0	-39.0	270.9	21.0	21.0	-0.3	313.3	315.2	0.3	21.4	12.5	10.
25-2	70-1	6832.9	425.0	-	-50.2	265.8	22.0	22.0	0.1	315.8	316.2	0.1	9.0	14.5	10.
26-8	73-7	7239.0	400.0	-	-65.1	270.9	23.2	23.2	-0.4	317.4	317.5	0.0	1.6	16.6	10.
28-4	77-7	7657.4	375.0	-37.0	-55.6	268.3	25.7	25.7	-0.3	318.0	318.2	0.0	1.3	18.5	9.
30-0	81-5	8173.8	350.0	-41.3	-58.1	268.3	30.1	30.1	0.9	318.7	318.9	0.1	13.0	21.6	9.
31-7	85-6	8687.1	325.0	-46.1	-58.1	268.3	31.9	31.5	4.5	319.7	319.9	99.9	99.9	24.8	9.
33-7	90-3	9225.1	300.0	-48.1	-58.1	268.3	33.1	31.9	8.5	320.5	319.9	99.9	99.9	28.4	9.
35-7	94-6	9794.0	275.0	-51.0	-58.1	268.3	33.5	37.5	8.1	321.4	319.9	99.9	99.9	32.3	9.
37-9	99-6	10412.2	250.0	-55.0	-58.1	268.3	38.0	36.7	9.6	324.3	319.9	99.9	99.9	36.8	9.
40-2	104-6	11082.7	225.0	-56.1	-58.1	268.3	39.3	37.9	10.2	332.6	319.9	99.9	99.9	42.3	8.
42-9	110-4	11827.7	200.0	-58.0	-58.1	268.3	40.2	37.9	5.0	340.9	319.9	99.9	99.9	48.2	8.
45-8	116-3	12655.8	175.0	-57.2	-58.1	268.3	41.0	38.4	6.2	355.6	319.9	99.9	99.9	52.7	8.
49-0	123-0	13646.9	150.0	-57.1	-58.1	268.3	41.0	38.4	6.2	371.8	319.9	99.9	99.9	57.9	8.
52-0	130-3	14810.4	125.0	-53.9	-58.1	268.3	41.0	38.4	2.1	392.4	319.9	99.9	99.9	63.2	8.
57-5	138-3	16242.8	100.0	-54.6	-58.1	268.3	41.0	38.4	6.8	422.3	319.9	99.9	99.9	69.4	8.
63-3	146-5	18083.4	75.0	-57.1	-58.1	268.3	41.0	38.4	-5.9	453.1	319.9	99.9	99.9	77.2	8.
71-5	155-7	20671.3	50.0	-53.8	-58.1	268.3	41.0	38.4	0.9	516.8	319.9	99.9	99.9	80.2	8.
84-2	185-3	25155.6	25.0	-49.7	-58.1	268.3	41.0	38.4	-1.2	642.2	319.9	99.9	99.9	80.7	8.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 654
MURON, S O

24 APRIL 1975
1720 GMT

TIME MIN	CNTCT	HEIGHT GPN	PRES MB	TEMP DEG C	DEW PT DEG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	9.1	392.0	965.0	10.0	6.7	150.0	4.1	-2.1	3.6	266.8	303.5	6.4	80.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	10.4	529.3	950.0	9.5	6.1	151.8	6.9	-3.2	6.3	287.6	303.9	6.2	79.7	0.2	32.8
1.3	12.5	750.5	925.0	8.3	5.2	144.1	7.5	-3.3	6.8	288.6	305.4	6.0	80.6	0.5	33.0
2.0	14.8	976.6	900.0	6.9	4.7	151.3	6.7	-3.2	5.9	289.4	305.3	6.0	86.0	0.8	33.1
2.7	16.8	1208.1	875.0	5.4	4.8	164.2	6.7	-1.8	6.5	290.2	306.6	6.2	95.8	1.1	33.2
3.6	19.2	1445.0	850.0	4.5	4.2	194.5	6.7	1.7	6.4	291.6	307.9	6.1	97.8	1.4	33.6
4.4	21.4	1686.5	825.0	3.8	3.5	218.9	7.3	4.6	5.7	293.4	309.5	6.0	98.1	1.7	34.7
5.3	23.8	1938.5	800.0	2.9	2.6	226.6	8.0	5.8	5.5	295.0	310.7	5.8	98.2	1.9	35.8
6.1	26.1	2195.6	775.0	1.8	1.6	235.4	7.3	6.0	4.1	296.5	311.7	5.6	98.5	2.2	36
7.0	28.6	2460.3	750.0	1.7	-4.1	217.0	9.6	5.8	7.7	298.9	309.6	3.8	66.3	2.5	12.
7.9	31.1	2733.9	725.0	1.4	-6.8	210.8	12.1	6.2	10.4	301.4	310.6	3.2	54.5	3.1	16.
9.0	33.7	3015.4	700.0	-1.0	-7.1	208.4	14.2	6.8	12.5	301.8	311.1	3.2	63.1	3.9	19.
9.9	36.1	3304.7	675.0	-3.3	-6.2	207.2	16.9	7.8	15.1	302.4	312.7	3.6	80.1	4.8	20.
11.1	38.9	3602.3	650.0	-5.2	-8.2	205.3	18.9	8.1	17.1	303.4	312.6	3.2	79.3	6.0	22.
12.0	41.4	3905.5	625.0	-7.3	-11.5	206.7	19.9	8.9	17.8	304.4	311.9	2.6	72.3	7.1	22.
13.0	44.3	4226.1	600.0	-10.0	-15.1	210.7	19.0	9.7	16.3	304.8	310.8	2.0	65.7	8.2	23.
14.0	47.1	4553.1	575.0	-12.3	-18.5	214.2	18.8	10.5	15.5	305.7	310.5	1.5	59.7	9.5	24.
15.3	50.2	4891.3	550.0	-15.0	-19.2	216.7	19.9	11.9	15.9	306.5	311.2	1.5	69.9	10.8	26.
16.5	53.0	5241.8	525.0	-17.7	-21.4	217.9	20.1	12.4	15.9	307.2	311.3	1.3	72.9	12.3	27.
17.9	55.9	5604.9	500.0	-20.6	-23.6	216.9	20.6	12.3	14.4	307.5	308.8	0.3	17.6	14.0	28.
19.3	59.1	5982.2	475.0	-23.6	-26.8	214.2	20.9	11.7	17.3	308.7	309.7	0.3	23.1	15.7	29.
20.9	62.5	6378.9	450.0	-27.1	-29.9	215.9	20.8	12.2	16.9	309.2	309.9	99.9	99.9	17.7	30.
22.3	65.7	6765.0	425.0	-29.6	-32.8	219.6	19.1	12.2	14.7	311.1	309.9	99.9	99.9	19.4	31.
23.0	69.1	7214.4	400.0	-32.8	-36.1	228.8	19.0	11.9	14.6	312.3	309.9	99.9	99.9	21.0	31.
25.4	72.6	7663.6	375.0	-36.1	-39.9	223.8	20.3	14.1	14.7	313.6	309.9	99.9	99.9	22.9	32.
27.1	76.5	8140.5	350.0	-40.2	-43.6	224.8	23.6	16.6	16.8	314.5	309.9	99.9	99.9	25.2	33.
28.7	80.4	8641.7	325.0	-44.6	-47.9	224.5	24.4	17.1	17.4	315.2	309.9	99.9	99.9	27.5	34.
30.3	84.5	9172.3	300.0	-48.8	-52.0	228.5	28.2	21.1	18.7	316.6	309.9	99.9	99.9	29.8	35.
32.1	88.7	9739.0	275.0	-52.9	-56.9	230.5	28.7	22.2	18.2	318.7	309.9	99.9	99.9	32.9	37.
34.2	93.4	10349.7	250.0	-56.2	-60.9	225.8	26.0	18.6	18.2	322.6	309.9	99.9	99.9	36.0	38.
36.3	98.2	11025.1	225.0	-53.1	-59.9	242.5	27.8	24.6	12.8	337.2	309.9	99.9	99.9	39.4	39.
38.7	103.4	11779.7	200.0	-55.0	-59.9	249.5	19.9	18.6	7.0	345.7	309.9	99.9	99.9	42.5	41.
41.6	106.3	12633.9	175.0	-54.8	-59.9	247.6	19.9	18.4	7.6	359.4	309.9	99.9	99.9	45.6	43.
45.1	115.4	13625.9	150.0	-53.1	-59.9	254.8	21.7	21.0	6.7	378.6	309.9	99.9	99.9	50.0	45.
48.2	122.3	14793.5	125.0	-54.7	-59.9	251.6	19.4	18.4	6.1	395.9	309.9	99.9	99.9	53.9	48.
50.8	129.8	16224.3	100.0	-53.6	-59.9	255.4	15.8	14.3	6.6	424.2	309.9	99.9	99.9	58.0	49.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 655
ST CLOUD, MINN24 APRIL 1975
1730 GMT

TIME MIN	CNTCT	HEIGHT GEM	PREL MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.7	316.0	979.0	8.1	3.9	90.0	5.1	-5.1	0.0	283.6	297.1	5.2	75.0	0.0	0.
99.9	99.9	1000.0	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.0	349.0	975.0	7.4	3.1	277.6	3.5	3.5	-0.5	283.3	296.0	4.9	73.8	0.4	275.
0.8	7.9	563.0	950.0	5.1	4.0	250.6	1.2	1.1	-0.4	283.0	297.0	5.4	92.8	0.4	275.
1.6	6.9	780.2	925.0	2.9	2.8	51.2	4.7	-4.7	0.1	282.9	296.1	5.1	98.9	0.5	275.
2.2	11.8	1002.0	900.0	1.6	1.5	98.2	5.4	-5.3	0.8	283.7	296.1	4.7	79.6	0.7	275.
3.0	13.8	1229.9	875.0	3.0	-0.2	104.2	4.4	-4.3	1.1	287.4	298.9	4.3	79.6	1.0	275.
3.8	15.8	1464.0	850.0	2.8	-2.2	111.9	5.0	-4.6	1.9	289.5	299.5	3.8	69.7	1.2	277.
4.9	17.9	1706.2	825.0	1.9	-2.7	178.9	4.3	-0.1	4.3	291.1	301.5	3.8	71.6	1.4	285.
5.7	20.1	1954.4	800.0	1.0	-5.0	189.5	2.8	0.5	2.8	292.6	301.9	3.3	65.6	1.4	293.
6.7	22.1	2210.6	775.0	3.1	-22.8	256.1	2.5	2.4	0.6	297.3	299.7	0.8	12.7	1.4	297.
7.8	24.4	2475.7	750.0	1.8	-21.3	267.8	3.7	3.7	0.1	298.7	301.6	0.9	16.0	1.2	302.
8.8	26.5	2748.1	725.0	0.2	-18.7	271.7	6.1	6.1	-0.2	299.9	303.7	1.3	23.6	1.0	310.
9.8	28.9	3028.1	700.0	-2.2	-9.4	265.4	7.5	7.5	0.6	300.4	309.2	2.7	57.6	0.7	332.
10.8	31.4	3315.6	675.0	-5.2	-10.2	262.1	9.0	8.9	1.2	302	307.8	2.6	68.2	0.8	34.
11.9	33.9	3611.3	650.0	-6.6	-15.6	273.9	8.6	8.6	-0.6	301.7	306.9	1.8	48.5	1.1	46.
13.0	36.2	3917.0	625.0	-8.1	-33.9	283.0	7.8	6.8	-1.5	303.2	304.4	0.4	10.9	1.5	52.
15.4	41.3	4559.5	575.0	-12.7	-31.9	279.3	8.4	8.3	-1.4	305.1	306.6	0.5	18.1	2.3	75.
16.7	44.1	4837.2	550.0	-14.7	-33.0	274.4	9.7	9.6	-0.7	306.7	308.1	0.4	19.2	3.0	81.
18.0	47.0	5247.2	525.0	-17.9	-32.9	295.2	10.3	9.9	-2.7	307.0	308.5	0.5	25.4	3.8	86.
19.2	49.3	5610.7	500.0	-20.2	-39.1	282.0	12.9	12.6	-2.7	308.4	309.3	0.3	16.6	4.5	90.
20.6	52.8	5995.3	475.0	-22.4	-43.9	272.1	13.1	13.1	-0.5	310.2	310.8	0.2	12.2	5.7	91.
22.2	55.8	6387.7	450.0	-25.8	-46.7	261.4	11.8	11.7	1.9	310.8	311.3	0.1	12.8	6.8	91.
24.7	59.0	6794.9	425.0	-29.4	-49.6	255.3	10.1	9.7	2.6	311.3	311.7	0.1	11.9	7.8	91.
25.4	62.4	7224.6	400.0	-33.3	-48.6	252.4	10.0	9.6	3.0	311.7	312.1	0.1	19.6	4.1	87.
27.0	65.9	7674.2	375.0	-37.3	-49.0	260.6	14.0	13.8	2.4	312.2	312.6	0.1	27.8	9.9	80.
28.8	68.4	8158.5	350.0	-40.1	-59.9	263.5	21.6	21.4	2.4	314.7	319.9	0.1	99.9	11.8	80.
30.7	73.3	8699.3	325.0	-44.2	-59.9	263.9	25.0	24.8	2.7	315.7	319.9	0.1	99.9	14.5	85.
32.5	77.2	9181.1	300.0	-48.5	-59.9	258.5	28.0	27.4	5.6	317.0	319.9	0.1	99.9	17.2	84.
34.3	81.3	9744.0	275.0	-52.7	-59.9	252.9	29.6	28.3	6.7	318.9	319.9	0.1	99.9	20.8	83.
36.6	85.9	10357.6	250.0	-57.1	-59.9	248.5	33.2	30.9	12.2	321.2	319.9	0.1	99.9	24.6	81.
38.7	90.3	11021.2	225.0	-58.2	-59.9	252.5	31.9	30.4	9.6	329.3	319.9	0.1	99.9	28.9	79.
41.1	96.0	11762.3	200.0	-59.6	-59.9	259.4	23.4	23.0	4.3	338.5	319.9	0.1	99.9	32.6	79.
43.8	101.9	12608.3	175.0	-55.2	-59.9	256.5	26.5	25.8	6.2	358.8	319.9	0.1	99.9	37.3	73.
46.5	108.3	13586.9	150.0	-56.2	-59.9	255.0	25.4	24.6	6.6	373.3	319.9	0.1	99.9	40.9	76.
48.8	115.5	14752.4	125.0	-55.6	-59.9	251.5	20.1	19.0	6.4	364.4	319.9	0.1	99.9	45.3	76.
51.0	124.3	16183.4	100.0	-54.4	-59.9	253.2	13.2	12.6	3.8	422.7	319.9	0.1	99.9	49.4	77.
53.6	135.3	18045.7	75.0	-52.6	-59.9	245.5	18.5	16.8	7.7	462.6	319.9	0.1	99.9	54.5	76.
56.4	145.5	20638.6	50.0	-54.8	-59.9	241.6	4.3	3.8	2.1	514.3	319.9	0.1	99.9	57.8	76.
78.3	158.5	25125.8	25.0	-51.2	-59.9	332.5	6.2	2.9	-5.5	637.6	319.9	0.1	99.9	59.4	77.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 662
RAPID CITY, S D
24 APRIL 1975
1735 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	15.5	966.0	901.8	13.9	4.2	310.0	15.4	11.8	-9.9	296.4	312.2	5.8	52.0	0.0	0.
99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	15.7	982.8	900.0	12.9	3.2	318.2	16.9	11.2	-12.6	295.5	310.2	5.4	51.8	0.2	42.
0.9	16.1	1217.2	875.0	9.0	1.2	326.6	20.1	11.1	-16.8	293.8	306.8	4.8	57.9	1.1	142.
1.8	20.6	1456.7	850.0	6.8	1.2	325.4	20.2	11.5	-16.6	293.9	307.3	4.9	67.4	2.1	143.
2.5	23.1	1701.3	825.0	4.5	0.2	327.8	18.4	9.8	-15.6	294.0	306.9	4.7	73.3	3.0	144.
3.3	25.7	1951.4	800.0	2.6	-0.9	324.1	22.0	12.9	-17.8	294.5	306.8	4.5	77.4	3.9	145.
4.1	28.2	2207.4	775.0	0.6	-1.6	320.7	19.8	12.7	-15.2	295.0	307.1	4.4	85.4	4.9	146.
4.8	31.0	2459.9	750.0	-2.0	-2.9	314.7	18.2	12.9	-12.8	294.9	306.4	4.1	93.8	5.7	143.
5.7	33.9	2740.0	725.0	-2.2	-7.0	313.1	20.0	14.6	-13.6	297.4	306.3	3.1	69.5	6.7	142.
6.4	36.4	3018.4	700.0	-3.2	-8.0	313.4	18.3	13.3	-12.5	299.3	307.5	3.0	69.5	7.6	141.
7.1	39.4	3325.9	675.0	-4.2	-12.9	310.5	17.0	12.9	-11.0	301.2	307.5	2.1	50.6	8.2	141.
7.9	42.1	3602.5	650.0	-5.9	-15.3	301.2	16.0	13.6	-8.3	302.4	307.8	1.8	47.3	9.1	139.
8.7	45.1	3908.4	625.0	-8.5	-17.7	288.9	14.8	14.0	-4.8	302.9	307.5	1.5	47.3	9.7	137.
9.6	48.3	4223.7	600.0	-10.9	-18.9	284.7	16.7	16.2	-4.2	303.7	308.1	1.4	51.7	10.3	135.
10.3	51.2	4545.5	575.0	-12.8	-22.7	280.3	17.9	17.0	-5.6	305.1	308.4	1.1	43.1	11.1	133.
11.2	54.4	4887.1	550.0	-15.5	-24.5	292.8	18.8	17.4	-7.3	305.8	308.8	0.9	45.6	12.0	131.
12.0	57.4	5236.7	525.0	-18.0	-28.0	298.3	20.5	18.1	-9.7	306.9	309.2	0.7	41.1	12.9	130.
13.0	60.9	5600.2	500.0	-20.1	-36.7	301.7	21.4	18.2	-11.3	308.5	309.6	0.3	21.1	14.0	129.
13.9	64.4	5977.7	475.0	-23.8	-42.0	302.4	23.1	19.5	-12.4	308.5	309.1	0.2	16.7	15.3	129.
14.8	67.7	6370.0	450.0	-27.1	-40.2	304.3	22.5	18.6	-12.7	309.2	310.0	0.3	27.3	16.7	128.
15.9	71.1	6776.5	425.0	-30.3	-43.8	303.3	21.7	18.2	-11.9	310.1	310.7	0.2	25.2	18.0	128.
17.0	75.0	7207.2	400.0	-34.1	-46.7	299.9	22.1	19.1	-11.0	310.6	311.1	0.1	26.4	17.4	127.
18.1	78.9	7654.9	375.0	-38.2	-49.3	301.7	20.5	17.4	-10.8	310.9	311.3	0.1	26.8	20.8	127.
19.3	82.8	8125.1	350.0	-42.6	99.9	308.6	21.7	17.0	-13.5	311.3	309.9	99.9	99.9	22.4	127.
20.5	86.8	8622.8	325.0	-45.7	99.9	307.5	23.1	18.4	-14.1	313.6	309.9	99.9	99.9	23.8	127.
21.8	91.3	9133.4	300.0	-47.6	99.9	307.3	24.5	19.5	-14.8	318.3	309.9	99.9	99.9	25.8	127.
23.1	95.5	9724.7	275.0	-50.4	99.9	310.8	22.6	17.1	-14.7	322.2	309.9	99.9	99.9	27.8	127.
24.5	100.6	10343.1	250.0	-53.1	99.9	302.4	19.0	16.1	-10.2	327.2	309.9	99.9	99.9	29.5	127.
25.9	105.6	11016.7	225.0	-57.4	99.9	284.0	23.4	22.7	-5.7	330.6	309.9	99.9	99.9	31.1	126.
27.5	111.0	11765.9	200.0	-54.7	99.9	271.7	25.6	25.6	-0.8	346.2	309.9	99.9	99.9	33.3	124.
29.4	116.8	12626.5	175.0	-51.9	99.9	261.4	17.9	17.7	2.7	364.3	309.9	99.9	99.9	35.3	122.
31.5	123.3	13616.4	150.0	-55.4	99.9	252.2	20.0	19.1	6.1	374.6	309.9	99.9	99.9	36.4	119.
33.9	130.5	14773.3	125.0	-56.8	99.9	255.1	22.2	22.1	1.9	392.1	309.9	99.9	99.9	39.4	116.
36.8	136.0	16204.9	100.0	-52.1	99.9	259.9	9.2	9.0	1.6	427.2	309.9	99.9	99.9	42.2	114.
40.4	146.3	18049.8	75.0	-50.0	99.9	233.1	13.0	10.4	7.8	468.2	309.9	99.9	99.9	43.2	111.
47.7	155.3	20670.0	50.0	-51.9	99.9	236.7	2.9	2.4	1.6	521.2	309.9	99.9	99.9	43.4	110.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 1
OF POOR QUALITY

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER24 APRIL 1975
1725 GMT

TIME MIN	CNTCT	HEIGHT GPN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.9	180.0	997.1	23.5	18.4	180.0	3.6	0.0	3.6	298.7	334.3	13.5	73.0	0.0	0.
99.9	99.9	999.0	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	7.7	375.4	975.0	21.1	17.7	203.1	12.0	4.7	11.0	298.2	333.0	13.2	80.9	0.4	1.
1.5	10.0	600.4	950.0	19.4	16.1	209.9	13.0	6.5	11.3	298.7	335.3	13.9	92.2	1.0	2.
2.4	15.1	829.4	925.0	16.4	16.0	214.0	13.8	7.7	11.4	297.8	330.8	12.5	97.5	1.7	2.
3.5	14.4	1063.2	900.0	15.1	14.6	224.2	16.5	11.5	11.9	296.7	329.8	11.7	96.9	2.6	3.
4.6	14.5	1302.2	875.0	14.0	13.2	234.0	21.6	17.4	12.7	295.8	329.2	11.0	94.7	3.7	3.
5.3	18.9	1547.1	850.0	13.5	10.5	242.9	20.2	14.0	9.2	301.5	327.2	9.5	82.4	4.8	4.
6.4	21.2	1759.0	825.0	13.3	6.5	251.8	16.7	15.8	5.2	303.7	324.2	7.4	63.1	5.6	4.
7.4	23.6	2057.6	800.0	11.4	5.9	254.9	15.7	15.1	4.1	308.2	324.5	7.3	68.5	6.7	5.
9.5	25.9	2322.4	775.0	9.8	3.6	259.9	16.7	16.4	2.9	305.2	323.3	6.4	65.5	7.6	5.
9.5	28.4	2594.1	750.0	7.4	2.2	262.1	17.1	17.0	2.3	305.4	322.4	6.0	69.5	8.6	5.
10.5	31.1	2872.5	725.0	5.2	0.6	259.7	19.3	18.9	3.5	305.9	321.6	5.5	72.2	9.5	6.
11.6	33.7	3156.5	700.0	3.0	0.9	256.5	20.3	19.7	4.7	308.5	323.2	5.8	68.0	10.4	6.
12.4	36.3	3453.3	675.0	4.0	-21.5	253.6	25.1	24.1	7.1	310.3	314.2	1.3	16.9	12.3	6.
13.9	38.0	3759.6	650.0	3.4	-47.8	251.3	27.3	25.9	8.7	312.0	313.1	0.1	1.0	14.2	6.
15.1	41.6	4076.3	625.0	0.6	-14.9	251.5	27.7	26.2	8.8	313.4	319.4	1.9	30.2	16.2	6.
16.3	44.5	4402.2	600.0	-2.5	-21.7	254.7	25.7	24.8	6.8	313.4	317.1	1.1	21.4	18.1	6.
17.5	47.5	4738.3	575.0	-4.5	-41.4	254.2	26.0	25.0	7.1	315.7	315.5	0.2	5.0	19.2	6.
18.6	50.6	5086.6	550.0	-7.3	-29.4	255.9	26.0	25.2	6.3	315.4	317.5	0.6	15.2	21.6	6.
19.4	53.6	5446.5	525.0	-10.8	-25.3	258.9	26.3	25.8	5.1	315.5	319.5	0.9	29.1	23.3	6.
20.1	56.7	5816.3	500.0	-13.7	-44.2	262.4	30.1	28.8	4.0	316.3	317.4	0.3	11.7	25.5	6.
21.7	59.0	6204.1	475.0	-15.3	-59.6	265.6	30.8	30.7	1.8	319.0	319.1	0.0	1.0	27.7	7.
23.7	63.4	6614.2	450.0	-17.9	-61.3	269.4	27.3	27.3	0.6	320.7	320.8	0.0	1.0	30.1	7.
25.2	66.9	7019.2	425.0	-20.8	-63.2	272.4	25.0	25.0	-1.1	322.2	322.3	0.0	1.0	32.4	7.
26.8	70.5	7444.3	400.0	-24.4	-65.5	272.1	27.1	27.1	-1.0	323.2	323.2	0.0	1.0	34.8	7.
28.5	74.1	7950.5	375.0	-28.5	-68.2	268.9	25.1	25.0	1.4	323.9	323.9	0.0	1.0	37.2	7.
30.2	78.5	8441.7	350.0	-31.6	-70.4	268.1	26.4	26.4	0.9	325.7	325.9	0.0	1.0	39.7	7.
31.3	82.6	8940.5	325.0	-36.5	-73.4	270.0	23.5	23.5	0.0	326.3	326.3	0.0	1.0	42.1	7.
33.3	85.9	9509.9	300.0	-41.2	-99.9	268.9	29.4	28.4	0.6	327.4	999.9	99.9	99.9	44.6	7.
35.1	91.9	10094.6	275.0	-46.2	-99.9	276.5	27.4	27.2	-3.1	328.3	999.9	99.9	99.9	47.5	7.
36.9	95.6	10721.4	250.0	-51.2	-99.9	283.6	24.5	23.4	-5.9	330.0	999.9	99.9	99.9	50.3	8.
39.1	102.0	11395.3	225.0	-55.7	-99.9	287.2	24.2	23.1	-7.2	331.2	999.9	99.9	99.9	52.9	8.
41.4	108.0	12140.5	200.0	-50.9	-99.9	278.7	22.6	22.4	-3.4	337.9	999.9	99.9	99.9	56.0	8.
44.0	114.3	12967.0	175.0	-62.5	-99.9	263.4	28.9	28.7	3.3	340.9	999.9	99.9	99.9	59.8	8.
47.0	121.3	13923.0	150.0	-60.0	-99.9	276.6	32.7	32.7	1.9	365.7	999.9	99.9	99.9	65.7	8.
50.3	129.0	15061.9	-25.0	-60.3	-99.9	265.4	26.6	26.6	0.2	385.9	999.9	99.9	99.9	71.1	8.
54.4	137.3	16431.1	100.0	-65.2	-99.9	275.1	22.5	22.4	-2.0	401.9	999.9	99.9	99.9	77.4	8.
58.5	146.3	18161.1	75.0	-67.3	-99.9	234.9	6.8	5.6	3.9	431.8	999.9	99.9	99.9	82.1	8.
64.5	156.3	20661.6	50.0	-59.3	-99.9	105.4	2.8	-2.7	0.7	503.8	999.9	99.9	99.9	84.8	8.
71.4	167.0	25099.5	25.0	-50.8	-99.9	66.7	5.6	-5.1	-2.2	638.7	999.9	99.9	99.9	83.2	8.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 22002
FT. SILL, OKLA

24 APRIL 1975
1850 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCRP M/SEC	POT T DG K	E POT T DG K	MR RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	8.7	362.0	966.6	28.0	15.6	190.0	4.1	6.7	4.0	305.7	227.6	11.7	47.0	0.7	0
99.9	99.9	99.9	1008.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	10.1	515.3	950.0	25.2	15.4	205.0	6.5	2.9	5.8	304.4	335.1	11.7	54.3	0.2	5
1.2	12.1	749.2	925.0	23.1	13.6	206.6	6.9	3.1	6.2	304.4	333.5	10.7	55.1	0.5	17
2.2	14.4	967.7	900.0	21.2	13.1	212.4	7.4	4.0	6.3	304.8	333.8	10.6	60.1	1.6	21
3.2	16.5	1231.2	875.0	18.8	11.9	218.9	8.5	5.4	6.6	304.6	332.4	10.1	64.4	1.4	27
4.3	18.8	1479.7	850.0	18.9	-2.3	248.3	7.4	6.7	3.2	308.5	318.4	4.1	64.4	1.9	32
5.4	20.9	1735.7	825.0	18.5	-4.8	247.6	10.5	9.7	4.0	308.6	318.3	3.2	20.0	2.3	40
6.3	23.3	1968.4	800.0	16.9	-6.1	242.3	13.0	11.5	6.0	309.5	318.6	0.0	20.1	3.3	46
7.4	25.7	2267.7	775.0	14.7	-7.5	236.3	13.5	10.8	8.0	310.0	318.4	2.8	20.9	3.6	49
8.4	28.1	2543.4	750.0	12.5	-9.0	237.9	14.6	12.3	7.7	310.4	319.2	2.6	21.3	4.7	50
9.5	30.7	2826.3	725.0	10.1	-10.9	243.7	14.6	13.1	6.5	310.8	317.9	2.3	21.4	5.7	52
10.7	33.3	3116.8	700.0	8.1	-12.6	238.5	15.3	13.1	8.0	311.7	318.2	2.1	21.5	6.7	53
11.9	35.8	3415.4	675.0	5.3	-13.4	232.8	15.8	12.6	9.5	311.8	318.2	2.0	24.3	7.8	54
13.1	38.5	3722.0	650.0	2.3	-7.1	230.4	17.0	13.1	10.9	312.0	322.6	3.5	51.1	9.0	53
14.3	41.1	4037.8	625.0	-0.3	-3.2	230.5	18.4	14.2	11.7	312.8	327.2	4.9	80.9	10.3	53
15.5	44.0	4363.2	600.0	-2.6	-10.6	232.7	19.3	15.3	11.7	313.4	318.8	1.7	33.0	11.6	53
16.8	47.0	4659.1	575.0	-5.2	-19.3	226.7	20.7	15.6	13.7	314.1	318.7	1.4	32.0	13.1	53
18.1	50.1	5046.7	550.0	-8.0	-22.0	230.2	22.4	17.2	14.3	314.7	318.6	1.2	31.3	14.8	52
19.4	53.0	5406.1	525.0	-11.1	-24.5	235.3	24.1	19.8	13.7	315.2	318.4	1.0	32.0	16.6	52
20.7	56.1	5778.9	500.0	-13.7	-30.6	245.4	26.2	23.8	10.9	316.4	316.4	0.6	22.4	18.7	53
22.1	59.4	6167.6	475.0	-15.9	-33.6	245.9	28.3	26.7	11.9	318.2	319.9	0.5	20.1	20.9	55
23.5	62.9	6572.3	450.0	-18.2	-35.5	243.7	28.6	25.7	12.7	320.3	321.8	0.4	22.7	23.3	56
25.0	66.4	6957.3	425.0	-21.7	-37.3	242.1	27.5	24.3	12.9	321.2	322.5	0.4	22.7	26.0	56
26.5	70.1	7440.3	400.0	-25.8	-39.4	241.1	26.9	25.3	14.0	321.4	322.5	0.3	24.9	28.3	57
28.0	73.8	7904.5	375.0	-29.7	-43.3	241.2	26.8	26.1	14.3	322.3	323.1	0.2	25.1	31.1	57
29.5	77.2	8392.6	350.0	-33.4	-48.0	242.3	31.0	27.4	14.4	323.7	324.3	0.2	26.7	33.6	58
31.2	82.0	8908.3	325.0	-37.9	-49.9	243.6	33.2	29.7	14.7	324.4	324.9	0.1	24.8	36.8	58
32.9	86.2	9454.5	300.0	-42.3	99.9	251.0	34.1	32.2	11.1	325.7	999.9	99.9	99.9	40.3	59
34.7	91.0	10036.9	275.0	-46.8	99.9	258.3	34.3	33.5	7.1	327.5	999.9	99.9	99.9	43.7	60
36.7	96.0	10663.1	250.0	-51.0	99.9	261.0	31.9	31.5	5.0	330.3	999.9	99.9	99.9	48.0	62
38.7	101.0	11340.6	225.0	-56.1	99.9	99.9	99.9	99.9	99.9	332.6	999.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

Intentionally Left Blank

SECRET VALUE IS

Sounding Data

24 April 1975

2100 GMT

STATION NO. 208
CHARLESTON, SC

24 APRIL 1975
2100 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	EM PCT	RANGE KM	AZ DG
0.0	4.4	13.0	1019.0	24.4	10.6	200.0	7.2	2.5	6.8	297.6	328.7	11.8	62.0	0.0	0.
0.6	6.0	177.3	1000.0	21.8	14.1	212.1	9.6	5.1	8.1	296.3	323.2	10.2	61.5	0.4	27.
1.6	8.2	356.7	975.0	20.2	14.3	205.3	11.7	5.7	10.2	297.0	325.0	10.6	64.8	1.1	28.
2.4	10.5	620.4	955.0	17.7	13.8	215.9	11.5	6.7	9.3	296.6	324.4	10.6	70.2	1.6	30.
3.2	12.5	648.2	945.0	15.7	13.7	220.7	10.5	6.9	8.0	296.8	325.2	10.7	88.0	2.2	32.
4.2	15.1	1080.7	905.0	14.4	11.6	228.8	10.6	8.0	7.0	296.8	325.2	9.6	83.6	2.9	35.
5.0	17.4	1419.0	875.0	14.2	3.1	225.4	9.4	6.7	6.6	299.3	314.6	5.5	87.2	3.2	37.
6.1	15.7	133.5	856.0	13.0	3.5	218.2	8.6	4.8	7.1	310.5	316.7	5.8	52.6	3.8	37.
7.0	22.3	1813.9	825.0	12.2	-6.0	215.7	9.5	5.6	7.7	301.9	310.5	3.0	30.7	4.3	37.
8.0	24.6	2071.5	805.0	12.0	-12.7	211.5	9.3	7.3	5.8	304.2	310.0	1.9	17.5	4.8	34.
9.0	26.9	2336.4	775.0	10.7	-2.0	243.2	9.4	8.6	4.3	303.9	318.3	4.3	41.0	5.4	40.
10.1	25.6	2509.6	755.0	5.8	-2.1	222.0	10.0	9.9	1.4	307.8	320.6	4.4	43.3	5.9	43.
11.2	22.1	2800.5	725.0	6.1	-1.9	276.7	11.2	11.1	-1.3	308.9	322.3	4.6	49.2	6.4	44.
12.3	35.1	3176.2	705.0	5.9	-2.2	279.9	12.6	12.4	-2.2	309.6	323.2	4.7	55.8	6.9	53.
13.5	37.7	3476.5	675.0	4.5	-3.8	283.7	12.0	11.6	-2.9	311.2	324.0	4.3	55.1	7.6	58.
14.6	40.5	3783.5	650.0	3.0	-7.1	295.0	14.1	12.6	-6.2	312.6	323.3	3.5	47.5	8.1	42.
15.9	43.3	4053.9	625.0	0.5	-9.3	301.0	16.4	14.0	-6.4	313.4	322.7	3.0	47.5	8.8	49.
17.0	46.4	4426.4	605.0	-1.9	-9.7	295.6	14.8	13.4	-6.4	314.3	323.6	3.1	55.1	9.6	74.
18.3	45.5	4763.7	575.0	-4.2	-8.7	246.5	14.2	13.6	-4.0	315.5	326.0	3.4	70.6	10.4	78.
19.5	52.4	5112.9	550.0	-6.2	-13.5	286.0	14.2	13.6	-3.9	317.0	324.7	2.5	56.7	11.4	70.
20.4	55.7	5475.4	525.0	-8.9	-19.3	294.7	14.8	13.4	-6.2	317.9	323.0	1.6	42.4	12.3	47.
22.1	56.0	5851.0	505.0	-12.0	-21.2	305.1	15.0	12.3	-8.6	319.6	323.2	1.4	45.8	13.3	46.
23.4	62.4	6242.0	475.0	-14.6	-29.3	305.7	14.2	11.5	-8.3	320.0	323.7	1.1	43.3	14.2	49.
24.8	65.4	6645.5	450.0	-17.0	-43.5	306.8	12.6	9.8	-7.9	321.8	322.6	0.2	9.5	15.1	42.
26.4	69.6	7075.4	425.0	-20.3	-44.3	308.5	15.1	11.6	-5.6	322.8	323.5	0.2	10.0	16.1	44.
28.0	73.2	7521.3	405.0	-24.0	-41.5	308.0	17.3	14.0	-10.2	323.7	324.6	0.3	18.4	17.4	97.
29.7	77.2	7949.1	375.0	-27.8	-44.6	303.1	14.3	12.0	-7.8	324.7	325.2	0.1	11.6	18.8	95.
31.5	81.2	8411.3	350.0	-31.1	-51.0	308.4	13.9	11.9	-7.1	326.8	327.1	0.1	11.9	20.2	101.
33.4	85.4	9001.9	325.0	-35.7	-54.5	295.5	15.5	13.5	-7.7	327.4	327.7	0.1	12.4	21.9	103.
35.5	89.9	9534.3	305.0	-40.1	99.9	300.1	14.6	12.6	-7.3	328.9	999.9	99.9	999.9	23.9	104.
37.4	94.8	10140.0	275.0	-45.6	99.9	292.4	16.4	15.2	-6.3	329.3	999.9	99.9	999.9	25.7	105.
40.2	98.6	10767.9	255.0	-51.0	99.9	295.5	16.3	14.7	-7.0	330.3	999.9	99.9	999.9	28.2	106.
43.1	104.6	11444.5	225.0	-54.0	99.9	249.2	17.6	16.6	-5.8	332.6	999.9	99.9	999.9	31.0	106.
46.1	117.4	12148.0	200.0	-59.3	99.9	240.8	22.4	22.0	-4.2	338.6	999.9	99.9	999.9	34.6	106.
49.5	116.5	13021.3	175.0	-59.9	99.9	280.1	29.7	29.2	-5.3	331.0	999.9	99.9	999.9	39.5	105.
53.2	123.3	13669.3	150.0	-59.2	99.9	283.3	25.1	23.7	-8.3	336.1	999.9	99.9	999.9	45.9	105.
57.7	130.4	15125.0	125.0	-62.6	99.9	285.5	21.3	20.6	-5.3	331.7	999.9	99.9	999.9	52.1	106.
63.0	126.8	14600.9	100.0	-62.9	99.9	246.1	16.8	16.8	0.6	334.6	999.9	99.9	999.9	59.0	104.
69.6	147.3	16209.1	75.0	-68.2	99.9	315.0	4.7	4.4	-5.0	430.0	999.9	99.9	999.9	64.9	106.
79.1	157.0	20703.8	50.0	-59.5	99.9	325.6	6.7	2.4	-4.0	503.3	999.9	99.9	999.9	67.1	106.
94.3	147.5	25138.5	25.0	-51.3	99.9	342.3	7.6	2.3	-7.2	637.4	999.9	99.9	999.9	69.1	108.

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA24 APRIL 1975
2030 GMT

TIME MIN	CATCT	HEIGHT CFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DEG K	E POT Y DEG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DEG
00	402	000	1010.0	21.4	13.2	150.0	1.0	-0.5	0.9	304.2	330.1	9.4	33.0	0.0	0.0
01	507	175.3	1000.0	27.3	9.4	72.5	1.8	-1.7	-0.5	301.5	322.0	7.4	32.5	0.1	32.3
02	709	398.6	975.0	26.0	8.6	133.6	4.4	-3.2	3.1	302.3	322.2	7.2	33.3	0.3	31.1
03	10.1	604	950.0	23.8	8.2	117.3	4.7	-4.2	2.2	302.4	322.4	7.2	36.9	0.6	30.7
04	12.3	659.6	925.0	21.5	8.3	127.7	5.3	-4.2	3.2	302.3	322.4	7.4	42.7	0.9	30.5
05	14.6	1095.3	900.0	19.4	8.7	127.7	5.6	-4.6	3.5	302.6	324.2	7.9	45.9	1.3	30.7
06	16.8	1336.7	875.0	16.7	8.0	113.4	5.7	-5.2	2.3	302.2	323.5	7.7	50.1	1.7	30.5
07	19.3	1563.0	850.0	14.4	6.7	97.1	5.7	-5.6	0.7	302.2	322.3	7.3	55.7	2.0	30.2
08	21.5	1834.7	825.0	12.4	5.2	83.4	5.4	-5.4	-0.6	302.6	321.3	6.7	61.3	2.4	29.6
09	24.1	2052.1	800.0	10.2	3.8	102.9	4.9	-4.8	1.1	302.9	320.5	6.3	64.1	2.6	29.4
10	26.4	2355.4	775.0	8.1	-1.4	107.7	5.0	-4.8	1.5	303.1	315.9	4.5	51.0	3.0	29.4
11	28.6	2651.1	750.0	6.3	-22.2	93.1	3.9	-3.9	0.2	305.7	308.4	0.9	9.4	3.3	29.3
12	31.0	2904.9	725.0	7.6	-23.4	44.5	2.4	-1.7	-1.7	307.9	310.5	0.8	8.0	3.4	29.1
13	34.6	3194.1	700.0	8.2	-15.4	0.5	4.5	-0.0	-4.5	311.7	317.0	1.7	17.4	3.4	29.0
14	37.1	3493.0	675.0	6.0	-11.3	353.6	6.4	0.5	-6.4	312.7	320.1	2.4	27.5	3.3	28.8
15	40.0	3801.2	650.0	4.4	-13.1	345.6	5.6	1.4	-5.5	314.2	320.9	2.1	26.6	3.1	27.3
16	42.6	4119.3	625.0	1.9	-8.5	343.7	7.6	2.1	-7.3	315.0	324.8	3.2	46.1	3.0	26.5
17	45.6	4447.1	600.0	-0.7	-8.3	353.2	9.8	1.2	-9.8	315.7	326.1	3.4	56.2	3.0	25.3
18	48.6	4786.4	575.0	-2.1	-12.8	345.6	10.1	1.8	-10.0	317.8	325.7	2.5	43.9	3.3	23.9
19	51.6	5136.2	550.0	-3.3	-17.3	327.3	7.7	4.2	-6.5	320.4	326.2	1.8	32.7	3.5	22.6
20	54.9	5505.6	525.0	-5.7	-16.8	310.2	8.2	6.2	-5.3	321.8	326.1	2.0	41.0	3.6	21.4
21	58.3	5866.3	500.0	-8.7	-18.3	298.7	9.9	8.7	-4.7	322.6	328.5	1.9	45.4	3.6	20.4
22	61.4	6281.9	475.0	-11.7	-22.6	257.6	10.1	9.0	-4.7	323.7	328.0	1.3	39.6	3.8	19.4
23	65.0	6653.5	450.0	-15.1	-25.0	310.8	10.1	7.6	-6.6	324.4	328.5	1.2	46.3	4.2	17.9
24	68.4	7123.0	425.0	-18.4	-27.2	315.4	10.7	7.5	-7.6	325.5	328.7	1.0	42.5	5.0	17.1
25	72.1	7573.3	400.0	-20.9	-30.0	305.3	12.3	10.0	-7.1	327.8	329.7	0.5	29.5	6.0	16.3
26	76.1	8047.0	375.0	-24.3	-37.3	295.8	13.7	11.9	-6.8	329.4	330.9	0.4	28.8	7.2	15.6
27	80.1	8545.3	350.0	-29.0	-40.5	298.4	13.7	12.0	-6.5	329.6	330.8	0.3	31.5	8.4	15.0
28	84.3	9071.3	325.0	-32.5	-46.4	286.6	16.8	16.1	-4.8	331.8	332.5	0.2	21.2	9.8	14.4
29	88.6	9631.2	300.0	-36.7	-51.4	288.9	20.3	19.2	-6.0	333.5	333.9	0.1	26.0	11.9	13.6
30	93.4	10226.5	275.0	-42.2	-58.9	297.9	20.4	19.0	-7.2	334.2	334.9	0.9	99.9	14.2	13.2
31	98.3	10864.0	250.0	-46.3	-63.9	297.9	20.9	23.8	-12.6	337.3	339.9	9.9	99.9	17.5	12.4
32	103.5	11544.2	225.0	-52.6	-69.9	296.8	29.8	26.6	-13.4	337.9	339.9	9.9	99.9	21.4	12.6
33	108.5	12303.0	200.0	-59.4	-76.9	293.6	30.8	28.2	-12.3	338.2	339.9	9.9	99.9	25.6	12.4
34	113.5	13127.6	175.0	-63.8	-83.8	285.4	29.1	28.2	-7.2	344.6	339.9	9.9	99.9	31.7	12.1
35	118.5	14087.8	150.0	-60.5	-90.9	293.9	21.7	19.9	-8.8	365.9	339.9	9.9	99.9	37.2	12.0
36	123.3	15087.8	125.0	-64.7	-98.9	270.7	20.3	20.3	-0.3	377.8	339.9	9.9	99.9	41.8	11.8
37	128.3	16100.0	100.0	-70.3	-98.9	285.3	18.2	13.7	-3.6	391.9	339.9	9.9	99.9	46.9	11.6
38	133.3	17155.0	75.0	-71.2	-98.9	350.1	6.5	1.1	-6.4	423.6	339.9	9.9	99.9	50.8	11.7
39	138.3	18247.1	50.0	-59.9	-98.9	50.2	1.6	-1.3	-0.9	502.5	339.9	9.9	99.9	50.5	11.6
40	143.3	20703.7	25.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 213
V. CROSS, GA

24 APRIL 1975
2102 GMT

TIME MIN	CATCT	EIGHT GPM	PRE MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PG T DG K	E POT Y DG K	W RTD G/SEC	RM PCT	RANGE RM	AZ DG
0.0	4.3	44.0	1013.7	29.2	15.0	230.0	4.1	3.1	2.6	302.6	331.5	10.6	42.0	0.0	0.
0.4	5.1	104.8	1000.0	26.6	14.5	166.9	5.3	0.6	5.2	301.5	330.3	10.7	47.7	0.2	14.
1.0	6.9	367.9	975.0	24.6	13.0	161.0	4.2	0.1	4.2	301.3	328.3	10.0	49.5	0.3	11.
1.7	9.1	615.1	950.0	22.4	12.5	158.6	4.2	1.3	4.0	301.3	327.4	0.6	53.3	0.5	9.
2.3	11.3	876.6	925.0	20.5	12.1	215.9	4.0	2.3	3.2	301.6	327.9	9.7	58.7	0.7	13.
2.9	13.2	1082.9	900.0	18.2	11.3	225.4	3.7	2.6	2.6	301.6	327.2	9.4	64.2	0.8	13.
3.7	15.3	1323.9	875.0	15.8	9.9	225.9	4.9	3.5	3.4	301.4	325.4	8.8	67.7	1.0	24.
4.7	17.5	1566.5	850.0	12.6	8.5	221.1	5.6	3.7	4.2	301.5	324.0	8.2	71.4	1.2	24.
5.7	19.9	1820.5	825.0	11.9	3.8	210.0	6.0	3.0	5.2	302.0	319.1	6.1	57.5	1.0	31.
6.6	21.9	2077.7	800.0	10.9	-5.5	212.4	6.3	3.8	5.0	303.2	312.5	3.2	31.1	1.3	39.
7.3	24.4	2342.1	775.0	10.4	-20.2	232.1	5.9	4.6	3.6	303.6	309.3	1.2	11.1	2.2	72.
8.3	26.6	2615.1	750.0	10.1	-1.6	252.9	4.9	4.7	1.4	308.1	321.5	4.0	44.5	2.5	36.
9.3	28.1	2856.5	725.0	9.6	-3.4	275.9	5.9	5.9	-0.6	309.7	321.8	4.1	42.1	2.7	41.
10.4	31.7	3186.4	700.0	7.7	-9.7	265.0	8.8	8.3	-2.9	311.4	319.3	2.6	27.8	3.0	49.
11.5	34.2	3445.2	675.0	5.3	-3.6	291.3	10.1	9.4	-3.7	312.9	325.8	4.4	50.4	3.7	56.
12.5	36.7	3723.0	650.0	3.3	-4.5	263.0	8.6	7.9	-3.4	313.2	325.8	4.2	56.8	3.7	62.
13.5	39.4	4106.9	625.0	0.7	-7.2	296.6	9.9	8.5	-4.8	313.7	324.4	3.6	55.6	4.0	71.
14.5	42.3	4436.3	600.0	-1.9	-9.0	303.5	11.9	9.9	-6.6	314.4	324.2	3.2	54.0	4.5	79.
15.6	44.4	4773.6	575.0	-4.7	-10.6	308.7	11.6	5.0	-7.2	314.8	323.9	3.0	63.0	5.0	83.
16.7	47.9	5122.3	550.0	-6.9	-10.3	306.9	9.3	7.5	-5.6	316.2	326.0	3.2	76.6	5.6	90.
17.9	50.8	5444.6	525.0	-8.4	-16.3	305.9	8.5	6.9	-5.0	318.5	325.0	2.0	53.0	6.1	93.
19.3	54.3	5811.7	500.0	-10.4	-21.4	316.7	10.2	7.0	-7.5	320.4	324.5	1.4	41.4	6.7	97.
20.4	57.0	6254.4	475.0	-13.7	-14.8	315.3	12.5	8.8	-6.6	321.2	327.1	1.8	64.9	7.5	103.
22.1	60.3	6663.5	450.0	-16.6	-24.8	303.9	14.4	12.0	-8.0	322.5	325.2	1.1	48.4	8.5	106.
23.6	63.9	7090.4	425.0	-19.3	-37.1	295.2	15.1	1.2	-7.4	324.2	325.6	0.4	15.3	9.5	107.
24.7	67.3	7538.6	400.0	-23.1	-30.5	264.3	16.7	15.2	-6.9	325.0	327.6	0.7	50.8	11.2	107.
26.7	70.9	8008.1	375.0	-26.3	-35.7	287.4	19.3	18.3	-6.1	325.7	328.6	0.5	43.9	14.9	106.
28.2	74.6	8536.1	350.0	-30.3	-39.4	291.2	17.9	16.7	-6.3	327.9	329.2	0.3	40.0	14.7	109.
30.1	78.6	9025.5	325.0	-34.8	-40.6	291.5	19.8	18.5	-7.3	325.6	324.9	0.3	55.2	16.7	110.
31.9	83.3	9576.6	300.0	-34.4	-47.2	285.1	19.1	17.2	-5.6	320.7	320.4	0.2	47.8	14.7	110.
33.9	87.4	10147.4	275.0	-44.8	99.9	285.4	14.1	13.6	-3.8	330.3	329.9	99.9	99.9	20.6	110.
35.9	92.2	10757.5	250.0	-50.3	94.7	287.1	16.2	15.7	-3.7	331.3	329.9	99.9	99.9	22.4	107.
38.1	97.1	11474.1	225.0	-54.0	99.9	284.9	18.1	17.5	-4.7	334.4	329.9	99.9	99.9	24.4	106.
40.5	102.6	12222.8	200.0	-54.3	99.9	280.9	21.5	21.1	-4.1	338.8	329.9	99.9	99.9	27.8	107.
43.4	108.9	13056.7	175.0	-60.4	99.9	277.5	24.4	22.2	-3.5	350.3	329.9	99.9	99.9	31.5	107.
46.5	115.0	14019.0	150.0	-64.6	99.9	276.9	27.5	23.1	-4.7	367.5	329.9	99.9	99.9	37.2	106.
50.5	122.7	15155.5	125.0	-61.8	99.9	281.5	23.4	23.1	-4.7	382.1	329.9	99.9	99.9	43.0	105.
54.8	128.4	16515.4	100.0	-67.7	99.9	291.8	13.4	12.5	-5.0	397.0	329.9	99.9	99.9	48.3	105.
60.4	140.5	18239.4	75.0	-67.7	99.9	308.1	7.1	5.6	-4.4	411.1	329.9	99.9	99.9	52.0	105.
67.7	151.3	20719.9	50.0	-60.1	99.9	10.4	1.2	-0.2	-1.2	501.9	329.9	99.9	99.9	53.3	107.
99.9	50.3	50.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 10
OF FOUR

STATION NO. 220
APALACHICOLA, FLA

24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CUMP M/SEC	V CCMF M/SEC	LOT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.0	11.0	1020.7	24.2	19.7	120.0	4.2	0.0	4.2	297.6	335.0	14.3	76.0	0.0	0
0.6	6.3	103.2	1000.0	20.3	99.9	99.9	99.9	99.9	99.9	294.7	99.9	99.9	99.9	99.9	99.9
1.4	8.5	406.6	975.0	19.2	99.9	99.9	99.9	99.9	99.9	294.4	99.9	99.9	99.9	99.9	99.9
2.2	10.8	629.0	950.0	19.1	99.9	99.9	99.9	99.9	99.9	296.6	99.9	99.9	99.9	99.9	99.9
2.9	13.1	856.7	925.0	17.5	99.9	99.9	99.9	99.9	99.9	297.2	99.9	99.9	99.9	99.9	99.9
3.7	15.4	1089.5	900.0	16.1	99.9	99.9	99.9	99.9	99.9	298.1	99.9	99.9	99.9	99.9	99.9
4.3	17.7	1327.6	875.0	14.7	99.9	99.9	99.9	99.9	99.9	299.1	99.9	99.9	99.9	99.9	99.9
5.3	20.2	1571.3	850.0	12.8	99.9	99.9	99.9	99.9	99.9	299.8	99.9	99.9	99.9	99.9	99.9
6.1	22.5	1821.6	825.0	12.5	99.9	99.9	99.9	99.9	99.9	302.3	314.1	4.1	37.7	99.9	99.9
6.9	25.1	2075.9	800.0	12.4	99.9	99.9	99.9	99.9	99.9	305.1	320.5	5.4	47.8	1.8	11.1
7.8	27.5	2345.6	775.0	10.8	0.2	262.1	2.8	2.8	0.4	305.0	320.5	5.0	48.1	1.9	1.4
8.8	30.2	2618.5	750.0	9.7	-4.3	277.1	3.2	3.2	-0.4	307.5	319.5	3.7	37.0	1.9	20.1
9.7	32.9	2899.4	725.0	9.3	-7.8	282.1	2.3	2.2	-0.7	310.0	318.8	2.9	29.1	2.0	24.1
10.7	35.6	3189.4	700.0	7.7	-14.1	311.9	2.5	1.8	-1.6	311.3	317.0	1.9	19.8	2.0	28.1
11.6	38.3	3483.2	675.0	5.9	-8.9	325.1	3.8	2.2	-3.1	312.6	321.4	2.9	33.5	1.9	32.1
12.7	41.0	3795.7	650.0	3.4	-11.0	336.3	6.9	2.9	-6.3	313.2	321.0	2.5	33.9	1.8	42.1
13.8	44.0	4112.8	625.0	0.9	-7.3	340.5	9.8	3.3	-9.3	314.0	324.6	3.5	53.9	1.6	60.1
14.8	46.5	4439.9	600.0	-1.4	-9.7	348.4	11.8	3.2	-11.4	314.9	324.6	3.1	53.1	1.6	80.1
15.8	50.0	4777.8	575.0	-3.7	-9.7	358.4	11.8	4.3	-11.0	316.1	325.8	3.2	62.8	1.9	107.1
16.9	53.0	5127.8	550.0	-5.8	-11.4	360.0	11.5	5.8	-9.9	317.5	326.5	2.9	64.4	2.5	120.1
18.1	56.0	5491.5	525.0	-7.8	-13.4	325.7	12.4	7.0	-10.2	319.4	327.5	2.6	64.0	3.3	127.1
19.3	59.4	5869.4	500.0	-10.4	-16.3	319.5	11.8	7.6	-8.9	320.5	327.4	2.1	62.0	4.1	130.1
20.5	62.9	6242.7	475.0	-13.0	-18.3	314.5	12.7	9.1	-8.9	322.1	328.2	1.9	64.2	5.0	131.1
21.7	66.2	6672.6	450.0	-16.3	-21.3	312.2	12.0	8.9	-8.1	322.9	329.0	1.5	65.0	5.9	132.1
23.1	70.0	7100.3	425.0	-19.3	-25.7	306.6	12.7	9.8	-8.1	324.3	328.0	1.1	56.7	6.9	132.1
24.6	73.6	7542.2	400.0	-23.0	-29.5	308.1	13.2	10.4	-8.2	325.2	328.0	0.8	54.6	6.1	131.1
26.1	77.5	8018.1	375.0	-26.5	-33.5	308.1	15.7	12.3	-9.7	326.6	328.7	0.6	51.2	9.4	130.1
27.8	81.5	8513.2	350.0	-30.1	-39.6	307.0	18.9	13.5	-10.2	328.2	329.4	0.3	38.5	11.1	130.1
29.5	85.7	9036.1	325.0	-34.7	-43.6	301.0	18.3	15.7	-9.4	328.8	329.7	0.2	39.5	12.9	130.1
31.5	90.2	9599.7	300.0	-39.3	-49.9	296.8	20.4	18.3	-9.2	329.9	329.9	99.9	99.9	14.9	124.1
33.4	95.0	10180.6	275.0	-42.9	-54.9	298.8	27.9	24.4	-13.4	333.1	334.9	99.9	99.9	17.7	125.1
35.5	99.8	10817.0	250.0	-47.7	-59.9	302.5	34.5	29.1	-18.6	335.2	335.9	99.9	99.9	21.8	125.1
37.9	105.0	11503.9	225.0	-53.3	-65.9	306.3	34.9	28.1	-20.6	336.6	336.6	99.9	99.9	26.6	125.1
40.7	110.8	12251.7	200.0	-59.3	-71.9	303.9	27.6	23.1	-15.5	338.9	338.9	99.9	99.9	32.4	125.1
43.6	117.0	13082.3	175.0	-61.6	-74.9	291.9	26.9	23.0	-10.0	338.3	338.3	99.9	99.9	36.6	124.1
47.0	124.0	14042.7	150.0	-59.7	-74.9	308.1	28.1	18.9	-14.8	367.3	367.3	99.9	99.9	42.6	123.1
50.9	131.0	15169.3	125.0	-64.5	-79.9	291.4	22.7	13.1	-8.9	377.5	377.5	99.9	99.9	47.3	123.1
55.7	139.0	16515.0	100.0	-68.9	-84.9	297.0	15.7	13.1	-6.7	394.6	394.6	99.9	99.9	53.1	122.1
61.1	147.0	18223.8	75.0	-69.3	-89.9	303.3	6.9	5.7	-3.8	427.5	427.5	99.9	99.9	57.0	122.1
69.1	156.0	20700.3	50.0	-59.5	-99.9	30.3	1.9	-1.2	-1.5	503.3	503.3	99.9	99.9	58.0	122.1
80.9	165.0	25135.5	25.0	-50.5	-99.9	38.6	6.4	-4.0	-5.0	639.6	639.6	99.9	99.9	59.5	124.1

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

8/12/11/12

STATION NO. 226
CENTERVILLE, ALA24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T LG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.5	140.0	1001.8	26.7	19.3	210.0	8.2	4.1	7.1	301.6	339.6	14.3	64.0	6.0	0.
0.1	6.1	155.9	1000.0	25.7	17.4	900.9	99.9	99.9	99.9	300.6	337.3	12.6	60.1	999.9	999.
1.6	8.6	278.4	975.0	23.8	16.5	999.9	99.9	99.9	59.9	300.7	333.4	12.2	63.8	999.9	999.
2.8	11.0	405.2	950.0	21.5	14.4	208.3	7.6	3.6	6.7	300.5	324.8	10.9	63.8	1.7	24.
3.6	13.5	836.2	925.0	19.4	15.5	210.8	9.6	4.9	8.3	300.7	333.0	12.1	78.2	2.0	25.
4.2	15.8	1071.7	900.0	17.1	15.3	217.5	11.3	6.9	9.0	300.7	333.6	12.3	89.5	2.5	26.
5.1	18.4	1311.9	875.0	14.9	13.2	230.6	13.2	10.2	3.4	300.8	330.4	11.0	89.6	3.0	29.
6.0	20.9	1557.6	850.0	14.4	9.6	246.0	13.9	12.7	5.7	302.4	326.7	8.9	73.3	3.7	35.
6.9	23.4	1803.6	825.0	13.4	4.8	253.7	13.2	12.7	3.7	303.6	322.0	6.6	58.2	4.3	41.
7.9	25.9	2063.4	800.0	12.6	0.1	265.5	14.9	14.9	0.1	305.3	319.1	4.8	42.1	5.0	47.
8.9	28.7	2337.9	775.0	10.4	-1.3	277.5	16.9	16.8	-2.2	305.6	318.2	4.4	42.5	5.0	54.
10.0	31.5	2606.3	750.0	9.4	-5.3	280.5	17.6	17.3	-3.2	307.2	317.4	3.5	35.3	6.5	62.
11.1	34.4	2886.7	725.0	8.1	-11.0	273.9	15.2	15.1	-1.0	308.7	315.7	2.3	24.6	7.4	67.
12.2	37.1	3175.9	700.0	7.6	-22.9	261.5	15.9	15.7	2.3	311.0	313.6	0.9	9.3	8.4	69.
13.4	40.1	3474.4	675.0	6.2	-14.3	254.3	20.4	19.7	5.5	312.8	318.4	1.8	20.6	9.7	70.
14.4	42.9	3782.1	650.0	3.9	-11.7	252.3	21.4	20.4	6.5	313.7	321.1	2.4	30.9	11.0	70.
15.5	45.4	4055.6	625.0	1.7	-13.1	252.1	22.8	21.9	6.2	314.7	321.6	2.2	32.2	12.4	71.
16.7	48.1	4427.1	600.0	-1.1	-16.4	252.5	23.0	22.6	3.0	315.1	320.7	1.8	25.9	14.1	72.
17.9	50.3	4764.9	575.0	-3.6	-20.4	265.7	20.2	20.2	0.1	315.9	320.1	1.3	25.6	15.4	73.
19.1	52.3	5114.4	550.0	-6.9	-19.8	281.6	17.3	17.0	-3.5	316.1	320.7	1.4	34.8	16.9	75.
20.4	58.6	5475.4	525.0	-10.0	-16.7	282.4	19.1	18.7	-4.1	316.7	322.9	2.0	57.8	18.1	77.
21.7	62.7	5849.6	500.0	-12.9	-20.0	278.1	22.8	22.6	-3.2	317.4	322.4	1.6	55.4	19.4	79.
23.0	65.5	6236.6	475.0	-15.4	-42.1	273.9	21.7	21.0	-1.5	319.8	319.7	0.2	10.0	21.3	79.
24.5	69.0	6644.7	450.0	-17.8	-50.2	277.0	20.7	20.5	-2.5	320.8	321.2	0.1	4.0	23.0	81.
26.0	72.6	7070.2	425.0	-20.5	-51.5	275.4	20.4	20.3	-1.5	322.7	323.0	0.1	4.2	24.8	83.
27.6	76.5	7516.4	400.0	-23.9	-53.3	280.1	20.3	20.0	-3.5	324.0	324.3	0.1	4.6	26.7	85.
29.2	80.4	7984.5	375.0	-27.5	-55.5	277.0	24.7	24.5	-3.0	325.1	325.3	0.1	5.0	28.0	85.
30.0	84.5	8476.5	350.0	-31.7	-58.0	274.2	23.8	23.7	-2.0	325.9	326.1	0.0	5.4	31.3	85.
32.7	88.9	8955.3	325.0	-36.3	-60.8	280.9	26.5	26.1	-5.0	326.5	326.7	0.0	5.9	31.8	87.
34.4	93.2	9541.6	300.0	-40.0	-69.9	286.8	28.7	27.5	-8.3	329.0	329.9	98.9	999.9	36.5	87.
36.4	98.0	10134.4	275.0	-44.9	-69.9	306.7	21.3	17.0	-12.7	330.2	999.9	98.9	999.9	38.9	80.
38.4	102.8	10764.7	250.0	-45.9	-69.9	300.4	17.8	15.4	-9.0	332.0	999.9	98.9	999.9	40.9	92.
40.7	108.3	11444.6	225.0	-55.6	-69.9	292.1	17.6	16.3	-6.6	333.3	999.9	98.9	999.9	43.1	93.
43.3	113.9	12186.0	200.0	-60.3	-69.9	279.0	20.6	20.4	-3.5	337.2	999.9	98.9	999.9	45.8	94.
46.1	120.0	13014.0	175.0	-59.9	-69.9	269.6	23.8	23.8	0.1	351.0	999.9	98.9	999.9	50.3	94.
48.6	126.5	13776.1	150.0	-60.0	-69.9	277.8	29.5	29.2	-4.0	366.7	999.9	98.9	999.9	56.9	94.
50.1	134.0	15111.0	125.0	-61.8	-69.9	248.2	20.9	20.8	0.7	383.1	999.9	98.9	999.9	63.8	94.
52.1	141.5	16473.6	100.0	-67.5	-69.9	245.7	20.5	20.4	1.5	397.3	999.9	98.9	999.9	70.6	94.
55.9	150.0	18200.6	75.0	-65.5	-69.9	296.7	8.1	7.3	-3.7	435.6	999.9	98.9	999.9	77.2	93.
74.3	159.0	20696.7	50.0	-58.3	-69.9	292.7	8.7	8.0	-3.3	506.1	999.9	98.9	999.9	79.2	94.
99.9	59.9	66.9	25.0	99.9	99.9	99.9	99.9	99.9	56.9	69.9	999.9	98.9	999.9	999.9	999.

ORIGINAL PAGE IS
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 232
BOOTHVILLE, LA24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CUMP M/SEC	V CUMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.9	1.0	1016.4	25.4	22.9	160.0	5.1	-1.7	4.8	298.9	345.3	17.6	86.0	0.0	0.
0.5	6.4	161.6	1000.0	23.4	22.0	95.9	9.9	9.9	9.9	298.9	343.0	16.1	91.4	999.9	99.9
1.2	6.8	383.1	975.0	21.7	21.1	959.9	9.9	9.9	9.9	299.2	342.3	16.1	96.2	999.9	99.9
1.9	11.1	609.0	950.0	20.4	20.1	173.1	10.7	-1.3	10.6	300.0	341.6	15.8	97.8	1.0	33.6
2.5	13.5	839.7	925.0	18.4	17.5	183.5	11.2	0.7	11.2	299.9	336.3	13.8	98.6	1.4	34.3
3.3	15.8	1074.8	900.0	16.9	13.3	180.6	9.0	1.0	8.9	300.3	329.2	10.7	79.4	1.8	34.0
4.2	16.4	1314.6	875.0	15.8	8.5	191.8	7.1	1.5	6.9	301.3	323.2	8.0	61.8	2.3	35.2
5.0	20.8	1561.3	850.0	16.0	4.6	153.3	5.4	1.4	5.2	303.7	321.4	6.3	46.9	2.5	35.5
5.9	23.4	1815.0	825.0	15.7	3.1	188.0	6.7	0.9	6.7	306.0	322.6	5.8	42.7	2.4	35.7
6.9	25.9	2075.4	800.0	13.9	1.5	188.6	6.4	1.0	6.3	306.7	322.0	5.3	42.6	3.2	35.4
7.4	28.6	2342.4	775.0	12.0	0.3	194.8	5.7	1.5	5.5	307.4	322.1	5.1	44.5	3.5	35.9
8.7	31.4	2614.5	750.0	10.9	-5.8	192.2	5.7	1.2	5.6	308.8	318.7	3.3	30.8	3.8	1.
9.7	34.2	2898.2	725.0	9.6	-18.8	187.7	5.9	0.5	5.9	310.1	313.9	1.2	11.6	4.2	1.
10.7	36.9	3182.9	700.0	9.1	-17.8	175.3	3.4	-0.3	3.4	312.7	317.0	1.4	13.1	4.5	1.
11.7	39.9	3469.2	675.0	7.8	-19.2	173.1	1.5	-0.2	1.5	314.5	318.5	1.2	12.7	4.6	1.
12.8	42.6	3759.0	650.0	5.6	-19.1	41.6	0.3	-0.2	-0.2	315.4	319.6	1.3	14.8	4.6	1.
14.0	45.8	4117.8	625.0	2.8	-16.3	332.9	0.2	0.1	-0.1	315.9	321.3	1.7	22.9	4.6	1.
15.1	48.9	4446.5	600.0	-0.0	-13.1	288.4	0.2	0.2	-0.1	316.4	323.7	2.3	36.7	4.6	1.
16.3	51.9	4785.8	575.0	-2.8	-11.0	254.5	2.5	2.5	0.6	317.1	325.9	2.9	52.9	4.6	2.
17.5	55.1	5137.1	550.0	-5.0	-13.8	263.7	5.2	5.2	0.6	318.4	325.9	2.4	49.8	4.7	5.
18.6	58.3	5501.1	525.0	-7.6	-14.0	261.0	7.2	7.1	1.1	315.6	327.4	2.5	55.7	4.8	10.
20.0	61.9	5879.1	500.0	-10.0	-21.2	264.4	10.6	10.6	1.0	324.9	325.6	1.4	39.6	5.1	14.
21.4	65.4	6273.6	475.0	-12.2	-27.6	267.5	12.8	12.8	0.6	323.0	325.8	0.8	26.1	5.5	28.
22.6	69.3	6684.5	450.0	-15.2	-32.3	265.6	14.6	14.6	1.0	324.1	326.1	0.6	21.4	6.2	37.
24.4	72.5	7114.1	425.0	-18.3	-35.4	265.9	15.8	15.8	0.0	325.5	327.0	0.4	20.7	7.1	45.
26.0	76.5	7563.8	400.0	-21.2	-35.2	273.1	20.2	20.2	-1.1	327.4	329.1	0.5	26.9	8.3	54.
27.5	80.5	8034.7	375.0	-25.2	-40.4	274.4	19.9	19.8	-1.5	328.2	329.2	0.3	22.6	9.9	61.
29.1	84.6	8533.1	350.0	-29.4	-45.2	273.7	18.2	18.1	-1.2	329.1	329.7	0.2	17.6	11.4	66.
30.9	88.7	9058.0	325.0	-33.4	-49.1	281.1	19.8	19.4	-3.8	330.6	331.3	0.2	26.5	13.1	70.
32.8	93.4	9615.3	300.0	-37.2	-42.4	287.1	27.1	25.9	-6.0	332.8	334.0	0.3	58.4	15.3	76.
34.9	98.2	10211.1	275.0	-41.0	99.9	284.3	30.6	29.7	-7.5	334.7	999.9	99.9	999.9	18.6	82.
37.0	103.2	10849.3	250.0	-47.3	99.9	280.5	32.1	30.7	-9.1	335.8	999.9	99.9	999.9	22.3	81.
39.4	108.8	11537.7	225.0	-52.9	99.9	280.8	31.8	30.1	-10.3	337.4	999.9	99.9	999.9	26.7	89.
41.9	114.5	12288.3	200.0	-58.2	99.9	290.6	35.2	32.9	-12.4	340.6	999.9	99.9	999.9	31.1	92.
44.8	121.0	13118.3	175.0	-62.8	99.9	293.6	32.8	30.1	-13.1	346.2	999.9	99.9	999.9	36.8	96.
48.0	127.8	14068.6	150.0	-62.8	99.9	277.3	32.0	31.9	-1.5	351.9	999.9	99.9	999.9	43.0	98.
51.9	135.3	15192.7	125.0	-65.0	99.9	271.0	21.1	21.1	-0.5	377.3	999.9	99.9	999.9	49.0	97.
56.6	142.5	16538.5	100.0	-69.0	99.9	278.0	17.5	17.1	-2.4	394.5	999.9	99.9	999.9	54.9	96.
62.3	150.7	18244.5	75.0	-70.3	99.9	284.5	12.3	11.9	-3.1	425.5	999.9	99.9	999.9	59.0	95.
69.9	159.3	20721.3	50.0	-58.8	99.9	306.2	5.3	4.2	-3.1	585.0	999.9	99.9	999.9	60.6	96.
81.5	168.0	25145.7	25.0	-50.6	99.9	999.9	99.9	99.9	99.9	639.1	999.9	99.9	999.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GFM	PREL MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T CG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.6	100.0	1005.2	25.8	19.5	220.0	4.6	3.0	3.5	304.5	343.2	14.4	54.0	0.0	0.
0.1	5.0	146.3	1000.0	26.0	18.3	207.4	12.0	5.5	10.6	303.6	339.7	13.4	53.8	0.3	29.
0.8	6.8	371.1	975.0	26.7	16.8	208.8	10.8	5.2	5.4	303.8	337.6	12.5	54.7	0.5	29.
1.6	9.1	600.1	950.0	26.6	15.7	212.5	10.1	5.4	6.7	303.8	336.2	12.0	57.8	1.0	30.
2.4	11.0	831.6	925.0	22.9	14.2	208.1	10.9	4.8	5.8	304.2	334.4	11.1	58.1	1.5	30.
3.2	13.3	1072.1	900.0	20.5	13.5	207.0	10.1	4.6	5.0	304.2	333.8	10.9	63.9	2.0	29.
4.0	15.4	1315.2	875.0	18.7	12.2	213.1	11.3	6.2	9.5	304.6	332.9	10.3	65.8	2.5	29.
4.7	17.6	1563.6	850.0	16.2	11.2	217.0	11.0	6.6	8.9	305.1	331.6	9.9	71.9	3.0	30.
5.6	20.0	1817.2	825.0	14.6	8.2	231.4	13.4	10.5	8.4	305.1	329.2	8.3	65.4	3.0	30.
6.2	22.1	2077.8	800.0	13.6	5.8	240.4	14.4	12.6	7.1	306.6	327.0	7.3	59.2	4.1	30.
7.0	24.5	2345.6	775.0	13.2	3.7	243.4	14.7	13.2	6.6	308.8	325.3	6.5	52.8	4.7	30.
7.8	26.8	2620.1	750.0	10.3	1.8	248.1	15.2	14.1	5.7	310.7	322.6	4.0	36.3	6.2	47.
8.8	29.4	2903.3	725.0	6.8	-3.8	255.3	13.8	11.4	3.5	312.4	320.7	2.7	27.2	6.7	50.
9.7	31.9	3193.1	700.0	6.6	-4.2	256.6	12.0	11.3	4.0	312.4	320.7	2.7	27.2	6.7	50.
10.6	34.6	3494.2	675.0	5.7	-10.2	243.3	12.1	10.9	5.4	315.7	323.8	2.6	25.0	7.4	51.
11.6	37.1	3804.8	650.0	6.2	-11.3	245.0	12.4	11.2	5.2	316.3	324.1	2.5	27.2	8.1	52.
12.7	39.9	4124.5	625.0	3.2	-12.3	251.0	13.1	12.4	4.3	316.3	323.8	2.4	31.0	8.3	52.
13.6	42.4	4454.5	600.0	1.1	-10.4	256.7	14.2	13.9	3.3	317.8	325.8	2.9	41.9	9.6	54.
14.7	45.3	4755.4	575.0	-2.1	-12.9	263.5	14.8	14.7	1.7	317.8	325.5	2.5	43.4	10.5	54.
15.7	48.3	5147.1	550.0	-4.7	-14.0	266.1	14.5	14.5	1.0	318.7	326.2	2.4	48.2	11.3	54.
16.8	51.1	5517.6	525.0	-7.8	-11.4	263.4	16.4	16.3	1.9	319.4	324.9	3.1	75.3	12.2	51.
19.1	54.3	5886.5	500.0	-10.0	-15.3	263.4	18.5	19.4	2.2	321.1	328.5	2.3	65.0	13.5	54.
19.3	57.3	6261.8	475.0	-13.1	-25.3	258.5	20.6	20.3	4.0	321.8	325.2	1.0	35.2	14.4	61.
20.5	60.6	6696.7	450.0	-16.9	-33.9	264.0	19.7	19.7	2.1	322.0	323.7	0.5	21.3	16.3	67.
21.1	64.1	7117.8	425.0	-19.2	-37.9	269.0	15.8	20.5	0.2	324.3	325.5	0.3	17.5	17.3	68.
21.2	67.5	7566.9	400.0	-21.9	-35.3	267.1	20.0	20.0	1.0	326.5	327.5	0.3	17.5	17.3	68.
21.7	71.0	8037.9	375.0	-25.8	-43.0	260.5	21.1	21.0	0.5	327.3	328.2	0.2	18.0	21.2	70.
26.4	74.9	8527.9	350.0	-26.2	-43.7	267.7	24.7	24.6	1.0	329.4	330.0	0.2	18.2	23.3	72.
28.2	79.0	9058.4	325.0	-32.6	-48.5	272.7	26.9	26.9	-1.3	331.7	332.3	0.1	18.5	26.0	75.
30.0	83.0	9615.0	300.0	-38.0	-53.0	276.2	28.3	28.0	-3.7	331.7	332.0	0.1	18.9	26.7	77.
31.9	87.3	10212.0	275.0	-42.1	-59.9	287.3	28.0	26.7	-8.3	334.3	335.9	99.9	99.9	31.7	71.
33.8	92.2	10849.9	250.0	-47.2	-69.9	285.4	34.5	32.5	-11.4	335.9	336.6	99.9	99.9	34.6	82.
35.9	97.0	11530.3	225.0	-52.8	-79.9	290.3	39.7	37.2	-13.8	337.6	337.6	99.9	99.9	34.8	81.
38.4	102.4	12255.3	200.0	-57.4	-89.9	294.3	33.0	30.0	-13.6	337.6	337.6	99.9	99.9	34.8	81.
41.3	108.5	13136.3	175.0	-62.3	-99.9	290.3	34.2	32.1	-11.9	337.1	337.1	99.9	99.9	34.8	81.
44.4	115.0	14083.9	150.0	-61.9	-99.9	290.3	33.5	19.5	0.7	343.5	343.5	99.9	99.9	34.8	81.
48.2	122.3	15214.9	125.0	-61.1	-99.9	290.2	24.4	24.0	4.2	344.3	344.3	99.9	99.9	34.8	81.
52.9	131.0	16587.2	100.0	-65.1	-99.9	290.7	25.5	24.8	5.9	402.0	402.0	99.9	99.9	34.8	81.
58.0	140.3	18347.2	75.0	-66.0	-99.9	291.7	10.7	9.9	-4.0	434.6	434.6	99.9	99.9	34.8	81.
65.4	150.7	20870.2	50.0	-59.0	-99.9	319.9	4.8	3.1	-3.7	504.5	504.5	99.9	99.9	34.8	81.
77.1	162.3	25364.1	25.0	-45.6	-99.9	339.7	3.8	1.3	-3.5	633.0	633.0	99.9	99.9	34.8	81.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 ** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 240
LAKE CHARLES, LA
24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GFV	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E PUT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	3.4	54.0	1015.7	26.7	21.2	160.0	9.3	-3.2	8.7	300.7	342.6	15.9	72.0	0.0	0.
0.6	4.7	142.9	1000.0	25.4	20.5	169.6	9.0	-1.6	8.9	300.7	341.5	15.4	74.3	0.4	1.
1.3	6.5	365.6	975.0	23.2	18.8	176.2	11.2	-0.7	11.2	300.5	338.2	14.2	76.4	0.9	357.
2.1	8.5	592.1	950.0	20.9	17.9	181.5	11.2	0.3	11.2	300.2	336.8	13.8	83.4	1.4	357.
2.9	10.5	822.9	925.0	19.6	16.4	194.9	12.6	3.2	11.2	300.8	331.1	11.3	72.3	1.9	1.
3.5	12.5	1059.1	900.0	19.3	12.1	200.3	13.3	4.6	12.5	302.8	329.8	9.9	62.8	2.4	4.
4.2	14.7	1301.2	875.0	17.8	9.9	199.8	13.3	4.4	12.3	303.4	327.6	8.8	59.9	2.9	7.
5.1	16.6	1549.0	850.0	16.4	8.5	195.4	11.1	4.8	10.0	304.5	327.3	8.3	59.4	3.5	10.
6.0	18.3	1802.4	825.0	14.0	6.6	200.4	10.2	3.5	9.5	304.4	325.1	7.4	60.7	4.1	12.
6.8	21.3	2061.6	800.0	13.1	5.1	201.9	10.4	3.9	9.6	306.1	325.6	6.9	56.2	4.6	13.
7.4	23.3	2328.4	775.0	12.1	-1.1	203.2	11.8	4.6	10.8	307.5	320.7	4.6	40.0	5.2	14.
8.9	25.3	2602.9	750.0	11.5	-7.5	199.5	12.9	4.3	12.1	309.5	318.3	2.9	25.9	6.0	15.
10.0	27.9	2885.7	725.0	11.4	-9.5	202.5	12.4	4.8	11.5	312.3	320.2	2.6	22.0	6.9	16.
11.1	30.4	3178.4	700.0	10.3	-10.4	204.7	12.5	5.2	11.3	314.2	321.9	2.5	22.1	7.7	17.
12.2	33.0	3479.5	675.0	7.9	-10.1	200.0	13.5	4.6	12.7	314.9	323.0	2.6	26.6	8.6	17.
13.3	35.5	3789.6	650.0	5.7	-12.0	200.6	12.3	4.3	11.5	315.7	323.0	2.3	26.7	9.4	17.
14.5	38.0	4108.8	625.0	3.3	-14.0	215.6	9.8	5.7	8.0	316.4	323.0	2.1	26.7	10.2	14.
15.6	40.6	4438.7	600.0	1.2	-15.8	222.6	7.4	5.0	5.4	317.7	323.6	1.9	26.8	10.7	19.
16.7	43.4	4775.1	575.0	-1.0	-18.2	223.8	6.9	4.7	5.0	318.2	323.4	1.6	26.9	11.2	23.
18.0	46.3	5131.3	550.0	-4.5	-12.3	223.1	9.0	7.0	6.6	319.0	327.5	2.7	54.5	11.7	21.
19.2	48.4	5455.7	525.0	-7.8	-15.2	223.3	9.7	6.7	7.1	319.3	326.4	2.2	55.0	12.4	22.
20.6	52.3	5673.1	500.0	-11.1	-16.7	229.1	9.7	7.3	6.3	319.7	326.3	2.1	63.1	13.1	24.
21.9	55.3	6264.8	475.0	-14.4	-18.1	244.2	10.3	9.3	4.5	320.3	326.5	1.9	73.8	13.7	20.
23.3	58.6	6672.9	450.0	-16.6	-27.8	251.8	14.9	14.2	4.6	322.5	325.4	0.9	37.2	14.5	20.
24.7	62.0	7100.1	425.0	-19.5	-29.9	259.3	18.7	18.4	3.5	324.0	326.6	0.7	38.9	15.5	12.
26.1	65.6	7547.3	400.0	-23.5	-32.1	261.5	21.6	21.4	3.2	324.5	325.7	0.6	44.6	16.3	17.
27.7	69.2	8015.7	375.0	-27.2	-38.8	262.7	21.4	21.3	2.7	325.5	326.8	0.4	32.3	18.2	41.
29.3	72.8	8535.6	350.0	-30.3	-55.2	268.4	20.3	20.3	0.6	327.9	328.1	0.1	6.7	19.8	40.
31.3	77.0	9032.6	325.0	-33.9	-43.5	278.1	25.8	25.6	-3.7	329.9	330.8	0.2	36.8	21.6	50.
33.1	81.0	9565.9	300.0	-36.9	-45.5	285.1	32.7	31.6	-8.5	333.3	334.2	0.2	46.0	23.7	57.
35.2	85.5	10186.7	275.0	-41.6	-59.9	281.9	35.0	34.3	-7.3	335.6	999.9	99.9	999.9	26.7	63.
37.5	90.4	10825.6	250.0	-46.8	99.9	276.8	38.3	38.0	-4.5	336.6	999.9	99.9	999.9	30.8	69.
39.8	95.5	11515.6	225.0	-52.4	99.9	273.9	37.1	37.0	-2.6	338.2	999.9	99.9	999.9	35.5	73.
42.4	101.0	12265.6	200.0	-58.6	99.9	276.5	36.8	36.6	-0.2	339.7	999.9	99.9	999.9	40.8	76.
45.2	107.3	13054.0	175.0	-64.4	99.9	286.0	43.9	42.2	-12.1	343.7	999.9	99.9	999.9	47.5	79.
48.5	114.3	14038.7	150.0	-62.2	99.9	265.6	34.1	34.0	2.6	362.9	999.9	99.9	999.9	54.5	82.
52.7	122.0	15170.7	125.0	-62.0	99.9	254.8	18.0	17.4	4.7	382.6	999.9	99.9	999.9	60.8	82.
57.3	130.8	16526.8	100.0	-65.0	99.9	262.7	14.4	14.3	1.8	394.4	999.9	99.9	999.9	66.3	82.
63.6	140.5	18241.3	75.0	-69.3	99.9	268.4	19.1	19.1	0.5	427.7	999.9	99.9	999.9	72.3	82.
72.0	151.0	20713.8	50.0	-58.8	99.9	264.7	7.1	7.0	0.6	505.0	999.9	99.9	999.9	75.4	83.
84.6	162.5	25148.7	25.0	-53.1	99.9	3.6	5.3	-0.3	-6.3	632.2	999.9	99.9	999.9	74.6	85.

ORIGINAL PAGE IS
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 248
SHREVEPORT, LA24 APRIL 1975
2103 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	PH PCT	RANGE KM	A7 DG
0.0	4.6	79.0	1003.7	30.0	24.5	190.0	6.7	1.2	6.6	305.5	358.1	19.6	72.3	0.0	0.
0.1	4.2	112.1	1000.0	29.9	19.7	205.7	10.3	4.5	9.3	305.1	345.1	14.8	55.0	0.3	4.
0.7	6.8	337.8	975.0	27.3	17.2	202.7	11.7	4.5	10.8	304.4	339.1	12.8	54.0	0.5	12.
1.6	8.7	567.2	950.0	25.0	15.9	146.3	12.6	1.8	12.4	304.2	337.0	12.1	50.9	1.1	13.
2.4	10.9	801.1	925.0	22.8	15.2	146.8	11.2	1.1	11.2	304.3	336.5	11.9	62.2	1.7	11.
3.1	12.6	1035.3	900.0	20.6	14.4	144.5	10.2	0.8	10.1	304.3	335.9	11.6	67.5	2.1	10.
3.9	14.8	1236.3	875.0	18.1	13.9	146.5	12.3	1.4	12.2	304.1	335.4	11.5	76.4	2.7	5.
4.7	16.7	1530.4	850.0	16.0	12.6	157.8	13.6	4.1	12.9	304.4	334.1	10.9	80.3	3.3	5.
5.7	18.9	1783.8	825.0	13.9	11.6	206.9	14.5	6.6	13.3	304.6	333.3	10.5	86.1	4.1	12.
6.7	21.0	2043.1	800.0	12.2	10.5	210.4	16.2	8.2	14.0	305.5	333.3	10.1	84.3	5.0	15.
7.4	23.4	2304.3	775.0	10.3	8.0	220.7	16.0	10.5	12.2	306.1	330.5	8.8	85.4	6.0	15.
9.3	25.6	2583.1	750.0	11.7	-4.1	233.6	14.9	12.0	8.9	309.8	321.8	4.1	36.4	7.1	23.
10.2	28.0	2865.8	725.0	10.7	-11.1	231.5	11.9	9.3	7.4	313.5	313.5	2.3	20.3	7.9	27.
11.1	30.3	3157.4	700.0	9.7	-13.9	214.3	12.0	6.8	9.3	313.5	313.3	1.9	17.4	8.6	25.
12.3	33.0	3455.1	675.0	10.0	-10.9	216.3	13.0	7.7	10.5	317.1	320.9	2.5	21.7	9.4	25.
13.5	35.3	3771.8	650.0	7.9	-10.9	221.7	12.8	8.5	9.6	318.1	320.1	2.6	25.2	10.3	30.
14.9	38.2	4093.0	625.0	4.7	-14.6	226.5	12.9	9.4	6.9	318.0	324.3	2.0	23.2	11.4	31.
16.3	40.8	4424.1	600.0	2.2	-17.5	221.0	12.4	10.8	6.0	318.8	324.0	1.6	21.6	12.4	33.
17.5	43.7	4765.6	575.0	-1.2	-18.4	250.5	11.9	11.2	4.0	318.8	323.8	1.6	25.4	13.1	35.
18.7	46.7	5117.8	550.0	-4.6	-20.1	251.7	12.4	11.7	3.9	318.8	323.4	1.4	28.5	13.7	35.
20.2	49.7	5481.5	525.0	-8.0	-23.5	250.6	11.4	10.8	3.8	318.8	322.4	1.1	27.5	14.7	39.
21.7	52.5	5858.1	500.0	-11.7	-25.5	251.5	13.0	12.3	4.1	318.8	322.0	1.0	30.7	15.4	47.
23.2	55.4	6248.2	475.0	-15.3	-30.1	255.1	15.1	14.6	3.9	319.1	321.3	0.7	26.7	16.7	45.
24.8	59.1	6654.5	450.0	-17.5	-34.9	257.2	18.2	17.7	4.0	321.2	321.8	0.4	20.2	18.7	45.
26.4	62.7	7081.0	425.0	-20.3	-37.4	256.0	21.3	20.6	5.2	322.9	324.2	0.4	20.0	19.7	49.
28.0	66.3	7527.2	400.0	-23.4	-40.3	258.1	21.4	20.9	4.4	324.5	325.6	0.3	19.4	21.5	52.
29.9	70.1	7997.1	375.0	-26.1	-42.9	262.5	23.7	23.5	3.1	327.0	327.8	0.2	18.7	23.3	55.
31.7	74.3	8451.9	350.0	-30.3	-46.3	263.7	23.9	23.8	2.6	327.8	329.4	0.2	19.0	26.1	57.
33.7	78.2	9013.8	325.0	-34.7	-49.9	261.9	24.6	24.4	3.5	328.7	329.2	0.1	19.4	26.7	60.
35.5	82.6	9577.3	300.0	-39.6	-54.0	264.7	24.9	24.8	2.3	329.5	329.8	0.1	19.7	31.4	67.
37.7	87.2	10158.2	275.0	-44.7	-59.9	268.0	31.4	31.4	1.1	333.3	333.3	99.9	99.9	34.6	54.
39.9	92.3	10755.3	250.0	-47.8	-59.9	268.2	37.6	37.5	1.2	335.0	335.0	99.9	99.9	39.2	67.
42.4	97.5	11481.7	225.0	-53.4	-59.9	271.1	40.5	40.5	-0.8	336.7	336.7	99.9	99.9	44.6	70.
45.1	103.5	12229.1	200.0	-59.6	-59.9	274.8	40.1	39.9	-3.3	338.3	338.3	99.9	99.9	51.9	73.
48.4	110.0	13052.5	175.0	-65.5	-59.9	279.1	44.7	44.1	-7.1	341.9	341.9	99.9	99.9	58.6	75.
51.8	116.8	13957.7	150.0	-61.6	-59.9	284.9	23.4	23.3	2.1	364.1	364.1	99.9	99.9	66.7	78.
56.0	125.0	15127.7	125.0	-62.2	-59.9	270.4	29.2	29.2	-0.2	362.3	362.3	99.9	99.9	74.3	79.
60.9	133.5	16492.9	100.0	-66.7	-59.9	262.9	21.5	21.4	2.7	398.9	398.9	99.9	99.9	80.8	80.
66.7	142.3	18210.8	75.0	-70.8	-59.9	256.4	15.6	15.1	3.7	424.5	424.5	99.9	99.9	85.2	80.
75.7	151.3	20722.4	50.0	-58.5	-59.9	335.5	6.9	2.9	-6.3	505.8	505.8	99.9	99.9	89.7	81.
89.3	160.3	25168.2	25.0	-45.8	-59.9	354.4	5.7	0.6	-5.7	642.0	642.0	99.9	99.9	90.0	83.

* BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 255
VICTORIA, TEX24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GPN	PRES WB	TEMP DG C	DEW PT DG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.2	33.0	1008.4	30.0	21.4	170.0	12.4	-2.2	12.2	304.6	304.0	16.1	60.0	0.0	0.
0.2	4.5	107.7	1006.0	27.8	20.4	99.9	99.9	99.9	99.9	303.0	303.9	15.3	64.4	999.5	999.
0.9	6.5	331.9	975.0	25.3	19.5	99.9	99.9	99.9	99.9	302.6	302.2	14.8	70.1	999.5	999.
1.7	8.5	560.1	955.0	23.2	19.6	99.9	99.9	99.9	99.9	302.8	303.6	15.3	80.3	999.9	999.
2.3	10.5	792.8	925.0	20.7	18.5	185.3	15.0	0.6	14.9	302.5	303.2	14.7	87.4	1.6	352.
2.9	12.6	1025.8	900.0	19.3	13.6	185.0	15.6	1.4	15.5	303.0	303.2	11.2	70.4	2.1	355.
3.7	14.5	1272.3	875.0	18.6	9.1	182.2	16.5	0.6	16.5	304.4	304.0	7.8	49.6	2.9	358.
4.6	16.8	1520.5	850.0	17.1	2.9	182.5	14.3	0.6	14.3	304.9	304.7	5.6	38.6	3.8	358.
5.5	19.1	1773.5	825.0	16.6	-6.6	182.5	14.1	2.4	15.9	306.7	307.2	2.8	17.9	4.5	360.
6.3	21.2	2038.7	800.0	16.0	-6.7	182.7	14.3	2.2	16.2	310.7	313.5	2.9	17.9	5.3	1.
7.2	23.6	2309.6	775.0	16.8	-6.7	17.1	15.1	2.4	14.9	312.3	321.4	3.0	19.2	6.2	2.
8.1	25.8	2587.9	750.0	15.5	-9.9	180.4	14.6	2.4	14.4	313.8	321.2	2.4	16.4	6.9	3.
9.1	28.2	2874.0	725.0	14.0	-11.2	180.0	13.5	1.4	13.4	315.1	322.1	2.2	16.2	7.8	4.
10.0	30.7	3169.0	700.0	12.8	-12.1	187.8	10.5	1.4	10.4	316.9	323.7	2.1	16.3	8.4	3.
10.9	33.2	3472.0	675.0	10.9	-12.9	190.6	7.9	2.5	7.4	318.1	324.8	2.1	17.4	8.9	4.
11.9	35.7	3786.7	650.0	8.9	-5.9	219.3	6.8	4.3	5.3	319.5	331.3	3.8	34.9	9.3	5.
13.0	38.2	4105.6	625.0	5.9	-8.1	233.2	7.2	6.0	3.9	319.7	331.7	3.9	41.5	9.7	7.
14.1	40.9	4442.1	600.0	2.7	-7.6	233.2	7.7	6.2	4.6	319.7	330.8	3.6	46.2	9.9	9.
15.2	43.6	4784.7	575.0	-0.7	-9.7	232.1	7.6	6.0	4.6	319.6	329.9	3.3	52.7	10.4	11.
16.4	46.5	5137.4	550.0	-4.0	-13.9	233.7	7.4	6.1	4.2	319.6	327.3	2.4	46.3	10.7	13.
17.6	49.5	5503.1	525.0	-6.8	-20.9	247.9	8.6	8.0	3.2	320.4	324.9	1.4	31.5	11.1	15.
18.9	52.3	5852.0	500.0	-9.6	-25.7	260.0	11.0	10.8	1.9	321.4	325.5	1.2	33.5	11.5	18.
20.1	55.4	6276.6	475.0	-12.0	-29.3	269.0	14.7	14.7	0.2	323.1	325.5	0.7	20.9	12.0	23.
21.8	58.5	6688.0	450.0	-15.0	-29.5	269.0	17.9	17.9	1.6	325.5	327.0	0.7	27.7	12.6	29.
23.2	61.9	7117.2	425.0	-18.5	-30.3	255.4	18.3	17.8	4.3	325.2	327.7	0.7	34.4	13.7	34.
24.8	65.4	7566.7	400.0	-21.7	-42.6	259.2	20.6	20.1	3.9	325.7	327.6	0.2	13.5	15.1	39.
26.3	68.9	8039.4	375.0	-24.7	-36.4	256.1	23.8	23.3	4.4	326.9	330.5	0.4	32.7	16.8	43.
27.9	72.4	8384.5	350.0	-27.8	-33.1	271.5	26.0	26.0	-0.7	331.2	333.6	0.7	60.4	18.5	48.
29.6	76.5	9066.6	325.0	-32.1	-36.3	275.9	27.5	27.3	-2.8	332.4	334.3	0.5	66.0	20.6	54.
31.3	80.6	9626.7	300.0	-36.4	-43.6	270.6	28.0	28.0	-0.1	334.0	335.0	0.3	47.3	22.6	58.
33.2	85.0	10223.7	275.0	-41.0	99.9	268.8	28.0	27.9	0.6	335.9	999.9	99.9	999.9	25.6	62.
35.3	89.4	10863.5	250.0	-45.6	99.9	265.4	32.8	32.8	0.4	338.4	999.9	99.9	999.9	29.1	65.
37.5	94.6	11558.7	225.0	-51.6	99.9	272.2	35.4	35.4	-1.4	339.4	999.9	99.9	999.9	33.3	69.
39.9	99.3	12310.9	200.0	-58.4	99.9	273.9	32.5	32.5	-1.7	340.3	999.9	99.9	999.9	37.7	72.
42.5	105.3	13137.8	175.0	-65.1	99.9	275.8	36.2	36.0	-3.7	342.6	999.9	99.9	999.9	43.1	74.
45.7	112.0	14066.2	150.0	-68.7	99.9	281.0	26.4	25.9	-5.0	345.2	999.9	99.9	999.9	49.7	78.
49.3	119.3	15177.0	125.0	-68.2	99.9	288.3	25.4	25.4	0.7	375.1	999.9	99.9	999.9	55.5	79.
53.8	128.0	16519.5	100.0	-70.0	99.9	259.0	20.8	20.4	4.0	392.5	999.9	99.9	999.9	61.5	79.
59.0	137.3	18234.6	75.0	-68.5	99.9	245.5	9.6	8.6	3.9	428.3	999.9	99.9	999.9	65.2	79.
66.5	147.5	20716.0	50.0	-61.7	99.9	224.4	3.6	-1.4	-7.4	498.2	999.9	99.9	999.9	67.4	80.
78.3	158.5	25151.8	25.0	-51.3	99.9	48.7	6.1	-8.6	-4.0	637.3	999.9	99.9	999.9	65.5	81.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 260
STEPHENSVILLE, TEX

24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SLC	V COMP M/SLC	PUT T DG K	E POT T DG K	MX R'' GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.5	399.0	963.4	30.1	19.5	190.0	7.5	1.3	7.4	303.5	347.2	14.1	50.0	0.0	0
99.9	59.9	50.9	1300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	10.5	523.9	950.0	27.5	15.6	181.0	9.7	0.2	9.7	306.7	339.3	11.9	49.3	0.4	1
1.5	12.9	753.9	925.0	24.4	13.8	189.0	11.7	1.6	11.6	305.8	335.4	10.8	51.4	0.4	1
2.2	15.2	558.5	900.0	22.0	13.4	195.3	11.3	3.7	10.0	305.6	335.3	10.8	54.3	1.4	0
2.9	17.5	1241.5	875.0	19.5	12.9	200.7	10.3	3.6	5.6	305.5	335.1	10.8	54.3	1.4	0
3.9	20.0	1451.5	850.0	16.9	12.9	202.4	11.1	4.2	10.2	305.4	335.6	11.1	76.8	3.4	12
4.2	22.4	1745.3	825.0	14.8	12.7	213.0	10.9	6.0	9.1	305.7	336.7	11.3	87.4	3.0	12
6.1	25.0	2007.7	800.0	12.5	7.4	216.2	7.3	4.3	5.9	305.8	332.9	8.1	54.8	3.9	20
7.1	27.4	2277.3	775.0	10.2	5.3	201.0	7.9	2.8	7.4	310.0	333.7	7.2	54.9	4.2	21
8.0	30.2	2553.4	750.0	11.9	5.2	218.3	7.9	4.8	6.1	310.5	331.8	7.5	63.8	4.4	21
8.9	33.0	2836.9	725.0	10.3	2.8	238.5	11.4	9.8	6.0	311.6	330.4	6.5	59.4	5.3	24
9.3	35.7	3129.4	700.0	10.0	0.4	230.8	15.1	12.7	8.3	310.3	331.0	5.6	51.2	5.0	29
10.6	36.5	3430.9	675.0	7.9	-0.2	231.7	17.1	13.5	10.6	315.2	331.8	5.6	50.7	6.4	34
11.7	41.3	3741.4	650.0	5.5	-1.0	225.5	19.3	13.7	12.5	315.8	331.5	5.3	60.4	7.5	34
12.7	44.3	4060.9	625.0	2.8	-5.8	225.5	19.8	14.1	12.9	316.2	328.2	4.0	52.8	8.7	39
13.9	47.4	4395.9	600.0	0.1	-12.2	224.6	20.3	14.3	14.5	316.5	324.3	2.5	39.1	10.0	37
14.9	50.4	4729.2	575.0	-2.7	-15.1	223.5	20.6	14.2	14.9	317.1	323.6	2.0	37.6	11.3	37
16.1	53.6	5075.5	550.0	-6.1	-15.8	226.7	20.7	15.1	14.2	317.0	323.4	2.0	45.9	12.6	37
17.1	56.6	5441.7	525.0	-8.2	-18.0	233.8	21.2	17.1	12.5	317.5	323.1	1.8	48.9	14.3	40
19.5	60.3	5816.0	500.0	-12.7	-20.3	237.9	23.3	19.7	12.4	317.7	322.8	1.6	53.9	15.8	41
19.7	63.5	6205.6	475.0	-16.0	-43.2	243.2	22.5	20.4	10.3	318.3	320.4	0.7	28.9	17.5	43
21.2	67.0	6611.4	450.0	-17.8	-61.2	246.3	22.3	20.4	9.0	320.9	320.9	0.0	1.0	19.2	45
22.5	70.6	7037.0	425.0	-20.3	-62.9	246.0	22.6	22.5	10.0	322.8	322.9	0.0	1.0	21.1	47
23.9	74.3	7432.5	400.0	-24.1	-65.3	246.4	22.9	25.0	5.9	323.6	323.7	0.0	1.0	23.1	47
25.4	78.3	7949.4	375.0	-28.2	-68.0	251.8	25.9	24.6	8.1	324.2	324.3	0.0	1.0	25.5	51
27.0	82.4	8442.2	350.0	-32.4	-70.8	254.9	24.5	23.6	6.4	324.9	325.0	0.0	1.0	27.7	51
29.5	86.5	8958.3	325.0	-36.0	-73.5	253.8	34.1	32.7	5.5	327.0	327.5	0.1	23.4	30.1	55
30.2	91.2	9510.4	300.0	-39.6	-79.0	255.0	30.4	35.8	7.0	327.5	327.5	0.1	23.4	30.1	55
31.8	95.9	10100.3	275.0	-43.7	-84.9	253.5	41.5	37.8	11.8	331.9	329.9	99.9	99.9	36.8	57
33.4	100.8	10734.4	250.0	-48.0	-90.9	253.0	42.4	43.7	11.9	333.8	329.9	99.9	99.9	41.7	61
35.9	106.3	11418.1	225.0	-54.3	-95.9	255.8	43.4	42.8	6.2	335.3	329.9	99.9	99.9	45.9	62
34.1	112.0	12162.8	200.0	-60.1	-99.9	256.4	50.2	50.8	12.7	337.6	329.9	99.9	99.9	53.0	65
40.4	119.3	12944.9	175.0	-65.5	-99.9	260.4	55.9	55.8	3.5	341.8	329.9	99.9	99.9	60.4	67
43.3	125.3	13929.0	150.0	-62.8	-99.9	255.7	38.7	37.5	5.5	341.9	329.9	99.9	99.9	67.4	69
46.3	132.7	15053.7	125.0	-62.0	-99.9	260.0	28.5	28.1	4.6	342.8	329.9	99.9	99.9	75.0	70
50.9	140.3	16426.0	100.0	-62.7	-99.9	260.0	25.4	23.7	9.1	400.5	329.9	99.9	99.9	81.8	70
56.1	148.7	13171.5	75.0	-66.7	-99.9	262.4	11.8	11.7	1.6	433.2	329.9	99.9	99.9	85.4	71
63.5	157.3	20676.3	50.0	-59.1	-99.9	268.3	4.7	4.7	0.1	508.3	329.9	99.9	99.9	88.4	72
75.4	166.5	25136.5	25.0	-50.4	-99.9	31.0	6.9	-5.4	-4.4	640.1	329.9	99.9	99.9	88.5	73

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 261
DEL RIO, TEX

24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	CLW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	9.0	314.0	572.1	29.4	19.1	120.0	2.6	-2.0	1.7	307.0	345.6	14.5	54.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	92.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.7	11.3	518.2	950.0	26.5	17.5	118.3	3.6	-3.2	1.7	305.9	342.4	13.4	57.9	0.2	315.
1.7	13.5	753.2	925.0	24.3	16.8	105.9	4.0	-3.8	1.1	305.9	341.7	13.1	63.1	0.4	304.
2.5	15.4	592.9	900.0	22.4	16.5	66.5	2.8	-2.6	-1.1	306.4	342.7	13.3	69.5	0.5	294.
3.3	16.4	1237.7	875.0	20.2	15.7	30.9	2.3	-1.2	-2.0	306.6	342.0	13.0	75.4	0.6	254.
4.0	20.8	1468.7	850.0	21.5	10.5	320.5	4.5	2.8	-3.4	310.0	335.7	9.5	49.7	0.6	273.
4.9	23.4	1747.6	825.0	20.7	4.4	258.6	6.7	5.9	-3.2	311.4	330.9	6.4	34.4	0.4	242.
5.9	25.3	2012.6	800.0	19.5	-5.4	243.4	3.6	3.2	1.6	312.4	321.9	3.1	17.6	0.2	171.
6.8	28.7	2284.6	775.0	18.2	-13.9	509.9	99.9	99.9	99.9	313.6	318.9	1.7	9.9	999.9	99.9
7.8	31.4	2563.9	750.0	16.4	-15.1	999.9	99.9	99.9	99.9	314.6	319.6	1.6	10.1	999.9	99.9
8.8	34.3	2851.2	725.0	15.4	-15.8	270.3	16.5	16.5	-0.1	316.5	321.4	1.5	10.2	2.3	173.
9.7	37.9	3146.9	700.0	13.3	-17.2	255.8	12.5	1.1	3.1	317.4	322.0	1.4	10.4	3.1	98.
10.8	38.6	3450.8	675.0	10.5	-19.0	238.3	11.5	9.8	6.1	317.6	321.7	1.3	10.7	3.7	92.
11.9	42.7	3763.1	650.0	7.7	-20.9	228.1	11.9	8.9	6.0	317.8	321.5	1.1	10.9	4.3	86.
13.0	45.9	4064.4	625.0	5.0	-18.4	221.9	11.8	7.9	6.8	318.4	321.0	1.4	16.3	5.0	80.
14.2	48.9	4415.5	600.0	1.9	-16.4	225.1	14.0	9.9	9.9	318.5	320.1	1.8	24.2	5.6	74.
15.2	51.8	4757.0	575.0	-0.5	-14.2	237.5	16.6	14.0	8.9	319.6	320.7	1.6	24.9	6.5	71.
16.3	55.0	5110.8	550.0	-2.7	-12.4	247.1	19.2	17.7	7.5	321.0	320.8	1.1	20.2	7.7	70.
17.4	58.0	5477.6	525.0	-5.3	-10.0	252.2	21.5	20.5	6.6	322.0	320.8	0.5	10.0	9.1	70.
18.7	61.6	5854.1	500.0	-8.7	-7.5	258.8	22.0	21.6	4.3	322.5	320.2	0.8	20.0	10.8	71.
20.1	65.1	6253.1	475.0	-11.7	-27.3	262.2	24.0	23.8	3.3	323.6	320.5	0.9	25.9	12.6	72.
21.4	68.5	6665.8	450.0	-14.0	-24.8	260.1	24.7	22.9	4.2	325.7	320.4	0.8	27.1	14.7	73.
22.9	71.9	7097.4	425.0	-16.4	-37.4	255.2	23.7	22.9	6.1	327.9	320.2	0.4	14.3	16.7	74.
24.4	75.7	7580.1	400.0	-20.0	-28.3	256.7	23.2	22.6	5.3	329.0	332.2	0.9	47.6	18.7	74.
25.8	79.7	8025.3	375.0	-23.6	-31.2	266.0	28.6	28.6	2.0	330.3	333.0	0.7	49.4	21.1	75.
27.2	83.5	8525.8	350.0	-27.7	-35.9	265.4	28.7	28.6	2.3	331.4	333.2	0.5	45.0	23.3	76.
28.7	87.5	9054.3	325.0	-31.6	-41.6	261.6	29.4	29.1	4.3	332.1	334.2	0.3	36.2	25.9	77.
30.5	92.3	9414.5	300.0	-36.4	-46.7	259.4	29.7	29.2	5.5	334.0	336.7	0.2	33.2	29.1	77.
32.3	96.6	9712.3	275.0	-41.1	-49.9	257.8	31.6	30.9	6.7	335.7	339.9	99.9	99.9	32.5	77.
34.3	101.3	10053.0	250.0	-46.0	-52.9	257.8	31.6	30.9	6.7	337.7	342.6	99.9	99.9	36.4	77.
36.6	106.6	11544.6	225.0	-52.0	-59.9	262.8	35.6	35.3	4.4	338.6	340.9	99.9	99.9	40.9	74.
39.9	112.0	12396.3	200.0	-58.0	-66.0	259.5	43.1	42.4	7.8	340.9	342.6	99.9	99.9	46.1	78.
41.7	116.3	13123.6	175.0	-65.0	-69.9	260.1	44.3	43.7	7.6	342.6	342.6	99.9	99.9	53.4	78.
44.7	125.0	14051.7	150.0	-66.3	-69.9	277.7	39.9	39.5	-5.3	356.0	342.6	99.9	99.9	61.3	80.
48.1	132.0	15156.6	125.0	-65.8	-69.9	254.1	25.2	24.2	6.9	375.8	342.6	99.9	99.9	67.4	90.
52.3	139.3	16506.5	100.0	-67.4	-69.9	255.3	21.0	21.2	5.5	397.5	342.6	99.9	99.9	73.3	79.
57.7	147.3	19228.9	75.0	-65.1	-69.9	277.2	9.9	9.8	-1.2	428.1	342.6	99.9	99.9	78.9	79.
65.0	156.3	20716.9	50.0	-56.8	-69.9	279.6	5.9	5.8	-1.0	502.7	342.6	99.9	99.9	91.6	80.
76.2	165.7	25151.5	25.0	-51.0	-69.9	29.6	2.5	-1.3	-2.2	638.5	342.6	99.9	99.9	81.3	81.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 16 DEG
 * BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 ** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 265
MIDLAND, TEX24 APRIL 1975
2015 GMT

TIME MIN	CATCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	CI9 CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E OUT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	1	0	911.3	31.1	-1.6	200.0	7.2	7.1	-1.2	313.0	320.2	3.7	12.0	0.0	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	13.0	984.1	500.0	23.0	0.1	999.9	99.9	99.9	99.9	312.0	324.8	4.3	15.4	99.9	99.9
0.4	15.2	1232.6	875.0	25.7	-2.3	999.9	99.9	99.9	99.9	311.0	324.1	3.7	15.6	99.9	99.9
1.8	17.4	1464.0	850.0	23.4	-4.0	999.9	99.9	99.9	99.9	311.1	321.1	3.3	15.8	99.9	99.9
3.4	19.4	1744.4	825.0	20.6	-6.0	264.7	6.8	6.8	0.6	310.8	317.7	3.0	16.0	1.3	1.3
4.9	22.0	2004.5	600.0	18.3	-7.8	272.7	6.0	6.0	-0.2	311.0	313.1	2.7	16.2	1.8	1.8
5.9	24.4	2278.9	775.0	15.7	-9.7	269.0	5.0	5.0	0.0	311.0	318.3	2.4	16.4	2.2	2.2
6.8	26.7	2555.3	750.0	13.2	-11.6	263.1	5.7	5.7	0.7	311.1	317.6	2.1	16.6	2.5	2.5
7.7	29.3	2938.6	725.0	10.3	-13.4	260.3	6.2	6.2	1.0	311.0	316.7	1.8	16.8	2.9	2.9
8.6	32.0	3128.7	700.0	7.8	-15.7	251.8	7.7	7.3	2.4	311.3	316.3	1.6	16.9	3.1	3.1
9.5	34.7	3427.7	675.0	6.7	-16.6	250.2	11.1	10.5	3.8	313.3	314.2	1.5	17.0	3.6	3.6
10.5	37.2	3736.3	650.0	4.4	-18.3	253.9	14.2	13.6	3.9	314.1	314.6	1.4	17.2	4.3	4.3
11.4	40.0	4053.6	625.0	1.7	-20.4	258.3	15.8	15.5	3.2	314.6	318.5	1.2	17.4	5.2	5.2
12.5	42.8	4391.2	600.0	-0.8	-24.4	259.7	18.2	17.9	3.2	315.3	319.2	0.9	17.7	6.3	6.3
13.7	45.7	4713.9	575.0	-2.5	-25.4	254.6	22.0	21.2	5.7	317.2	320.0	0.8	18.2	7.7	7.7
14.9	48.9	5071.5	550.0	-4.1	-27.3	249.3	24.2	22.6	8.5	319.3	321.8	0.7	18.3	9.4	9.4
16.2	51.6	5436.6	525.0	-6.8	-29.3	246.6	26.2	24.1	10.4	320.3	322.5	0.6	18.5	11.4	11.4
17.5	54.7	5815.1	500.0	-9.7	-31.5	246.2	26.8	24.9	9.9	321.2	323.1	0.5	18.8	13.5	13.5
18.3	56.1	6205.0	475.0	-12.4	-33.6	247.4	25.8	23.9	6.7	322.7	324.3	0.5	19.0	15.6	15.6
20.1	61.6	6615.6	450.0	-15.5	-36.0	246.5	26.6	24.4	10.6	323.7	325.1	0.4	19.3	17.4	17.4
21.3	65.1	7047.8	425.0	-19.1	-38.8	245.9	27.4	25.7	5.4	324.4	325.6	0.3	19.4	19.5	19.5
22.7	68.7	7496.0	400.0	-22.7	-41.5	252.7	28.8	27.6	8.1	325.5	326.4	0.2	19.9	21.4	21.4
24.0	72.3	7956.0	375.0	-26.2	-44.3	254.7	30.2	29.7	5.3	326.9	327.5	0.2	20.2	23.1	23.1
25.5	76.4	8461.0	350.0	-30.1	-47.4	254.4	30.2	29.7	5.5	328.1	328.7	0.1	20.5	24.8	24.8
27.1	80.7	8982.6	325.0	-34.5	-50.9	241.8	33.4	33.1	4.8	329.1	329.5	0.1	20.9	26.4	26.4
28.9	85.2	9538.4	300.0	-38.5	-54.1	254.5	37.3	36.6	6.8	331.0	331.3	0.1	21.2	33.5	33.5
30.4	89.9	10131.4	275.0	-42.3	-59.9	255.2	40.8	39.5	10.4	334.0	334.9	99.9	99.9	37.4	37.4
32.4	95.0	10767.6	250.0	-48.0	-66.0	257.5	42.3	41.3	9.1	334.6	334.9	99.9	99.9	48.7	48.7
35.0	100.2	11455.2	225.0	-53.1	-73.1	258.1	45.2	44.3	9.3	337.1	337.1	99.9	99.9	55.7	55.7
37.4	106.0	12202.7	200.0	-59.5	-79.9	256.0	49.2	47.7	11.9	338.5	338.5	99.9	99.9	63.7	63.7
39.9	112.3	13026.7	175.0	-64.5	-86.9	258.9	58.1	57.0	11.2	343.6	343.6	99.9	99.9	72.3	72.3
42.9	119.3	13775.4	150.0	-62.4	-84.9	262.6	36.1	35.8	4.7	342.6	342.6	99.9	99.9	78.9	78.9
46.4	127.3	15009.9	125.0	-63.3	-89.9	262.1	33.6	32.0	10.2	340.3	340.3	99.9	99.9	87.1	87.1
50.7	136.0	16468.6	100.0	-65.6	-99.9	257.9	23.0	22.5	4.9	401.1	401.1	99.9	99.9	93.0	93.0
56.1	149.0	19212.9	75.0	-66.0	-99.9	303.4	5.9	4.9	-3.2	434.6	434.6	99.9	99.9	95.2	95.2
63.6	158.0	20726.1	50.0	-59.2	-99.9	261.0	1.2	1.2	0.2	504.1	504.1	99.9	99.9	98.3	98.3
75.4	185.5	35186.5	25.0	-50.4	-99.9	278.7	4.0	4.0	-0.6	634.9	634.9	99.9	99.9	98.3	98.3

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 704
MATTERAS, NC

24 APRIL 1975
2100 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ UG
0.0	4.6	4.0	1019.9	22.6	15.4	210.0	7.2	3.6	6.2	255.6	324.3	10.9	64.0	0.0	0.
0.7	4.3	166.7	1000.0	20.6	14.1	211.3	20.7	10.8	17.7	253.1	321.8	10.2	66.2	0.6	27.
1.6	8.7	395.1	975.0	18.6	13.1	211.1	18.9	9.8	16.2	253.2	321.0	9.8	70.6	1.7	30.
2.5	11.1	607.3	950.0	16.4	10.6	215.0	20.7	11.9	17.0	295.0	317.5	8.5	68.4	2.8	31.
3.5	13.6	633.8	925.0	14.6	8.4	219.0	20.0	12.6	15.5	255.3	315.9	7.7	68.1	3.9	33.
4.4	16.3	1065.1	900.0	13.5	5.7	219.1	18.5	11.7	15.4	296.3	313.7	6.4	55.1	5.0	34.
5.3	18.6	1302.2	875.0	13.0	1.2	218.2	15.8	9.8	12.4	258.0	312.0	5.1	47.0	5.9	35.
6.3	21.3	1545.7	850.0	12.4	4.6	221.4	14.9	9.9	11.2	299.9	317.3	6.3	59.0	6.9	36.
7.3	23.7	1795.0	825.0	11.0	2.6	224.5	14.7	10.3	10.5	300.9	316.6	5.6	56.3	7.7	37.
8.2	26.2	2051.9	800.0	10.0	-7.1	231.4	15.5	12.1	9.7	302.2	311.0	3.0	31.2	8.5	37.
9.1	28.3	2315.1	775.0	8.8	-1.6	236.5	15.1	12.5	8.3	303.9	316.5	4.4	47.7	9.3	39.
10.1	31.8	2586.1	750.0	7.6	-1.0	255.9	14.2	13.8	3.4	305.4	319.1	4.8	54.7	10.1	41.
11.1	34.7	2844.8	725.0	5.8	-3.4	264.6	13.5	13.5	1.3	306.4	318.3	4.1	51.3	10.7	44.
12.1	37.4	3151.4	700.0	3.9	-4.0	272.6	15.0	15.0	-0.7	307.3	317.3	4.1	56.5	11.3	47.
13.1	40.3	3445.9	675.0	1.8	-4.4	278.5	16.6	16.5	-2.5	308.1	320.1	4.1	63.4	12.0	50.
14.2	43.1	3750.7	650.0	1.5	-6.0	279.9	17.2	16.9	-2.9	311.2	322.4	3.8	57.3	12.8	54.
15.2	46.1	4058.8	625.0	-0.2	-13.7	276.9	17.0	16.7	-2.9	312.4	317.0	4.1	35.3	13.5	57.
16.3	48.4	4390.6	600.0	-3.0	-19.2	276.8	16.6	16.4	-2.8	312.8	317.3	1.4	27.3	14.4	60.
17.4	52.3	4726.4	575.0	-5.2	-23.5	280.2	15.3	15.3	-2.7	314.0	317.2	1.0	22.0	15.2	63.
18.6	55.3	5073.7	550.0	-8.3	-22.0	286.8	16.2	15.8	-4.7	314.4	318.2	1.2	32.0	16.1	65.
19.9	58.7	5432.9	525.0	-11.0	-18.7	291.2	16.1	15.0	-5.8	315.4	320.7	1.7	52.9	17.0	68.
21.2	62.1	5806.3	500.0	-12.6	-31.3	293.7	14.5	9.6	-4.2	317.6	319.5	0.6	19.2	17.8	71.
22.6	65.6	6195.9	475.0	-15.4	-36.5	289.5	14.0	13.2	-4.7	318.9	320.1	0.3	14.4	18.5	72.
24.1	69.0	6501.9	450.0	-18.0	-38.4	282.3	16.6	18.2	-4.0	320.6	321.7	0.3	14.7	19.8	75.
25.6	72.6	7026.2	425.0	-21.7	-40.5	283.1	17.7	17.2	-4.0	321.1	322.1	0.3	16.2	21.3	77.
27.2	76.4	7470.4	400.0	-24.5	-39.7	290.5	19.1	17.5	-0.7	323.1	324.1	0.3	22.9	22.9	79.
28.7	80.4	7938.1	375.0	-27.1	-41.4	283.5	12.0	11.7	-2.8	325.7	326.6	0.3	24.1	24.2	81.
30.4	84.4	8431.7	350.0	-30.9	-45.4	282.1	9.7	9.5	-2.0	327.0	327.7	0.2	22.3	25.2	82.
32.1	88.4	8852.9	325.0	-34.8	-50.9	294.3	9.3	8.5	-3.8	328.7	329.1	0.1	17.4	25.9	83.
34.2	93.3	9306.3	300.0	-39.4	-54.6	319.2	10.1	6.6	-7.7	329.7	330.0	0.1	18.0	26.6	84.
36.1	97.6	10094.8	275.0	-45.0	-59.9	308.5	15.3	12.3	-6.5	336.1	336.9	99.9	99.9	27.9	87.
38.5	102.4	10724.1	250.0	-50.3	-59.9	304.6	19.4	16.0	-11.0	331.3	334.9	99.9	99.9	29.8	90.
40.7	107.8	11402.9	225.0	-56.1	-59.9	288.6	16.9	10.1	-5.4	332.5	333.9	99.9	99.9	31.8	92.
43.0	113.2	12142.4	200.0	-61.1	-59.9	291.8	17.5	16.3	-6.5	336.1	336.9	99.9	99.9	34.3	93.
45.5	119.3	12964.1	175.0	-64.6	-59.9	292.1	17.8	15.5	-6.7	343.4	343.9	99.9	99.9	36.4	95.
48.0	125.9	13716.6	150.0	-64.7	-59.9	294.8	28.5	25.9	-12.0	358.7	358.9	99.9	99.9	40.8	97.
50.2	130.3	15028.4	125.0	-58.9	-59.9	282.1	34.4	33.6	-7.2	368.3	368.9	99.9	99.9	47.9	98.
52.6	140.7	16420.5	100.0	-62.0	-59.9	303.1	11.4	9.6	-6.3	407.9	399.9	99.9	99.9	53.6	100.
54.4	149.0	18172.0	75.0	-65.8	-59.9	324	4.4	-2.4	-3.7	434.9	434.9	99.9	99.9	56.4	100.
56.5	158.3	20885.8	50.0	-58.7	-59.9	318.9	3.3	2.2	-2.5	505.4	499.9	99.9	99.9	57.3	101.
59.7	166.5	25122.6	25.0	-51.5	-59.9	999.9	99.9	99.9	99.9	636.7	999.9	99.9	99.9	59.9	99.9.

* EV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* PV TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** DV SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 311
ATMENS. GA24 APRIL 1975
2040 GMT

155 17. 0

TIME MIN	CNCT	HEIGHT GCM	PRES MH	TEMP DG C	DLB PT DG C	DIR DG	SPLD M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	F POT T DG K	MR RTD CM/RC	RM PCT	RANGE KM	AZ DG
00.0	7.1	246.0	989.2	26.1	16.6	210.0	7.2	3.6	6.2	301.8	239.5	12.2	56.0	0.0	0.0
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.4	373.0	975.0	23.5	13.2	230.9	14.6	11.3	9.2	300.2	326.7	9.0	52.2	0.3	5.2
1.1	10.5	599.7	950.0	22.3	13.4	239.2	13.2	10.1	8.4	301.2	323.9	10.3	57.1	0.0	5.1
2.0	12.7	817.0	925.0	18.9	11.4	225.2	10.2	7.3	7.2	299.8	326.7	9.2	61.8	1.4	7.0
2.7	15.1	1265.1	900.0	16.4	10.2	219.8	9.5	6.1	7.3	298.2	323.2	8.8	67.9	1.0	6.6
3.4	17.1	1305.0	875.0	14.5	10.0	220.0	9.4	7.1	6.1	300.0	324.0	8.9	74.4	2.3	4.7
4.6	19.3	1550.0	850.0	12.5	9.4	245.5	13.4	12.2	5.5	306.5	324.4	8.0	81.4	3.0	5.1
5.7	21.7	1800.7	825.0	11.7	7.3	243.7	15.7	14.0	6.9	302.0	323.5	7.8	74.7	4.0	5.4
6.5	24.3	2047.6	800.0	9.6	7.1	250.0	13.6	12.9	4.2	308.5	324.4	8.0	84.7	4.0	5.4
7.4	26.5	2321.9	775.0	9.7	5.0	253.1	14.4	17.6	4.9	308.4	321.0	5.1	74.6	9.2	5.4
8.3	29.3	2593.5	750.0	8.0	2.4	251.1	20.3	19.2	6.6	308.1	325.0	7.1	72.8	5.5	5.4
9.4	31.6	2472.0	725.0	5.8	0.9	250.7	21.1	19.9	7.0	308.6	322.7	5.7	70.8	6.6	6.1
10.4	34.3	3152.8	700.0	3.0	-1.1	250.6	20.5	20.0	4.9	308.4	321.0	5.1	74.6	9.2	5.4
11.5	36.4	3457.6	675.0	3.6	-15.7	260.7	20.8	20.6	2.6	308.2	315.0	1.7	22.8	10.5	6.4
12.7	38.5	3753.2	650.0	1.8	-9.2	260.7	22.2	21.9	3.6	311.4	321.0	3.2	47.5	12.0	7.6
13.9	40.2	4074.9	625.0	0.6	-11.7	262.7	24.6	24.4	3.1	313.5	321.2	2.5	39.1	13.5	7.0
14.9	42.8	4401.4	600.0	-1.7	-14.2	271.3	25.2	25.2	-0.9	318.5	321.1	2.1	37.0	15.2	7.2
16.2	47.3	4736.7	575.0	-4.2	-11.1	270.6	24.9	24.7	-2.9	315.4	324.2	2.9	58.6	16.9	7.4
17.5	50.6	5088.2	550.0	-6.4	-12.4	276.9	23.1	23.0	-2.8	316.6	325.1	2.7	62.3	18.6	7.6
18.8	53.5	5408.7	525.0	-9.9	-17.0	276.5	21.3	21.2	-2.4	316.0	324.9	1.9	56.0	20.1	7.8
20.1	56.9	5827.7	500.0	-13.4	-20.5	280.8	21.1	22.7	-4.3	310.8	321.6	1.5	55.2	21.9	7.9
21.4	59.3	6212.7	475.0	-14.9	-30.3	282.4	22.5	22.0	-4.8	310.5	320.7	0.4	14.1	23.5	8.1
22.9	63.1	6619.0	450.0	-18.1	-38.7	275.3	20.7	20.4	-3.3	320.5	321.5	0.3	14.4	25.3	8.3
24.4	66.4	7044.2	425.0	-20.7	-40.0	276.8	21.6	21.4	-2.5	322.7	323.6	0.3	14.6	27.2	8.4
25.9	70.3	7498.5	400.0	-23.1	-43.7	280.4	17.2	16.5	-4.4	323.0	323.7	0.2	14.9	29.0	8.5
27.4	73.4	7955.1	375.0	-25.6	-46.4	275.2	21.8	21.5	-3.5	324.5	325.1	0.2	15.2	30.8	8.6
29.2	77.3	8447.4	350.0	-28.1	-49.4	276.4	25.0	24.8	-2.8	325.7	326.1	0.1	15.5	32.9	8.7
30.9	81.1	8962.1	325.0	-30.7	-52.5	280.3	24.7	24.3	-4.4	327.3	327.6	0.1	15.8	35.4	8.8
32.7	85.3	9517.0	300.0	-33.1	-55.9	283.9	22.4	21.6	-5.9	328.2	327.9	99.9	99.9	37.0	9.0
34.4	89.5	10104.0	275.0	-35.5	-59.3	279.2	19.1	18.9	-3.0	330.3	329.9	99.9	99.9	40.4	9.0
37.0	94.2	10733.9	250.0	-38.0	-62.7	284.0	16.9	16.4	-4.1	331.1	329.9	99.9	99.9	42.4	9.1
39.4	99.1	11414.8	225.0	-40.4	-66.0	285.9	17.3	16.3	-5.9	334.3	329.9	99.9	99.9	45.1	9.1
42.3	104.0	12160.0	200.0	-42.8	-69.9	281.7	15.1	14.7	-3.1	338.2	329.9	99.9	99.9	48.2	9.2
45.2	108.9	12948.6	175.0	-45.2	-73.7	286.3	12.6	12.5	-1.7	340.5	329.9	99.9	99.9	51.7	9.2
48.5	115.8	13948.6	150.0	-47.6	-77.5	283.2	32.9	32.0	-7.5	346.4	329.9	99.9	99.9	57.9	9.2
52.8	122.8	15079.4	125.0	-49.9	-81.2	289.2	26.9	26.3	-0.4	348.2	329.9	99.9	99.9	64.6	9.3
57.0	130.3	16452.7	100.0	-52.3	-85.9	280.2	17.4	17.1	-3.1	401.6	329.9	99.9	99.9	71.5	9.3
62.5	138.4	18163.1	75.0	-54.1	-90.9	295.6	12.6	11.4	-5.4	434.4	329.9	99.9	99.9	76.5	9.4
70.7	148.3	20693.4	50.0	-60.8	-99.9	272.9	8.6	8.5	-0.4	500.3	329.9	99.9	99.9	77.4	9.5
82.4	157.7	23123.0	25.0	-62.1	-99.9	315.3	4.4	3.1	-3.2	635.2	329.9	99.9	99.9	78.1	9.6

* PV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * PV TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 * PV SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC

24 APRIL 1975
2015 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	Z POT Y DG K	MR PTD CM/KG	RM PCT	RANGE KM	AZ DG
0.0	0.2	275.0	983.5	25.6	15.0	190.0	9.3	1.8	9.2	301.7	331.4	11.0	52.0	0.0	0.
00.0	0.0	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	0.0	351.1	975.0	23.7	8.2	202.4	14.1	5.4	13.0	300.0	319.4	7.1	37.4	0.3	42.
1.3	11.2	576.9	950.0	21.3	8.9	215.2	12.9	7.5	10.6	299.8	320.6	7.6	45.1	1.0	35.
2.1	13.9	807.3	925.0	19.3	9.5	224.7	13.6	9.6	9.7	300.2	322.2	6.1	53.0	1.6	30.
2.9	16.3	1042.1	900.0	17.1	9.2	222.6	16.1	10.9	11.9	300.3	322.5	6.2	59.5	2.4	40.
4.0	19.1	1241.8	875.0	14.8	5.8	227.5	16.8	12.4	11.4	300.3	322.5	8.8	72.1	3.5	41.
4.9	21.6	1526.6	850.0	12.7	9.6	227.0	16.9	12.3	11.5	300.6	322.7	8.9	81.7	4.1	42.
5.8	24.4	1776.6	825.0	10.3	9.0	231.3	18.2	14.2	11.4	300.6	322.7	8.8	91.9	5.1	43.
6.6	27.1	2032.5	800.0	8.1	7.6	243.8	22.2	19.9	9.8	304.8	323.4	8.2	96.5	6.2	46.
7.9	30.9	2296.2	775.0	9.4	3.8	250.4	26.2	24.7	8.9	304.8	323.4	6.5	108.2	8.1	51.
9.2	32.3	2568.3	750.0	8.7	2.4	250.3	24.9	23.5	8.4	306.8	323.4	6.1	114.5	10.0	54.
10.5	35.9	2848.2	725.0	7.1	-11.0	249.9	24.4	22.9	8.4	307.5	323.5	2.4	127.2	11.9	57.
11.5	38.6	3136.1	700.0	6.4	-40.0	251.5	23.9	22.7	7.6	308.6	323.6	0.1	130.3	13.3	59.
12.6	41.4	3432.9	675.0	4.4	-24.5	256.3	23.0	22.9	7.6	310.7	319.3	0.8	140.5	14.7	60.
13.7	44.5	3738.8	650.0	2.2	-12.2	262.3	23.0	22.0	3.1	311.7	319.8	2.3	153.7	16.3	62.
14.9	47.8	4034.4	625.0	-0.1	-10.1	266.1	26.0	24.0	1.8	312.7	321.4	2.9	166.8	17.9	64.
16.1	50.9	4380.7	600.0	-2.2	-13.1	272.8	25.1	25.1	-1.2	313.9	321.1	2.3	179.4	19.4	67.
17.5	54.1	4716.7	575.0	-4.8	-8.8	269.3	23.7	23.7	0.3	314.8	325.2	3.4	192.5	21.4	69.
18.9	57.4	5065.6	550.0	-6.6	-32.0	271.7	25.5	25.5	-0.7	316.2	317.8	0.5	205.3	23.3	71.
20.2	61.0	5426.4	525.0	-9.9	-31.6	274.1	23.2	23.1	-1.6	316.6	318.3	0.5	218.9	25.2	72.
21.4	64.6	5809.8	500.0	-12.5	-22.1	274.6	23.6	23.5	-1.9	318.0	322.2	1.3	232.1	27.1	74.
22.9	68.0	6191.0	475.0	-14.7	-25.7	273.4	22.9	22.8	-1.3	319.9	323.2	1.0	245.4	28.7	75.
24.4	71.7	6597.8	450.0	-18.2	-61.5	275.5	20.1	20.0	-1.9	320.4	320.4	0.0	258.5	30.5	76.
26.0	75.7	7022.3	425.0	-20.9	-63.2	273.1	24.2	24.1	-1.3	322.2	322.2	0.0	271.6	32.4	77.
27.7	79.5	7487.5	400.0	-24.0	-65.3	280.4	24.0	23.9	-3.2	323.7	323.8	0.0	284.7	34.8	79.
29.4	83.8	7935.0	375.0	-27.8	-67.7	278.4	22.1	21.9	-3.2	324.7	324.7	0.0	297.8	37.4	80.
31.2	88.0	8427.4	350.0	-30.8	-69.7	272.3	21.6	21.6	-0.7	327.2	327.2	0.0	310.9	39.3	81.
33.2	92.7	8943.9	325.0	-35.3	-72.7	273.3	20.6	20.6	-1.2	327.9	327.9	0.0	323.9	41.7	82.
35.1	97.4	9500.9	300.0	-39.9	99.9	259.6	25.6	25.2	4.6	329.1	99.9	99.9	339.9	44.2	82.
37.4	102.2	10085.1	275.0	-45.1	99.9	255.2	13.4	13.0	3.4	330.0	99.9	99.9	352.9	46.5	82.
39.8	107.6	10719.6	250.0	-49.4	99.9	254.8	14.7	14.1	3.8	332.6	99.9	99.9	365.9	48.6	82.
42.0	113.0	11401.4	225.0	-54.9	99.9	281.2	11.5	11.3	-2.2	334.3	99.9	99.9	378.9	50.0	82.
44.7	119.3	12142.6	200.0	-61.6	99.9	275.0	15.5	15.5	-1.4	335.2	99.9	99.9	391.9	51.5	83.
47.5	125.5	12901.7	175.0	-64.2	99.9	780.4	34.4	33.8	-6.2	344.1	99.9	99.9	404.9	53.2	84.
50.4	132.3	13814.7	150.0	-60.8	99.9	293.7	34.3	31.4	-13.8	345.4	99.9	99.9	417.9	54.2	84.
53.9	139.3	15045.6	125.0	-60.6	99.9	263.6	30.4	30.2	3.4	345.3	99.9	99.9	430.9	56.7	84.
56.5	146.3	16431.7	100.0	-63.3	99.9	273.7	17.6	17.6	-1.1	405.5	99.9	99.9	443.9	58.9	84.
59.5	153.5	19187.9	75.0	-65.1	99.9	311.4	6.0	4.5	-0.0	434.4	99.9	99.9	456.9	60.9	84.
73.8	161.3	20703.9	50.0	-58.0	99.9	48.2	0.4	-0.3	-0.3	505.0	99.9	99.9	469.9	61.6	84.
87.0	168.7	25160.4	25.0	-50.0	99.9	99.9	99.9	99.9	99.9	641.3	99.9	99.9	482.9	62.9	84.

0 PV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 327
NASHVILLE, TENN24 APRIL 1975
2015 GMT

TIME MIN	CATCT	WEIGHT GPM	PRES MC	TEMP DG C	DIR PT EG C	DI C	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y K	E POT Y DG K	MR RTO GM/KG	PH PCT	RANGE A7 MW	C
0.0	5.4	120.7	993.0	20.0	19.0	240.0	3.6	3.1	1.8	295.6	33.2	14.1	94.0	0.1	162
0.0	6.9	99.7	1030.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	17.0
0.4	6.9	314.6	575.0	19.9	19.5	566.0	99.9	99.9	99.9	297.0	33.5	14.0	99.9	99.9	17.0
1.1	6.9	503.2	650.0	19.7	17.5	999.4	99.9	99.9	99.9	293.0	33.3	13.4	99.9	99.9	17.0
1.9	10.0	793.1	925.0	17.9	16.3	237.9	14.1	15.3	9.6	294.3	33.1	12.7	90.1	1.1	162
2.7	12.8	1027.7	900.0	16.1	14.6	234.9	12.2	14.6	9.6	294.7	33.1	11.8	91.0	2.1	162
3.6	15.1	1297.5	875.0	14.7	13.3	243.7	20.4	18.3	5.0	300.5	33.2	11.1	91.7	3.1	162
4.3	17.1	1512.8	850.0	13.1	11.9	245.8	21.1	19.3	8.7	301.2	33.3	10.4	92.4	4.1	162
5.1	19.3	1714.1	825.0	11.9	10.5	255.4	14.9	14.4	4.6	302.5	33.0	9.7	93.7	5.1	162
6.0	21.5	2222.1	800.0	10.7	9.4	262.1	22.2	22.0	3.1	303.8	32.9	9.3	91.6	6.1	162
6.7	23.9	2286.6	775.0	9.0	7.6	263.7	23.1	22.9	2.9	304.6	32.8	8.5	91.4	7.1	162
7.7	26.0	2557.9	750.0	7.3	5.0	266.6	24.5	24.4	1.5	305.5	32.9	7.7	89.4	8.1	162
8.6	28.1	2837.7	725.0	5.2	3.7	268.7	25.9	25.9	0.6	306.0	32.5	6.5	90.2	9.1	162
9.4	31.0	3122.6	700.0	3.0	1.9	264.5	26.1	26.1	0.7	306.6	32.5	6.3	92.8	10.1	162
10.1	33.6	3417.0	675.0	1.1	0.3	265.3	25.6	25.6	0.3	307.6	32.3	5.8	94.4	11.1	162
11.1	36.0	3715.8	650.0	-1.1	-1.2	270.3	26.8	26.7	-0.1	308.4	32.3	5.1	91.1	12.1	162
12.0	38.9	4022.9	625.0	-2.4	-3.2	271.5	29.5	29.5	-0.6	310.3	32.5	4.8	94.1	13.1	162
12.9	41.3	4356.9	600.0	-3.8	-4.6	274.4	30.0	29.9	-0.3	311.3	32.5	4.5	93.9	14.1	162
13.9	44.1	4692.3	575.0	-5.6	-6.5	273.4	29.3	29.0	-0.5	313.9	32.2	4.1	93.6	15.1	162
14.6	47.1	5040.5	550.0	-7.4	-8.3	281.1	28.4	27.9	-0.4	315.7	32.0	3.7	93.3	16.1	162
15.0	50.1	5421.9	525.0	-9.5	-10.8	280.2	29.5	29.1	-0.2	317.3	32.2	3.2	90.5	17.1	162
17.2	53.1	5776.6	500.0	-12.9	-15.9	281.7	28.1	27.6	-0.7	317.5	32.5	2.2	76.3	18.1	162
18.4	57.1	6165.3	475.0	-17.2	-20.1	266.3	25.8	24.8	-0.3	316.3	31.9	0.7	35.4	19.1	162
19.7	59.5	6569.0	450.0	-19.0	-30.4	246.4	29.6	24.4	-0.3	314.4	31.7	0.7	35.7	20.1	162
20.9	63.0	6941.1	425.0	-22.5	-44.0	289.7	28.0	26.3	-0.4	320.1	32.7	0.2	12.0	21.1	162
22.2	66.4	7434.2	400.0	-25.7	-49.1	264.5	30.2	24.5	-1.0	321.2	32.0	0.1	10.1	22.1	162
23.7	70.3	7894.4	375.0	-29.2	-51.0	260.5	26.1	24.5	-0.1	322.3	32.3	0.1	10.1	23.1	162
25.3	74.0	8386.3	350.0	-32.0	-49.9	284.1	25.9	25.1	-0.3	325.5	32.9	0.1	14.9	24.1	162
26.3	78.2	8907.1	325.0	-34.9	-42.5	272.6	22.4	22.3	-0.1	327.1	32.1	0.3	50.4	25.1	162
28.5	82.3	9449.7	300.0	-40.0	99.9	264.2	24.8	24.7	2.5	326.9	94.8	99.9	99.9	26.1	162
30.4	86.9	10047.1	275.0	-44.5	99.9	262.3	23.7	23.5	2.2	330.8	94.9	99.9	99.9	27.1	162
32.6	91.9	10677.4	250.0	-50.1	99.9	262.1	24.5	14.4	2.4	331.7	94.9	99.9	99.9	28.1	162
34.5	97.0	11356.6	225.0	-56.2	99.9	261.4	19.7	10.5	2.3	332.5	94.9	99.9	99.9	29.1	162
36.7	102.5	12066.9	200.0	-61.4	99.9	262.6	25.2	24.4	3.2	335.6	94.9	99.9	99.9	30.1	162
39.4	109.0	12912.1	175.0	-66.8	99.9	267.9	25.8	24.4	0.9	337.7	94.9	99.9	99.9	31.1	162
42.7	115.8	13640.4	150.0	-59.1	99.9	276.1	33.9	33.7	-3.6	344.2	94.9	99.9	99.9	32.1	162
46.6	123.3	15004.9	125.0	-70.1	99.9	247.9	23.7	22.0	4.9	343.3	94.9	99.9	99.9	33.1	162
51.3	132.3	16322.4	100.0	-64.5	99.9	270.1	21.1	21.1	-0.1	403.1	94.9	99.9	99.9	34.1	162
57.1	141.7	17160.7	75.0	-62.6	99.9	213.5	2.5	1.4	2.1	441.8	94.9	99.9	99.9	35.1	162
65.0	157.0	20611.6	50.0	-58.9	99.9	92.8	3.3	-3.2	0.2	504.8	94.9	99.9	99.9	36.1	162
7.0	162.5	23040.8	25.0	-53.6	99.9	20.8	4.4	-1.5	-0.1	636.9	94.9	99.9	99.9	37.1	162

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE
 OF FOUR QUALITY

STATION NO. 340
LITTLE ROCK, ARK
24 APRIL 1975
2030 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.0	79.0	1002.7	27.8	19.6	220.0	0.2	4.0	4.7	302.7	341.5	14.5	61.0	0.0	0.0
0.1	6.1	102.9	1000.0	25.9	18.6	191.7	0.8	1.4	6.6	300.6	333.8	11.3	53.1	0.2	1.0
0.4	8.2	325.2	975.0	23.5	15.7	194.0	7.3	1.8	7.1	300.3	329.5	10.9	58.0	0.3	5.0
1.6	10.4	551.8	950.0	22.1	14.9	203.1	8.4	3.3	7.7	301.1	331.6	11.3	63.8	0.7	12.0
2.2	12.5	783.8	925.0	21.0	15.4	210.9	8.8	4.5	7.6	302.4	334.8	12.0	70.2	1.0	17.0
2.9	14.7	1020.7	900.0	19.1	14.1	213.4	11.9	6.6	10.0	302.8	333.4	11.3	72.4	1.4	21.0
3.6	16.7	1262.7	875.0	17.2	13.6	215.8	14.2	9.1	10.9	303.2	333.9	11.3	79.2	1.9	26.0
4.2	19.1	1510.1	850.0	15.2	12.4	227.5	14.5	10.7	9.8	303.5	332.7	10.7	83.1	2.5	30.0
5.1	21.2	1753.4	825.0	14.0	10.6	239.4	17.6	15.2	8.9	304.7	331.7	9.8	79.7	3.2	35.0
6.0	23.6	2022.7	800.0	12.0	9.7	240.4	17.8	15.5	8.9	305.2	331.4	9.5	86.1	4.2	41.0
6.9	25.3	2289.3	775.0	12.1	8.4	239.1	18.0	15.4	9.2	307.9	330.0	7.9	86.3	5.1	47.0
7.9	28.2	2564.6	750.0	12.8	-8.9	233.3	18.9	13.6	10.1	310.9	320.1	3.0	24.6	6.0	47.0
8.7	30.8	2848.6	725.0	11.3	-10.0	234.0	15.4	12.4	9.0	312.2	320.0	2.6	22.0	6.7	47.0
9.6	33.3	3140.2	700.0	8.8	-13.3	237.7	14.7	12.4	7.9	312.4	318.5	2.0	19.4	7.7	48.0
10.6	35.8	3439.4	675.0	6.2	-14.4	242.9	14.4	12.9	6.6	312.8	318.6	1.9	21.2	8.5	49.0
11.1	38.3	3747.1	650.0	3.8	-16.3	248.9	15.0	14.0	5.4	313.4	318.6	1.6	21.3	9.3	51.0
12.5	40.8	4064.2	625.0	1.3	-18.3	254.4	16.3	15.7	4.4	314.1	318.7	1.4	21.5	10.1	53.0
13.5	43.6	4391.2	600.0	-1.3	-19.4	258.2	18.5	18.1	3.8	314.8	319.2	1.4	23.5	11.1	55.0
14.6	46.4	4728.6	575.0	-4.1	-20.3	258.8	19.9	19.5	3.8	315.3	319.6	1.3	27.0	12.3	57.0
15.8	49.3	5077.5	550.0	-6.8	-21.8	258.4	23.5	23.0	4.7	316.2	322.2	1.9	44.7	13.7	60.0
17.0	52.0	5438.9	525.0	-9.7	-22.3	259.0	27.2	26.7	5.2	317.9	320.9	1.2	34.7	15.5	65.0
18.2	55.0	5813.0	500.0	-13.1	-24.7	262.2	27.6	27.3	3.7	317.1	319.5	0.7	25.4	17.4	68.0
19.6	58.0	6202.7	475.0	-14.3	-26.3	258.8	26.9	26.4	5.2	320.2	321.5	0.4	13.4	19.4	68.0
20.9	61.1	6610.9	450.0	-17.0	-28.3	252.4	25.3	24.1	7.7	321.8	322.9	0.3	13.7	21.5	67.0
22.2	64.6	7036.9	425.0	-20.6	-30.6	253.7	26.0	25.0	7.3	322.5	323.4	0.2	14.1	23.6	67.0
23.7	67.7	7481.8	400.0	-24.4	-33.9	258.8	26.1	25.6	5.1	323.2	323.9	0.2	14.5	25.8	68.0
25.4	71.1	7948.7	375.0	-28.0	-38.5	263.9	24.9	24.7	2.6	324.5	325.1	0.2	14.5	28.4	69.0
26.9	74.3	8435.9	350.0	-32.1	-43.7	268.8	24.4	24.3	2.4	325.3	325.8	0.1	15.4	30.6	70.0
28.6	78.8	8958.5	325.0	-36.4	-49.0	267.8	29.0	29.0	1.1	326.5	326.8	0.1	15.8	33.5	75.0
30.4	82.7	9509.5	300.0	-40.3	-53.0	267.0	27.4	27.3	1.4	328.5	329.9	0.9	99.9	36.2	71.0
32.3	86.7	10096.4	275.0	-45.2	-58.3	271.4	26.7	26.7	-0.6	329.8	329.9	99.9	99.9	39.3	74.0
34.5	91.2	10725.7	250.0	-50.0	-63.0	268.8	31.4	31.4	0.6	331.7	329.9	99.9	99.9	43.0	76.0
36.7	95.9	11406.4	225.0	-55.5	-67.7	269.1	33.4	33.4	0.6	333.5	329.9	99.9	99.9	47.1	77.0
39.1	100.8	12147.9	200.0	-60.7	-72.6	267.6	33.3	33.3	1.4	336.7	329.9	99.9	99.9	51.8	78.0
41.9	106.5	12973.2	175.0	-63.0	-76.0	270.0	37.6	37.6	0.0	340.0	329.9	99.9	99.9	57.2	78.0
44.9	112.5	13923.7	150.0	-62.0	-79.9	268.8	31.8	31.7	2.3	343.2	329.9	99.9	99.9	63.4	80.0
48.7	119.3	15052.4	125.0	-61.7	-83.9	268.1	41.4	41.2	4.2	343.4	329.9	99.9	99.9	71.3	82.0
53.2	127.3	16430.3	100.0	-62.0	-87.9	272.7	25.4	25.4	-1.2	408.1	329.9	99.9	99.9	74.6	81.0
58.1	136.0	18186.7	75.0	-66.0	-91.9	257.6	8.3	8.1	1.8	434.6	329.9	99.9	99.9	83.7	81.0
65.7	145.3	20700.1	50.0	-57.7	-95.9	336.8	2.4	0.9	-2.2	507.6	329.9	99.9	99.9	87.0	81.0
77.0	155.5	23147.3	25.0	-50.5	-98.9	301.5	3.9	3.3	-2.0	639.7	329.9	99.9	99.9	89.3	83.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 349
MONETTE, MO24 APRIL 1975
2100 GMT

TIME M/N	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	0.3	434.0	958.7	24.6	18.1	170.0	6.7	-1.2	6.6	303.2	340.2	13.8	67.0	160	0
00.0	00.0	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0
00.0	00.0	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0
0.3	5.2	517.8	950.0	22.1	15.4	171.8	7.0	-1.0	6.9	301.2	332.5	11.7	65.9	99.9	0
1.3	11.4	749.9	925.0	19.6	14.2	182.6	8.3	0.4	8.2	300.9	330.7	11.1	70.9	0.2	34.4
2.2	12.5	984.7	900.0	18.0	14.0	192.7	10.7	2.4	10.5	301.6	331.9	11.3	77.1	1.1	15.9
3.0	16.1	1225.9	875.0	16.5	14.0	210.1	14.0	7.0	12.1	302.4	333.8	11.6	85.4	1.6	7
3.9	18.6	1472.6	850.0	14.9	11.7	228.9	14.0	10.6	5.2	303.1	331.0	10.2	81.4	2.3	17
4.9	21.0	1725.5	825.0	14.8	6.2	248.2	14.0	14.9	5.9	305.2	325.5	7.2	56.4	3.1	29
5.6	23.6	1996.2	800.0	15.5	-8.8	260.8	16.6	16.4	2.7	308.0	316.6	2.9	20.9	3.5	16
6.5	26.0	2254.5	775.0	14.0	-8.6	261.6	17.6	17.4	2.6	309.2	317.0	2.6	20.0	4.2	45
7.5	28.7	2525.7	750.0	11.7	-9.7	258.4	17.3	17.0	3.2	309.6	317.0	2.4	21.3	5.1	52
8.4	31.3	2811.7	725.0	9.2	-11.5	256.1	17.3	16.8	4.2	309.8	316.5	2.2	21.7	6.0	56
9.6	34.1	3100.9	700.0	6.6	-13.7	253.6	20.0	19.2	5.6	310.0	315.9	1.9	21.9	7.2	59
10.6	36.5	3379.9	675.0	4.2	-15.6	254.5	20.0	19.5	4.7	310.5	315.7	1.7	22.0	8.5	61
11.9	39.4	3703.5	650.0	1.6	-17.4	251.1	19.8	19.3	4.4	310.9	315.6	1.5	22.7	9.8	64
12.0	42.2	4017.4	625.0	-1.2	-17.9	250.8	20.3	19.8	4.6	311.3	316.0	1.5	26.7	11.0	65
14.0	45.2	4341.7	600.0	-3.7	-19.5	250.1	22.9	21.5	7.8	311.9	316.3	1.4	28.1	12.5	66
15.2	48.3	4676.2	575.0	-6.4	-23.0	251.2	25.0	23.6	8.1	312.7	316.3	1.1	27.5	14.2	67
16.5	51.1	5021.9	550.0	-9.4	-26.3	254.4	28.9	27.8	7.9	313.1	316.5	1.1	31.1	16.4	68
17.9	54.3	5380.3	525.0	-11.4	-28.1	258.3	30.4	29.6	7.2	314.8	317.6	0.9	28.3	18.8	68
19.3	57.4	5752.9	500.0	-13.7	-29.2	258.1	33.0	32.3	6.8	316.3	318.6	0.7	25.6	21.4	70
20.7	60.7	6140.7	475.0	-15.9	-33.0	257.5	32.0	31.2	6.9	318.3	320.0	0.5	21.2	24.2	71
22.2	64.3	6547.2	450.0	-17.8	-38.6	256.6	31.6	30.7	7.3	320.9	322.4	0.4	21.3	27.0	71
23.8	67.7	6971.6	425.0	-21.6	-38.5	255.8	31.9	30.9	7.8	321.3	322.7	0.4	24.5	29.9	72
25.4	71.2	7415.3	400.0	-25.2	-39.0	257.7	30.6	29.9	6.5	322.3	323.4	0.3	26.0	32.9	72
27.1	75.0	7880.0	375.0	-29.2	-33.9	259.7	32.5	31.9	5.8	323.0	325.0	0.6	63.4	36.1	73
28.9	79.2	8369.2	350.0	-33.2	-37.0	259.9	32.9	31.9	8.0	324.0	325.5	0.4	68.0	39.6	73
30.5	83.0	8845.6	325.0	-37.5	-41.9	258.2	30.9	29.8	8.4	325.0	326.0	0.3	62.6	43.0	73
32.8	87.2	9432.2	300.0	-42.6	99.9	249.4	32.8	30.7	11.5	325.3	329.9	99.9	99.9	47.5	73
34.9	91.8	10013.6	275.0	-47.5	99.9	253.0	37.1	35.4	10.8	326.5	329.9	99.9	99.9	51.9	73
37.2	96.6	10717.1	250.0	-51.8	99.9	258.9	34.2	33.6	6.6	329.1	329.9	99.9	99.9	56.6	73
39.5	101.6	11313.1	225.0	-56.2	99.9	259.1	39.2	38.5	7.4	332.4	329.9	99.9	99.9	61.6	74
42.0	107.3	12052.8	200.0	-61.1	99.9	259.0	39.4	38.7	7.5	336.1	329.9	99.9	99.9	67.9	74
44.9	113.3	12875.7	175.0	-63.9	99.9	261.3	45.3	44.8	6.9	344.5	329.9	99.9	99.9	73.9	75
49.3	119.8	13829.8	150.0	-59.8	99.9	261.4	36.9	36.5	5.5	367.2	329.9	99.9	99.9	82.8	75
52.1	127.0	14967.9	125.0	-60.4	99.9	268.1	22.8	22.7	2.3	365.6	329.9	99.9	99.9	86.6	76
56.7	135.3	16355.4	100.0	-62.1	99.9	258.9	20.4	27.9	5.5	407.8	329.9	99.9	99.9	97.7	76
62.6	143.3	18145.1	75.0	-64.5	99.9	265.3	16.9	16.4	1.4	437.7	329.9	99.9	99.9	101.9	77
71.0	173.0	23661.7	50.0	-56.8	99.9	51.4	4.8	-3.7	-3.0	509.8	999.9	99.9	99.9	105.1	78
83.4	183.0	25102.6	25.0	-50.9	99.9	282.9	4.9	4.8	-1.1	638.2	999.9	99.9	99.9	108.4	79

* BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 363
ANARILLO, TEX24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP OG C	DEW PT OG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	14.7	1095.0	886.6	25.4	-5.0	250.0	5.1	4.8	1.7	309.4	318.4	3.0	13.0	0.0	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	15.7	1210.6	875.0	25.1	-6.1	266.1	4.6	4.6	0.3	310.2	318.6	2.8	12.3	0.2	71.0
0.0	16.0	1462.7	850.0	21.8	-6.3	272.1	4.1	4.1	-0.1	309.4	317.9	2.8	14.6	0.3	76.0
1.4	20.4	1720.6	825.0	20.1	-7.6	283.1	4.2	4.1	-0.9	310.2	318.1	2.6	14.7	0.4	83.0
1.9	22.7	1983.7	800.0	16.8	-8.9	293.2	4.3	4.2	-1.0	309.4	316.8	2.4	16.2	0.5	89.0
2.6	25.3	2252.4	775.0	13.8	-8.0	275.2	4.6	4.5	-0.4	309.4	317.2	2.7	21.2	0.7	91.0
3.5	27.7	2526.7	750.0	10.4	-8.7	266.6	4.4	4.2	-1.3	308.2	316.2	2.6	25.1	0.9	93.0
4.4	30.3	2807.4	725.0	7.5	-8.4	300.1	3.9	3.4	-1.9	308.0	315.8	2.6	28.8	1.2	97.0
5.6	34.0	3094.7	700.0	4.7	-10.3	300.7	5.0	4.3	-2.6	308.0	315.5	2.5	32.7	1.5	102.0
6.8	35.6	3365.8	675.0	2.2	-11.0	293.3	6.4	5.8	-2.5	308.4	315.7	2.4	36.8	1.9	105.0
7.8	38.4	3693.3	650.0	-0.2	-13.1	279.6	6.0	5.9	-1.0	309.0	315.6	2.2	37.0	2.3	106.0
8.9	41.1	4005.5	625.0	-2.9	-15.7	265.3	6.7	6.7	0.4	309.3	314.9	1.8	36.5	2.7	108.0
10.1	44.0	4327.2	600.0	-5.6	-20.8	260.9	9.3	9.2	1.5	309.8	313.6	1.2	28.8	3.2	100.0
11.3	47.1	4660.7	575.0	-8.0	-28.0	260.3	12.9	12.7	2.2	313.0	315.2	0.7	15.5	3.9	96.0
12.5	50.3	5037.6	550.0	-7.9	-30.3	257.3	15.6	15.4	3.5	314.7	316.6	0.6	14.4	5.0	93.0
13.7	53.3	5367.4	525.0	-10.4	-31.0	251.2	18.7	17.7	6.0	315.9	317.8	0.5	16.6	6.1	89.0
14.9	56.4	5741.2	500.0	-13.3	-32.5	249.0	22.3	20.8	8.0	316.9	320.1	1.0	36.5	7.6	85.0
16.2	59.5	6129.8	475.0	-15.7	-32.1	246.7	28.4	26.5	10.3	319.7	323.1	1.4	57.6	9.3	82.0
17.6	63.3	6515.3	450.0	-18.8	-29.7	244.6	30.2	27.3	13.0	319.6	323.4	1.1	59.4	11.9	79.0
19.1	68.9	6958.8	425.0	-22.1	-27.7	243.3	30.3	27.1	13.6	320.7	323.8	0.9	60.4	14.6	76.0
20.5	70.8	7401.7	400.0	-25.8	-31.0	241.2	32.3	28.3	15.6	321.5	323.9	0.7	61.6	17.2	74.0
22.1	74.5	7866.2	375.0	-29.2	-36.1	244.3	35.8	32.3	15.5	322.9	324.5	0.5	50.9	20.3	72.0
23.0	76.8	8354.9	350.0	-33.6	-39.9	248.0	37.3	34.6	14.0	323.4	324.6	0.3	52.3	24.4	71.0
25.6	83.0	8870.1	325.0	-38.1	-44.1	246.4	37.3	34.1	14.9	324.0	324.9	0.2	53.2	27.9	71.0
27.2	87.2	9415.9	300.0	-42.8	-48.9	245.1	39.1	35.5	16.5	325.1	325.9	99.9	99.9	31.6	70.0
29.4	92.2	9968.7	275.0	-46.5	-54.5	244.4	41.6	37.5	18.0	327.9	327.9	99.9	99.9	37.0	69.0
31.4	97.2	10626.2	250.0	-50.4	-59.9	249.2	42.9	40.1	15.2	331.1	331.1	99.9	99.9	42.2	67.0
33.6	102.5	11306.6	225.0	-54.7	-64.3	250.8	44.2	43.4	8.6	336.7	336.7	99.9	99.9	47.1	70.0
35.1	108.5	12053.1	200.0	-58.8	-69.9	254.3	30.6	28.4	8.2	339.6	339.6	99.9	99.9	52.3	70.0
38.9	114.8	12886.3	175.0	-59.4	-74.9	259.9	31.1	30.6	5.4	351.8	351.8	99.9	99.9	59.7	71.0
42.1	121.7	13854.5	150.0	-57.9	-79.9	261.0	33.0	32.6	5.2	370.3	370.3	99.9	99.9	66.7	72.0
46.0	128.3	15001.7	125.0	-58.8	-84.9	261.4	25.1	25.8	3.8	388.6	388.6	99.9	99.9	74.0	72.0
50.4	137.3	16356.2	100.0	-61.7	-89.9	266.7	28.1	25.4	0.0	408.5	408.5	99.9	99.9	81.2	73.0
55.6	145.0	18173.9	7.0	-60.8	-94.9	268.1	27.5	27.5	0.9	445.6	445.6	99.9	99.9	90.1	74.0
63.3	154.0	20653.5	5.0	-57.3	-99.9	123.5	6.3	-5.3	3.5	508.4	508.4	99.9	99.9	92.6	74.0
75.2	163.0	25161.7	25.0	-49.2	-99.9	265.6	14.5	14.5	1.1	643.2	643.2	99.9	99.9	97.5	74.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 14
 OF POOR QUALITY

ORIGINAL PAGE IS

STATION NC. 402
WALLOPS ISLAND, VA24 APRIL 1975
2055 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PQT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	156 RM	16.0 RM	0 AZ
0.0	4.8	4.0	1012.2	14.4	10.6	955.9	99.9	99.9	59.9	287.6	308.2	8.0	78.0	99.9	9.9	9.9
0.4	5.9	107.4	1000.0	17.8	12.2	959.9	99.9	99.9	59.9	292.2	315.8	9.0	69.7	99.9	9.9	9.9
1.3	P.0	325.7	975.0	21.1	12.3	999.9	99.9	99.9	59.9	297.7	323.4	9.6	59.4	99.9	9.9	9.9
2.3	10.1	550.1	950.0	19.2	11.7	959.9	99.9	99.9	59.9	297.9	321.4	9.1	61.6	99.9	9.9	9.9
3.2	12.2	778.9	925.0	17.1	10.5	999.9	99.9	99.9	59.9	298.0	321.2	8.7	65.0	99.9	9.9	9.9
4.1	14.4	1012.4	900.0	15.3	9.7	999.9	99.9	99.9	59.9	298.5	321.2	8.5	69.1	99.9	9.9	9.9
5.1	16.5	1250.9	875.0	13.5	8.8	999.9	99.9	99.9	59.9	298.9	321.0	8.2	72.9	99.9	9.9	9.9
6.3	18.4	1454.8	850.0	12.1	7.0	959.9	99.9	99.9	59.9	299.8	320.1	7.4	71.3	99.9	9.9	9.9
7.3	21.3	1745.3	825.0	12.9	3.9	999.9	99.9	99.9	59.9	303.0	320.3	6.2	54.2	99.9	9.9	9.9
8.2	23.4	2003.8	800.0	11.8	3.0	999.9	99.9	99.9	59.9	304.6	321.4	6.0	54.7	99.9	9.9	9.9
9.1	25.7	2268.9	775.0	9.6	2.2	999.9	99.9	99.9	59.9	304.9	321.3	5.8	59.7	99.9	9.9	9.9
10.2	28.1	2540.2	750.0	7.3	1.3	959.9	99.9	99.9	59.9	305.2	321.2	5.6	65.5	99.9	9.9	9.9
11.4	30.7	2818.6	725.0	5.0	1.8	999.9	99.9	99.9	59.9	305.8	322.8	6.0	79.4	99.9	9.9	9.9
12.6	33.3	3104.2	700.0	2.5	1.7	999.9	99.9	99.9	59.9	306.0	323.6	6.2	94.4	99.9	9.9	9.9
13.8	35.3	3337.6	675.0	-0.1	-0.8	999.9	99.9	99.9	59.9	306.2	323.6	5.4	95.1	99.9	9.9	9.9
15.1	38.6	3609.3	650.0	-0.7	-2.5	999.9	99.9	99.9	59.9	308.2	323.0	4.9	87.4	99.9	9.9	9.9
16.3	41.1	4012.3	625.0	-2.5	-4.3	999.9	99.9	99.9	59.9	310.2	323.5	4.6	89.2	99.9	9.9	9.9
17.6	44.3	4335.1	600.0	-4.8	-6.3	999.9	99.9	99.9	59.9	311.0	323.8	4.0	89.1	99.9	9.9	9.9
18.9	47.3	4669.4	575.0	-6.5	-7.8	999.9	99.9	99.9	59.9	312.8	324.0	3.7	90.3	99.9	9.9	9.9
20.0	50.3	5015.9	550.0	-8.7	-11.9	999.9	99.9	99.9	59.9	314.1	322.8	2.8	78.3	99.9	9.9	9.9
21.4	52.9	5375.3	525.0	-13.7	-20.0	999.9	99.9	99.9	59.9	315.8	323.5	1.5	46.2	99.9	9.9	9.9
23.0	55.9	5745.7	500.0	-12.2	-21.6	999.9	99.9	99.9	59.9	318.3	322.7	1.4	45.4	99.9	9.9	9.9
24.5	58.3	6139.8	475.0	-14.7	-40.4	999.9	99.9	99.9	59.9	319.7	320.6	0.2	9.0	99.9	9.9	9.9
25.9	62.6	6546.6	450.0	-18.1	-41.0	999.9	99.9	99.9	59.9	320.5	321.3	0.2	11.3	99.9	9.9	9.9
27.4	66.0	6970.6	425.0	-21.3	-39.3	999.9	99.9	99.9	59.9	321.6	322.7	0.3	17.8	99.9	9.9	9.9
29.0	69.7	7414.8	400.0	-25.1	-30.6	999.9	99.9	99.9	59.9	322.4	323.0	0.7	59.7	99.9	9.9	9.9
30.8	73.3	7880.6	375.0	-28.5	-41.8	999.9	99.9	99.9	59.9	323.8	324.7	0.3	26.5	99.9	9.9	9.9
32.8	77.3	8371.1	350.0	-32.1	-42.7	999.9	99.9	99.9	59.9	325.4	326.3	0.3	34.6	99.9	9.9	9.9
35.0	81.3	8890.7	325.0	-35.9	-47.9	999.9	99.9	99.9	59.9	327.1	327.7	0.1	27.6	99.9	9.9	9.9
36.9	85.5	9418.7	300.0	-40.7	-59.9	999.9	99.9	99.9	59.9	328.0	999.9	99.9	99.9	99.9	9.9	9.9
38.4	89.2	10274.6	275.0	-45.6	-69.9	999.9	99.9	99.9	59.9	329.2	999.9	99.9	99.9	99.9	9.9	9.9
40.8	93.2	10654.5	250.0	-51.4	-54.3	999.9	99.9	99.9	59.9	329.7	999.9	99.9	99.9	99.9	9.9	9.9
43.1	100.2	11328.9	225.0	-57.7	-59.9	999.9	99.9	99.9	59.9	330.2	999.9	99.9	99.9	99.9	9.9	9.9
45.7	106.8	12361.1	200.0	-64.2	-69.9	999.9	99.9	99.9	59.9	331.1	999.9	99.9	99.9	99.9	9.9	9.9
49.5	111.7	12974.1	175.0	-65.7	-69.9	999.9	99.9	99.9	59.9	331.5	999.9	99.9	99.9	99.9	9.9	9.9
51.6	118.3	13903.2	150.0	-63.2	-59.9	999.9	99.9	99.9	59.9	331.3	999.9	99.9	99.9	99.9	9.9	9.9
55.6	125.3	14941.4	125.0	-59.7	-59.9	999.9	99.9	99.9	59.9	337.0	999.9	99.9	99.9	99.9	9.9	9.9
60.2	133.3	16330.7	100.0	-60.9	-69.9	999.9	99.9	99.9	59.9	410.0	999.9	99.9	99.9	99.9	9.9	9.9
66.1	140.7	19056.9	75.0	-66.3	-69.9	999.9	99.9	99.9	59.9	433.9	999.9	99.9	99.9	99.9	9.9	9.9
74.3	148.3	22616.3	50.0	-59.4	-69.9	999.9	99.9	99.9	59.9	503.7	999.9	99.9	99.9	99.9	9.9	9.9
87.2	156.3	25047.8	25.0	-52.2	-69.9	999.9	99.9	99.9	59.9	635.1	999.9	99.9	99.9	99.9	9.9	9.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 405
STERLING, VA

24 APRIL 1975

TIME MIN	CATCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX PTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.2	85.0	999.1	23.9	12.5	220.0	6.2	4.0	4.7	298.4	323.1	9.2	49.0	0.0	0.
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	394.
0.7	8.7	256.5	975.0	23.0	12.0	204.3	12.7	5.2	11.5	299.5	324.1	9.1	50.0	0.4	29.
1.4	10.9	524.3	950.0	21.0	11.1	208.3	13.7	6.5	12.0	299.7	323.6	8.8	53.1	0.9	27.
2.0	13.4	754.5	925.0	18.9	10.4	211.1	14.2	7.4	12.2	299.8	323.2	8.6	57.9	1.5	28.
2.8	15.9	985.3	900.0	17.0	9.7	215.8	15.5	9.3	12.5	300.1	323.1	8.5	62.4	2.2	30.
3.6	18.3	1226.9	875.0	14.6	9.2	219.1	16.8	10.6	13.1	300.1	323.0	8.4	69.9	2.9	32.
4.5	20.3	1472.6	850.0	12.8	8.5	226.3	15.7	11.7	10.4	300.6	323.0	8.2	75.1	3.8	34.
5.3	23.3	1724.0	825.0	11.0	7.2	236.9	15.2	12.8	8.3	301.2	322.6	7.8	77.6	4.5	34.
6.2	25.9	1990.5	800.0	9.6	6.7	242.9	17.6	15.7	8.0	302.4	323.7	7.7	81.9	5.3	41.
6.9	28.5	2233.8	775.0	7.7	5.6	250.4	19.6	18.5	6.6	303.1	323.5	7.4	86.2	6.1	44.
7.7	31.3	2513.8	750.0	5.9	4.9	256.2	22.2	21.6	5.3	304.0	324.2	7.3	92.7	6.9	46.
8.5	34.2	2791.3	725.0	4.9	3.2	258.0	23.9	23.4	5.0	305.7	324.5	6.7	88.3	7.9	51.
9.4	36.9	3077.8	700.0	4.0	0.5	257.3	23.8	23.3	5.2	307.7	324.1	5.7	78.0	9.1	56.
10.4	39.3	3372.7	675.0	1.4	-1.0	256.3	23.1	22.4	5.5	307.9	323.2	5.3	83.8	10.1	54.
11.4	42.6	3675.9	650.0	-0.9	-3.2	258.0	25.0	24.2	6.2	308.5	323.3	5.1	92.5	11.9	61.
12.4	45.1	3986.6	625.0	-2.3	-3.2	258.0	24.6	24.3	6.9	310.4	324.5	4.8	93.4	13.3	63.
13.4	47.1	4312.4	600.0	-4.0	-4.9	257.0	25.6	25.0	7.1	312.1	325.2	4.4	93.1	14.7	64.
14.3	51.7	4647.6	575.0	-6.0	-7.2	255.1	27.8	26.9	7.1	313.4	325.0	3.9	91.7	16.1	65.
15.4	55.3	4993.8	550.0	-9.1	-11.2	253.7	26.9	25.9	7.6	313.6	322.6	2.9	84.8	18.0	66.
16.4	59.0	5353.1	525.0	-10.9	-12.0	254.9	29.2	28.2	7.6	315.7	324.6	2.9	91.1	19.6	67.
17.5	61.5	5726.8	500.0	-13.6	-16.8	256.5	30.3	29.4	7.1	318.6	323.2	2.1	77.2	21.6	68.
18.7	65.3	6114.5	475.0	-15.7	-19.6	261.8	26.1	25.4	3.7	319.8	324.2	1.7	71.4	23.6	64.
19.9	68.3	6522.0	450.0	-17.3	-21.3	265.2	21.1	23.0	1.9	321.6	325.7	1.5	70.5	25.4	70.
21.1	71.3	6948.1	425.0	-20.4	-24.7	263.6	20.0	19.9	2.2	322.9	327.0	1.2	68.3	26.4	70.
22.4	75.7	7394.3	400.0	-23.7	-27.9	265.9	22.4	22.4	1.6	324.2	327.5	1.0	68.2	28.4	71.
23.8	79.7	7862.4	375.0	-27.2	-31.5	267.3	23.4	23.4	1.1	325.6	328.1	0.7	66.4	30.2	72.
25.4	83.5	8356.0	350.0	-31.1	-36.6	270.5	29.4	29.4	-0.2	326.8	328.5	0.5	57.8	32.9	73.
27.1	87.7	8876.9	325.0	-35.4	-41.7	273.5	27.8	27.7	-2.2	327.8	328.9	0.3	52.2	35.3	75.
28.6	92.2	9428.5	300.0	-40.4	-46.9	274.3	27.0	27.0	-1.5	328.5	329.9	99.9	99.9	38.0	76.
30.5	96.5	10015.5	275.0	-45.5	-50.9	274.3	26.7	26.6	-2.0	329.3	329.9	99.9	99.9	40.9	78.
32.6	101.4	10693.3	250.0	-51.2	-56.9	276.6	24.5	24.3	-2.9	330.0	329.9	99.9	99.9	44.0	79.
34.8	106.5	11319.2	225.0	-57.1	-62.9	276.6	25.9	25.7	-3.0	331.0	329.9	99.9	99.9	47.3	80.
37.3	112.3	12052.5	200.0	-63.9	-69.9	278.3	34.3	33.9	-5.0	331.6	329.9	99.9	99.9	51.3	82.
40.2	118.9	12858.4	175.0	-70.3	-76.9	286.5	35.6	34.1	-10.1	334.0	329.9	99.9	99.9	57.0	84.
43.4	124.3	13680.5	150.0	-76.9	-82.9	287.0	21.3	21.3	1.1	334.7	329.9	99.9	99.9	61.1	85.
47.6	131.2	14930.1	125.0	-85.3	-90.9	291.9	33.8	33.8	-4.0	387.6	329.9	99.9	99.9	64.1	86.
52.3	138.8	16335.0	100.0	-91.1	-96.9	291.9	15.8	14.7	-5.0	413.5	329.9	99.9	99.9	76.0	88.
59.3	147.0	18107.3	75.0	-96.6	-101.1	304.3	13.0	10.7	-7.1	433.2	329.9	99.9	99.9	79.0	84.
67.0	155.7	20625.7	50.0	-98.6	-103.1	324.8	4.4	0.6	-4.4	505.5	329.9	99.9	99.9	91.0	90.
79.7	165.7	25099.5	25.0	-12.0	-99.9	324.8	4.8	2.4	-3.9	635.6	329.9	99.9	99.9	91.5	91.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 475
HUNTINGTON, WVA24 APRIL 1975
2040 GMT

103 169. C

TIME MIN	CATCT	HEIGHT GPN	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y UG K	E POT Y DG K	WX RTO GM/KG	BM PCT	RANGE KM	AZ DG
0.0	7.4	246.0	982.1	17.2	15.5	230.0	4.1	3.1	2.6	293.4	323.0	11.4	90.0	0.0	7.4
99.9	55.3	59.9	1300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	7.3	308.2	975.0	17.0	15.2	240.1	11.4	9.9	5.7	253.8	323.0	11.2	88.9	0.2	4.0
0.8	10.1	539.1	950.0	17.1	12.1	240.6	14.0	12.2	6.9	258.8	319.9	9.5	78.2	0.5	6.2
1.3	12.1	759.2	925.0	17.8	12.9	241.1	15.9	13.9	7.7	298.9	325.9	10.1	72.3	0.9	5.1
2.0	14.3	952.7	900.0	16.5	10.8	251.7	23.7	22.7	6.7	292.7	324.2	9.1	69.3	1.6	5.2
2.6	16.4	1217.4	875.0	15.0	9.3	256.0	26.9	25.1	6.5	305.5	323.5	8.5	68.9	2.7	5.6
3.2	18.6	1477.5	850.0	13.2	8.7	251.6	23.9	22.7	7.5	301.1	324.0	8.4	74.3	3.5	7.1
4.3	20.9	1729.1	825.0	11.2	9.2	255.5	24.3	23.5	6.1	301.6	325.9	8.9	87.7	4.9	7.1
4.7	23.2	1984.9	800.0	9.3	7.0	253.4	25.6	24.1	5.2	302.1	323.9	7.9	85.6	5.8	7.4
5.3	25.5	2248.1	775.0	7.4	6.2	258.9	25.2	24.8	4.8	302.8	324.1	7.7	92.4	6.7	7.4
6.1	28.0	2517.8	750.0	5.9	4.7	261.0	24.4	24.1	3.8	303.9	323.9	7.2	92.0	7.7	7.4
6.8	30.5	2795.4	725.0	4.4	2.0	262.7	25.1	24.9	3.2	305.0	322.3	6.1	84.6	8.7	7.1
7.7	33.1	3093.4	700.0	2.8	0.6	264.8	25.7	25.6	2.3	308.4	322.7	5.7	85.4	10.2	7.1
8.5	35.6	3375.5	675.0	1.6	0.2	268.4	25.5	25.5	1.4	308.2	324.7	5.8	90.1	11.4	7.1
9.3	38.2	3679.0	650.0	-0.3	-1.5	262.9	24.8	24.7	0.1	310.2	324.5	5.3	91.5	12.5	7.1
10.1	40.4	3952.5	625.0	-1.9	-3.7	272.9	24.7	24.7	-1.3	310.2	324.6	4.7	97.5	13.4	7.1
11.0	42.6	4315.6	600.0	-3.9	-5.5	273.1	25.8	25.7	-1.5	312.2	324.6	4.2	88.6	15.1	7.1
11.9	44.4	4651.9	575.0	-5.4	-7.1	272.2	27.2	27.2	-1.1	313.9	325.6	3.9	84.7	16.4	7.1
12.9	46.4	4999.8	550.0	-7.6	-9.3	272.2	28.0	28.0	-1.1	315.5	326.0	3.4	87.1	18.1	7.1
13.7	52.1	5311.1	525.0	-5.6	-11.5	272.5	28.5	28.5	-1.3	317.3	326.6	3.0	85.5	19.4	7.1
14.7	55.2	5736.9	500.0	-11.8	-14.0	271.3	28.7	28.7	-1.0	318.9	327.0	2.6	83.5	21.1	7.1
15.7	56.3	6124.4	475.0	-14.2	-16.7	270.8	27.4	27.4	-0.4	320.6	327.5	2.2	81.3	22.7	7.1
16.7	61.6	6537.1	450.0	-16.6	-19.4	268.7	27.9	27.9	0.6	322.5	328.4	1.8	78.9	24.4	7.1
17.4	65.0	6964.3	425.0	-19.4	-22.4	261.4	26.9	26.6	4.0	324.2	329.2	1.5	76.9	26.3	7.1
18.3	68.3	7412.9	400.0	-22.6	-25.2	258.4	26.9	26.1	6.3	325.6	329.4	1.1	72.5	27.3	7.1
19.9	71.7	7482.9	375.0	-26.4	-28.4	256.1	25.7	25.0	6.1	326.7	329.7	0.9	75.4	28.7	7.1
21.0	75.5	8378.1	350.0	-30.2	-31.6	256.4	27.8	27.0	6.4	328.1	330.1	0.6	65.0	31.4	7.1
22.2	75.3	8931.3	325.0	-34.3	-39.2	255.0	27.3	26.4	7.1	329.3	330.7	0.4	60.5	33.3	7.1
23.5	83.2	9455.5	300.0	-39.1	-43.7	251.7	27.3	26.9	8.6	330.2	331.1	0.2	61.0	35.4	7.1
24.9	87.4	10060.7	275.0	-43.6	-48.9	246.7	26.3	26.2	10.4	332.0	332.6	99.9	99.9	37.8	7.1
26.7	92.0	10678.6	250.0	-49.6	-54.9	246.9	24.1	25.8	11.0	332.3	333.9	99.9	99.9	40.5	7.1
28.1	96.3	11358.2	225.0	-56.1	-59.9	241.7	24.9	21.9	11.8	332.5	334.5	99.9	99.9	42.4	7.1
29.8	101.8	12044.6	200.0	-62.9	-67.5	250.7	24.3	22.9	8.0	333.1	335.9	99.9	99.9	44.4	7.1
31.8	107.4	12905.2	175.0	-67.5	-72.9	99.9	99.9	99.9	99.9	336.6	336.9	99.9	99.9	46.9	7.1
33.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	49.9	7.1
35.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	52.9	7.1
37.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	55.9	7.1
39.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	58.9	7.1
41.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	61.9	7.1
43.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	64.9	7.1
45.9	99.9	99.9	0.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	67.9	7.1

ORIGINAL PAGE IS
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS

STATION NO. 429
DAYTON, OHIO24 APRIL 1975
2015 GMT

TIME MIN	CNTY	HEIGHT GPA	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	8.2	578.0	975.0	18.5	15.9	205.0	1.5	0.0	1.4	295.3	326.2	11.8	45.0	0.0	0
0.6	99.9	58.9	1000.0	99.9	99.9	95.9	99.9	99.9	58.9	99.9	999.9	99.9	999.9	999.9	999.9
0.8	99.9	975.0	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.8	10.2	520.6	950.0	16.7	12.6	594.9	99.9	99.9	59.9	295.5	321.1	9.7	76.5	999.9	999.9
1.5	12.4	747.8	925.0	15.4	12.0	999.9	99.9	99.9	59.9	295.5	321.1	9.6	80.3	999.9	999.9
2.4	14.7	979.7	900.0	13.0	11.4	292.3	7.0	6.5	-3.6	296.7	319.0	9.5	60.3	6.8	105
3.4	16.5	1216.4	875.0	11.3	9.6	294.5	6.7	7.9	-3.6	296.7	319.0	8.6	69.5	1.2	105
4.2	19.3	1452.5	850.0	10.4	6.8	295.2	9.0	6.2	-3.8	298.0	317.9	7.3	78.2	1.7	108
5.3	21.3	1705.8	825.0	8.6	5.5	290.0	9.5	8.9	-3.3	298.6	317.9	6.9	80.9	2.3	109
6.2	23.6	1961.1	800.0	7.1	5.1	293.9	5.4	4.9	-2.2	299.7	318.6	6.9	86.8	2.7	109
7.2	25.9	2221.9	775.0	5.3	4.3	302.8	5.0	4.2	-2.7	300.3	318.9	6.8	93.6	3.0	110
8.3	28.4	2499.5	750.0	3.8	0.7	314.3	6.0	4.3	-4.2	301.4	314.6	5.4	104.4	3.3	112
9.3	31.0	2764.8	725.0	2.5	-1.8	318.1	7.3	4.8	-5.4	302.8	316.0	4.6	73.2	3.7	115
10.3	33.6	3046.4	700.0	1.3	-3.2	318.2	6.2	4.1	-4.6	304.5	316.9	4.3	71.8	4.1	117
11.3	36.0	3140.7	675.0	-0.3	-5.6	310.4	5.8	4.4	-3.8	305.8	316.7	3.7	67.2	4.4	119
12.3	38.7	3642.1	650.0	-2.1	-6.9	278.1	8.4	6.3	-1.2	307.1	317.4	3.5	69.3	4.8	119
13.4	41.3	3953.2	625.0	-3.4	-6.9	259.6	15.3	15.1	2.8	309.0	319.9	3.7	76.9	5.4	115
14.4	44.1	4275.9	600.0	-4.4	-7.0	256.0	20.4	19.8	4.9	311.4	322.7	3.8	12.5	6.4	128
15.7	47.3	4610.1	575.0	-6.8	-9.0	256.3	23.4	22.7	5.5	312.5	323.4	3.6	90.9	7.8	128
17.0	50.0	4958.3	550.0	-9.0	-11.2	256.6	24.4	23.9	5.7	313.8	322.8	3.0	84.1	9.6	97
18.1	52.9	5315.6	525.0	-10.5	-19.0	260.2	27.3	26.9	4.6	315.9	321.1	1.6	49.9	11.3	94
19.2	55.9	5691.2	500.0	-11.0	-35.8	266.9	27.0	27.0	-0.9	319.6	320.9	0.4	11.1	13.0	72
20.6	58.0	6082.8	475.0	-14.0	-50.2	272.0	27.0	27.0	-0.9	320.6	320.9	0.1	2.9	15.3	42
22.1	62.3	6491.0	450.0	-16.9	-48.0	273.4	26.8	26.8	-1.6	321.9	322.3	0.1	4.7	17.7	32
23.7	65.7	6917.9	425.0	-20.3	-39.5	268.2	29.1	29.1	0.9	323.0	324.0	0.3	16.1	20.4	92
25.3	69.1	7363.8	400.0	-23.6	-33.6	263.0	31.3	31.1	3.8	324.3	326.3	0.6	35.1	23.5	71
27.1	72.5	7832.7	375.0	-26.9	-40.2	259.4	28.7	28.2	5.3	325.9	327.0	0.3	26.8	26.5	30
28.4	75.3	8326.3	350.0	-30.8	-41.3	256.4	30.8	29.9	7.2	327.2	329.3	0.3	35.4	29.5	44
30.5	80.3	8847.7	325.0	-35.3	-42.7	253.1	33.8	32.3	9.8	328.0	329.0	0.3	46.2	32.7	47
32.4	84.3	9400.5	300.0	-39.3	-48.8	250.1	35.0	32.9	11.9	329.9	330.5	0.1	35.1	34.5	46
34.5	88.5	9900.0	275.0	-44.4	-59.9	244.2	34.8	31.3	15.1	330.9	330.9	99.9	999.9	45.6	84
36.7	93.2	10421.2	250.0	-49.6	-59.9	239.4	33.8	29.1	17.2	332.3	333.3	99.9	999.9	48.5	42
39.3	98.3	11032.8	225.0	-55.0	-99.9	229.4	29.4	22.3	19.1	334.2	334.2	99.9	999.9	49.4	74
41.8	103.2	12044.7	200.0	-61.1	-99.9	221.9	34.0	30.0	18.0	336.1	336.1	99.9	999.9	53.5	77
44.4	109.0	12864.2	175.0	-64.3	-99.9	265.5	30.2	30.1	2.4	343.9	343.9	99.9	999.9	59.6	77
47.6	115.2	13803.4	150.0	-64.3	-99.9	266.5	27.6	27.0	1.7	359.4	359.4	99.9	999.9	64.1	77
51.4	122.3	14941.6	125.0	-56.2	-99.9	265.9	29.4	29.3	2.1	393.3	393.3	99.9	999.9	71.1	78
56.0	129.2	16345.7	100.0	-56.8	-99.9	266.4	23.7	23.7	1.5	414.1	414.1	99.9	999.9	78.4	79
61.8	137.3	18146.6	75.0	-60.8	-99.9	269.5	5.9	5.9	0.1	445.4	445.4	99.9	999.9	83.7	79
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 433
SALEM, ILL24 APRIL 1975
2033 GMT

159 240 0

TIME MIN	CNTCT	WEIGHT GFM	PRES WG	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTD GM/KG	EM PCT	RANGE KM	AZ CG
0.0	5.5	175.0	991.0	20.7	14.4	110.0	3.1	-2.9	1.1	296.0	323.6	10.5	67.0	0.0	0
00.9	50.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	6.5	315.6	975.0	19.3	11.2	208.0	1.3	0.6	1.2	295.7	318.7	8.6	55.5	0.1	2.4
1.2	8.9	539.5	950.0	17.3	10.9	196.3	0.4	-0.4	0.1	295.9	318.9	8.7	66.3	0.1	2.4
2.1	10.8	765.9	925.0	15.4	10.7	20.4	1.1	-0.4	-1.0	296.2	318.6	8.4	70.2	0.1	2.4
2.8	13.0	967.8	900.0	13.9	8.0	12.2	3.3	-0.7	-3.2	296.8	317.1	7.5	67.8	0.1	2.4
3.6	15.2	1239.9	875.0	11.6	6.2	358.7	5.1	0.1	-5.1	296.7	315.3	6.8	69.5	0.3	2.4
4.3	17.4	1477.2	850.0	11.0	4.8	323.9	5.1	3.0	-4.1	298.5	315.9	6.4	65.6	0.5	1.3
5.2	19.7	1726.3	825.0	10.2	2.5	289.4	7.7	7.3	-2.6	300.1	315.6	5.6	58.7	0.6	1.3
6.0	21.9	1962.1	800.0	9.8	0.7	278.9	12.0	12.5	-2.0	302.3	316.6	5.1	53.1	1.0	1.3
6.9	24.3	2245.7	775.0	9.0	-1.3	272.9	18.7	18.7	-1.0	304.0	317.0	4.5	44.6	1.7	1.3
7.7	26.6	2517.1	750.0	8.6	-6.7	271.3	21.9	21.9	-0.9	306.3	315.5	3.1	33.0	2.7	1.3
8.4	28.1	2716.8	725.0	7.4	-14.5	272.4	22.5	22.5	-1.1	307.9	313.3	1.8	20.0	3.9	1.3
9.5	31.7	3094.6	700.0	5.4	-16.8	274.4	23.7	23.6	-1.8	309.1	313.7	1.5	17.9	5.2	1.3
10.0	34.3	3361.1	675.0	3.8	-18.0	274.0	25.7	25.7	-1.0	310.1	314.4	1.4	18.4	6.7	1.3
11.5	36.8	3686.1	650.0	1.0	-20.2	274.3	25.4	25.4	-1.9	310.2	314.0	1.2	18.7	8.2	1.3
12.5	39.6	3969.9	625.0	-1.4	-21.6	275.5	24.3	24.2	-2.4	310.9	314.4	1.1	19.6	9.6	1.3
13.6	42.2	4323.4	600.0	-4.2	-23.1	276.7	24.4	24.2	-2.9	311.3	314.5	1.0	21.2	11.1	1.3
14.4	45.1	4656.9	575.0	-7.3	-23.2	277.5	24.4	24.4	-3.2	311.5	314.8	1.0	26.7	14.4	1.3
15.5	48.0	5011.3	550.0	-9.7	-22.0	276.7	25.9	25.6	-3.9	312.7	314.5	1.2	35.5	16.3	1.3
16.7	50.3	5300.8	525.0	-10.2	-31.3	275.5	26.6	26.2	-4.4	316.2	319.0	0.5	15.8	15.9	1.3
17.9	52.3	5734.3	500.0	-12.8	-36.9	275.3	30.2	30.0	-2.8	317.4	318.5	0.3	11.1	17.9	1.3
19.3	57.0	6124.5	475.0	-14.9	-35.4	265.7	33.8	33.7	2.5	319.5	320.9	0.4	15.3	20.4	1.3
20.6	60.4	6531.0	450.0	-16.5	-36.2	264.0	34.8	34.6	3.6	320.0	321.3	0.4	19.1	23.3	1.3
22.0	64.0	6954.0	425.0	-22.5	-39.9	265.3	36.3	36.2	3.0	320.1	321.1	0.3	19.9	26.1	1.3
23.4	67.3	7395.8	400.0	-26.4	-39.5	263.7	35.2	34.9	4.3	320.7	321.9	0.3	31.4	29.1	1.3
24.7	70.9	7859.4	375.0	-29.5	-36.1	262.4	33.3	33.1	4.1	322.5	324.1	0.5	52.5	31.9	1.3
26.4	74.7	8248.3	350.0	-33.2	-40.0	268.9	38.5	38.5	0.8	323.9	325.1	0.3	49.9	35.1	1.3
28.0	78.9	8646.6	325.0	-37.2	-43.9	269.0	39.4	39.8	0.7	325.3	326.2	0.2	49.9	36.0	1.3
29.7	83.0	9411.9	300.0	-40.7	99.9	266.9	41.1	41.0	2.3	325.7	326.9	99.9	99.9	47.3	1.3
31.7	87.2	9902.8	275.0	-46.7	99.9	264.9	42.8	42.6	3.8	327.5	328.9	99.9	99.9	49.9	1.3
33.8	92.0	10621.1	250.0	-51.0	99.9	266.8	40.5	40.4	2.3	330.2	330.9	99.9	99.9	53.2	1.3
36.2	97.0	11310.4	225.0	-55.4	59.9	262.2	38.9	38.6	5.3	331.6	332.9	99.9	99.9	56.7	1.3
39.8	102.5	12043.5	200.0	-60.2	59.9	254.3	39.3	37.8	10.6	337.4	338.9	99.9	99.9	65.0	1.3
43.6	108.5	12868.4	175.0	-63.5	99.9	253.4	32.6	31.3	9.3	345.1	345.9	99.9	99.9	70.7	1.3
48.7	115.9	13824.5	150.0	-68.2	59.9	267.7	30.3	30.3	1.2	369.7	369.9	99.9	99.9	77.7	1.3
48.8	122.7	14969.7	125.0	-69.1	99.9	257.4	27.3	26.6	6.0	382.0	382.9	99.9	99.9	83.9	1.3
53.5	131.0	16268.5	100.0	-57.6	99.9	263.0	17.9	17.4	-4.0	416.5	416.9	99.9	99.9	92.5	1.3
58.4	140.5	18159.7	75.0	-61.2	59.9	259.4	12.7	12.5	2.3	444.5	444.9	99.9	99.9	97.3	1.3
67.5	151.5	20459.6	50.0	-57.2	99.9	262.1	1.7	1.7	-0.4	508.7	508.9	99.9	99.9	101.3	1.3
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
* BY PT SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS

STATION NO. 451
DODGE CITY, KAN24 APRIL 1975
2015 GMT

156 22. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MR	TEMP CG C	DEW PT CG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WX RTO CM/SEC	RM PCT	RANGE KM	AZ DG
0.0	13.7	791.0	920.4	21.7	12.0	20.0	0.2	-2.6	-7.7	303.2	329.6	9.6	54.0	0.0	7.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.3	99.3	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.4	13.7	924.1	906.0	17.9	9.9	20.3	11.2	-3.9	-10.5	301.1	324.4	8.5	55.4	0.5	19.
1.8	18.1	1224.1	875.0	15.1	8.8	23.3	8.3	-3.3	-7.6	300.5	322.8	8.2	66.3	1.2	21.
3.0	20.6	1469.4	850.0	13.3	9.4	28.1	9.9	-4.7	-8.7	301.2	325.0	8.7	77.2	1.7	20.
3.3	23.2	1720.1	825.0	11.0	9.2	27.5	9.1	-4.2	-8.0	301.5	325.8	8.9	88.6	2.3	27.
4.4	25.7	1576.9	800.0	9.4	8.4	45.9	5.5	-4.2	-3.6	302.3	326.1	8.7	93.1	2.7	20.
5.7	28.3	2240.2	775.0	7.8	6.9	74.1	5.7	-5.5	-1.6	303.3	325.6	8.1	93.8	2.9	20.
6.6	29.2	2510.3	750.0	5.8	3.2	121.6	1.9	-1.7	1.0	303.8	322.3	6.6	84.6	3.0	21.
7.8	30.3	2787.3	725.0	4.2	-5.2	219.2	5.0	3.2	3.9	305.8	317.3	3.6	43.5	2.8	21.
9.0	35.7	3074.0	700.0	4.3	-22.8	226.3	7.1	5.1	4.9	307.4	310.2	0.9	11.7	2.4	21.
9.9	36.6	3168.4	675.0	1.8	-23.7	231.8	7.0	5.5	4.3	307.7	310.4	0.8	13.0	2.0	20.
11.1	42.3	3071.4	650.0	-0.4	-24.5	254.4	7.4	7.1	2.0	308.6	311.2	0.8	14.0	1.4	12.
12.3	45.3	3983.3	625.0	-3.3	-23.5	250.0	9.5	6.9	3.2	309.8	311.8	0.9	19.0	1.4	17.
13.5	48.4	4304.6	600.0	-5.8	-21.5	252.1	9.7	9.2	3.0	309.6	313.2	1.1	27.6	1.3	14.
14.9	51.4	4834.4	575.0	-8.5	-20.0	270.1	14.3	14.3	-0.0	310.2	314.4	1.4	38.8	1.2	12.
16.2	54.6	4974.6	550.0	-11.1	-23.8	261.2	11.3	11.6	1.8	310.9	313.7	0.9	28.7	3.2	10.
17.6	57.9	5235.5	525.0	-12.8	-38.4	251.1	14.8	15.0	4.8	313.0	313.9	0.3	9.6	3.3	10.
19.2	61.1	5705.8	400.0	-15.4	-37.5	257.9	17.6	17.2	3.7	315.3	315.3	0.3	13.0	5.3	7.
20.6	64.6	6091.4	475.0	-17.8	-43.2	263.6	19.0	18.8	2.1	316.0	316.6	0.2	8.7	6.9	7.
22.1	69.9	4593.5	450.0	-21.0	-48.0	263.5	18.8	18.7	2.1	316.8	317.2	0.1	6.7	8.5	4.
23.5	71.4	6512.5	425.0	-24.9	-55.1	265.8	18.7	18.6	1.4	317.1	317.3	0.1	4.3	10.1	4.
25.1	75.3	7350.1	400.0	-28.5	-68.2	268.3	19.1	19.1	0.6	317.9	317.9	0.0	1.0	11.7	4.
26.7	79.3	7809.7	375.0	-32.6	-70.9	259.3	22.7	22.3	4.2	318.4	318.5	0.0	1.0	13.0	4.
28.4	83.0	4292.2	350.0	-35.5	-72.4	253.5	29.4	28.2	6.4	320.8	320.8	0.0	1.1	16.4	5.
30.3	87.2	6103.6	325.0	-39.8	99.9	247.1	33.6	30.9	13.1	321.8	999.9	99.9	999.9	20.0	4.
32.1	91.5	9346.0	300.0	-43.9	99.9	244.9	37.8	34.2	16.1	323.5	999.9	99.9	999.9	23.0	4.
34.3	95.2	9824.4	275.0	-48.3	99.9	238.6	44.4	37.9	23.1	325.3	999.9	99.9	999.9	29.1	7.
36.4	100.8	10549.7	250.0	-52.2	99.9	244.8	49.2	44.5	20.9	328.4	999.9	99.9	999.9	34.6	7.
38.8	106.2	11221.7	225.0	-55.8	99.9	247.2	45.3	41.8	17.6	332.8	999.9	99.9	999.9	41.4	7.
41.1	111.9	11567.7	200.0	-57.2	99.9	246.5	46.0	42.1	18.3	342.2	999.9	99.9	999.9	47.3	7.
43.9	117.8	12815.7	175.0	-55.2	99.9	252.9	33.0	31.6	9.7	358.9	999.9	99.9	999.9	53.5	7.
46.9	125.7	13752.9	150.0	-56.4	99.9	259.0	32.6	30.1	6.2	372.9	999.9	99.9	999.9	59.3	7.
50.3	131.7	14548.4	125.0	-56.7	99.9	260.0	31.2	30.8	5.4	392.3	999.9	99.9	999.9	65.8	7.
54.7	139.5	16362.9	100.0	-57.7	99.9	241.4	21.7	19.1	10.4	416.2	999.9	99.9	999.9	72.2	7.
60.1	147.5	19167.6	75.0	-57.5	99.9	267.5	12.7	12.7	0.6	452.4	999.9	99.9	999.9	79.3	7.
67.6	156.7	20715.4	50.0	-56.1	99.9	281.0	8.9	8.8	-1.7	511.3	999.9	99.9	999.9	93.6	7.
80.0	166.7	25212.5	25.0	-49.6	99.9	999.9	99.9	99.9	99.9	642.6	999.9	99.9	999.9	996.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 456
TOPEKA, KAN24 APRIL 1975
2050 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MR RTC CM/KG	RH PCT	RANGF KM	AZ DG
0-0	6-4	264-0	978-5	20-6	18-4	20-0	2-6	-0-9	-2-4	297-4	333-4	13-7	87-9	0-9	0-0
0-9	96-3	58-9	1000-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
0-0	6-7	294-1	975-0	20-0	16-9	36-7	3-1	-1-8	-2-5	297-0	330-1	12-6	82-3	0-1	23-4
0-9	8-7	522-8	950-0	17-9	14-3	51-0	4-5	-3-5	-2-8	296-9	325-7	10-9	79-5	0-2	29-1
1-6	10-6	750-9	925-0	16-2	13-3	50-2	5-5	-4-2	-3-5	297-1	324-8	10-5	84-1	0-4	27-1
2-4	12-7	583-7	900-0	14-5	12-4	41-3	2-0	-1-3	-1-5	297-8	324-8	10-1	87-1	0-7	22-1
3-1	14-9	1222-5	875-0	14-3	11-1	292-6	0-9	0-9	-0-3	299-9	325-6	9-6	81-4	0-7	22-1
3-9	16-9	1467-3	850-0	12-8	9-9	259-9	1-2	1-2	0-2	300-6	323-8	8-5	77-6	0-1	22-1
4-6	19-1	1718-1	825-0	11-7	7-3	271-7	2-9	2-9	-0-1	302-0	323-5	7-8	74-1	0-4	21-1
5-4	21-1	1975-0	800-0	9-9	4-8	261-3	4-2	4-2	0-6	302-6	321-5	6-8	70-5	0-5	14-1
6-4	23-5	2234-9	775-0	8-8	3-0	236-3	3-6	3-0	2-3	304-1	321-3	6-1	66-7	0-4	14-1
7-4	25-7	2509-8	750-0	6-6	3-7	999-9	5-9	99-9	99-9	304-6	323-4	6-7	82-0	99-9	99-9
8-4	28-3	2747-9	725-0	5-4	2-1	999-9	99-9	99-9	99-9	306-2	323-7	6-2	79-6	99-9	99-9
9-3	30-3	3074-5	700-0	3-5	0-1	999-9	99-9	99-9	99-9	307-1	323-0	5-5	74-5	99-9	99-9
10-2	33-3	3364-9	675-0	1-2	-2-1	227-9	13-0	9-7	8-7	307-6	321-5	4-8	77-4	2-3	5-1
11-1	35-5	3672-1	650-0	-1-0	-4-1	236-8	13-4	11-2	7-4	308-4	321-1	4-4	79-1	3-7	5-1
12-2	38-3	3981-9	625-0	-3-4	-5-3	241-2	15-7	13-8	7-6	309-1	321-5	4-2	88-6	3-7	5-1
13-3	40-6	4306-8	600-0	-4-7	-11-7	242-1	17-6	15-6	6-3	311-0	317-0	2-6	58-1	5-3	5-1
14-5	43-3	4640-1	575-0	-7-4	-17-6	245-4	18-9	17-2	7-9	311-5	316-7	1-7	43-6	6-4	6-1
15-7	46-2	4965-1	550-0	-9-2	-24-3	251-0	19-4	14-5	5-7	313-2	310-4	1-0	28-0	7-7	6-1
16-4	49-1	5343-2	525-0	-11-6	-25-5	251-9	20-5	14-5	6-4	314-6	317-6	0-9	30-4	9-7	5-1
17-3	52-0	5715-3	500-0	-14-3	-22-8	245-8	20-6	14-8	8-4	315-7	319-6	1-2	42-1	10-5	6-4
18-2	55-1	6102-4	475-0	-17-0	-27-2	239-8	17-9	15-5	9-0	316-9	319-8	0-9	40-9	11-0	6-4
20-5	58-1	6505-9	450-0	-20-3	-37-0	242-1	19-0	14-8	8-0	317-7	319-7	0-6	24-0	13-1	6-1
21-0	61-5	6926-8	425-0	-23-5	-31-7	246-6	21-4	21-5	9-3	318-9	321-0	0-6	44-8	15-3	6-4
23-4	65-0	7366-9	400-0	-27-2	-34-0	246-4	25-9	23-4	11-2	319-6	321-4	0-5	52-2	17-4	6-4
25-0	68-4	7829-6	375-0	-30-2	-36-4	243-9	28-6	25-7	12-6	321-6	321-1	0-4	54-1	19-4	6-4
26-5	72-0	8314-2	350-0	-34-7	-39-6	247-0	32-4	29-8	12-7	321-9	323-2	0-3	60-6	22-5	6-4
28-2	76-3	8825-7	325-0	-38-6	-41-4	248-8	38-5	35-4	15-2	323-4	324-5	0-3	74-8	26-1	6-4
29-9	80-1	9374-7	300-0	-43-2	-49-9	249-4	43-1	40-1	15-9	324-4	327-9	99-9	99-9	30-2	6-1
31-6	84-3	9655-0	275-0	-47-8	-59-7	249-4	48-5	41-5	16-3	326-0	329-9	99-9	99-9	34-4	6-1
33-6	88-9	10574-4	250-0	-52-2	-69-9	249-9	47-8	44-9	16-5	326-9	329-9	99-9	99-9	40-5	6-1
34-0	93-9	11247-6	225-0	-56-6	-69-9	99-9	99-9	99-9	99-9	331-8	329-9	99-9	99-9	99-9	99-9
39-9	96-9	59-9	200-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
40-9	99-9	59-9	175-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
41-9	99-9	59-9	150-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
42-9	99-9	59-9	125-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
43-9	99-9	59-9	100-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
44-9	99-9	59-9	75-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
45-9	99-9	59-9	50-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9
46-9	99-9	59-9	25-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9	99-9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 486
FORT TOTTEN, N Y

24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GCM	PHES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX WTC GPM/G	RH PCY	RANGE KM	AZ DG
0.0	4.0	P.0	1000.5	10.6	14.2	099.9	99.9	99.9	99.9	290.3	316.6	10.2	86.9	999.5	959.
0.3	5.6	89.2	1000.0	10.9	15.0	099.9	99.9	99.9	99.9	291.5	319.4	10.8	86.0	999.7	959.
1.1	7.7	300.9	975.0	15.4	14.3	099.9	99.9	99.9	99.9	292.1	319.6	10.6	93.2	999.9	959.
2.3	6.3	525.2	950.0	13.9	12.9	099.9	99.9	99.9	99.9	292.6	318.5	9.9	94.0	999.3	959.
2.4	11.8	756.7	925.0	13.8	12.4	099.9	99.9	99.9	99.9	294.7	320.5	9.8	91.1	999.9	959.
3.6	14.2	982.0	900.0	12.6	11.1	099.9	99.9	99.9	99.9	295.0	320.5	9.3	90.6	999.9	959.
4.3	16.3	1218.4	875.0	11.1	10.0	099.9	99.9	99.9	99.9	296.5	320.2	4.9	92.6	999.5	959.
5.1	18.6	1466.6	850.0	10.6	9.1	099.9	99.9	99.9	99.9	297.8	320.8	8.8	94.0	999.9	959.
6.0	20.9	1708.9	825.0	8.9	8.1	099.9	99.9	99.9	99.9	299.1	321.5	8.3	94.4	999.5	959.
6.4	23.3	1953.8	800.0	7.5	6.6	099.9	99.9	99.9	99.9	300.1	321.5	7.7	94.3	999.3	959.
7.0	25.7	2225.2	775.0	5.8	4.8	099.9	99.9	99.9	99.9	301.0	320.2	7.0	93.3	999.3	959.
8.0	28.2	2493.3	750.0	4.1	3.1	099.9	99.9	99.9	99.9	301.8	319.6	6.4	93.1	999.5	959.
8.4	30.7	2765.9	725.0	2.6	0.8	099.9	99.9	99.9	99.9	303.1	319.9	5.6	87.7	999.9	959.
10.0	33.3	3052.4	700.0	1.0	-3.5	099.9	99.9	99.9	99.9	304.2	316.3	4.2	71.9	999.5	959.
11.0	35.4	3244.8	675.0	0.2	-3.1	099.9	99.9	99.9	99.9	306.4	319.5	4.5	78.6	999.9	959.
12.9	38.6	3648.7	650.0	-1.6	-5.4	099.9	99.9	99.9	99.9	307.7	319.2	3.9	75.0	999.9	959.
14.1	41.3	3950.2	625.0	-3.4	-8.8	099.9	99.9	99.9	99.9	308.9	318.3	3.3	66.3	999.5	959.
15.1	44.1	4280.1	600.0	-6.7	-15.7	099.9	99.9	99.9	99.9	310.9	316.7	1.9	41.9	999.3	959.
16.2	47.1	4614.1	575.0	-6.9	-9.4	099.9	99.9	99.9	99.9	312.3	322.2	3.3	81.9	999.3	959.
17.3	50.2	4968.4	550.0	-8.3	-24.0	099.9	99.9	99.9	99.9	314.6	319.4	1.6	42.2	999.3	959.
18.6	53.3	5319.6	525.0	-11.0	-31.0	099.9	99.9	99.9	99.9	315.2	315.4	0.1	1.6	999.3	959.
19.9	56.3	5652.4	500.0	-13.8	-35.5	099.9	99.9	99.9	99.9	316.2	317.0	0.2	8.4	999.3	959.
21.3	59.6	6081.6	475.0	-14.6	-37.0	099.9	99.9	99.9	99.9	319.8	321.1	0.4	13.9	999.3	959.
22.9	63.1	6468.5	450.0	-17.6	-31.6	099.9	99.9	99.9	99.9	320.9	322.9	0.6	28.7	999.9	959.
24.3	66.6	6913.4	425.0	-20.9	-29.4	099.9	99.9	99.9	99.9	322.2	324.9	0.8	45.9	999.9	959.
25.8	70.3	7356.9	400.0	-24.2	-30.7	099.9	99.9	99.9	99.9	323.6	326.1	0.7	54.5	999.9	959.
27.4	74.0	7825.7	375.0	-28.1	-34.7	099.9	99.9	99.9	99.9	324.4	326.3	0.5	53.0	999.9	959.
29.1	78.2	8216.9	350.0	-32.2	-38.6	099.9	99.9	99.9	99.9	325.3	326.7	0.4	52.6	999.3	959.
30.9	82.2	8636.0	325.0	-35.6	-42.7	099.9	99.9	99.9	99.9	327.6	328.6	0.3	47.6	999.3	959.
32.6	86.6	9274.6	300.0	-40.2	-49.7	099.9	99.9	99.9	99.9	328.7	329.9	99.9	99.9	999.3	959.
34.6	91.4	9974.2	275.0	-43.6	-54.9	099.9	99.9	99.9	99.9	329.2	329.9	99.9	99.9	999.3	959.
36.7	96.3	10601.8	250.0	-51.1	-59.9	099.9	99.9	99.9	99.9	330.1	329.9	99.9	99.9	999.3	959.
38.9	101.3	11277.1	225.0	-57.5	-69.9	099.9	99.9	99.9	99.9	330.4	329.9	99.9	99.9	999.3	959.
41.3	107.3	12010.3	200.0	-63.6	-79.9	099.9	99.9	99.9	99.9	332.0	329.9	99.9	99.9	999.3	959.
43.9	113.3	12823.3	175.0	-67.7	-89.9	099.9	99.9	99.9	99.9	336.2	329.9	99.9	99.9	999.3	959.
47.1	120.9	13753.9	150.0	-72.6	-99.9	099.9	99.9	99.9	99.9	341.9	329.9	99.9	99.9	999.3	959.
51.0	127.3	14692.6	125.0	-78.5	-109.9	099.9	99.9	99.9	99.9	349.2	329.9	99.9	99.9	999.3	959.
55.0	135.3	16304.5	100.0	-87.4	-119.9	099.9	99.9	99.9	99.9	416.5	329.9	99.9	99.9	999.3	959.
61.3	142.7	18112.0	75.0	-90.7	-129.9	099.9	99.9	99.9	99.9	445.8	329.9	99.9	99.9	999.3	959.
69.1	151.0	20654.3	50.0	-97.2	-139.9	099.9	99.9	99.9	99.9	508.8	329.9	99.9	99.9	999.3	959.
80.5	159.3	23104.2	25.0	-91.7	-149.9	099.9	99.9	99.9	99.9	636.6	329.9	99.9	99.9	999.3	959.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
0 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 518
ALBANY, N. Y.24 APRIL 1975
2015 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

156 15. 1

TIME MIN	CHTCT	WEIGHT GPA	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y UG K	E POT Y DEG K	MR RTO GM/KG	RM PCT	RANGE KM	AZ DEG
0.0	5.5	86.0	999.5	13.7	12.4	170.0	5.2	-0.9	5.1	288.1	311.5	9.1	92.0	0.0	0.0
99.0	99.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.0	7.1	265.0	975.0	13.4	11.9	216.0	3.4	2.0	2.8	265.0	313.2	9.0	90.8	0.5	359.0
1.6	5.3	515.2	950.0	13.7	11.2	209.1	6.5	4.1	7.5	292.3	315.4	8.8	90.7	0.9	359.0
2.4	11.2	730.7	925.0	11.8	10.3	256.5	10.6	10.3	2.5	292.5	314.4	8.4	88.6	1.1	24.0
3.7	13.2	969.1	970.0	10.9	9.3	256.9	11.8	11.3	0.6	293.8	315.5	8.2	90.1	1.5	4.0
4.1	15.2	1204.2	875.0	5.7	8.2	268.3	11.8	11.9	0.3	294.9	315.7	7.8	90.3	2.3	57.0
5.3	17.3	1444.7	850.0	8.0	6.5	271.6	9.9	9.9	-0.3	295.5	314.7	7.2	90.0	2.5	64.0
5.9	17.3	1444.7	825.0	6.4	5.2	272.3	7.9	7.9	-0.3	296.2	314.3	6.7	90.7	3.0	54.0
6.8	21.3	1642.8	800.0	4.4	3.0	280.8	6.5	6.5	0.0	296.6	312.9	6.0	90.6	3.3	71.0
7.4	23.6	2201.3	775.0	2.7	1.4	261.8	6.3	6.2	1.2	297.4	312.5	5.5	90.8	3.7	73.0
8.0	25.6	2866.0	750.0	1.4	0.0	261.5	9.2	9.1	1.4	298.0	313.0	5.1	90.1	4.3	74.0
9.7	26.3	2739.5	725.0	1.2	-0.7	267.7	9.5	9.5	0.4	301.4	315.5	5.0	87.2	4.9	71.0
10.7	30.7	3022.0	700.0	0.4	-2.4	275.5	11.2	11.2	-1.1	303.5	316.6	4.6	81.7	5.3	77.0
11.7	32.2	3312.9	675.0	-1.7	-3.3	274.4	13.7	13.6	-1.1	304.3	317.0	4.5	89.3	6.1	72.0
12.7	35.5	3612.9	650.0	-3.5	-4.9	272.2	15.6	15.6	-0.6	305.6	317.4	4.1	85.7	6.4	81.0
13.7	38.2	3922.2	625.0	-5.4	-6.8	269.9	17.8	17.8	0.0	306.8	317.6	3.7	89.9	7.0	82.0
14.7	40.7	4242.9	600.0	-6.2	-7.5	266.3	19.8	19.4	0.6	309.4	320.2	3.6	90.4	9.0	83.0
15.9	43.4	4575.7	575.0	-7.5	-8.8	268.3	21.3	21.3	0.6	311.6	321.9	3.4	90.3	10.4	84.0
16.9	46.3	4920.9	550.0	-9.4	-10.8	268.4	22.0	22.0	0.5	313.3	322.5	3.0	89.5	11.9	84.0
18.0	49.2	5278.7	525.0	-13.0	-15.1	272.1	21.8	21.4	-0.8	313.1	320.1	2.3	83.8	13.3	85.0
19.1	52.0	5648.4	500.0	-16.0	-17.3	275.1	24.1	24.0	-2.1	313.5	316.2	0.6	37.2	15.0	90.0
20.5	55.2	6031.5	475.0	-20.0	-20.2	273.2	28.6	28.5	-1.6	313.2	313.4	0.0	2.5	16.9	97.0
21.4	58.3	6431.1	450.0	-21.8	-21.3	272.5	33.0	33.0	-1.4	315.8	316.1	0.1	4.9	19.5	98.0
23.1	61.5	6850.6	425.0	-23.6	-23.7	268.7	32.6	32.6	0.7	318.7	318.9	0.1	7.1	22.3	99.0
25.3	65.1	7231.7	400.0	-25.9	-25.7	269.8	32.2	32.2	0.1	321.2	321.4	0.1	5.3	25.5	99.0
26.6	68.5	7566.5	375.0	-28.7	-28.3	282.5	30.7	29.9	-0.7	323.5	323.7	0.1	5.6	28.5	99.0
28.2	72.0	7944.4	350.0	-32.6	-32.9	283.9	35.0	34.0	-0.4	324.7	325.0	0.1	11.1	31.6	90.0
30.0	74.3	8264.5	325.0	-34.3	-37.5	280.4	41.9	41.2	-7.3	326.0	327.1	0.2	30.0	35.7	92.0
31.9	80.3	8714.9	300.0	-41.1	99.9	281.5	47.1	46.1	-9.4	327.4	327.9	99.9	99.9	40.8	93.0
33.9	84.2	9090.0	275.0	-45.9	99.9	275.7	49.0	48.3	-8.2	328.7	329.9	99.9	99.9	46.4	94.0
36.0	90.2	12555.6	250.0	-51.3	99.9	285.6	47.5	47.5	-10.5	329.7	329.9	99.9	99.9	52.5	95.0
38.3	94.3	11201.6	225.0	-54.8	99.9	278.7	63.0	62.3	-9.3	331.4	331.4	99.9	99.9	60.3	96.0
40.7	99.3	11937.2	200.0	-63.1	99.9	280.0	66.5	65.5	-11.6	332.5	332.5	99.9	99.9	69.1	96.0
43.6	105.0	12748.6	175.0	-67.9	99.9	285.4	61.7	60.2	-11.0	337.9	337.9	99.9	99.9	78.2	97.0
47.0	111.3	13697.5	150.0	-59.6	99.9	277.3	43.6	43.2	-5.5	337.4	337.4	99.9	99.9	86.0	97.0
50.0	119.2	14851.6	125.0	-54.6	99.9	99.9	33.9	31.6	-12.3	336.2	336.2	99.9	99.9	94.9	97.0
56.1	126.3	16270.8	100.0	-53.3	99.9	99.9	11.8	11.7	-1.7	421.0	421.0	99.9	99.9	101.4	98.0
62.4	135.7	19101.2	75.0	-59.2	99.9	99.9	4.6	4.6	-7.4	448.0	448.0	99.9	99.9	108.8	99.0
70.9	145.0	20672.7	50.0	-50.0	99.9	99.9	3.0	2.7	-2.4	511.5	511.5	99.9	99.9	133.9	100.0
84.3	155.7	23146.3	25.0	-50.2	99.9	99.9	1.8	-2.6	-2.8	600.9	600.9	99.9	99.9	150.6	100.0

BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 520
PITTSBURGH, PA24 APRIL 1975
2200 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	FDY T DEG K	E POT T DEG K	MR MTD GM/KG	RM PCT	RANGE NM	A7 DEG
0.0	0.0	359.0	906.8	15.8	16.3	260.0	4.2	4.1	0.7	296.4	326.1	12.2	97.0	0.0	C.
00.0	00.0	49.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.5	0.7	508.5	950.0	15.4	14.3	260.4	9.1	0.0	-2.3	294.2	322.6	10.9	93.1	0.3	74.
1.3	11.8	734.7	925.0	13.6	12.0	263.1	9.3	9.1	-2.1	290.4	319.0	9.6	90.0	0.7	94.
2.1	16.1	685.6	909.0	12.2	11.6	272.9	8.0	0.0	-0.3	295.3	320.7	9.6	90.0	1.1	94.
2.9	16.1	1202.0	875.0	11.2	10.5	266.8	7.9	7.9	0.4	296.6	321.1	9.1	95.0	1.5	74.
4.0	16.5	1442.9	850.0	9.2	8.4	274.0	7.3	7.2	-0.6	296.9	319.1	8.3	95.6	1.9	94.
4.9	20.5	1491.1	825.0	7.1	5.6	283.5	7.6	7.4	-1.8	297.0	315.8	7.0	98.5	2.3	94.
5.5	22.9	1944.4	800.0	6.6	3.9	273.0	10.4	10.3	-0.5	299.1	319.1	7.3	95.3	2.9	95.
6.7	25.2	2285.3	775.0	5.5	4.6	273.5	12.9	12.9	-0.8	300.6	319.7	7.0	95.3	3.4	94.
7.7	27.5	2473.2	750.0	3.0	3.0	277.4	14.5	10.4	-3.1	301.5	319.4	6.4	94.8	4.3	95.
8.5	30.7	2748.3	725.0	2.4	1.7	273.6	16.0	17.9	-1.1	302.9	319.7	6.0	95.1	5.3	95.
9.7	32.6	3031.7	700.0	0.6	-0.1	267.3	16.6	18.6	0.0	303.8	319.2	5.4	94.9	5.4	94.
10.4	35.2	3223.6	675.0	-0.5	-1.2	995.9	99.9	99.9	99.9	307.0	320.5	5.2	94.4	999.9	999.9
12.0	37.7	3425.0	650.0	-2.3	-3.1	995.9	99.9	99.9	99.9	99.9	999.9	99.9	94.0	999.9	999.9
00.0	00.0	99.9	625.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	600.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	575.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	550.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	525.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	500.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	475.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	450.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	425.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	400.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	375.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
00.0	00.0	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 528
BUFFALO, N. Y.24 APRIL 1975
2026 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	CIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.9	218.9	584.1	11.7	10.6	20.0	3.1	-1.1	-2.9	287.2	308.3	8.2	93.0	0.0	0.
99.9	99.9	1030.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	6.7	295.8	975.0	10.8	8.4	356.0	4.0	0.3	-4.0	286.9	305.4	7.1	85.1	0.1	17.7
1.2	6.9	512.0	950.0	8.6	6.0	339.1	4.1	1.5	-3.8	287.1	305.5	7.1	94.6	0.2	14.1
1.9	10.6	732.9	925.0	8.6	7.9	292.3	6.1	5.6	-2.3	289.1	308.1	7.3	95.4	0.4	14.4
2.7	12.7	900.4	906.0	9.0	8.3	278.1	9.4	9.4	-0.7	291.8	312.0	7.7	95.5	0.6	12.4
3.4	14.8	1193.7	875.0	8.0	7.4	282.5	11.6	11.4	-2.5	293.1	312.7	7.4	95.4	1.1	11.6
4.3	16.8	1432.2	850.0	7.4	6.7	272.1	12.8	12.7	-0.5	294.8	314.3	7.3	95.1	1.7	10.7
5.1	19.1	1675.2	825.0	6.4	5.6	266.5	12.0	11.9	0.7	296.3	315.0	6.9	94.4	2.3	10.3
5.9	21.1	1931.7	800.0	5.5	2.4	276.9	11.0	11.0	-1.3	297.7	313.4	5.7	80.4	2.8	12.1
6.8	23.5	2190.9	775.0	4.1	-0.2	282.1	12.1	11.9	-2.5	298.9	312.5	4.9	73.3	3.5	10.1
7.7	25.6	2457.7	750.0	2.9	0.5	283.9	12.4	12.0	-3.0	300.4	315.3	5.3	84.3	4.1	10.1
8.7	27.9	2731.6	725.0	1.3	-1.2	283.0	12.6	12.3	-2.9	301.5	315.2	4.9	83.8	4.4	11.4
9.7	30.4	3013.7	700.0	-0.4	-4.9	280.5	12.4	12.2	-2.3	302.5	313.4	3.8	71.5	5.6	10.7
10.6	32.9	3304.1	675.0	-1.9	-6.5	278.0	12.4	12.3	-1.7	304.0	314.1	3.5	70.8	6.1	10.1
11.7	35.4	3603.6	650.0	-3.9	-13.2	272.3	12.7	12.7	-0.5	304.8	311.4	2.2	69.7	7.1	10.1
12.7	37.9	3912.7	625.0	-4.0	-35.9	271.9	12.4	12.4	-0.4	307.9	304.8	0.3	6.2	7.3	10.7
13.9	40.5	4233.5	600.0	-6.3	-37.3	281.2	12.8	12.5	-2.5	308.2	304.7	0.3	6.4	8.7	9.9
14.9	43.1	4564.6	575.0	-8.5	-38.7	280.2	13.8	13.6	-2.4	309.7	310.5	0.2	6.7	9.6	10.7
16.2	46.0	4806.8	550.0	-11.9	-40.6	269.6	13.6	13.6	0.1	310.0	310.7	0.2	7.0	10.6	7.7
17.4	48.9	5261.5	525.0	-13.8	-41.9	267.4	14.3	14.3	0.7	311.8	312.4	0.2	7.2	11.7	9.9
18.3	51.7	5631.1	500.0	-15.7	-43.1	253.7	17.0	16.5	4.2	313.8	314.4	0.2	7.4	12.8	9.7
20.2	54.8	6016.8	475.0	-17.0	-43.9	253.6	20.9	20.0	5.9	316.9	317.5	0.2	7.5	14.3	9.4
21.6	57.9	6420.6	450.0	-19.4	-45.5	257.1	20.8	20.2	4.7	318.8	319.3	0.1	7.8	16.0	9.2
23.1	61.1	6843.5	425.0	-22.0	-47.1	255.3	18.3	17.7	4.6	320.2	321.3	0.1	8.1	17.7	9.1
24.7	64.5	7286.4	400.0	-25.9	-49.8	255.4	18.5	17.9	4.5	321.3	321.7	0.1	8.5	19.1	8.9
26.4	68.0	7749.8	375.0	-30.2	-47.1	250.2	19.3	18.1	6.5	321.6	322.1	0.1	17.2	21.1	8.4
27.9	71.4	8237.9	350.0	-33.2	-45.5	258.3	26.5	25.9	5.4	323.9	325.8	0.5	78.2	23.1	8.4
29.5	75.3	8755.4	325.0	-36.6	-42.7	267.7	32.8	32.9	1.3	326.2	327.1	0.3	52.7	26.1	8.7
31.4	79.5	9305.7	300.0	-40.1	-49.9	268.8	38.1	37.9	3.5	328.8	329.9	0.9	99.9	30.1	8.7
33.1	83.7	9853.5	275.0	-45.2	-59.9	263.4	42.6	42.4	4.6	329.8	329.9	0.9	99.9	34.7	8.7
35.5	88.2	10522.4	250.0	-50.5	-59.0	257.8	43.4	42.4	9.2	331.0	329.9	0.9	99.9	40.2	8.7
37.7	93.0	11200.9	225.0	-55.9	-59.0	256.9	46.6	45.4	10.6	332.8	329.9	0.9	99.9	46.3	8.4
40.0	98.2	11939.3	200.0	-62.7	-64.2	260.8	43.5	44.9	7.2	333.5	329.9	0.9	99.9	52.7	8.4
42.9	103.8	12756.4	175.0	-64.2	-64.2	260.4	32.1	32.1	0.9	344.1	329.9	0.9	99.9	58.6	8.4
46.0	110.2	13705.1	150.0	-60.6	-64.2	267.8	31.3	31.3	1.2	345.7	329.9	0.9	99.9	65.8	8.4
49.7	117.0	14958.0	125.0	-54.3	-64.2	261.9	27.2	27.2	-5.7	346.7	329.9	0.9	99.9	72.3	8.5
54.2	125.7	16293.0	100.0	-52.4	-61.2	261.9	27.6	27.6	-5.7	426.6	329.9	0.9	99.9	79.9	8.7
59.6	136.0	18109.7	75.0	-61.2	-61.2	262.5	12.4	12.4	-2.7	444.6	329.9	0.9	99.9	87.3	8.4
66.7	148.0	20668.3	50.0	-55.4	-59.9	247.2	4.0	3.7	1.6	512.9	329.9	0.9	99.9	89.7	8.4
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 532
PEORIA, ILL

24 APRIL 1975
2015 GMT

165 160 0

TIME MIN	CATCY	HEIGHT GEN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	0.5	200.0	928.6	14.4	11.7	20.0	4.6	-1.6	-4.3	289.7	312.5	8.8	84.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	6.6	316.9	975.0	12.6	11.2	99.9	99.9	99.9	99.9	289.8	311.1	8.6	91.1	999.9	99.9
1.0	8.9	518.9	950.1	11.3	11.0	99.9	99.9	99.9	99.9	289.8	312.4	8.7	97.8	999.9	99.9
1.7	10.9	758.0	921.0	12.3	12.0	99.9	99.9	99.9	99.9	293.2	318.2	9.6	97.6	999.9	99.9
2.5	13.1	989.2	903.0	12.0	11.6	348.8	5.1	1.0	-5.0	295.2	320.5	9.6	97.1	0.9	22.9
3.2	15.4	1225.0	875.0	10.3	6.8	323.1	6.7	4.0	-5.4	295.6	317.3	8.2	90.1	1.0	20.7
4.1	17.5	1466.8	850.0	11.2	1.5	311.7	5.8	4.4	-3.9	298.6	312.6	5.1	52.5	1.1	19.4
4.9	20.7	1711.9	825.0	11.0	-10.3	310.0	7.4	5.7	-4.5	300.5	308.8	2.1	21.2	1.3	14.3
5.6	22.2	1971.7	800.0	9.5	-15.0	285.1	9.7	7.0	-2.5	301.5	305.0	1.5	16.2	1.5	17.0
6.4	24.6	2234.0	775.0	7.7	-12.7	294.3	7.6	7.4	-3.2	302.3	307.8	1.8	21.9	1.7	15.4
7.2	27.0	2502.6	750.0	5.3	-14.4	292.5	8.8	8.2	-3.4	302.6	307.6	1.7	22.5	2.0	15.1
8.3	29.5	2778.9	725.0	3.5	-4.3	284.3	10.2	9.9	-2.5	303.6	318.9	3.9	56.8	2.4	14.3
9.0	32.2	3062.6	700.0	1.0	-9.8	274.9	10.9	10.9	-0.9	303.9	311.7	2.6	44.5	2.9	13.4
9.9	34.8	3354.1	675.0	-0.8	-16.7	274.7	10.0	10.0	-0.8	305.0	309.7	1.5	28.4	3.4	12.7
10.7	37.3	3654.6	650.0	-2.7	-13.0	276.2	9.3	9.3	-1.0	306.2	312.7	2.2	44.9	3.9	12.4
11.0	40.1	3964.0	625.0	-5.4	-17.0	263.2	10.2	10.2	1.2	306.4	311.4	1.6	39.8	4.4	11.4
13.0	42.9	4283.3	600.0	-7.4	-28.3	252.8	10.8	10.3	3.2	307.6	309.6	0.6	16.8	4.9	11.4
14.1	45.8	4613.0	575.0	-10.0	-37.2	248.1	13.0	12.0	4.8	308.3	309.2	0.3	8.6	5.5	10.4
15.1	48.8	4954.5	550.0	-11.9	-19.4	254.9	17.0	16.4	4.4	310.1	318.9	1.5	54.5	6.1	13.3
16.2	51.6	5302.7	525.0	-13.4	-24.7	261.9	21.6	21.4	3.0	312.4	315.6	1.0	38.9	7.4	9.4
17.4	54.4	5680.3	500.0	-14.6	-41.6	261.2	20.8	20.6	3.2	315.2	315.9	0.2	7.9	8.9	9.4
18.7	57.9	6064.2	475.0	-18.0	-47.8	267.5	20.9	20.9	0.9	315.6	316.0	0.1	5.3	10.5	9.4
20.0	61.1	6467.9	450.0	-21.0	-62.4	270.1	20.5	20.5	-0.0	316.8	316.9	0.0	1.1	12.1	9.4
21.4	64.1	6872.0	425.0	-24.8	-36.6	269.2	22.7	22.7	0.3	317.3	318.6	0.4	32.4	13.6	9.3
22.9	68.1	7325.4	400.0	-27.8	-36.9	266.6	25.4	25.4	1.5	318.8	320.2	0.4	41.3	15.4	9.2
24.3	71.7	7785.8	375.0	-31.4	-39.8	265.4	26.6	24.5	2.1	320.0	321.1	0.3	43.0	18.2	9.2
25.9	75.7	8268.4	350.0	-36.1	-47.0	262.9	26.7	26.5	3.1	320.0	320.6	0.2	31.3	20.7	9.1
27.0	79.7	8780.7	325.0	-39.5	99.9	262.7	28.0	27.8	3.5	322.2	99.9	99.9	99.9	23.5	9.0
29.3	83.9	9322.9	300.0	-43.8	99.9	262.1	29.1	26.8	4.0	323.7	99.9	99.9	99.9	26.5	8.7
31.3	88.2	9901.6	275.0	-48.8	99.9	260.5	29.0	28.6	4.8	324.6	99.9	99.9	99.9	29.9	8.9
33.4	93.0	10520.7	250.0	-53.4	99.9	263.7	38.6	38.3	4.2	326.7	99.9	99.9	99.9	33.8	8.7
35.7	98.2	11194.8	225.0	-58.2	99.9	260.6	39.0	38.5	6.4	332.5	99.9	99.9	99.9	39.4	8.7
38.4	103.2	11938.1	200.0	-58.9	99.9	260.5	41.0	40.4	6.8	339.5	99.9	99.9	99.9	45.5	9.1
41.3	105.0	12772.4	175.0	-58.4	99.9	258.9	37.8	37.1	7.3	353.6	99.9	99.9	99.9	52.6	8.5
44.7	115.5	13742.5	150.0	-58.9	99.9	259.4	30.3	29.8	5.6	368.6	99.9	99.9	99.9	59.4	8.4
48.6	122.7	14892.5	125.0	-57.6	99.9	253.8	27.2	26.1	7.6	390.8	99.9	99.9	99.9	65.9	8.4
53.7	131.3	16302.7	100.0	-56.7	99.9	258.6	14.8	18.8	0.1	418.3	99.9	99.9	99.9	73.6	8.1
59.1	140.0	18106.9	75.0	-62.2	99.9	264.3	18.9	18.9	1.9	442.6	99.9	99.9	99.9	78.5	8.1
67.1	151.0	23647.8	50.0	-56.7	99.9	261.5	7.5	7.4	1.1	510.0	99.9	99.9	99.9	82.7	8.1
79.0	164.0	25100.6	25.0	-51.8	99.9	269.7	1.3	1.1	-0.6	635.8	99.9	99.9	99.9	84.0	8.1

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 553
CHAMPA, NEB24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GSM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T CG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	7.3	400.0	905.3	16.8	12.7	290.0	2.6	2.4	-0.5	294.2	319.6	9.7	77.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.4	8.5	535.9	950.0	14.4	11.7	999.9	99.9	99.9	99.9	293.0	316.9	9.2	84.2	999.9	999.9
1.1	10.4	760.8	925.0	12.0	10.6	999.9	99.9	99.9	99.9	292.7	315.7	8.7	90.9	999.9	999.9
1.9	12.4	990.0	900.0	10.1	9.1	298.2	5.4	4.7	-2.5	293.0	311.4	8.1	93.5	0.4	17.9
2.8	14.5	1224.3	875.0	8.9	7.3	249.5	6.6	6.2	-2.2	294.0	313.6	7.4	89.7	0.7	11.2
3.7	16.5	1464.2	850.0	7.7	2.4	279.6	6.8	6.7	-1.1	294.9	309.7	5.4	69.3	1.1	10.8
4.6	18.6	1710.1	825.0	6.6	-3.0	289.9	5.8	5.4	-0.0	296.0	306.7	3.8	51.2	1.4	10.8
5.5	20.7	1963.1	800.0	7.9	-6.4	270.6	3.1	3.1	-0.0	300.0	308.5	3.0	35.5	1.6	17.7
6.4	22.9	2224.5	775.0	6.7	-5.5	241.6	1.4	1.3	0.7	301.5	310.9	3.3	41.3	1.7	10.5
7.4	25.2	2493.1	750.0	5.1	-9.0	201.9	3.0	1.1	2.7	302.4	310.0	2.6	35.3	1.8	10.2
8.3	27.4	2765.0	725.0	3.4	-8.9	204.3	4.1	1.7	3.7	303.5	311.4	2.7	40.0	1.8	4.5
9.2	29.7	3032.5	700.0	1.3	-9.2	219.5	5.3	3.4	4.1	304.2	312.3	2.7	45.6	1.9	8.7
10.2	32.3	3343.9	675.0	-1.5	-9.8	220.3	6.6	4.3	5.0	304.3	312.3	2.7	53.2	2.2	8.2
11.3	34.9	3643.2	650.0	-4.1	-11.7	216.6	8.0	4.8	6.4	304.7	311.6	2.4	55.2	2.6	7.4
12.3	37.1	3951.1	625.0	-6.9	-10.7	218.5	9.7	5.4	6.8	304.8	312.6	2.2	69.0	3.0	6.8
13.5	39.9	4269.6	600.0	-9.1	-13.7	221.3	9.6	6.5	7.3	305.9	312.6	2.7	74.3	3.6	6.3
14.6	42.3	4578.5	575.0	-10.4	-23.9	231.5	10.2	8.0	6.4	307.9	310.9	1.0	32.2	4.2	4.1
15.9	45.1	4938.2	550.0	-12.7	-25.0	238.3	10.2	8.7	5.3	309.0	312.0	0.9	34.8	5.0	6.0
17.1	48.3	5291.0	525.0	-15.8	-26.1	242.6	12.1	10.7	5.6	309.5	312.3	0.9	40.7	5.8	6.0
18.3	50.9	5657.1	500.0	-18.4	-25.0	242.6	14.2	13.3	5.0	310.7	313.9	1.0	56.0	6.8	6.1
19.8	53.8	6038.0	475.0	-21.3	-28.2	254.7	12.7	12.2	3.3	311.7	314.2	0.8	53.2	7.9	6.3
21.1	56.7	6438.6	450.0	-24.3	-31.3	259.3	14.0	13.7	2.6	312.7	314.8	0.6	51.6	8.9	6.4
22.4	59.0	6848.3	425.0	-27.6	-35.2	261.0	17.4	17.1	2.7	313.6	315.1	0.4	48.0	10.1	6.6
24.0	63.4	7282.4	400.0	-30.3	-40.0	252.2	19.6	18.7	6.3	315.6	316.6	0.3	37.7	11.8	6.8
25.5	66.7	7737.6	375.0	-34.6	-42.8	251.0	20.2	19.1	6.6	315.8	316.6	0.2	42.6	13.7	6.8
27.2	70.4	8215.9	350.0	-38.5	-44.7	244.3	21.4	19.3	5.3	316.8	317.5	0.2	51.1	15.7	6.8
28.9	74.0	8720.9	325.0	-42.5	99.9	246.3	24.3	22.2	7.5	318.8	999.9	99.9	999.9	18.1	5.9
30.9	78.2	9245.1	300.0	-47.2	99.9	254.2	27.7	26.7	10.2	321.3	999.9	99.9	999.9	21.2	5.8
32.8	82.3	9826.4	275.0	-51.1	99.9	251.1	31.4	29.7	10.2	321.3	999.9	99.9	999.9	24.5	4.9
35.0	86.7	10440.9	250.0	-54.3	99.9	252.1	38.4	36.6	11.8	325.4	999.9	99.9	999.9	29.2	6.9
37.4	91.6	11112.9	225.0	-57.7	99.9	250.1	38.0	35.7	12.8	333.2	999.9	99.9	999.9	34.9	6.5
40.0	96.9	11862.8	200.0	-57.0	99.9	250.9	35.0	33.6	9.7	342.5	999.9	99.9	999.9	40.8	7.0
42.6	102.3	12703.3	175.0	-57.9	99.9	251.2	35.8	33.9	11.6	354.3	999.9	99.9	999.9	45.9	7.0
45.9	108.6	13682.2	150.0	-56.3	99.9	252.5	39.2	37.4	11.8	373.1	999.9	99.9	999.9	53.2	7.1
48.7	115.7	14836.1	125.0	-55.4	99.9	259.6	38.6	28.1	5.2	394.7	999.9	99.9	999.9	61.3	7.2
54.7	124.5	16262.5	100.0	-55.3	99.9	240.0	15.5	13.4	7.5	421.0	999.9	99.9	999.9	69.2	7.3
60.5	134.5	19081.7	75.0	-58.4	99.9	244.2	18.3	16.4	7.9	450.4	999.9	99.9	999.9	76.2	7.1
68.4	145.5	20482.5	50.0	-54.7	99.9	151.0	0.7	-0.3	0.6	514.7	999.9	99.9	999.9	82.0	7.3
81.2	158.5	25130.5	25.0	-49.9	99.9	49.3	6.3	-5.9	-2.2	641.3	999.9	99.9	999.9	80.7	7.4

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 502
NORTH PLATTE, NEB24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DEG C	DRY PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MX RTO CM/KG	RM PCT	RANGF KM	AZ DEG
0.0	14.6	847.0	914.7	20.6	-3.8	330.0	4.1	2.1	-3.6	301.8	310.9	3.2	19.0	0.0	0.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	55.3	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	15.3	986.5	900.0	19.5	-6.2	149.5	7.9	-4.1	6.7	302.0	309.8	2.7	17.0	0.0	0.3
1.0	14.3	1227.1	875.0	16.6	-7.2	177.2	4.1	-0.2	4.1	301.4	308.8	2.5	18.8	0.1	15.7
1.6	20.4	1472.4	850.0	14.2	-7.8	273.3	3.0	3.0	-0.2	301.3	308.6	2.5	21.0	0.2	11.1
2.3	23.1	1722.9	825.0	11.5	-8.5	302.6	4.1	3.4	-2.2	301.1	308.3	2.4	23.7	0.3	11.4
2.8	25.3	1576.9	800.0	9.3	-8.4	301.7	4.2	3.5	-2.2	301.4	308.8	2.5	27.6	0.5	11.7
3.6	28.7	2247.7	775.0	6.7	-8.1	308.2	1.9	3.2	-2.3	301.3	309.2	2.7	33.9	0.6	11.8
4.3	31.4	2508.9	750.0	4.5	-8.1	293.5	5.3	4.8	-2.1	301.8	309.9	2.8	39.4	0.8	12.7
4.0	34.3	2793.9	725.0	2.1	-8.9	287.1	9.1	4.7	-2.7	302.1	310.0	2.7	44.1	1.1	11.4
5.9	37.3	3065.8	700.0	-0.1	-10.9	286.4	13.9	13.4	-3.9	302.7	309.7	2.4	43.9	1.4	11.4
6.0	39.9	3356.3	675.0	-1.5	-11.3	277.5	18.5	16.4	-2.1	304.3	311.4	2.4	47.0	2.7	11.1
7.0	42.7	3655.9	650.0	-3.8	-17.0	268.6	16.8	16.7	1.6	304.9	309.7	1.6	35.5	3.7	10.5
8.9	45.7	3964.4	625.0	-5.4	-23.7	259.9	15.2	15.9	1.9	307.9	308.9	0.9	22.1	4.6	9.3
9.9	48.3	4283.5	600.0	-7.1	-35.4	262.8	15.2	15.1	1.9	307.9	308.9	0.3	8.3	5.5	7.2
10.0	51.9	4614.0	575.0	-9.1	-39.6	267.0	14.6	14.6	0.8	309.3	310.0	0.2	6.3	6.4	9.2
12.0	55.1	4955.6	550.0	-11.5	-41.0	278.2	14.0	13.9	-2.0	310.4	311.0	0.2	6.6	7.3	9.4
13.1	58.3	5311.1	525.0	-14.5	-39.9	283.9	15.1	14.6	-3.6	311.0	311.8	0.2	9.4	8.7	9.4
14.5	61.7	5678.7	500.0	-17.2	-39.5	275.6	16.3	16.0	-2.7	312.0	312.9	0.2	12.3	9.5	9.4
15.8	65.2	6047.8	475.0	-20.5	-37.5	276.8	17.3	17.2	-2.1	312.5	313.7	0.3	20.4	10.9	9.4
17.1	68.5	6458.7	450.0	-23.4	-43.9	278.9	18.6	18.6	-2.9	313.5	314.0	0.1	13.7	13.9	9.7
18.5	72.1	6873.4	425.0	-27.7	-47.0	279.5	18.0	17.7	-2.9	314.3	314.3	0.2	13.2	12.3	9.7
19.3	76.0	7305.8	400.0	-31.6	-49.4	278.1	18.3	18.1	-3.6	313.9	314.2	0.1	15.1	15.3	9.7
21.4	80.3	7758.5	375.0	-35.6	-53.1	275.7	17.4	17.3	-1.7	314.4	314.7	0.1	14.5	17.0	9.7
22.7	83.8	8215.7	350.0	-38.8	-56.4	275.1	17.9	17.9	-1.6	316.3	316.5	0.0	13.4	18.5	9.7
24.4	86.3	8739.9	325.0	-43.8	97.9	274.8	16.9	16.8	-1.4	316.4	316.4	99.9	99.9	20.2	9.7
26.0	92.4	9271.7	300.0	-48.4	99.9	273.4	18.4	18.4	-1.4	317.2	317.2	99.9	99.9	21.8	9.7
28.1	97.2	9830.5	275.0	-52.3	99.9	273.4	18.4	18.4	-1.4	317.2	317.2	99.9	99.9	23.9	9.7
30.4	102.3	10450.6	250.0	-56.1	99.9	273.4	18.4	18.4	-1.4	317.2	317.2	99.9	99.9	26.0	9.7
33.0	107.4	11130.2	225.0	-63.6	99.9	268.6	22.2	21.8	4.4	316.6	316.6	99.9	99.9	28.0	9.7
35.5	112.9	11885.3	200.0	-54.1	99.9	268.6	20.8	20.5	3.5	317.1	317.1	99.9	99.9	30.0	9.7
38.4	118.0	12740.1	175.0	-55.4	99.9	268.6	23.7	19.4	9.5	316.6	316.6	99.9	99.9	32.3	9.7
42.1	125.5	13731.0	150.0	-54.1	99.9	268.6	17.8	17.8	1.1	317.0	317.0	99.9	99.9	36.0	9.7
46.0	132.7	14869.6	125.0	-57.5	99.9	268.6	17.9	17.5	3.5	316.9	316.9	99.9	99.9	40.6	9.7
51.1	140.3	16304.8	100.0	-53.5	99.9	268.6	14.8	14.8	2.4	424.4	424.4	99.9	99.9	45.1	8.9
57.2	147.7	18140.3	75.0	-55.2	99.9	265.0	20.7	14.8	8.7	457.2	457.2	99.9	99.9	51.4	9.7
65.3	156.0	20732.4	50.0	-54.1	99.9	264.2	5.3	5.2	0.5	515.9	515.9	99.9	99.9	56.9	8.9
77.4	164.7	25222.3	25.0	-49.4	99.9	278.0	2.9	2.8	-0.4	643.1	643.1	99.9	99.9	65.7	8.4

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 606
PORTLAND, ME24 APRIL 1975
2015 GMT

158 27.0

TIME MIN	CNTCT	WEIGHT GPA	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E PUT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.4	20.0	1009.2	7.2	7.2	340.0	4.1	1.4	-3.9	280.4	296.5	6.3	100.0	0.0	0.
0.3	6.2	95.6	1030.0	7.3	6.9	999.9	99.9	99.9	05.9	281.3	297.1	6.2	98.6	999.9	99.9
1.0	6.5	303.7	975.0	5.5	5.2	999.9	99.9	99.9	99.9	281.5	296.1	5.7	97.8	999.9	99.9
1.8	10.7	516.2	957.0	5.6	5.3	999.9	99.9	99.9	99.9	283.7	298.9	5.9	97.8	999.9	99.9
2.5	13.0	736.3	925.0	10.1	9.8	244.8	14.9	13.5	6.3	290.7	312.3	8.3	98.5	0.4	105.
3.2	15.3	965.3	900.0	10.4	10.0	242.4	15.3	13.6	7.1	293.4	316.1	8.6	98.8	1.4	95.
4.1	17.6	1200.1	875.0	9.5	9.2	245.0	16.8	15.3	7.2	295.3	317.0	8.4	97.9	2.1	77.
4.8	20.1	1460.3	850.0	7.8	7.5	245.2	17.1	15.5	7.2	295.3	315.9	7.7	98.0	2.9	74.
5.7	22.4	1686.7	825.0	6.7	6.4	247.2	17.4	16.1	6.7	296.7	316.5	7.4	97.8	3.4	72.
6.5	25.0	1939.4	800.0	5.4	5.0	249.5	15.1	14.2	5.2	297.8	316.5	6.9	97.6	4.4	71.
7.4	27.3	2109.1	775.0	4.3	3.9	252.1	14.8	14.1	4.5	299.3	317.3	6.6	97.4	5.4	71.
8.4	30.7	2464.9	750.0	1.6	1.0	246.7	12.2	11.3	4.4	299.0	314.3	5.5	95.5	6.3	72.
10.0	32.7	2738.3	725.0	0.7	0.4	246.4	11.6	10.7	4.7	301.0	316.3	5.5	97.8	7.3	71.
11.4	35.4	3019.8	700.0	-1.1	-1.8	251.9	13.2	12.6	4.1	301.9	315.5	4.8	95.2	8.3	72.
12.6	38.3	3300.2	675.0	-2.6	-4.0	255.8	14.9	14.7	2.7	303.3	315.4	4.2	90.1	9.3	71.
14.0	40.7	3607.4	650.0	-5.0	-7.5	268.4	16.7	16.7	0.5	303.7	313.5	3.4	82.9	10.7	73.
15.4	43.6	3914.4	625.0	-7.0	-9.9	273.4	16.4	16.4	-1.0	304.8	313.4	2.9	80.3	12.2	75.
16.9	46.5	4232.7	600.0	-8.5	-11.1	274.7	15.5	15.4	-1.3	306.6	314.8	2.7	81.7	13.4	77.
18.3	49.4	4562.0	575.0	-10.2	-11.9	265.7	17.4	17.3	1.3	308.4	316.4	2.7	87.0	14.7	78.
19.6	52.5	4903.6	550.0	-12.4	-14.4	262.6	17.2	17.0	2.2	309.7	316.6	2.3	85.0	15.2	79.
21.2	55.7	5257.7	525.0	-14.8	-16.9	261.4	20.1	19.9	3.0	310.8	316.9	2.0	84.6	17.8	79.
22.5	58.6	5625.9	500.0	-16.9	-19.3	260.8	20.7	20.4	3.3	312.6	318.0	1.7	83.4	19.4	79.
24.0	62.1	6009.2	475.0	-19.7	-22.3	259.2	21.4	21.0	4.0	313.7	318.0	1.3	79.5	21.3	79.
25.5	65.7	6409.0	450.0	-22.3	-25.5	259.7	20.9	20.6	3.8	315.3	318.8	1.1	74.7	23.1	79.
27.0	69.2	6826.6	425.0	-25.3	-29.1	254.2	22.4	22.3	2.3	316.6	319.2	0.8	68.4	25.2	79.
28.7	72.7	7244.1	400.0	-28.0	-32.5	255.8	31.5	31.4	2.3	318.6	320.7	0.6	65.1	27.7	90.
30.1	76.6	7724.5	375.0	-31.4	-36.2	270.1	34.6	34.6	-0.1	320.0	321.6	0.5	62.4	31.1	91.
32.0	80.6	8208.8	350.0	-35.9	-45.2	249.4	37.5	37.5	0.4	320.3	321.0	0.2	38.6	34.6	92.
33.8	84.8	8719.0	325.0	-40.2	-49.9	275.2	33.1	32.9	-3.0	321.2	321.6	99.9	99.9	38.5	93.
35.7	89.0	9261.4	300.0	-43.4	-49.9	283.8	36.9	36.8	-8.4	324.2	324.2	99.9	99.9	42.1	94.
37.9	93.7	9842.6	275.0	-46.7	-59.9	296.9	43.1	38.4	-19.5	327.6	327.6	99.9	99.9	46.9	97.
40.1	98.5	10459.2	250.0	-51.3	-69.9	293.7	55.9	51.7	-21.4	329.8	329.8	99.9	99.9	53.5	91.
42.6	103.6	11145.6	225.0	-56.6	-79.9	293.7	55.7	51.0	-22.4	331.8	331.8	99.9	99.9	60.4	91.
45.1	109.3	11882.8	200.0	-62.4	-89.9	290.3	56.1	52.0	-19.5	334.0	334.0	99.9	99.9	69.6	91.
48.4	115.4	12704.9	175.0	-68.6	-99.9	288.4	33.7	32.9	-7.3	346.6	346.6	99.9	99.9	77.7	97.
52.2	122.3	13668.7	150.0	-75.5	-99.9	288.1	32.1	31.2	-7.5	371.1	371.1	99.9	99.9	84.4	98.
57.5	129.7	14931.6	125.0	-83.9	-99.9	280.9	26.5	26.0	-5.0	397.4	397.4	99.9	99.9	93.2	99.
63.2	137.5	16255.7	100.0	-94.5	-99.9	281.5	23.1	22.6	-4.6	422.5	422.5	99.9	99.9	100.6	99.
71.2	145.7	18055.8	75.0	-106.7	-99.9	309.0	15.4	12.0	-9.7	454.1	454.1	99.9	99.9	109.0	100.
80.8	154.9	20675.2	50.0	-134.8	-99.9	316.4	3.7	2.5	-2.7	514.3	514.3	99.9	99.9	112.7	101.
90.0	163.3	99.9	25.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9

* PV SPEED MEANS ELEVATION ANGLE BETWEEN 5 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 637
FLINT, MICH24 APRIL 1975
2100 GMT

152 16. 3

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE A7 KM	DG
0.0	5.9	236.0	984.1	8.9	5.6	60.0	5.1	-4.4	-2.5	284.1	209.2	5.8	80.0	0.3	0.
99.9	99.9	95.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.3	6.6	312.9	975.0	7.5	3.9	6.6	5.8	-0.7	-5.7	283.4	266.7	5.2	77.4	7.2	182.
1.0	6.7	526.1	950.0	5.3	4.2	11.3	5.5	-1.1	-5.4	283.2	297.4	5.5	93.0	0.4	104.
1.7	10.7	743.6	925.0	3.5	2.2	16.5	4.0	-1.1	-3.9	283.5	266.8	5.1	96.4	0.4	149.
2.5	12.7	665.9	900.0	3.3	2.6	32.4	4.0	1.9	-3.6	285.6	299.0	5.1	95.0	0.4	145.
3.1	14.9	1195.4	875.0	5.4	-0.7	305.0	6.9	5.7	-4.0	289.9	301.2	4.2	64.7	0.9	177.
3.9	16.8	1433.2	850.0	6.4	2.1	295.5	6.4	5.8	-2.8	293.6	307.8	5.2	73.6	1.1	144.
4.7	19.1	1674.4	825.0	6.4	2.5	285.0	6.2	5.9	-1.6	296.1	311.3	5.6	75.4	1.3	102.
5.5	21.2	1531.2	800.0	6.1	1.3	289.3	5.1	4.8	-1.7	299.3	312.9	5.3	71.3	1.5	144.
6.3	23.5	2190.9	775.0	4.3	-0.4	255.5	6.3	5.7	-2.7	299.1	312.5	4.8	71.6	1.9	140.
7.1	25.8	2457.5	750.0	3.9	-17.5	300.1	7.5	6.5	-3.7	301.0	305.7	1.6	24.3	2.1	177.
8.1	28.2	2734.2	725.0	2.5	-20.3	306.5	8.9	7.2	-5.3	302.4	305.6	1.0	16.5	2.5	134.
8.9	30.5	3015.1	700.0	1.0	-21.3	308.1	9.1	8.0	-4.3	303.8	306.9	1.0	16.9	3.0	133.
9.4	33.1	3306.1	675.0	-1.1	-19.7	290.1	9.5	8.9	-3.3	304.5	308.2	1.2	22.9	3.5	130.
10.9	35.6	3606.2	650.0	-2.9	-39.6	295.2	11.3	10.3	-4.9	305.7	307.4	0.5	10.7	4.1	127.
11.9	38.2	3915.6	625.0	-4.6	-30.8	293.1	13.3	12.2	-5.2	307.2	308.8	0.5	10.7	4.9	124.
13.1	40.7	4235.6	600.0	-6.8	-35.7	293.3	13.6	13.3	-3.1	308.3	309.3	0.3	7.9	5.3	111.
14.1	43.5	4564.0	575.0	-9.6	-38.4	275.6	14.4	14.2	-1.9	308.8	309.6	0.2	7.3	6.6	120.
15.3	46.3	4907.4	550.0	-12.6	-38.4	275.6	13.4	13.4	-1.3	305.1	310.0	0.2	9.3	7.5	117.
16.4	49.3	5260.6	525.0	-14.9	-40.3	289.9	15.0	15.0	0.0	310.5	311.2	0.2	9.3	8.3	114.
17.6	52.0	5629.0	500.0	-15.8	-44.5	285.0	18.0	18.0	1.6	313.7	314.2	0.1	6.4	9.4	111.
18.8	55.3	6013.7	475.0	-18.8	-35.2	268.4	17.5	17.5	0.5	314.6	316.0	0.4	21.9	10.6	111.
19.9	57.9	6413.7	450.0	-20.5	-37.9	266.3	17.3	17.2	1.1	315.0	316.1	0.3	22.8	11.7	106.
21.0	61.1	6830.6	425.0	-26.1	-35.5	266.5	14.2	14.1	0.9	315.6	317.1	0.4	41.6	12.8	104.
22.5	64.5	7267.5	400.0	-28.8	-33.5	259.9	12.2	12.0	2.1	317.6	319.5	0.6	63.4	13.3	111.
23.9	67.7	7726.5	375.0	-32.3	-37.6	252.4	17.3	16.6	5.1	318.8	320.2	0.4	58.9	14.9	101.
25.3	71.2	8216.4	350.0	-35.1	-38.0	252.5	20.1	19.2	6.1	321.4	322.8	0.4	74.4	16.3	94.
27.1	75.1	8722.7	325.0	-39.3	99.9	237.8	22.4	21.9	4.7	322.5	999.9	99.9	99.9	18.2	45.
28.8	79.2	9266.1	300.0	-43.2	99.9	256.4	26.5	25.8	6.0	324.5	999.9	99.9	99.9	20.7	31.
30.5	83.2	9846.4	275.0	-47.9	99.9	256.6	35.0	34.1	7.1	325.5	999.9	99.9	99.9	23.7	41.
32.5	87.6	10468.2	250.0	-53.0	99.9	259.9	41.2	38.7	14.3	327.3	999.9	99.9	99.9	25.3	44.
34.4	92.4	11140.3	225.0	-57.5	99.9	250.8	37.8	35.7	12.4	330.3	999.9	99.9	99.9	28.3	45.
37.2	97.4	11876.5	200.0	-60.5	99.9	251.2	33.8	32.0	10.9	336.9	999.9	99.9	99.9	30.5	47.
40.1	103.0	12706.0	175.0	-60.2	99.9	253.7	33.8	32.4	9.5	350.6	999.9	99.9	99.9	34.1	44.
43.3	109.3	13675.7	150.0	-58.0	99.9	255.2	29.6	29.5	2.5	370.2	999.9	99.9	99.9	44.1	42.
47.0	115.8	14821.3	125.0	-58.4	99.9	264.7	26.3	26.2	2.4	389.3	999.9	99.9	99.9	50.2	42.
51.7	124.0	16245.2	100.0	-56.6	99.9	262.1	21.1	20.9	2.9	422.2	999.9	99.9	99.9	58.0	43.
57.4	133.3	18082.1	75.0	-59.8	99.9	297.4	5.7	5.0	-2.7	449.7	999.9	99.9	99.9	63.2	41.
64.4	143.0	20626.3	50.0	-56.7	99.9	102.2	4.7	-4.6	1.0	509.8	999.9	99.9	99.9	70.5	41.
75.5	153.3	25090.2	25.0	-50.5	99.9	29.3	1.6	-0.8	-1.4	639.8	999.9	99.9	99.9	71.3	44.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 645
GREEN BAY, WIS24 APRIL 1975
2115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.3	210.0	989.5	7.8	1.0	70.0	5.1	-4.8	-1.7	282.3	293.2	4.2	62.0	0.0	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	8.3	331.7	975.0	6.9	0.3	24.4	4.1	-1.7	-3.7	282.7	293.2	4.0	42.7	0.2	24.2
1.4	10.5	544.5	950.0	4.8	1.2	30.1	4.1	-2.0	-3.5	282.7	294.2	4.4	77.1	0.4	22.0
2.5	12.7	761.4	925.0	2.8	1.0	6.3	4.1	-0.5	-4.0	282.8	294.4	4.4	47.7	0.6	21.5
3.2	15.0	982.7	900.0	1.1	1.1	2.9	4.4	-0.2	-4.4	283.3	295.3	4.6	99.8	0.8	20.5
3.9	17.1	1209.3	875.0	1.0	-5.4	32.4	4.6	-2.6	-4.0	283.2	295.3	2.9	62.1	1.0	21.4
4.9	19.6	1444.1	850.0	4.0	-6.9	37.2	5.3	-3.2	-4.2	290.7	298.2	2.7	45.0	1.2	20.8
5.7	21.8	1686.8	825.0	3.6	-9.3	19.7	3.4	-1.2	-3.2	292.7	299.2	2.2	38.1	1.5	20.4
6.7	24.3	1935.9	800.0	2.1	-10.7	337.1	4.8	1.9	-4.4	293.6	299.9	2.2	39.2	1.6	20.4
7.6	26.7	2102.0	775.0	2.5	-42.9	315.4	6.4	4.5	-4.5	295.5	296.9	0.1	1.8	1.8	19.6
8.5	29.2	2457.0	750.0	2.6	-42.9	306.7	6.9	5.5	-4.1	293.4	299.8	0.1	1.8	2.0	17.7
9.5	31.3	2729.9	725.0	1.2	-43.1	297.4	8.6	7.6	-3.9	300.7	301.1	0.1	2.0	2.2	17.7
10.5	34.3	3011.2	700.0	-0.5	-43.5	295.2	9.6	10.9	-4.0	301.9	302.3	0.1	2.3	2.5	15.5
11.6	37.1	3300.7	675.0	-1.8	-43.8	290.0	11.6	10.9	-4.0	303.6	304.0	0.1	2.3	3.0	15.4
12.6	39.6	3599.7	650.0	-3.7	-26.1	285.0	11.7	11.3	-3.0	304.8	307.1	0.1	15.8	3.6	14.7
13.8	42.6	3907.9	625.0	-4.2	-28.1	285.6	13.0	12.6	-3.5	305.4	307.7	0.7	18.9	4.2	13.5
14.8	45.5	4225.9	600.0	-8.0	-40.6	284.6	13.7	13.0	-4.4	305.9	307.5	0.2	5.2	5.0	13.1
16.1	48.5	4555.1	575.0	-10.3	-33.1	284.0	15.1	14.6	-3.7	307.9	309.3	0.4	13.3	6.0	12.6
17.4	51.4	4855.7	550.0	-13.0	-35.4	281.2	16.1	15.8	-3.1	308.6	309.8	0.3	13.1	7.1	12.4
18.7	54.6	5248.4	525.0	-15.8	-38.6	275.3	18.1	18.0	-1.7	308.6	310.5	0.3	13.1	8.3	12.0
20.0	57.6	5614.6	500.0	-18.5	-37.9	265.9	18.1	18.1	0.0	310.5	311.5	0.3	16.1	9.6	11.6
21.4	61.0	5994.5	475.0	-21.8	-37.4	265.6	20.1	20.0	1.6	311.0	312.0	0.3	22.7	11.0	11.2
22.8	64.4	6391.4	450.0	-24.1	-40.0	260.1	21.8	21.8	0.4	313.0	313.9	0.3	21.2	12.7	11.0
24.2	67.7	6606.7	425.0	-26.0	-52.7	265.9	20.9	20.9	1.5	315.6	315.8	0.1	6.1	14.4	10.4
25.8	71.1	7231.8	400.0	-30.1	-55.3	260.9	19.5	19.5	0.0	315.8	316.0	0.1	6.5	16.1	10.4
27.3	75.0	7657.6	375.0	-33.6	-57.6	275.4	21.8	21.8	-2.0	317.0	317.1	0.0	6.5	19.0	10.3
29.0	79.2	8178.2	350.0	-34.9	-58.8	278.9	24.3	24.2	-2.1	318.9	319.1	0.1	13.5	20.4	10.2
30.8	83.0	8685.7	325.0	-41.8	-59.9	265.9	25.3	25.3	0.5	319.1	319.9	99.9	99.9	23.0	10.1
32.7	87.2	9223.2	300.0	-46.2	-59.9	270.9	27.9	27.9	-0.4	320.2	320.9	99.9	99.9	25.9	10.0
34.6	91.8	9755.9	275.0	-50.4	-59.9	267.1	33.4	33.4	1.7	322.2	322.9	99.9	99.9	29.4	9.8
36.7	96.4	10410.8	250.0	-55.4	-59.9	268.4	33.2	33.2	3.4	323.2	323.9	99.9	99.9	33.7	9.7
39.0	101.5	11076.3	225.0	-58.1	-59.9	262.1	33.7	33.4	4.7	324.4	324.9	99.9	99.9	38.4	9.5
41.6	107.3	11823.0	200.0	-58.1	-59.9	252.4	25.5	24.3	7.7	329.4	329.9	99.9	99.9	42.8	9.3
44.4	113.3	12672.9	175.0	-56.7	-59.9	260.8	30.6	30.2	4.9	330.4	330.9	99.9	99.9	47.3	9.2
47.7	119.8	13649.2	150.0	-56.2	-59.9	262.8	28.0	24.8	3.1	333.3	333.9	99.9	99.9	52.7	9.1
51.3	127.0	14810.8	125.0	-54.8	-59.9	259.1	27.2	26.7	5.2	335.8	335.9	99.9	99.9	58.2	9.0
55.9	135.3	16241.1	100.0	-54.6	-59.9	252.1	24.7	23.5	7.6	422.3	422.9	99.9	99.9	64.7	8.8
61.8	143.3	18094.8	75.0	-55.3	-59.9	280.4	9.2	9.1	-1.7	456.9	456.9	99.9	99.9	71.9	8.6
70.0	152.0	20671.4	50.0	-53.6	-59.9	143.7	5.6	-3.3	4.5	517.3	517.3	99.9	99.9	78.0	8.4
83.2	160.7	25160.1	25.0	-50.7	-59.9	14.4	2.8	-0.7	-2.7	639.3	639.3	99.9	99.9	75.5	8.4

ORIGINAL PAGE IS
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 654
MURON. S D

24 APRIL 1975
2015 GMT

TIME MIN	CNTCT	WEIGHT GFN	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.7	392.0	966.1	15.0	10.6	120.0	7.2	-6.2	3.6	292.3	314.3	8.4	75.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	10.7	516.4	950.0	12.8	8.8	132.8	6.9	-5.0	4.7	291.2	310.9	7.5	76.5	0.3	299.
1.0	13.0	739.9	925.0	10.7	6.5	141.6	7.6	-4.7	6.0	291.3	311.2	7.6	86.3	0.5	304.
1.6	15.3	968.3	905.0	9.7	6.7	159.2	8.3	-1.6	8.2	292.4	310.7	6.9	81.9	0.9	315.
2.3	17.5	1202.5	875.0	9.3	4.4	159.3	7.8	2.6	7.4	294.3	310.5	6.0	71.0	1.1	325.
3.1	20.1	1442.5	850.0	7.8	2.1	214.6	8.0	4.5	6.6	295.0	309.3	5.3	67.5	1.3	345.
3.8	22.3	1688.2	825.0	6.2	0.8	222.7	7.5	5.1	5.5	295.8	309.3	4.9	68.5	1.5	355.
4.8	25.0	1939.6	800.0	4.0	0.5	241.6	6.2	7.2	3.9	296.0	309.7	5.0	77.8	1.8	7.
6.7	29.9	2461.6	750.0	0.3	-1.7	244.5	14.0	12.6	0.0	297.4	310.0	4.5	86.5	2.1	17.
7.6	32.7	2732.8	725.0	-1.4	-5.5	250.2	15.3	13.3	7.6	298.4	308.4	3.5	74.1	3.4	38.
8.6	35.3	3012.0	700.0	-2.4	-25.0	234.1	16.4	13.3	9.6	299.4	302.2	0.7	15.8	4.3	42.
9.6	38.0	3300.0	675.0	-3.6	-37.3	227.4	16.7	12.3	11.3	301.6	302.4	0.2	5.2	5.3	44.
10.6	40.6	3597.1	650.0	-5.6	-47.3	221.8	16.3	10.8	12.1	302.6	302.9	0.1	2.1	6.3	44.
11.5	43.4	3903.1	625.0	-8.0	-66.9	218.6	15.9	9.9	12.4	303.2	303.5	0.1	2.6	7.2	43.
12.5	46.4	4218.4	600.0	-10.9	-82.3	216.8	15.6	9.8	12.1	303.5	304.0	0.2	5.4	8.1	43.
13.5	49.4	4543.7	575.0	-13.8	-98.0	217.6	15.1	9.2	12.0	303.9	304.7	0.3	11.0	9.1	42.
14.7	52.3	4879.6	550.0	-16.5	-115.2	217.4	15.2	9.2	12.1	304.5	305.6	0.3	18.1	10.1	42.
15.9	55.3	5227.3	525.0	-19.4	-134.9	217.7	15.9	9.7	12.6	305.2	308.0	0.9	56.1	11.2	41.
17.2	58.4	5586.7	500.0	-21.7	-154.9	221.8	16.1	10.7	12.0	306.7	309.9	1.0	74.6	12.4	41.
18.4	61.7	5964.6	475.0	-24.6	-174.7	226.7	16.0	11.7	11.0	307.5	309.6	0.7	62.6	13.6	41.
19.8	65.2	6356.2	450.0	-27.3	-194.5	229.7	16.5	12.6	10.7	308.9	310.8	0.5	60.6	15.0	42.
21.2	68.5	6765.3	425.0	-30.6	-214.2	235.4	19.2	15.8	10.9	309.8	311.1	0.4	55.7	16.4	43.
23.2	71.9	7193.3	400.0	-33.5	-234.2	232.6	23.1	18.4	14.1	311.4	311.8	0.1	21.5	19.1	44.
25.2	75.7	7643.6	375.0	-36.5	-254.0	227.8	19.3	14.3	13.0	313.4	999.9	99.9	99.9	21.6	45.
26.8	79.7	8117.8	350.0	-40.5	-273.8	213.5	18.6	10.3	15.5	314.2	999.9	99.9	99.9	23.3	45.
28.1	83.5	8618.3	325.0	-44.6	-293.6	215.2	18.2	10.5	14.9	315.1	999.9	99.9	99.9	24.8	44.
29.8	87.6	9148.6	300.0	-49.2	-313.4	225.2	18.2	12.9	12.8	316.0	999.9	99.9	99.9	26.6	44.
31.7	92.2	9717.3	275.0	-50.7	-333.2	234.0	20.5	16.4	12.0	321.8	999.9	99.9	99.9	28.7	44.
33.6	96.6	10337.3	250.0	-51.1	-353.0	236.6	23.9	20.0	13.2	330.1	999.9	99.9	99.9	31.5	45.
35.9	101.5	11019.9	225.0	-51.6	-372.8	239.9	19.0	17.8	10.7	339.5	999.9	99.9	99.9	34.6	47.
38.3	107.0	11760.1	200.0	-53.9	-392.6	245.8	19.0	17.3	7.8	347.4	999.9	99.9	99.9	36.8	48.
41.2	112.7	12638.2	175.0	-54.1	-412.4	255.4	20.6	19.9	5.2	360.6	999.9	99.9	99.9	40.0	50.
44.5	118.8	13625.8	150.0	-53.9	-432.2	262.4	19.9	19.7	2.6	377.2	999.9	99.9	99.9	44.3	53.
48.7	125.8	14601.0	125.0	-53.8	-451.9	255.4	17.3	16.7	4.4	397.6	999.9	99.9	99.9	48.2	55.
53.6	133.3	16230.8	100.0	-53.8	-471.7	239.7	11.2	9.7	5.7	423.7	999.9	99.9	99.9	52.8	57.
59.5	140.8	18078.4	75.0	-53.5	-491.5	246.1	10.7	9.8	4.3	460.7	999.9	99.9	99.9	57.0	57.
67.2	149.3	20691.5	50.0	-53.4	-511.3	257.2	4.5	2.1	4.0	517.6	999.9	99.9	99.9	58.3	57.
78.5	157.3	25208.4	25.0	-48.8	-599.9	145.9	4.2	-1.0	4.1	644.8	999.9	99.9	99.9	59.3	57.

9 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

9 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

99 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 655
ST CLOUD, MINN24 APRIL 1975
2015 GMT

156 29. 0

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.6	316.0	979.0	5.6	4.8	90.0	2.6	-2.6	0.0	285.2	299.6	5.5	72.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	7.1	345.9	975.0	8.1	2.8	82.7	3.0	-3.0	-0.4	284.0	296.6	4.8	69.2	0.1	257.
0.9	9.4	563.9	950.0	6.1	3.5	89.1	3.0	-3.0	-0.0	284.1	297.5	5.2	83.2	0.2	259.
1.4	11.5	782.0	925.0	4.1	3.5	100.7	3.0	-2.9	0.6	284.2	298.0	5.3	95.8	0.3	267.
2.5	13.7	1004.3	900.0	2.1	1.9	94.1	3.0	-3.0	0.2	284.3	297.1	4.9	99.0	0.5	271.
3.4	15.3	1231.8	875.0	2.1	1.9	97.6	3.3	-3.3	0.4	286.6	299.8	5.0	98.7	0.6	274.
4.3	18.2	1466.1	850.0	1.9	-1.0	109.1	3.2	-3.0	1.1	288.6	299.9	4.2	81.4	0.8	275.
5.2	20.6	1705.6	825.0	0.6	-2.9	165.5	3.0	-0.7	2.9	289.7	299.9	3.7	77.2	0.9	283.
6.1	22.9	1953.6	800.0	0.1	-1.8	208.7	2.8	1.3	2.4	291.8	303.2	4.2	88.8	0.3	291.
7.9	25.3	2207.8	775.0	-0.2	-19.0	259.1	2.0	1.5	0.4	297.2	297.6	1.3	27.8	0.3	297.
8.8	27.7	2470.6	750.0	0.6	-40.0	281.2	2.6	2.0	0.4	299.2	297.8	0.2	2.9	0.8	304.
9.9	30.3	2742.0	725.0	-0.6	-8.9	99.9	99.9	99.9	99.9	299.2	307.0	2.7	53.6	99.9	99.9
10.9	32.9	3021.2	700.0	-3.1	-10.6	99.9	99.9	99.9	99.9	300.3	306.4	2.4	56.3	99.9	99.9
11.7	35.5	3309.5	675.0	-6.2	-10.5	99.9	99.9	99.9	99.9	302.5	307.9	2.5	64.6	99.9	99.9
13.1	40.8	3909.9	625.0	-8.2	-43.6	259.4	9.4	9.3	1.7	303.1	303.5	0.1	4.1	99.9	99.9
14.2	43.6	4226.1	600.0	-9.9	-19.0	258.2	9.6	9.4	2.0	304.8	309.2	1.4	47.2	2.5	69.
15.5	46.6	4553.3	575.0	-12.1	-22.6	259.9	8.8	8.7	0.9	306.0	309.4	1.1	41.5	3.2	71.
16.7	49.4	4891.7	550.0	-14.6	-20.5	264.4	9.4	9.4	0.9	306.9	311.1	1.4	60.9	3.9	73.
17.8	52.4	5242.6	525.0	-17.2	-24.3	258.8	10.9	10.6	2.7	307.9	311.1	1.0	53.6	4.5	75.
19.2	55.5	5607.0	500.0	-19.3	-36.7	252.1	14.8	13.1	6.9	309.6	310.9	0.4	24.3	5.5	73.
20.6	58.7	5986.4	475.0	-22.2	-43.5	239.9	15.5	12.8	7.6	310.8	311.8	0.3	28.6	6.4	70.
21.9	62.0	6380.9	450.0	-25.8	-38.6	237.6	14.2	12.0	5.6	311.2	312.0	0.2	28.6	9.1	67.
23.4	65.4	6792.1	425.0	-29.5	-41.8	242.8	12.3	10.9	3.6	312.0	312.0	0.2	42.3	10.2	67.
25.0	69.9	7221.6	400.0	-33.1	-41.5	251.3	11.2	10.6	3.7	312.5	312.9	0.1	29.8	11.3	64.
26.5	72.5	7671.9	375.0	-37.1	-48.3	255.0	16.7	16.4	10.5	317.3	317.3	99.9	99.9	12.9	63.
28.3	76.4	8145.1	350.0	-41.2	-59.9	259.5	16.7	16.4	14.8	321.0	317.3	99.9	99.9	23.7	70.
30.0	80.4	8643.7	325.0	-45.6	-69.9	253.7	19.7	18.9	10.9	326.9	317.3	99.9	99.9	27.4	64.
31.8	84.7	9171.9	300.0	-49.8	-79.9	253.3	24.7	23.6	7.1	315.2	315.2	99.9	99.9	31.3	60.
33.4	89.0	9735.7	275.0	-53.8	-89.9	258.7	28.9	26.9	10.5	321.0	317.3	99.9	99.9	35.3	71.
35.7	93.8	10342.8	250.0	-57.2	-99.9	258.7	28.5	24.4	14.8	326.9	317.3	99.9	99.9	39.9	71.
37.9	98.8	11003.0	225.0	-59.8	-99.9	246.3	27.2	24.9	10.9	326.9	317.3	99.9	99.9	44.3	72.
40.5	104.2	11743.0	200.0	-57.7	-99.9	256.8	25.3	24.7	5.8	341.5	317.3	99.9	99.9	49.8	72.
43.3	110.2	12592.8	175.0	-55.6	-99.9	259.6	19.7	19.3	2.6	358.1	317.3	99.9	99.9	55.6	71.
46.6	116.7	13573.6	150.0	-56.3	-99.9	253.3	22.3	21.3	6.4	392.9	317.3	99.9	99.9	57.9	71.
50.5	124.3	14738.1	125.0	-56.4	-99.9	250.6	17.1	16.7	4.0	424.2	317.3	99.9	99.9	57.9	71.
55.2	132.7	16165.2	100.0	-53.8	-99.9	237.2	15.7	13.2	8.5	463.4	317.3	99.9	99.9	57.9	71.
61.5	142.0	18018.4	75.0	-52.2	-99.9	227.7	13.0	9.6	1.3	521.0	317.3	99.9	99.9	57.9	71.
69.4	151.7	20614.1	50.0	-52.0	-99.9	225.0	1.8	1.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 662
RAPID CITY, S D
24 APRIL 1975
2013 GMT

TIME MIN	CNTCT	HEIGHT GFN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MR R70 CM/KG	RM PCT	RANGE KM	AZ DG
0.0	14.1	966.0	902.1	15.6	4.6	320.0	10.3	0.6	-7.9	258.2	314.5	5.9	48.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	14.3	965.6	900.0	14.9	4.4	324.2	10.9	0.4	-8.6	257.7	313.7	5.8	49.2	0.1	13.
0.0	16.3	1221.9	875.0	10.5	2.1	334.9	13.6	5.8	-12.3	295.3	309.3	5.1	56.0	0.7	15.
1.5	18.5	1462.5	850.0	7.9	1.1	325.9	12.2	6.9	-10.1	295.1	308.5	4.9	62.1	1.2	15.
2.3	20.7	1708.0	825.0	5.7	-1.2	312.7	12.9	9.5	-8.7	295.2	307.0	4.3	60.9	1.8	15.
3.2	22.9	1459.0	800.0	3.9	-3.0	308.8	14.0	11.5	-8.0	295.8	306.5	3.8	60.3	2.5	14.
4.0	25.2	2216.3	775.0	1.6	-4.7	303.9	14.1	11.7	-7.8	296.0	305.8	3.5	62.9	3.2	13.
5.1	27.5	2479.5	750.0	-1.0	-7.2	308.6	13.4	10.7	-6.0	295.9	304.4	3.0	62.6	4.0	13.
6.0	30.0	2749.0	725.0	-2.9	-11.1	302.0	15.2	12.9	-8.1	295.5	303.1	2.3	53.1	4.8	13.
6.7	32.5	3028.1	700.0	-2.3	-22.1	297.4	14.2	12.6	-6.5	300.0	302.9	0.9	20.1	5.4	13.
7.4	35.1	3315.7	675.0	-4.2	-22.5	292.2	13.8	12.8	-5.2	301.0	303.9	0.9	22.5	6.0	13.
8.3	37.5	3612.1	650.0	-6.4	-20.6	288.1	13.5	12.8	-4.2	301.8	305.4	1.2	31.9	6.6	12.
9.2	40.1	3917.5	625.0	-8.2	-25.1	281.8	14.8	13.7	-5.5	303.2	305.7	0.8	24.4	7.3	12.
10.1	42.7	4233.0	600.0	-10.7	-31.8	299.2	15.9	13.8	-7.7	303.8	305.2	0.4	15.5	8.2	12.
11.1	45.6	4599.1	575.0	-12.8	-38.4	307.3	14.9	11.9	-9.3	305.1	306.8	0.5	21.2	9.1	12.
12.1	48.4	4897.3	550.0	-14.4	-38.4	313.6	16.5	11.9	-11.4	308.9	307.8	0.2	11.0	10.3	12.
13.2	51.3	5248.8	525.0	-16.2	-39.4	317.1	19.5	13.3	-14.3	309.9	309.7	0.2	11.2	11.2	12.
14.3	54.3	5613.9	500.0	-19.1	-41.7	316.1	19.3	13.3	-13.9	309.7	310.4	0.2	11.5	12.4	12.
15.4	57.3	5992.1	475.0	-22.5	-44.2	310.1	20.9	16.0	-13.4	310.1	310.6	0.2	11.8	13.7	12.
16.5	60.3	6387.2	450.0	-25.9	-46.6	304.2	22.5	18.6	-12.7	310.7	311.1	0.1	12.2	15.2	12.
17.7	64.0	6797.8	425.0	-29.9	-49.6	301.7	24.2	20.6	-12.7	310.6	311.0	0.1	12.6	16.8	12.
18.8	67.3	7227.5	400.0	-33.1	-52.0	304.5	25.1	20.7	-14.2	312.0	312.2	0.1	12.9	18.5	12.
20.0	70.9	7677.9	375.0	-36.6	-54.7	305.9	24.7	20.0	-14.5	313.0	313.3	0.1	13.3	20.2	12.
21.2	74.7	8151.6	350.0	-40.8	-58.9	305.9	23.4	19.9	-13.7	313.7	313.7	99.9	99.9	22.1	12.
22.6	78.8	8651.1	325.0	-45.2	-64.2	305.4	24.2	19.7	-14.0	314.4	314.4	99.9	99.9	24.0	12.
24.1	82.8	9180.9	300.0	-49.1	-69.9	305.4	23.9	19.5	-13.8	316.2	316.2	99.9	99.9	26.2	12.
25.6	87.0	9746.0	275.0	-53.7	-74.9	300.5	26.6	23.1	-13.6	317.5	317.5	99.9	99.9	28.4	12.
27.3	91.7	10353.5	250.0	-57.1	-79.9	298.3	25.1	22.1	-11.9	321.2	321.2	99.9	99.9	31.0	12.
29.0	96.6	11018.4	225.0	-57.1	-84.9	295.2	22.3	20.2	-9.5	331.0	331.0	99.9	99.9	33.4	12.
31.2	101.8	11764.6	200.0	-56.0	-89.9	269.4	26.0	20.0	0.2	344.1	344.1	99.9	99.9	35.4	12.
33.7	107.8	12619.6	175.0	-54.9	-94.9	275.1	17.1	17.0	-1.5	359.3	359.3	99.9	99.9	39.0	12.
36.8	114.3	13601.5	150.0	-55.7	-99.9	273.6	21.3	21.3	-1.4	374.1	374.1	99.9	99.9	42.4	11.
40.4	121.7	14723.9	125.0	-55.5	-99.9	265.9	25.9	24.9	1.8	394.6	394.6	99.9	99.9	46.3	11.
44.4	129.7	16180.9	100.0	-54.0	-99.9	258.6	16.3	16.0	3.2	423.5	423.5	99.9	99.9	50.7	11.
48.1	138.3	18013.4	75.0	-51.0	-99.9	250.1	12.1	11.4	4.1	466.0	466.0	99.9	99.9	53.1	10.
55.9	148.7	20632.1	50.0	-52.5	-99.9	314.8	2.6	1.8	-1.8	519.8	519.8	99.9	99.9	54.4	10.
67.7	156.0	25123.7	25.0	-49.8	-99.9	999.9	99.9	99.9	99.9	641.4	641.4	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

24 APRIL 1975
2026 GMT

TIME MIN	CTCT	WEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO CM/SEC	RH PCT	RANGE KM	AZ DG
0.0	9.5	100.0	995.4	25.9	17.5	210.0	3.6	1.8	3.1	301.2	235.4	12.8	60.0	0.3	0.
0.9	9.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.8	7.9	362.2	675.0	24.1	16.5	200.2	9.7	3.4	9.1	301.1	333.8	12.2	62.4	0.3	16.
1.7	9.9	542.2	970.0	21.9	16.2	204.4	9.1	3.8	8.3	301.1	334.0	12.3	70.1	0.8	20.
2.4	11.9	620.3	925.0	19.3	15.4	208.6	10.2	4.9	9.0	300.6	332.7	12.0	78.3	1.2	22.
3.2	18.2	1055.9	900.0	17.1	15.0	222.5	10.2	6.9	7.5	300.7	333.0	12.1	87.6	1.7	25.
4.0	16.2	1256.3	875.0	15.4	14.3	234.5	10.4	8.4	6.0	301.3	333.1	11.8	93.3	2.2	31.
4.9	18.5	1541.8	850.0	12.8	12.2	250.5	13.7	12.9	4.6	300.9	329.5	10.0	96.4	2.7	37.
5.7	20.7	1703.1	825.0	12.2	10.5	265.4	15.1	15.0	1.2	302.7	329.3	9.7	89.5	3.3	46.
6.7	22.9	2050.9	800.0	10.3	9.3	283.5	17.3	17.2	2.0	303.3	328.6	9.2	93.5	4.0	54.
7.6	25.3	2315.4	775.0	9.2	7.5	261.4	18.0	17.8	2.7	304.8	328.3	8.5	85.2	5.0	60.
8.7	27.6	2587.0	750.0	7.2	5.6	261.1	18.3	18.1	2.8	305.4	326.8	7.7	89.3	6.2	64.
9.8	30.1	2865.5	725.0	5.0	3.2	263.4	17.4	17.3	2.0	305.9	324.7	6.7	87.7	7.3	77.
11.3	32.7	3151.5	700.0	2.9	1.7	264.5	18.1	18.0	1.7	306.5	324.2	6.2	91.8	8.4	70.
11.9	35.3	3435.7	675.0	1.3	-11.2	259.8	19.3	17.8	2.3	307.7	321.9	4.9	80.2	9.4	71.
12.9	37.8	3750.0	650.0	1.1	-29.9	262.8	19.3	19.0	3.4	310.5	319.1	2.5	39.1	10.4	72.
13.9	40.4	4054.4	625.0	-0.8	-26.9	257.1	22.1	21.5	4.9	311.7	314.4	0.8	14.5	11.7	73.
15.0	43.1	4369.2	600.0	-2.4	-32.3	256.9	24.6	24.2	4.8	313.4	314.8	0.4	7.6	13.3	74.
16.3	46.9	4692.3	575.0	-4.4	-36.4	273.3	27.7	27.7	-1.9	315.2	316.3	0.3	9.0	15.2	74.
17.8	49.9	5023.0	550.0	-7.5	-41.3	276.3	29.2	29.0	-3.2	318.3	319.0	0.2	4.9	17.4	76.
18.9	51.9	5434.4	525.0	-9.4	-41.3	276.3	29.2	29.0	-6.5	318.3	319.0	0.2	4.9	19.4	78.
20.2	55.0	5813.3	500.0	-12.0	-21.5	282.3	29.1	28.4	-8.5	318.6	323.0	1.4	44.7	21.3	80.
21.3	58.1	6201.3	475.0	-14.3	-29.2	280.8	25.9	29.3	-5.6	320.3	322.7	0.7	27.0	23.3	82.
22.6	61.4	6678.5	450.0	-19.0	-38.3	275.7	29.1	28.7	-4.9	320.3	321.6	0.3	14.9	25.4	84.
23.8	65.2	7032.4	425.0	-21.6	-53.7	279.3	28.7	28.3	-4.6	321.3	321.5	0.1	3.6	27.5	85.
25.3	68.4	7476.3	400.0	-25.1	-55.4	276.3	26.7	26.5	-3.9	322.3	322.5	0.0	4.0	29.7	86.
26.8	72.0	7941.3	375.0	-28.9	-54.0	276.4	25.2	25.0	-2.8	323.2	323.5	0.1	6.8	32.2	87.
28.0	76.3	8430.1	350.0	-32.7	-41.6	275.5	22.6	22.3	-3.8	323.3	324.3	0.3	44.3	34.5	88.
30.5	80.1	8946.6	325.0	-36.8	-42.3	281.3	19.1	19.0	-3.8	325.9	326.9	0.3	54.2	36.9	90.
32.3	84.5	9456.6	300.0	-40.8	99.9	277.2	18.6	18.5	-2.3	327.8	999.9	99.9	99.9	38.9	92.
34.2	88.3	10031.6	275.0	-46.3	99.9	281.9	16.1	15.8	-3.3	328.1	999.9	99.9	99.9	42.9	94.
36.2	94.0	10737.4	250.0	-51.5	97.9	285.1	12.8	12.3	-3.3	329.6	999.9	99.9	99.9	42.4	90.
38.1	98.2	11342.8	225.0	-57.6	94.9	273.5	11.8	11.8	-0.7	330.3	959.9	99.9	99.9	43.2	91.
40.3	104.8	12111.6	200.0	-62.6	99.9	263.3	19.4	19.3	2.2	333.6	999.9	99.9	99.9	45.5	90.
42.8	111.7	12937.1	175.0	-62.5	99.9	278.9	32.7	32.3	-5.1	346.7	999.9	99.9	99.9	42.8	91.
45.7	117.8	13855.9	150.0	-61.2	99.9	275.4	29.7	29.5	-2.8	346.7	999.9	99.9	99.9	55.5	91.
49.0	125.4	15026.6	125.0	-61.2	99.9	262.8	29.2	28.9	-2.6	348.1	999.9	99.9	99.9	61.0	91.
52.7	134.5	16331.9	100.0	-65.9	99.9	274.2	18.5	18.5	-1.3	400.5	999.9	99.9	99.9	60.4	91.
57.6	143.7	18122.3	75.0	-68.4	99.9	273.3	8.0	8.0	-0.5	429.5	999.9	99.9	99.9	70.6	91.
64.4	154.0	20606.9	50.0	-60.7	99.9	274.6	5.1	5.1	-0.4	500.4	999.9	99.9	99.9	72.5	91.
74.8	165.5	25018.5	25.0	-51.8	99.9	41.5	5.6	-3.7	-4.2	635.8	999.9	99.9	99.9	73.2	92.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 1 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 2 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 10
OF POOR QUALITY

Sounding Data

25 April 1975

0000 GMT

PLATE IS

ORIGINAL PAGE IS

STATION NO. 200
CHARLESTON, SC24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DC C	DRY PT DC C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT V DG K	E POT DG K	MR RTO CM/KG	RM PCT	RANGE NM	AZ DG
0.0	4.6	13.0	1018.3	22.2	15.5	210.0	7.2	3.6	6.2	255.3	324.2	11.0	66.0	0.0	0
0.4	5.9	170.8	1000.0	21.2	14.9	217.9	7.9	4.9	6.3	295.8	324.1	10.7	67.1	0.3	25
1.1	8.1	385.6	975.0	19.1	14.5	213.5	9.1	5.0	7.6	295.8	324.1	10.8	75.0	0.6	30
1.8	10.3	612.7	950.0	17.1	12.9	218.5	10.9	6.2	9.0	295.9	322.2	9.9	76.3	1.1	31
2.6	12.4	840.5	925.0	16.6	12.1	231.8	9.7	7.7	6.0	257.7	325.2	10.3	79.7	1.6	34
3.5	14.7	1074.2	900.0	15.9	10.9	249.3	10.0	9.4	3.5	299.1	323.8	9.2	72.3	2.0	41
4.2	16.8	1313.5	875.0	14.5	9.0	252.7	11.4	10.9	3.4	300.0	322.5	8.3	69.5	2.5	47
5.2	19.2	1558.2	850.0	12.8	7.2	255.9	11.2	10.2	4.6	300.6	321.1	7.5	66.4	3.0	52
6.1	21.4	1809.6	825.0	10.9	3.9	278.9	12.4	10.6	6.5	301.0	318.3	6.3	62.6	3.7	51
7.0	23.9	2064.9	800.0	10.2	-11.5	266.9	11.8	10.9	4.6	302.3	308.3	2.8	28.5	4.3	54
8.0	26.2	2329.0	775.0	10.4	-7.7	250.7	12.8	12.1	4.2	305.4	313.6	2.6	27.1	5.0	57
8.9	29.8	2601.1	750.0	8.7	-0.9	256.8	12.5	12.2	2.9	306.7	320.5	4.8	51.1	5.7	54
9.8	31.4	2841.3	725.0	7.6	-2.6	259.0	12.6	12.6	0.2	308.3	321.1	4.4	48.5	6.3	61
10.6	34.1	3165.9	700.0	7.1	-11.6	274.1	13.2	13.1	-0.9	310.6	317.5	2.3	25.1	7.0	64
11.9	36.7	3488.0	675.0	4.9	-6.5	273.8	13.5	13.4	-0.9	311.6	322.0	3.5	43.6	7.8	68
13.9	39.4	3774.6	650.0	2.3	-5.8	279.9	14.8	14.5	-2.5	312.0	323.4	3.8	55.3	8.6	71
14.0	42.1	4050.4	625.0	0.2	-8.4	287.8	15.2	15.4	-4.9	313.1	322.9	3.2	52.3	9.5	74
15.2	45.0	4418.6	600.0	-1.8	-7.6	295.7	15.0	13.5	-6.5	314.5	325.4	3.6	64.6	10.3	74
16.4	48.1	4754.3	575.0	-4.1	-9.1	291.0	14.8	13.8	-6.5	315.6	325.8	3.3	67.6	11.2	81
17.7	50.9	5103.3	550.0	-7.1	-10.7	289.9	15.5	14.6	-5.3	316.0	325.4	3.1	75.6	12.3	84
19.1	54.1	5464.7	525.0	-9.7	-15.8	294.1	13.2	12.4	-4.3	317.0	323.7	2.1	61.1	13.4	87
20.5	57.1	5936.6	500.0	-12.6	-17.4	284.9	12.4	11.2	-5.2	317.8	324.0	1.9	67.2	14.4	94
21.6	60.6	6279.9	475.0	-14.8	-20.1	282.6	12.0	10.6	-5.8	319.8	325.1	1.6	64.1	15.2	90
23.1	64.0	6637.5	450.0	-17.3	-25.2	297.9	12.2	10.8	-7.4	322.9	325.2	1.1	49.9	16.1	91
24.6	67.3	7063.8	425.0	-20.3	-44.4	301.4	14.2	12.1	-7.4	322.9	323.5	0.2	9.4	17.0	91
26.2	70.9	7505.2	400.0	-24.3	-47.1	295.0	14.1	12.8	-6.0	323.4	323.9	0.1	9.9	18.3	91
29.3	74.5	7976.5	375.0	-27.4	-49.3	286.0	14.4	13.3	-6.5	325.3	325.7	0.1	10.2	20.9	91
30.5	79.8	8465.2	350.0	-31.3	-52.1	291.1	14.2	13.2	-5.1	327.0	326.8	0.1	10.7	21.9	91
32.6	83.0	8908.9	325.0	-36.0	-55.5	291.1	14.2	13.2	-5.1	327.0	326.8	0.1	11.2	23.7	91
34.8	87.2	9336.8	300.0	-41.2	-59.9	291.2	14.6	13.7	-5.3	327.3	326.8	0.1	11.2	25.6	107
37.3	91.6	10123.5	275.0	-45.8	-59.9	292.2	17.4	16.1	-6.6	329.0	326.8	0.1	11.2	27.8	101
40.1	96.4	10750.6	250.0	-51.4	-59.9	289.8	15.9	15.0	-5.4	329.0	326.8	0.1	11.2	30.6	102
43.3	101.3	11427.5	225.0	-55.3	-59.9	287.1	14.3	13.7	-4.2	333.7	326.8	0.1	11.2	33.6	103
46.7	107.3	12108.3	200.0	-61.3	-59.9	286.9	18.0	17.7	-3.4	335.8	326.8	0.1	11.2	36.9	104
50.5	113.3	12901.7	175.0	-62.6	-59.9	284.7	30.6	29.6	-7.2	346.7	326.8	0.1	11.2	42.1	102
55.1	116.7	13948.2	150.0	-59.5	-59.9	288.7	25.9	24.5	-6.3	367.7	326.8	0.1	11.2	50.2	103
60.3	127.3	15078.1	125.0	-62.5	-59.9	285.5	25.2	24.3	-6.7	379.9	326.8	0.1	11.2	54.8	104
64.2	132.8	16432.7	100.0	-65.4	-59.9	272.8	20.0	20.0	-1.0	393.7	326.8	0.1	11.2	63.6	104
73.6	142.7	18157.9	75.0	-68.9	-59.9	312.7	4.4	4.7	-1.0	428.6	326.8	0.1	11.2	70.4	105
84.1	151.5	20628.1	50.0	-62.5	-59.9	276.0	3.0	3.0	-0.3	496.3	326.8	0.1	11.2	73.1	105
100.0	160.7	25012.5	25.0	-53.3	-59.9	454.6	8.5	-7.8	-3.5	631.8	326.8	0.1	11.2	74.0	108

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 8 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 C

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA24 APRIL 1975
2315 GMT

TIME MIN	CATCY	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR RTO CM/SEC	RM PCT	RANGE KM	AZ DEG
0.0	4.5	8.0	1018.7	26.8	16.5	295.0	5.2	4.7	-2.2	298.2	330.4	11.7	56.0	0.0	0.
0.7	6.2	170.7	1000.0	23.6	16.4	318.2	4.7	3.3	-3.4	298.2	328.0	10.4	56.4	0.3	111.
1.6	6.5	391.0	975.0	22.1	14.3	304.1	4.4	3.7	-2.5	298.0	327.1	10.6	61.6	0.5	126.
2.3	10.9	617.7	950.0	21.7	13.0	306.7	1.9	1.5	-1.1	300.6	327.5	10.8	57.8	0.7	120.
3.3	13.3	848.8	925.0	20.5	10.5	102.3	2.2	-2.2	0.5	301.4	325.1	8.7	52.9	0.6	124.
4.3	15.7	1094.9	900.0	18.4	9.2	108.3	3.9	-3.7	1.2	301.5	323.9	8.2	55.2	0.5	130.
5.2	18.1	1325.0	875.0	16.0	8.3	106.6	5.5	-5.2	1.9	301.4	322.6	7.7	58.9	0.2	157.
6.1	20.6	1571.5	850.0	13.9	7.4	113.1	5.7	-5.2	3.0	301.7	322.0	7.7	58.9	0.2	239.
7.1	23.1	1822.5	825.0	11.6	7.1	122.5	6.3	-5.3	3.4	301.9	321.1	7.7	73.8	0.5	276.
8.1	25.5	2075.2	800.0	9.2	4.8	120.4	5.3	-4.6	2.7	301.8	320.5	6.8	73.8	0.8	289.
9.1	28.1	2362.2	775.0	9.6	-13.3	101.7	2.9	-2.9	0.6	304.4	309.8	1.8	14.4	1.1	270.
10.3	30.9	2615.0	750.0	10.1	-15.2	343.0	2.1	0.6	-2.1	307.8	312.6	1.6	15.2	1.2	287.
11.3	33.7	2865.8	725.0	9.0	-13.3	350.2	5.4	0.9	-5.3	305.6	315.4	1.9	19.2	1.0	277.
12.3	36.3	3115.4	700.0	7.4	-8.5	351.6	7.5	1.1	-7.4	311.0	319.8	2.9	31.6	1.0	252.
13.6	39.2	3403.5	675.0	5.8	-7.6	347.6	8.4	1.8	-8.2	312.5	322.2	3.2	37.6	1.2	225.
14.7	42.0	3791.7	650.0	3.5	-6.4	352.0	9.3	1.2	-9.2	313.4	325.4	3.7	48.4	1.7	206.
15.9	45.0	4109.4	625.0	1.8	-8.0	2.6	9.8	-0.4	-9.9	315.0	325.1	3.3	47.9	2.3	195.
17.1	48.1	4437.3	600.0	-0.5	-10.5	359.6	9.5	0.7	-9.5	315.9	324.7	2.9	46.5	3.0	195.
18.4	51.0	4776.7	575.0	-2.5	-12.5	342.3	10.5	3.2	-10.0	317.4	325.3	2.5	46.1	3.7	190.
19.8	54.3	5129.1	550.0	-3.7	-16.4	325.1	8.9	5.1	-7.3	319.5	326.1	1.9	36.6	4.4	193.
21.3	57.4	5494.6	525.0	-6.6	-17.0	320.8	7.9	5.0	-6.1	320.7	326.8	1.9	43.4	5.0	172.
22.8	60.9	5873.7	500.0	-9.6	-17.4	308.1	8.4	6.6	-8.2	321.5	327.6	1.9	52.6	5.5	173.
24.4	64.5	6267.6	475.0	-12.9	-19.9	308.3	9.2	7.2	-8.7	322.1	327.5	1.7	55.4	6.2	167.
26.0	67.9	6677.5	450.0	-16.1	-25.3	320.2	11.0	7.1	-8.5	323.1	328.0	1.1	44.8	7.0	162.
27.7	71.4	7105.8	425.0	-18.9	-27.9	315.2	13.4	9.1	-9.5	324.8	327.9	0.9	44.5	8.1	159.
29.4	75.3	7555.2	400.0	-21.5	-32.9	302.6	15.5	13.0	-10.4	327.1	329.2	0.6	34.7	9.4	154.
31.2	79.5	8026.9	375.0	-25.9	-36.1	303.2	15.8	13.3	-10.7	327.1	328.9	0.5	37.5	10.9	150.
33.1	82.5	8522.8	350.0	-29.9	-37.9	292.1	15.9	14.7	-10.3	328.1	329.9	0.4	45.2	12.5	145.
35.0	87.7	9046.1	325.0	-33.7	-42.0	282.7	19.5	19.0	-8.3	330.1	331.2	0.3	42.2	14.1	140.
37.3	92.3	9602.3	300.0	-38.5	-47.5	285.9	21.2	20.4	-5.8	331.1	331.7	0.2	37.6	14.3	134.
39.4	97.3	10194.2	275.0	-43.0	-50.9	299.2	26.8	23.4	-13.0	332.9	332.9	99.9	99.9	19.1	131.
41.8	101.8	10830.6	250.0	-47.7	-59.9	297.6	30.0	26.6	-13.9	335.1	335.1	99.9	99.9	23.3	129.
44.6	107.5	11517.3	225.0	-53.8	-69.9	294.5	33.0	29.8	-14.2	336.1	336.1	99.9	99.9	28.4	127.
47.5	113.3	12262.9	200.0	-60.1	-79.9	290.5	31.3	29.2	-11.1	337.6	337.6	99.9	99.9	33.9	125.
50.5	119.3	13066.5	175.0	-66.0	-99.9	286.3	27.4	26.3	-7.7	341.0	341.0	99.9	99.9	38.6	122.
54.1	128.5	14041.0	150.0	-59.9	-99.9	297.9	22.9	20.2	-16.7	347.8	347.8	99.9	99.9	41.5	122.
58.3	138.3	15141.4	125.0	-15.7	-59.9	274.3	23.4	23.2	-2.6	376.0	376.0	99.9	99.9	44.2	120.
63.3	142.3	16459.7	100.0	-65.8	-99.9	286.7	8.6	8.4	-5.8	393.0	393.0	99.9	99.9	54.9	114.
69.3	150.7	18192.5	75.0	-72.0	-99.9	331.2	5.9	2.8	-5.2	422.0	422.0	99.9	99.9	57.0	110.
77.5	160.0	20436.0	50.0	-60.4	-99.9	312.2	4.7	3.5	-3.2	501.2	501.2	99.9	99.9	57.5	110.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 213
WAYCROSS, GA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	3.7	48.0	1013.5	27.0	14.7	190.0	3.2	0.6	3.2	300.4	328.6	10.5	47.0	0.0	0
0.4	4.8	122.6	1000.0	26.6	15.2	224.3	6.5	4.5	4.6	301.2	320.8	11.0	49.8	0.2	58
1.1	6.8	385.6	975.0	25.4	13.3	225.2	5.8	4.1	4.1	301.2	320.8	9.9	49.9	0.4	51
2.0	9.0	612.5	950.0	22.5	12.7	225.3	6.5	4.5	4.7	301.4	327.9	9.8	53.7	0.7	44
2.8	10.9	642.9	925.0	20.4	11.7	225.2	5.4	3.8	3.9	301.4	326.8	9.4	57.3	1.0	47
3.5	12.2	1079.7	900.0	17.9	10.9	225.8	5.8	3.9	4.2	301.2	326.1	9.2	63.6	1.3	46
4.5	15.4	320.3	875.0	15.7	10.4	227.0	5.5	4.0	3.8	301.3	326.1	9.1	71.0	1.6	48
5.3	17.5	1565.9	850.0	13.4	9.1	232.6	5.5	4.4	3.4	301.3	326.8	8.6	75.3	1.8	46
6.2	20.0	1816.6	825.0	11.0	7.7	235.6	5.6	4.9	2.8	301.3	323.2	8.0	80.1	2.1	49
7.1	22.2	2073.3	800.0	9.0	7.0	237.5	6.4	5.4	3.4	301.8	323.4	7.9	87.3	2.4	49
7.9	24.6	2336.1	775.0	8.2	-0.5	238.5	6.1	5.2	2.2	303.3	316.9	4.8	54.7	2.9	50
8.8	26.9	2607.8	750.0	9.5	-1.9	243.4	6.0	5.4	2.7	307.5	320.6	4.5	45.4	3.1	51
9.7	29.2	2882.7	725.0	6.0	-1.5	265.3	6.7	6.7	0.6	308.9	322.7	4.7	50.8	3.4	53
10.6	32.1	3177.6	700.0	7.0	-12.2	282.9	8.6	8.4	-1.9	310.5	317.1	2.1	24.0	3.7	57
11.6	34.8	3476.2	675.0	9.7	-7.5	289.9	9.3	8.8	-3.2	312.5	322.2	3.2	37.9	4.1	61
12.7	37.3	3788.0	650.0	3.8	-11.1	291.7	9.9	9.2	-3.7	313.6	321.4	2.5	32.5	4.5	63
13.8	40.1	4101.2	625.0	1.4	-9.4	296.3	10.5	9.4	-4.7	314.4	323.7	3.0	44.6	5.1	75
14.9	42.9	4428.4	600.0	-1.3	-11.5	300.6	11.0	10.0	-5.9	314.9	323.1	2.6	45.8	5.6	60
16.0	45.0	4745.9	575.0	-4.3	-17.9	301.1	11.4	9.8	-5.9	315.4	326.6	3.7	76.3	6.2	65
17.2	48.6	5115.2	550.0	-6.9	-10.2	302.0	11.1	9.5	-5.9	316.2	326.0	3.2	77.1	6.8	64
18.5	51.5	5477.2	525.0	-8.3	-15.8	310.9	10.4	7.9	-6.8	318.6	325.4	2.1	54.5	7.5	63
19.7	54.6	5854.3	500.0	-11.1	-19.3	307.8	11.6	9.4	-7.3	319.7	325.1	1.6	50.3	8.1	58
21.0	57.7	6246.2	475.0	-14.0	-22.7	307.8	11.6	9.2	-7.1	320.7	325.0	1.3	47.6	9.0	98
22.4	61.0	6654.4	450.0	-16.9	-22.9	304.8	10.9	9.0	-6.2	322.1	326.6	1.3	59.4	9.4	102
23.9	64.4	7081.0	425.0	-20.3	-25.3	298.4	10.5	9.2	-5.0	323.0	326.8	1.1	64.1	10.7	103
25.6	67.8	7527.0	400.0	-24.1	-27.2	305.8	10.0	12.0	-7.2	323.8	327.2	1.0	75.4	11.9	105
27.3	71.3	7994.4	375.0	-27.5	-31.6	298.1	17.5	15.4	-8.3	325.2	326.0	0.2	20.9	13.5	117
29.0	75.2	8497.6	350.0	-30.8	-32.9	293.0	19.4	17.9	-7.6	327.2	327.2	0.0	20.9	15.3	138
30.8	79.2	9008.2	325.0	-35.6	-39.4	286.2	18.4	17.6	-5.1	327.5	327.6	0.0	6.6	17.4	158
32.6	83.2	9598.8	300.0	-41.0	-39.9	285.8	17.6	16.9	-4.8	327.5	327.6	0.0	99.9	19.6	178
34.6	87.3	10148.5	275.0	-45.6	-39.9	257.0	17.5	15.6	-7.9	324.2	327.9	99.9	99.9	21.4	108
36.8	92.0	10773.1	250.0	-50.1	-39.9	255.3	20.3	18.4	-8.7	331.6	327.9	99.9	99.9	23.6	108
39.2	97.0	11453.6	225.0	-55.3	-39.9	287.4	17.3	16.4	-5.3	333.7	327.9	99.9	99.9	26.4	110
41.7	102.0	12197.6	200.0	-59.3	-39.9	278.2	21.9	21.8	-2.0	338.6	327.9	99.9	99.9	29.5	109
44.5	107.8	13025.6	175.0	-61.1	-39.9	278.8	31.6	31.2	-4.8	349.2	327.9	99.9	99.9	33.5	107
48.0	114.0	13990.6	150.0	-59.0	-39.9	283.3	25.2	24.5	-5.2	368.4	327.9	99.9	99.9	39.2	108
51.9	121.0	15123.6	125.0	-63.1	-39.9	281.2	22.1	21.7	-4.3	380.7	327.9	99.9	99.9	45.0	108
56.7	128.7	16475.3	100.0	-68.8	-39.9	278.8	9.9	9.9	-1.0	384.9	327.9	99.9	99.9	49.8	108
62.4	137.3	18187.0	75.0	-68.5	-39.9	298.8	8.5	7.4	-4.1	429.4	327.9	99.9	99.9	54.0	108
70.2	146.3	20659.0	50.0	-62.9	-39.9	340.5	4.1	1.4	-3.9	455.3	327.9	99.9	99.9	58.8	107
83.0	156.5	25077.9	25.0	-50.9	-39.9	26.7	4.1	-1.8	-3.6	638.5	327.9	99.9	99.9	56.8	110

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 220
APALACHICOLA, FLA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	11.0	1020.0	22.6	18.8	150.0	2.6	-1.3	2.3	295.5	331.1	13.8	79.0	0.0	0.
0.7	6.1	183.0	1000.0	20.4	17.3	99.9	99.9	99.9	59.9	295.3	324.0	12.6	82.4	599.9	99.9
1.3	8.1	401.0	975.0	19.6	14.8	99.9	99.9	99.9	59.9	296.3	325.3	11.0	79.1	999.9	99.9
2.2	10.2	626.0	950.0	19.4	11.2	99.9	99.9	99.9	99.9	298.1	321.9	8.9	59.1	999.9	99.9
2.8	12.1	854.9	925.0	18.1	10.1	55.9	99.9	99.9	99.9	298.9	321.7	8.4	59.5	999.9	99.9
3.7	14.3	1065.2	900.0	16.3	9.0	99.9	99.9	99.9	55.5	299.3	321.3	8.1	62.3	999.9	99.9
4.5	16.3	1328.5	875.0	14.8	8.7	99.9	99.9	99.9	99.9	300.3	322.4	8.1	65.7	999.9	99.9
5.4	18.5	1573.5	850.0	13.0	7.6	99.9	99.9	99.9	99.9	300.8	322.0	7.7	69.5	999.9	99.9
6.1	20.7	1828.4	825.0	12.7	-1.4	99.9	99.9	99.9	99.9	302.6	315.0	4.4	39.4	999.9	99.9
7.0	23.0	2082.8	800.0	12.3	2.2	99.9	99.9	99.9	99.9	305.0	320.9	5.6	45.8	999.9	99.9
7.9	25.3	2348.5	775.0	10.7	1.3	99.9	99.9	99.9	99.9	307.7	321.6	5.5	52.4	999.9	99.9
8.9	27.6	2621.5	750.0	9.6	-1.3	99.9	99.9	99.9	99.9	307.7	321.2	4.7	46.5	999.9	99.9
9.7	30.1	2902.6	725.0	9.6	-10.0	99.9	99.9	99.9	99.9	310.3	317.8	2.5	23.8	999.9	99.9
10.7	32.7	3193.0	700.0	8.1	-13.0	99.9	99.9	99.9	99.9	311.7	316.0	2.0	21.1	999.9	99.9
11.7	35.3	3492.3	675.0	6.1	-5.5	99.9	99.9	99.9	99.9	313.0	324.3	3.8	43.2	999.9	99.9
12.6	37.8	3800.2	650.0	3.7	-6.7	348.5	5.2	1.0	-5.1	313.6	324.4	3.6	46.3	1.2	4P.
13.9	40.5	4117.7	625.0	1.6	-9.1	339.7	8.1	2.8	-7.6	314.6	324.0	3.1	44.8	1.1	67.
14.9	43.1	4445.1	600.0	-1.2	-10.6	342.6	10.2	3.0	-9.7	315.1	323.9	2.8	43.4	1.2	97.
16.1	46.0	4783.2	575.0	-3.4	-11.2	344.2	11.5	3.1	-11.0	316.4	325.1	2.8	54.8	1.7	121.
17.3	49.0	5133.5	550.0	-5.7	-13.3	342.0	10.9	3.4	-10.3	317.6	325.4	2.8	54.6	2.4	135.
18.4	51.9	5492.4	525.0	-8.4	-14.1	333.2	10.1	4.5	-9.0	318.6	326.3	2.4	63.3	3.0	141.
19.8	55.0	5873.4	500.0	-10.8	-16.5	315.9	9.8	6.8	-7.0	320.1	329.8	2.1	62.8	3.8	141.
21.2	58.0	6265.7	475.0	-13.8	-18.3	301.7	10.5	8.9	-5.5	321.8	327.2	1.9	68.4	4.6	135.
22.7	61.4	6678.4	450.0	-17.2	-22.1	259.9	10.7	9.3	-5.3	321.8	326.5	1.4	65.3	5.6	135.
24.2	65.0	7105.4	425.0	-20.2	-25.4	301.9	12.6	10.7	-6.6	323.1	326.9	1.1	62.9	6.5	133.
25.8	68.3	7547.1	400.0	-23.6	-29.4	301.0	15.2	13.0	-7.8	324.4	327.2	0.8	58.2	7.9	131.
27.5	71.9	8015.6	375.0	-26.8	-35.7	302.6	17.6	14.8	-9.5	326.1	327.9	0.5	42.5	9.5	130.
29.1	75.8	8509.3	350.0	-31.0	-41.1	301.6	16.5	14.1	-8.7	326.9	328.0	0.3	36.1	11.2	129.
31.0	80.0	9020.2	325.0	-35.8	-45.0	286.6	20.0	17.8	-8.9	327.2	328.0	0.2	37.9	13.2	127.
33.1	84.2	9582.4	300.0	-38.9	-56.8	311.2	22.3	16.8	-14.7	330.5	330.7	0.1	12.8	15.7	126.
35.3	88.4	10174.0	275.0	-42.9	-59.9	316.7	28.3	19.4	-20.6	333.0	999.9	99.9	99.9	19.0	124.
37.7	93.4	10839.4	250.0	-48.1	-59.9	318.0	31.0	20.8	-23.1	334.5	999.9	99.9	99.9	23.6	130.
40.2	98.4	11494.2	225.0	-54.4	-59.9	318.7	29.9	21.3	-21.0	335.1	999.9	99.9	99.9	28.0	131.
43.1	103.8	12238.4	200.0	-60.2	-59.9	311.5	29.4	22.0	-19.5	337.5	999.9	99.9	99.9	33.9	131.
46.3	110.0	13064.0	175.0	-63.1	-59.9	302.2	25.2	21.3	-13.4	345.9	999.9	99.9	99.9	39.3	131.
50.3	116.7	14017.1	150.0	-61.2	-59.9	301.6	28.0	20.5	-12.6	364.6	999.9	99.9	99.9	46.5	129.
54.7	124.3	15142.4	125.0	-64.4	-59.9	289.1	21.8	20.6	-7.2	378.4	999.9	99.9	99.9	51.7	127.
60.1	133.0	16469.4	100.0	-69.3	-59.9	295.1	15.8	14.3	-6.7	393.8	999.9	99.9	99.9	57.5	126.
66.4	142.0	18157.0	75.0	-70.4	-59.9	320.8	10.6	6.7	-8.2	425.3	999.9	99.9	99.9	61.9	126.
75.6	152.0	20660.8	50.0	-61.6	-59.9	348.1	6.0	1.7	-6.4	498.4	999.9	99.9	99.9	63.5	126.
90.6	162.3	25086.7	25.0	-51.5	-59.9	68.3	5.5	-5.1	-2.0	637.1	999.9	99.9	99.9	64.5	130.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 226
CFMTERVILLE, ALA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFN	PRES MB	TEMP DG C	CFW PT CG C	DIA DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.4	140.0	1000.6	25.9	19.8	210.0	7.2	3.6	6.2	300.9	337.6	13.8	65.0	0.0	0.
0.0	6.5	145.3	1000.0	25.8	19.8	205.5	7.2	3.1	6.5	300.8	337.5	13.8	65.1	0.0	4.
0.5	8.0	367.8	975.0	23.3	17.2	169.2	9.8	-1.6	9.7	300.3	334.3	12.8	68.4	0.4	40.
1.4	11.1	554.3	950.0	21.2	16.4	180.6	11.3	0.1	11.3	300.4	333.5	12.5	73.8	0.8	9.
2.4	13.6	825.3	925.0	19.6	16.1	200.8	11.3	4.0	10.6	300.8	334.3	12.6	81.4	1.5	12.
3.4	15.9	1061.1	900.0	17.7	15.7	218.8	11.3	6.5	9.3	301.4	335.2	12.6	88.6	2.1	16.
4.3	18.4	1302.0	875.0	15.8	13.9	229.3	12.7	9.7	8.3	301.7	332.6	11.5	88.4	2.7	22.
5.2	20.8	1548.3	850.0	14.7	11.0	243.0	14.3	12.7	6.5	302.9	329.5	9.8	78.4	3.4	30.
6.3	23.4	1800.6	825.0	12.9	8.4	252.7	12.1	11.6	3.6	303.4	326.6	8.4	74.1	4.1	37.
7.3	25.9	2058.9	800.0	11.6	6.7	265.6	11.6	11.6	0.7	304.6	322.6	7.7	71.7	4.8	43.
8.4	28.7	2324.2	775.0	10.3	2.5	275.8	13.7	13.5	-2.3	305.7	322.6	6.0	52.5	5.1	50.
9.5	31.4	2596.6	750.0	8.8	-0.8	281.1	14.5	14.2	-2.8	306.8	320.7	4.8	50.9	5.9	54.
10.7	34.0	2876.5	725.0	7.3	-9.0	272.1	14.4	12.3	-0.5	308.0	319.5	3.9	44.2	6.6	63.
11.7	36.6	3165.8	700.0	6.2	-17.2	263.2	14.2	14.1	1.7	313.7	316.2	1.4	14.6	7.3	66.
12.8	39.5	3465.2	675.0	7.1	-13.9	265.6	16.6	16.5	1.3	313.8	319.8	1.9	20.6	8.4	68.
14.0	42.2	3774.2	650.0	4.9	-15.7	270.4	18.6	15.6	-0.1	314.7	320.1	1.7	20.8	9.4	70.
15.0	45.1	4092.3	625.0	2.2	-19.1	277.8	19.2	15.0	-2.0	315.2	319.9	1.5	20.4	10.3	72.
16.3	48.3	4420.6	600.0	-0.1	-24.6	286.5	19.9	14.7	-4.9	316.1	319.0	0.9	13.4	11.3	75.
17.6	51.3	4750.4	575.0	-3.1	-29.3	297.7	19.9	14.9	-8.1	316.5	319.3	0.8	15.9	12.1	78.
19.1	54.4	5105.2	550.0	-6.4	-26.6	302.3	17.8	15.1	-9.5	316.5	319.2	0.8	18.2	13.5	83.
20.5	57.5	5471.1	525.0	-9.1	-20.1	292.6	19.1	17.6	-7.3	317.6	323.0	0.7	19.9	14.8	87.
21.9	60.9	5846.2	500.0	-12.5	-20.9	285.2	22.1	21.3	-5.8	318.0	322.6	1.4	49.3	16.4	89.
23.3	64.3	6215.8	475.0	-15.0	-40.2	283.0	21.7	21.1	-5.2	319.4	320.3	0.2	9.7	18.3	91.
24.8	67.6	6642.6	450.0	-17.7	-46.2	288.1	20.5	19.5	-6.4	321.0	321.5	0.1	6.1	20.1	92.
26.3	71.0	7067.7	425.0	-20.3	-47.9	285.9	19.6	17.9	-5.1	322.9	323.3	0.1	6.4	21.7	93.
28.0	74.9	7514.2	400.0	-23.5	-49.9	286.0	17.4	16.7	-4.6	324.4	324.8	0.1	6.7	23.5	94.
29.9	78.9	7982.3	375.0	-27.7	-52.6	281.5	21.3	20.8	-4.2	324.9	325.2	0.1	7.2	25.4	95.
31.9	82.5	8475.0	350.0	-31.4	-55.1	280.4	19.1	18.8	-3.5	326.4	326.6	0.1	7.5	28.1	96.
34.2	86.6	8956.5	325.0	-35.3	-57.8	282.6	22.5	21.9	-4.9	327.9	328.1	0.0	7.9	30.9	97.
36.3	91.3	9547.7	300.0	-40.0	-61.0	284.3	24.2	23.2	-6.9	328.9	329.0	0.0	8.4	33.9	97.
39.6	95.6	10134.4	275.0	-44.6	99.9	284.3	24.2	23.2	-5.8	330.6	999.9	99.9	999.9	37.2	98.
41.2	100.3	10767.5	250.0	-49.5	99.9	285.2	22.3	21.5	-5.8	332.5	999.9	99.9	999.9	41.1	99.
43.9	105.6	11449.8	225.0	-54.6	99.9	290.0	20.6	27.8	-10.1	334.6	999.9	99.9	999.9	44.9	99.
47.0	111.0	12194.6	200.0	-59.7	99.9	287.0	35.0	33.5	-10.2	338.3	999.9	99.9	999.9	50.8	101.
50.3	117.0	13022.2	175.0	-63.1	99.9	278.0	28.1	27.4	-4.3	345.9	999.9	99.9	999.9	57.1	101.
54.3	124.0	13976.6	150.0	-60.7	99.9	285.7	31.5	30.3	-8.5	365.5	999.9	99.9	999.9	64.4	100.
58.7	131.0	15105.0	125.0	-64.4	99.9	279.7	26.6	26.2	-4.5	378.4	999.9	99.9	999.9	71.7	101.
64.0	139.0	16457.3	100.0	-67.3	99.9	270.0	17.9	17.9	-0.0	397.7	999.9	99.9	999.9	79.7	100.
71.0	1.7.3	18183.5	75.0	-66.3	99.9	285.0	14.3	13.8	-3.7	433.9	999.9	99.9	999.9	87.7	99.
80.6	156.5	20643.4	50.0	-61.0	99.9	332.4	4.1	1.9	-3.6	499.8	999.9	99.9	999.9	90.3	94.
96.6	166.3	25067.1	25.0	-53.0	99.9	343.0	6.4	1.7	-6.2	632.8	999.9	99.9	999.9	91.6	102.

* BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 232
HOOTHVILLE, LA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE NM	AZ DG
0.0	4.8	1.0	1017.9	24.0	21.7	150.0	3.6	-1.8	3.1	297.8	340.3	16.3	87.0	0.0	0.
0.5	6.3	157.0	1000.0	23.5	22.5	170.1	6.8	-1.2	6.7	299.0	344.5	17.5	94.4	0.2	323.
1.2	8.8	378.3	975.0	21.4	-1.0	177.3	8.3	-0.4	8.2	298.9	341.6	16.3	97.6	0.5	340.
1.9	11.1	604.0	950.0	20.1	19.8	182.8	8.1	0.4	8.0	299.7	340.5	15.5	97.6	0.8	344.
2.5	13.7	834.9	925.0	15.3	19.0	201.1	7.3	2.6	6.8	301.0	341.1	15.1	98.1	1.1	354.
3.2	16.0	1070.7	900.0	16.8	16.5	203.2	7.7	3.0	7.1	300.6	336.0	13.3	97.9	1.4	1.
4.0	18.6	1310.4	875.0	15.0	9.7	201.4	6.0	2.2	5.6	300.6	324.2	8.7	70.9	1.7	5.
5.0	20.9	1557.1	850.0	15.9	7.1	184.0	6.4	0.5	6.4	303.8	324.6	7.5	55.8	2.0	7.
5.6	23.7	1810.2	825.0	15.0	-3.8	177.9	6.6	-0.5	6.6	305.0	315.2	3.5	27.0	2.3	6.
6.5	26.1	2065.9	800.0	13.2	5.2	176.4	6.5	-0.4	6.5	306.2	325.7	7.0	58.1	2.6	5.
7.4	28.9	2336.3	775.0	11.7	-7.9	171.1	6.7	-1.0	6.5	306.7	314.9	2.7	28.7	3.0	4.
8.4	31.9	2605.6	750.0	10.0	-7.1	166.2	7.2	-1.7	6.9	307.9	310.8	3.0	29.3	3.3	2.
9.3	34.6	2890.9	725.0	9.5	-19.0	167.3	6.8	-1.5	6.6	310.5	314.3	1.2	11.3	3.8	0.
10.3	37.2	3181.7	700.0	9.3	-44.2	161.3	4.0	-1.3	3.8	312.8	313.2	0.1	1.0	4.1	35.
11.2	40.1	3481.9	675.0	7.7	-24.1	156.9	1.9	-0.6	1.8	314.4	317.1	0.8	8.3	4.2	35.
12.3	42.9	3791.6	650.0	5.8	-24.7	178.8	1.5	-0.0	1.5	315.6	318.2	0.8	9.0	4.3	35.
13.3	46.1	4110.5	625.0	2.8	-20.4	182.3	2.3	0.1	2.3	315.8	314.7	1.2	16.1	4.4	35.
14.3	48.2	4439.0	600.0	-0.0	-15.9	182.6	2.9	0.1	2.9	316.3	322.2	1.8	29.1	4.6	35.
15.3	52.1	4778.3	575.0	-2.6	-13.0	212.2	4.1	2.2	3.5	317.3	324.9	2.4	44.4	4.8	35.
16.6	55.4	5129.5	550.0	-5.2	-15.0	226.5	6.1	4.4	4.2	318.2	325.0	2.2	45.7	5.0	2.
17.8	58.7	5487.5	525.0	-7.6	-16.9	237.0	7.9	6.6	4.3	319.6	325.7	1.9	46.8	5.4	6.
19.0	62.1	5871.8	500.0	-9.6	-18.5	266.2	9.9	9.9	0.7	321.4	323.9	0.7	19.5	5.7	12.
20.5	65.6	6266.6	475.0	-11.9	-38.6	276.2	12.2	12.2	-1.3	323.2	324.2	0.3	8.8	5.9	21.
21.9	69.1	6677.3	450.0	-15.6	-42.5	272.2	12.8	12.7	-0.5	323.5	324.1	0.2	7.8	6.3	30.
23.4	72.7	7106.5	425.0	-18.5	-39.0	279.6	15.8	15.6	-2.6	325.2	326.3	0.3	14.5	6.9	40.
24.9	76.7	7556.0	400.0	-21.6	-38.3	274.9	19.4	19.3	-1.7	327.6	328.1	0.3	20.4	7.9	50.
26.5	80.5	8027.8	375.0	-25.6	-46.6	275.2	18.4	18.4	-1.7	327.6	328.2	0.1	11.8	9.3	58.
28.1	84.7	8524.8	350.0	-29.0	-49.9	279.1	16.6	16.4	-2.6	329.5	330.0	0.1	12.8	10.6	63.
29.9	88.8	9050.3	325.0	-32.8	-44.7	295.0	23.2	21.0	-5.8	331.3	332.1	0.2	29.1	12.1	70.
31.9	93.4	9509.3	300.0	-36.8	-51.5	296.1	28.1	25.2	-12.3	333.4	333.8	0.1	19.9	14.5	74.
34.0	98.2	10294.9	275.0	-41.9	99.9	295.1	29.5	26.7	-12.5	334.5	333.8	99.9	99.9	17.0	81.
36.3	103.2	10842.0	250.0	-47.5	99.9	293.8	33.1	30.3	-13.4	335.5	334.5	99.9	99.9	21.3	94.
38.5	108.6	11530.5	225.0	-53.1	99.9	286.8	34.8	33.3	-16.0	337.2	337.2	99.9	99.9	25.9	95.
41.1	114.0	12275.9	200.0	-58.7	99.9	287.1	35.4	33.8	-10.4	339.6	339.6	99.9	99.9	31.1	97.
44.2	120.3	13108.2	175.0	-64.0	99.9	300.7	37.6	32.3	-19.2	344.3	344.3	99.9	99.9	36.1	100.
47.3	127.0	14046.6	150.0	-65.9	99.9	269.2	31.5	31.5	0.5	356.6	356.6	99.9	99.9	43.4	102.
51.6	134.7	15162.6	125.0	-65.6	99.9	268.0	21.8	23.7	0.8	376.2	376.2	99.9	99.9	50.8	101.
56.3	141.7	16508.4	100.0	-68.4	99.9	273.9	12.9	12.9	-0.9	395.6	395.6	99.9	99.9	57.4	100.
62.4	146.7	18216.0	75.0	-69.1	99.9	257.9	12.6	11.1	-5.9	428.1	428.1	99.9	99.9	62.6	99.
70.5	158.0	20692.4	50.0	-59.4	99.9	23.8	9.1	-3.7	-8.4	503.4	503.4	99.9	99.9	68.0	100.
83.4	164.7	25132.1	25.0	-49.9	99.9	40.7	6.0	-3.9	-4.5	641.6	641.6	99.9	99.9	63.8	104.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.0	100.0	1004.0	27.4	18.9	190.0	5.7	1.0	5.6	302.1	339.2	13.9	60.0	0.0	0.
0.1	5.3	135.6	1000.0	27.2	19.3	181.2	6.4	0.1	6.4	302.3	340.4	14.3	62.3	0.1	3.
0.9	7.4	359.5	975.0	25.4	17.2	175.0	8.7	-0.8	8.6	302.4	336.9	12.8	60.8	0.6	4.
1.7	5.8	587.6	950.0	23.5	17.0	191.3	8.9	1.8	8.8	302.8	337.7	13.0	67.3	1.0	3.
2.5	11.4	820.6	925.0	22.0	17.0	192.3	6.6	1.4	6.4	303.6	339.4	13.3	73.3	1.4	6.
3.4	14.4	1056.3	900.0	19.4	17.2	193.0	6.5	1.5	6.3	303.4	340.7	13.9	87.2	1.7	7.
4.5	16.2	1100.8	875.0	17.2	16.2	197.6	7.4	2.3	7.0	303.4	339.4	13.4	93.7	2.1	9.
5.3	16.2	1548.2	850.0	15.0	13.9	210.2	9.4	4.7	8.1	303.4	335.6	11.9	93.6	2.5	11.
6.1	21.5	1801.1	825.0	13.3	12.1	221.3	11.6	7.7	6.8	308.1	333.7	10.9	92.6	3.0	18.
7.0	24.1	2055.9	800.0	11.4	10.0	223.3	12.0	8.2	8.7	308.6	331.4	9.7	91.4	3.6	20.
7.8	26.5	2325.4	775.0	10.1	8.0	229.7	12.4	9.4	8.0	305.9	330.2	8.8	86.8	4.2	24.
8.6	28.1	2557.8	750.0	7.9	5.8	236.1	11.7	9.7	6.5	308.1	327.9	7.8	86.9	4.7	27.
9.4	31.9	2878.2	725.0	9.8	-10.7	241.2	10.3	9.0	4.9	310.5	317.8	2.4	22.6	5.1	30.
10.5	34.7	3168.6	700.0	7.9	-11.0	239.6	10.9	9.4	5.5	311.5	318.7	2.3	24.8	5.6	34.
11.6	37.2	3468.0	675.0	6.9	-11.5	236.2	14.4	12.0	8.0	318.0	329.0	5.1	55.1	6.5	37.
12.7	40.1	3777.4	650.0	5.0	-3.4	243.4	16.1	14.4	7.2	315.2	328.9	4.6	54.8	7.5	40.
14.1	42.6	4096.3	625.0	2.5	-6.1	248.8	17.7	16.5	6.4	315.8	327.6	3.6	53.2	6.7	44.
15.4	45.7	4424.6	600.0	-0.5	-10.2	245.8	19.0	17.9	6.6	315.9	325.0	3.0	48.0	10.1	48.
16.8	48.9	4763.4	575.0	-3.3	-12.3	254.3	18.4	17.7	5.0	316.4	324.5	2.6	49.9	11.6	51.
18.3	51.8	5113.5	550.0	-6.2	-14.8	258.3	15.5	15.2	3.1	316.9	323.9	2.2	50.8	12.9	54.
19.7	55.0	5475.6	525.0	-8.9	-16.0	264.6	16.5	16.8	1.8	318.0	324.6	2.1	56.2	14.0	57.
21.0	58.3	5852.1	500.0	-11.5	-16.4	267.8	21.1	21.1	0.8	319.3	326.0	2.1	66.7	15.4	59.
22.4	61.4	6283.5	475.0	-13.5	-40.8	267.2	19.7	19.7	1.0	321.2	322.1	0.2	7.9	16.9	62.
23.8	65.1	6652.2	450.0	-16.8	-42.0	264.0	20.0	19.9	2.1	322.1	322.8	0.2	9.1	18.4	64.
25.4	68.4	7075.2	425.0	-19.8	-44.0	261.2	20.5	20.3	3.1	323.6	324.3	0.2	9.4	20.2	67.
26.9	71.4	7526.7	400.0	-22.6	-46.0	263.8	21.7	21.5	2.4	325.6	326.1	0.1	9.7	22.2	67.
28.7	75.1	7997.0	375.0	-26.2	-49.6	272.1	21.3	21.3	-0.8	326.8	327.3	0.1	10.0	24.3	69.
30.6	78.3	8451.9	350.0	-30.2	-51.4	275.1	23.2	23.2	-2.1	328.0	328.4	0.1	10.4	26.6	71.
32.5	82.3	9014.0	325.0	-34.4	-54.5	280.9	23.4	23.0	-4.4	329.2	329.5	0.1	10.6	29.9	74.
34.4	87.5	9564.9	300.0	-39.2	-58.1	283.5	23.2	22.5	-5.4	330.1	330.3	0.0	11.3	31.4	76.
36.4	92.0	10159.7	275.0	-43.0	-61.9	285.5	30.4	29.3	-8.1	333.0	333.0	99.9	99.9	34.0	78.
38.8	96.9	10755.5	250.0	-47.8	-65.9	287.1	36.3	34.6	-10.7	335.0	335.0	99.9	99.9	37.9	82.
41.5	101.8	11482.1	225.0	-53.7	-69.9	283.7	36	37.5	-9.1	336.3	336.3	99.9	99.9	43.9	85.
44.3	107.3	12229.5	200.0	-59.3	-74.9	283.1	40.1	39.0	-9.1	338.9	338.9	99.9	99.9	50.4	84.
47.2	113.0	13054.3	175.0	-64.9	-79.9	285.4	40.0	38.4	-10.9	342.9	342.9	99.9	99.9	57.1	90.
50.5	118.5	13936.7	150.0	-63.1	-74.9	270.1	34.9	34.9	-0.1	341.4	341.4	99.9	99.9	63.3	90.
53.7	124.3	15123.2	125.0	-63.1	-69.9	268.5	28.0	28.0	0.7	380.7	380.7	99.9	99.9	70.7	90.
56.8	134.3	16481.9	100.0	-66.2	-69.9	273.5	20.4	20.4	-1.2	390.9	390.9	99.9	99.9	74.3	90.
65.5	142.0	18212.2	75.0	-68.9	-69.9	268.6	17.7	17.7	0.4	428.5	428.5	99.9	99.9	83.8	91.
73.6	150.7	20711.8	50.0	-60.5	-69.9	266.0	1.7	1.6	-0.5	501.1	501.1	99.9	99.9	86.4	91.
86.3	160.0	25136.9	25.0	-50.3	-69.9	347.6	7.1	1.5	-6.9	640.0	640.0	99.9	99.9	87.4	94.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 240
LAKE CHARLES, LA

24 APRIL 1975
2315 GMT

TIME MIN	CNTCY	HEIGHT GPH	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	3.4	5.0	1014.4	25.0	21.7	150.0	0.7	-3.4	5.8	299.2	342.0	16.4	82.0	0.0	0.
0.4	4.6	131.1	1000.0	24.4	21.6	206.8	10.5	4.7	9.3	299.8	343.0	16.5	84.3	0.4	32.0
1.3	6.4	352.9	975.0	21.8	19.8	180.3	9.5	1.1	9.5	299.1	339.9	15.1	88.3	0.9	35.5
2.3	8.5	578.5	950.0	15.6	18.6	181.0	11.2	0.2	11.2	299.0	337.0	14.4	94.0	1.3	35.7
3.1	10.5	862.6	925.0	18.4	16.9	195.0	12.2	3.4	11.8	299.9	335.1	13.3	91.1	1.9	0.
3.9	12.5	1044.1	905.0	18.1	14.8	206.1	10.2	4.5	9.1	301.7	333.7	11.9	81.5	2.5	5.
4.9	14.5	1285.8	875.0	18.0	10.2	197.7	11.6	3.5	11.1	303.7	328.4	9.0	60.5	3.0	9.
5.8	16.5	1533.9	855.0	16.7	8.3	192.2	13.3	2.8	13.0	304.8	327.4	8.2	57.6	3.8	10.
6.4	18.8	1787.9	825.0	14.8	7.7	185.9	10.7	1.8	10.6	305.4	327.8	8.1	62.4	4.5	10.
7.3	20.9	2047.7	800.0	13.0	6.5	190.9	9.8	3.0	9.4	306.0	327.3	7.6	64.6	5.1	10.
8.9	22.2	2313.9	775.0	11.0	3.7	195.9	11.3	3.8	10.6	306.5	324.9	6.5	60.6	5.7	12.
9.9	25.5	2587.7	750.0	11.4	-4.9	194.8	13.4	3.4	12.9	309.4	320.4	3.7	33.8	6.4	12.
11.0	27.8	2871.2	725.0	12.2	-12.3	195.5	14.3	3.6	13.9	313.1	319.4	2.0	16.7	7.4	12.
12.1	30.2	3163.9	700.0	10.1	-11.2	193.2	13.8	3.1	13.4	313.9	321.1	2.3	21.0	8.3	13.
13.1	32.8	3464.9	675.0	7.7	-10.9	192.9	14.2	3.2	13.8	314.6	322.2	2.5	25.2	9.3	13.
14.4	35.3	3775.0	650.0	5.7	-11.0	195.0	13.3	3.5	12.8	315.8	323.6	2.5	28.7	10.2	13.
15.6	37.9	4094.3	625.0	3.4	-15.3	205.6	10.5	4.4	9.5	316.5	322.4	1.9	24.0	11.2	13.
16.9	40.5	4424.7	600.0	1.9	-12.6	220.3	8.8	5.7	6.7	318.6	326.2	2.4	33.2	11.8	14.
18.1	43.1	4766.4	575.0	-0.9	-13.4	230.9	7.9	6.1	5.0	319.3	326.7	2.4	37.9	12.4	14.
19.4	46.3	5119.1	550.0	-4.2	-12.8	235.4	7.4	6.3	3.7	319.5	327.6	2.6	50.7	12.8	17.
20.8	49.0	5483.9	525.0	-7.6	-14.0	245.8	8.5	7.8	3.5	319.5	327.3	2.5	60.2	13.3	20.
22.1	51.9	5861.5	500.0	-11.2	-18.0	260.3	8.9	8.8	1.5	319.5	325.5	1.9	57.3	13.6	22.
23.5	55.0	6253.3	475.0	-13.5	-25.9	252.7	12.6	12.0	3.8	321.3	324.5	1.0	34.2	14.2	25.
25.0	58.0	6661.7	450.0	-16.9	-28.2	263.1	10.1	16.0	1.9	322.1	324.9	0.8	36.4	15.0	29.
26.5	61.4	7088.3	425.0	-20.2	-32.2	265.8	18.8	14.7	1.7	323.1	325.2	0.6	33.1	16.0	33.
28.2	65.0	7534.8	400.0	-24.8	-34.9	259.9	23.8	23.4	4.2	325.0	326.8	0.5	33.0	17.4	35.
29.4	68.3	8004.9	375.0	-26.2	-46.1	266.4	23.9	23.9	1.5	326.9	327.5	0.2	13.3	19.2	43.
31.6	72.0	8500.0	350.0	-28.7	-41.5	265.8	21.9	21.9	0.1	328.6	329.6	0.3	30.7	21.0	48.
33.6	76.0	9024.9	325.0	-33.2	-38.8	280.8	27.8	27.4	-5.2	330.5	332.4	0.4	56.5	23.0	54.
35.7	80.1	9582.8	300.0	-37.5	-44.2	277.2	32.8	32.5	-4.1	332.4	333.3	0.2	49.5	24.0	60.
38.0	84.4	10178.5	275.0	-41.5	59.9	273.7	33.6	33.6	-2.2	335.2	335.9	99.9	99.9	29.8	65.
40.3	88.8	10814.9	250.0	-47.2	59.9	275.3	34.0	33.9	-3.1	335.9	335.9	99.9	99.9	33.8	69.
43.0	94.0	11504.9	225.0	-52.9	59.9	276.8	34.5	34.5	-0.5	337.5	337.5	99.9	99.9	39.1	72.
45.8	95.3	12254.6	200.0	-58.7	99.9	279.8	40.5	39.9	-6.9	339.8	339.9	99.9	99.9	44.8	75.
49.0	105.0	13082.9	175.0	-63.8	99.9	281.7	45.2	44.2	-9.2	344.7	344.7	99.9	99.9	52.3	79.
52.5	111.7	14017.0	150.0	-65.6	99.9	271.9	30.7	36.7	-1.2	337.2	337.2	99.9	99.9	60.3	82.
56.9	119.0	15143.3	125.0	-61.9	99.9	261.1	14.8	14.6	2.3	332.8	332.8	99.9	99.9	67.1	83.
62.0	127.5	16455.7	100.0	-70.4	99.9	264.5	15.5	19.4	1.9	331.7	331.7	99.9	99.9	73.1	83.
68.6	137.0	18207.9	75.0	-68.9	99.9	277.5	20.3	20.1	-2.6	428.4	428.4	99.9	99.9	79.6	84.
77.8	147.0	20702.0	50.0	-59.8	99.9	261.1	3.9	-0.1	-3.9	502.5	502.5	99.9	99.9	82.6	85.
92.2	156.0	25129.9	25.0	-52.3	99.9	330.4	7.9	3.9	-6.9	636.4	636.4	99.9	99.9	81.7	87.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 248
SHREVEPORT, LA

24 APRIL 1975
2123 GMT

TIME MIN	CNCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.4	79.0	1002.4	28.3	18.4	180.0	7.2	0.0	7.2	303.1	339.2	13.4	55.0	0.0	0.
0.1	4.6	100.4	1000.0	28.1	18.5	179.9	7.9	-0.0	7.9	303.1	339.6	13.6	55.9	0.1	0.
1.0	6.4	325.0	475.0	26.4	17.5	180.2	10.4	0.0	10.4	303.5	339.6	13.0	58.1	0.6	0.
1.7	8.5	553.9	950.0	24.4	16.7	182.5	11.9	0.5	11.9	303.7	338.2	12.8	62.3	1.1	0.
2.6	10.6	787.3	925.0	22.2	15.9	188.4	13.6	2.0	13.5	303.7	337.2	12.4	67.6	1.9	2.
3.6	12.6	1025.2	900.0	20.0	15.4	182.0	12.3	2.7	12.0	303.8	337.3	12.4	75.1	2.6	5.
4.6	14.3	1267.7	875.0	17.7	14.5	198.0	13.4	4.1	12.7	303.8	336.4	12.0	81.8	3.3	7.
5.6	16.9	1515.5	850.0	15.6	13.6	200.9	13.3	6.6	12.5	304.1	335.6	11.6	87.4	4.0	9.
6.5	19.3	1768.8	825.0	13.6	11.9	206.0	15.0	8.6	13.5	304.4	333.5	10.7	89.2	4.8	12.
7.6	21.4	2026.0	800.0	11.7	10.3	212.3	15.0	8.1	12.6	304.9	332.2	9.9	91.1	5.8	15.
8.4	23.8	2293.8	775.0	12.6	-4.4	221.4	18.0	11.9	13.5	307.9	319.2	3.9	34.3	6.7	19.
9.3	25.1	2560.4	750.0	13.5	-17.0	224.5	17.3	12.1	12.3	311.4	315.7	1.3	10.4	7.9	22.
11.0	28.6	2853.6	725.0	12.3	-19.3	218.5	17.7	11.0	13.9	313.1	316.8	1.1	9.2	9.3	25.
12.0	31.2	3146.8	700.0	11.2	-14.7	215.2	17.5	10.1	14.3	315.1	320.6	1.7	14.7	10.1	28.
13.0	33.9	3448.7	675.0	8.8	-18.1	210.6	15.2	7.7	13.1	315.7	320.1	1.4	12.9	11.1	29.
14.2	36.3	3735.7	650.0	6.8	-17.3	213.0	13.0	7.1	10.9	316.5	321.7	1.5	15.9	12.1	27.
15.6	39.2	4080.0	625.0	4.0	-19.1	222.7	12.6	8.6	9.3	317.1	321.5	1.3	16.6	13.1	24.
16.9	41.4	4410.0	600.0	1.0	-20.1	236.4	12.5	10.4	6.9	317.4	321.6	1.3	18.8	14.1	22.
18.3	44.8	4750.2	575.0	-1.9	-17.3	255.4	14.2	13.8	3.6	317.9	323.4	1.7	29.6	15.8	31.
19.7	47.8	5101.5	550.0	-5.2	-19.1	260.3	16.3	16.6	2.8	317.7	322.5	1.5	32.5	16.4	34.
21.1	50.7	5464.4	525.0	-9.1	-19.8	262.1	16.8	16.6	2.3	317.7	322.5	1.5	41.1	16.4	34.
22.3	53.6	5836.6	500.0	-12.6	-20.4	260.6	17.9	17.7	2.9	317.9	322.8	1.5	51.9	17.4	41.
23.6	56.5	6229.0	475.0	-16.1	-20.6	264.2	16.9	16.8	1.7	318.2	323.3	1.6	67.9	18.4	44.
25.2	59.5	6633.1	450.0	-20.0	-25.5	262.9	17.3	17.2	2.1	318.1	321.6	1.1	61.0	20.1	47.
26.9	63.4	7057.2	425.0	-21.1	-46.2	259.3	19.2	18.9	3.6	321.9	322.4	0.1	8.4	21.6	50.
28.6	66.9	7502.0	400.0	-24.1	-49.7	261.0	21.4	21.2	3.4	323.6	324.0	0.1	7.3	23.6	57.
30.4	70.5	7965.5	375.0	-27.7	-51.9	262.6	23.9	23.7	3.0	324.6	325.2	0.1	7.8	25.6	55.
32.3	74.3	8461.2	350.0	-31.7	-54.6	270.4	22.2	22.2	-0.2	325.9	326.1	0.1	8.3	27.4	54.
34.3	78.5	8940.0	325.0	-36.4	-50.6	265.3	23.9	23.8	2.0	326.4	326.8	0.1	21.3	30.4	62.
36.3	82.7	9531.2	300.0	-39.1	-45.1	268.7	32.3	32.3	0.7	330.2	331.0	0.2	52.5	33.1	63.
38.4	86.8	10122.7	275.0	-43.3	99.9	268.0	36.0	35.9	1.3	332.5	999.9	99.9	999.9	37.2	62.
40.8	91.8	10756.9	250.0	-46.4	99.9	266.8	40.5	40.4	2.2	334.1	999.9	99.9	999.9	42.5	64.
43.5	96.3	11441.6	225.0	-54.3	99.9	268.9	38.8	38.8	0.7	335.3	999.9	99.9	999.9	48.6	71.
46.2	102.4	12186.5	200.0	-60.3	99.9	275.4	41.3	41.1	-3.9	337.2	999.9	99.9	999.9	55.2	74.
49.3	108.8	13008.3	175.0	-65.0	99.9	281.4	49.8	48.9	-9.8	342.7	999.9	99.9	999.9	64.4	77.
53.1	115.7	13646.9	150.0	-61.0	99.9	263.7	40.2	40.0	4.4	365.0	999.9	99.9	999.9	71.3	73.
57.5	122.7	14165.3	125.0	-61.8	99.9	275.7	24.5	24.4	-2.4	363.1	999.9	99.9	999.9	78.9	80.
62.4	129.7	14511.9	100.0	-67.9	99.9	262.7	25.1	24.9	3.2	396.6	999.9	99.9	999.9	85.8	86.
68.8	143.0	14164.5	75.0	-69.0	99.9	270.8	14.9	14.8	-0.2	428.2	999.9	99.9	999.9	94.5	81.
77.6	155.0	20644.2	50.0	-60.5	99.9	268.4	14.9	14.1	-4.7	500.8	999.9	99.9	999.9	96.4	82.
99.9	99.9	59.9	25.0	59.5	99.9	99.9	99.9	99.9	59.9	99.9	999.9	99.9	999.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 255
VICTORIA, TEX

24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DLB PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T K	E POT Y DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.1	4.3	33.0	1006.8	28.0	21.3	180.0	11.8	0.0	11.8	302.8	345.6	16.1	67.0	0.0	0.
0.2	4.9	93.3	1008.0	27.1	21.1	99.9	99.9	99.9	99.9	302.5	345.1	16.0	69.8	999.9	999.9
0.8	6.5	317.4	975.0	25.2	20.7	999.9	99.9	99.9	99.9	302.7	345.4	16.0	76.5	999.9	999.9
1.5	8.5	545.9	950.0	23.2	20.8	999.9	99.9	99.9	99.9	303.0	347.0	16.6	86.5	999.9	999.9
2.2	10.5	778.8	925.0	20.9	19.7	154.9	12.5	-5.3	11.3	302.8	344.9	15.8	92.7	1.7	341.
2.8	12.4	1015.5	908.0	18.9	7.9	168.6	13.3	-2.4	13.1	302.0	323.3	7.8	51.5	2.2	341.
3.6	14.5	1258.0	875.0	19.5	9.1	180.5	15.8	0.1	15.8	304.9	322.7	6.3	38.6	2.8	345.
4.3	16.4	1506.7	850.0	18.3	-5.7	184.4	17.4	1.3	17.3	305.9	316.6	3.7	24.0	3.5	348.
5.2	18.5	1742.1	825.0	19.2	-38.2	189.4	17.0	2.8	16.8	308.5	309.5	0.2	1.0	4.4	352.
6.1	20.6	2025.9	800.0	19.3	-38.1	187.9	18.1	2.5	17.9	311.8	312.1	0.2	1.0	5.3	355.
7.1	22.3	2257.2	775.0	17.8	-33.2	183.4	15.8	1.5	15.7	313.0	314.0	0.3	1.0	6.3	357.
8.1	25.2	2576.1	750.0	16.6	-39.7	184.9	14.9	1.2	14.8	314.7	315.2	0.2	1.0	7.2	358.
9.0	27.4	2862.4	725.0	14.3	-40.0	188.8	13.2	2.0	13.0	315.1	315.7	0.2	1.1	7.9	359.
9.8	29.8	3157.5	703.0	13.2	-41.8	202.1	11.0	4.2	10.2	317.2	317.7	0.1	1.0	8.5	360.
10.7	32.3	3461.9	675.0	11.8	-41.3	222.0	10.1	6.8	7.5	318.8	319.4	0.2	1.2	9.0	2.
11.8	34.9	3775.8	650.0	9.7	-18.8	235.3	9.5	7.8	5.4	320.1	324.5	1.4	11.8	9.4	5.
12.8	37.2	4099.6	625.0	6.8	-13.7	241.4	7.8	6.8	3.7	320.5	327.3	2.1	21.4	9.8	7.
14.1	40.3	4432.6	600.0	3.3	-15.2	241.7	6.6	5.9	3.1	320.6	326.4	1.9	24.1	10.1	10.
15.4	42.4	4775.9	575.0	0.4	-19.9	248.2	7.2	6.7	2.7	320.6	325.1	1.4	19.5	10.4	12.
16.6	45.4	5130.2	550.0	-2.7	-18.5	260.0	9.6	9.4	1.7	321.0	326.3	1.6	28.6	10.7	15.
17.7	48.4	5456.8	525.0	-5.7	-28.2	274.4	10.6	10.5	-0.8	321.7	325.1	1.0	20.8	10.9	18.
19.1	51.3	5876.8	500.0	-8.6	-38.8	274.2	10.9	10.9	-0.8	322.5	323.9	0.4	10.1	11.1	23.
20.4	54.4	6272.3	475.0	-11.5	-31.9	274.0	14.5	14.4	-1.0	323.8	325.7	0.6	16.5	12.1	33.
21.8	57.4	6664.8	450.0	-14.2	-33.0	268.8	17.9	17.9	0.4	325.3	327.2	0.5	18.5	12.1	33.
23.2	60.9	7115.7	425.0	-17.0	-39.0	263.6	20.5	20.3	2.3	327.2	328.3	0.3	12.8	13.2	39.
24.7	64.3	7567.7	400.0	-20.5	-38.3	263.6	21.1	21.0	2.4	328.4	330.5	0.6	32.2	14.6	44.
26.2	67.8	8042.1	375.0	-24.3	-32.6	265.6	23.0	23.0	1.8	329.4	332.5	0.9	61.8	16.2	49.
27.9	71.5	8541.9	350.0	-27.8	-32.5	272.5	25.4	25.4	-1.1	331.3	333.8	0.7	63.5	18.0	53.
29.5	75.6	9065.9	325.0	-32.3	-32.7	274.2	30.2	30.1	-2.2	332.1	333.6	0.4	52.5	20.2	55.
31.3	79.8	9630.1	300.0	-36.1	-44.0	273.8	30.2	30.1	-2.0	334.4	335.4	0.3	43.7	23.1	63.
33.4	84.0	10228.4	275.0	-40.6	99.9	271.1	30.2	30.2	-0.6	336.4	339.9	99.9	999.9	26.4	67.
35.6	88.8	10871.4	250.0	-45.6	99.9	273.0	30.8	30.7	-1.6	338.4	339.9	99.9	999.9	30.0	70.
37.9	94.0	11564.7	225.0	-51.4	99.9	275.5	34.2	34.0	-3.3	339.8	339.9	99.9	999.9	34.0	74.
40.4	99.5	12319.3	200.0	-57.6	99.9	268.2	36.8	36.7	-2.5	341.6	339.9	99.9	999.9	39.1	76.
43.0	105.5	13148.7	175.0	-64.5	99.9	274.1	35.1	35.0	-2.5	343.5	339.9	99.9	999.9	44.5	77.
46.3	112.3	14040.5	150.0	-65.9	99.9	281.6	38.1	37.3	-7.7	346.7	339.9	99.9	999.9	52.0	81.
50.1	119.7	15191.5	125.0	-64.1	99.9	262.1	27.7	27.5	3.8	348.7	339.9	99.9	999.9	58.4	82.
54.9	128.7	16544.5	100.0	-68.9	99.9	268.3	18.4	18.4	0.5	349.7	339.9	99.9	999.9	64.3	82.
60.8	138.5	18263.7	75.0	-68.6	99.9	269.1	8.5	8.5	0.1	459.1	339.9	99.9	999.9	68.8	82.
69.1	149.0	20734.7	50.0	-59.7	99.9	253.3	15.2	15.5	4.6	502.8	339.9	99.9	999.9	70.9	83.
81.7	160.0	23170.7	25.0	-50.5	99.9	999.9	99.9	99.9	99.9	639.5	339.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

JOURNAL PAGE IS
OF POOR QUALITY

STATION NO. 260
STEPHENVILLE, TEX

24 APRIL 1975
2315 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

161 21. 1

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT CG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MA RTO GM/KG	RH PCY	RANGE KM	AZ DG
0.7	9.9	399.0	962.5	28.5	18.9	180.0	6.2	0.0	6.2	307.0	346.3	14.4	56.0	0.0	0.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	11.0	515.2	950.0	27.2	15.6	349.9	1.5	0.3	-1.4	308.4	338.9	11.8	4.0	0.8	1.
1.3	13.4	750.9	925.0	25.6	14.9	185.5	8.8	0.8	8.8	307.0	239.0	11.6	51.6	0.9	1.
2.1	15.8	931.3	900.0	23.3	14.2	187.2	14.6	1.8	14.5	307.1	338.5	11.4	56.4	1.6	4.
3.0	18.2	1236.7	875.0	21.1	13.3	192.3	13.0	2.0	12.7	307.2	337.8	11.1	61.2	2.4	5.
4.0	20.3	1467.3	850.0	19.1	13.1	201.3	12.4	4.5	11.5	307.7	339.7	11.2	68.0	3.1	8.
4.7	22.4	1742.7	825.0	16.9	12.7	212.6	11.8	6.3	9.9	308.0	339.4	11.3	72.4	3.7	11.
5.7	26.3	2035.7	800.0	14.6	12.4	222.0	11.9	8.6	8.3	308.3	340.0	11.5	86.7	4.2	15.
6.6	28.3	2274.3	775.0	12.8	11.5	241.1	12.3	10.8	6.0	309.0	339.8	11.1	91.7	4.7	20.
7.5	31.6	2545.7	750.0	10.8	10.2	-55.2	11.8	11.8	3.1	309.6	332.0	10.5	96.3	5.2	26.
8.4	34.4	2833.7	725.0	12.5	-6.3	257.1	12.4	12.1	2.8	313.6	324.1	3.5	27.6	5.6	32.
9.6	37.1	3127.2	700.0	11.7	-42.7	244.2	13.3	12.0	5.8	315.4	315.9	0.1	1.0	6.3	37.
10.7	40.1	3430.0	675.0	10.1	-43.7	235.3	14.8	12.2	8.4	317.0	317.4	0.1	1.0	7.1	35.
11.7	42.9	3741.9	650.0	8.1	-45.0	212.9	17.2	13.7	10.4	318.1	318.5	0.1	1.0	8.0	41.
12.7	46.0	4033.2	625.0	5.1	-46.8	230.7	18.7	14.5	11.9	318.2	318.5	0.1	1.0	9.1	42.
13.8	49.3	4394.6	600.0	2.3	-44.9	229.8	19.2	14.7	12.4	318.8	321.7	0.9	11.7	10.4	43.
14.9	52.1	4736.4	575.0	-0.7	-14.1	229.2	21.2	16.0	13.8	319.4	320.5	2.2	35.8	11.6	44.
16.1	55.3	5096.8	550.0	-4.0	-7.0	229.0	22.0	16.6	14.4	319.8	322.5	4.1	80.0	13.2	45.
17.5	58.6	5454.9	525.0	-7.4	-12.7	235.8	20.0	16.6	11.3	319.9	328.5	2.7	65.6	15.0	45.
18.7	62.1	5832.7	500.0	-10.8	-18.4	235.7	20.8	17.1	11.7	320.1	325.8	1.8	53.3	17.2	47.
21.1	65.6	6225.0	475.0	-14.3	-24.5	241.0	21.3	18.6	10.3	320.5	327.6	2.2	83.5	19.4	48.
23.6	69.2	6631.9	450.0	-18.3	-22.8	248.4	20.9	19.4	7.7	320.4	324.9	1.4	67.7	22.4	50.
25.5	72.7	7037.6	425.0	-20.2	-62.8	249.4	23.6	22.1	6.3	323.1	323.1	0.0	1.0	25.1	52.
26.9	76.7	7504.9	400.0	-22.5	-64.3	251.8	24.3	23.1	7.6	325.7	325.7	0.0	1.0	26.8	54.
28.5	80.7	7974.9	375.0	-26.7	-67.0	245.1	27.4	24.8	11.5	326.2	326.3	0.0	1.0	29.2	55.
29.8	84.8	8468.7	350.0	-30.7	-69.6	261.6	26.7	26.4	3.9	327.3	327.3	0.0	1.0	31.7	56.
31.6	88.3	8993.5	325.0	-34.7	-72.2	250.9	31.2	28.5	10.2	328.8	328.9	0.0	1.0	34.0	58.
33.4	91.8	9545.5	300.0	-37.7	-74.2	258.0	30.5	35.9	6.7	334.6	332.2	0.0	1.0	37.5	60.
35.3	95.4	10140.8	275.0	-41.9	-59.9	256.4	36.9	35.9	6.7	334.6	332.2	0.0	1.0	42.2	61.
37.4	103.5	10779.3	250.0	-46.8	-59.3	257.3	40.3	45.1	10.2	336.5	336.5	99.9	99.9	47.1	63.
39.7	109.0	11468.7	225.0	-52.4	-59.9	259.9	45.2	44.5	7.9	338.2	338.2	99.9	99.9	54.0	65.
42.2	114.8	12219.4	200.0	-58.4	-59.9	264.0	63.6	63.2	6.6	340.4	339.9	99.9	99.9	61.1	67.
45.0	121.0	13046.4	175.0	-64.8	-59.9	264.8	59.6	59.3	5.4	343.0	339.9	99.9	99.9	70.8	70.
48.2	128.0	13843.7	150.0	-63.6	-59.9	261.4	27.7	27.4	4.1	340.5	339.9	99.9	99.9	79.7	72.
52.4	135.5	15111.0	125.0	-62.9	-59.9	265.4	30.1	26.4	2.4	341.2	339.9	99.9	99.9	86.6	72.
58.1	142.7	16478.9	100.0	-68.3	-59.9	260.1	16.2	15.9	2.8	403.6	339.9	99.9	99.9	93.9	73.
63.8	150.7	19214.4	75.0	-68.8	-59.9	246.4	4.6	4.2	1.8	428.7	339.9	99.9	99.9	99.5	74.
72.2	159.3	20706.6	50.0	-58.8	-59.9	288.2	7.3	6.9	-2.3	505.1	339.9	99.9	99.9	102.1	75.
84.9	167.7	25147.6	25.0	-50.1	-59.9	316.7	5.0	3.4	-3.6	641.1	339.9	99.9	99.9	102.6	77.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 261
DEL RIO, TEX24 APRIL 1975
2315 GMT

TIME MIN	CATY	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	MX RTO CM/KG	PH PCT	162 KM	16.0 DG
0.0	0.0	314.0	970.6	31.7	17.6	100.0	3.2	-3.2	0.6	309.3	345.7	13.2	43.0	0.0	0.0
0.9	0.9	99.9	1000.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
4.9	4.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	10.7	506.0	950.0	25.0	17.7	126.7	4.3	-3.5	2.6	309.3	346.8	13.6	44.3	0.2	24.6
1.3	13.0	744.1	925.0	27.5	15.9	118.0	4.4	-3.8	2.1	309.3	343.5	12.4	44.4	0.4	23.5
2.4	15.4	966.4	900.0	25.2	15.3	108.1	4.5	-4.3	1.4	309.3	343.2	12.3	44.4	0.7	23.5
3.3	17.7	1233.5	875.0	22.9	14.8	113.1	4.0	-3.7	1.6	309.2	343.1	12.2	44.4	0.9	23.5
4.4	20.2	1495.5	850.0	20.4	14.3	104.3	4.0	-4.0	1.3	309.2	342.8	12.2	44.4	1.2	23.2
5.2	22.6	1743.1	825.0	18.4	11.8	87.0	2.3	-2.3	-0.1	309.5	339.1	10.6	45.3	1.4	29.1
6.1	25.2	2306.9	800.0	17.7	6.5	339.1	5.3	1.9	-5.0	311.1	333.0	7.7	46.0	1.4	29.6
7.0	27.6	2376.1	775.0	17.4	-0.4	305.0	9.5	7.8	-5.5	313.2	327.6	4.9	30.4	1.1	27.1
7.6	30.3	2537.8	750.0	17.2	-2.8	278.6	9.2	9.0	-1.4	315.9	328.4	4.2	25.2	0.6	25.7
8.7	33.0	2845.9	725.0	15.4	-4.4	303.4	5.4	4.5	-3.0	316.8	328.5	3.8	25.3	0.1	23.2
9.7	35.6	3142.2	700.0	13.1	-6.3	275.0	11.0	11.0	-1.0	317.4	327.9	3.4	25.4	0.5	19.6
10.6	38.3	3446.8	675.0	11.1	-8.6	99.9	99.9	99.9	99.9	318.4	327.7	3.0	24.3	99.9	99.9
11.6	41.1	3759.7	650.0	7.9	-11.2	99.9	99.9	99.9	99.9	318.5	325.8	2.3	24.7	3.1	5.4
12.9	43.9	4081.4	625.0	5.0	-12.5	224.6	13.2	9.2	7.4	318.5	325.3	2.2	30.4	4.0	5.2
14.0	47.0	4412.4	600.0	1.7	-13.6	232.8	12.3	9.6	7.4	318.5	325.3	2.2	30.4	4.0	5.2
15.1	50.1	4753.6	575.0	-1.5	-16.7	243.3	13.7	12.3	6.2	318.5	324.3	1.8	30.1	4.8	5.3
16.3	53.0	5105.0	550.0	-4.1	-19.1	254.2	17.9	17.2	4.9	319.4	324.4	1.5	30.0	5.9	5.6
17.4	56.0	5471.1	525.0	-6.5	-22.5	262.9	20.7	20.6	2.6	320.7	324.6	1.2	26.6	7.3	6.1
19.1	58.4	5850.3	500.0	-9.8	-25.0	264.0	22.1	21.9	2.3	321.2	325.1	1.2	33.1	9.1	6.6
20.6	62.9	6244.5	475.0	-11.7	-29.2	261.3	22.0	21.7	3.3	323.5	325.9	0.7	21.5	11.1	6.9
21.9	66.0	6656.4	450.0	-14.4	-35.4	262.8	21.1	21.0	2.6	325.1	326.6	0.4	14.8	12.7	7.6
23.2	69.4	7087.1	425.0	-17.4	-37.6	264.0	24.0	23.9	2.5	326.6	327.9	0.3	15.1	14.3	7.2
24.5	73.1	7538.2	400.0	-21.0	-30.6	262.1	23.9	23.7	3.3	327.6	330.4	0.7	41.6	16.3	7.3
26.0	77.0	8012.0	375.0	-24.2	-30.6	271.1	25.4	25.4	-0.5	329.6	332.3	0.8	53.4	18.4	7.5
27.7	80.9	8512.2	350.0	-27.6	-36.5	270.1	30.6	30.6	-0.5	331.5	333.2	0.5	41.9	21.3	7.7
29.5	85.0	9041.6	325.0	-31.0	-44.1	264.8	30.4	30.3	2.8	333.0	334.7	0.2	26.1	24.5	7.8
31.2	88.2	9603.7	300.0	-36.1	-50.7	264.3	28.1	28.0	2.8	334.5	334.9	0.1	20.2	27.3	7.9
32.8	92.8	10231.0	275.0	-41.5	99.9	262.8	30.3	30.0	3.8	335.1	335.9	99.9	99.9	30.3	7.9
34.7	98.5	10840.4	250.0	-47.0	99.9	268.7	30.0	30.0	0.7	336.2	336.9	99.9	99.9	34.0	8.0
37.3	103.5	11524.9	225.0	-52.7	99.9	262.1	34.7	34.4	4.8	337.8	337.9	99.9	99.9	38.6	8.1
39.4	108.7	12276.3	200.0	-58.5	99.9	265.5	37.6	37.5	2.9	340.1	339.8	99.9	99.9	43.4	8.1
42.7	115.0	13104.5	175.0	-65.6	99.9	260.6	41.6	41.1	6.8	341.6	339.9	99.9	99.9	51.1	8.1
44.1	121.5	14028.2	150.0	-69.3	99.9	273.4	40.4	40.4	-2.4	350.7	339.9	99.9	99.9	60.5	8.2
50.1	129.0	15132.4	125.0	-64.2	99.9	258.5	28.9	28.3	5.4	378.7	339.9	99.9	99.9	67.9	8.2
54.6	134.7	16490.7	100.0	-68.6	99.9	270.1	25.4	25.4	-0.0	395.3	339.9	99.9	99.9	74.4	8.2
60.0	143.9	18198.1	75.0	-71.0	99.9	292.5	6.8	3.9	-5.6	424.0	339.9	99.9	99.9	78.9	8.3
67.0	154.7	20678.5	50.0	-60.3	99.9	325.5	3.5	3.3	-1.6	511.5	339.9	99.9	99.9	80.7	9.3
79.4	165.3	25089.6	25.0	-53.4	99.9	56.9	5.2	-4.3	-2.9	631.2	339.9	99.9	99.9	83.1	8.5

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 265
MIDLAND, TEX20 APRIL 1975
2315 GMT

156 11. 3

TIME MIN	CNTCT	HEIGHT CM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	MX RTO CM/KG	RM PCY	RANGE KM	AZ DG
0.0	12.5	872.0	910.3	31.1	-4.1	250.0	6.2	5.8	2.1	313.0	322.4	3.1	16.0	0.2	6.
99.3	59.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.0	59.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.0	59.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.0	99.3	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
3.4	13.5	974.5	900.0	29.9	-4.7	242.7	7.8	7.0	3.6	312.8	321.9	3.0	10.2	0.2	67.
1.3	15.8	1223.9	875.0	26.5	-3.5	245.7	6.6	6.0	2.7	311.8	322.0	3.4	13.6	0.5	6.
2.3	18.2	1477.5	850.0	23.6	-5.8	245.8	7.1	6.7	2.5	311.3	320.1	2.9	13.6	0.2	6.
3.2	20.6	1736.5	825.0	21.4	-7.4	255.1	7.1	6.9	1.8	311.6	319.7	2.7	13.7	1.3	6.
4.1	23.0	2001.2	800.0	19.0	-9.1	251.0	8.4	8.0	2.7	311.7	319.1	2.4	13.9	1.7	6.
4.9	25.5	2272.3	775.0	16.4	-10.5	252.6	8.4	8.3	1.5	311.7	318.5	2.2	14.7	2.1	7.
5.7	28.1	2545.2	750.0	13.4	-11.7	262.4	9.0	8.9	1.2	311.4	317.9	2.1	16.2	2.5	7.
6.4	30.9	2834.9	725.0	10.8	-12.4	262.0	7.6	7.5	1.1	311.5	317.8	2.0	18.2	2.9	7.
7.5	33.4	3123.5	700.0	7.8	-13.9	277.6	7.0	6.9	-0.0	311.4	317.2	1.9	19.6	3.3	7.
8.7	36.0	3421.8	675.0	5.9	-16.9	271.6	8.3	8.3	-0.2	312.4	317.1	1.5	17.5	3.9	7.
9.8	38.3	3729.1	650.0	3.4	-21.0	267.7	11.5	11.5	0.1	312.9	316.5	1.1	14.7	4.4	8.
10.9	41.5	4045.9	625.0	1.4	-22.5	269.9	14.9	14.9	0.0	314.2	317.4	1.0	14.8	5.2	8.
12.0	44.6	4373.5	600.0	-0.4	-23.8	273.1	17.0	17.0	-0.9	315.7	318.8	0.9	15.0	6.4	8.
13.1	47.6	4712.2	575.0	-2.7	-25.5	276.5	20.9	20.8	-1.6	316.9	319.7	0.8	15.2	7.4	8.
14.6	50.6	5063.0	550.0	-5.0	-27.3	276.9	21.9	21.9	-0.3	318.2	320.6	0.7	15.3	9.4	8.
15.8	53.4	5426.4	525.0	-7.4	-29.1	282.8	22.4	22.3	2.8	319.6	321.8	0.6	15.5	11.1	8.
17.1	56.9	5804.6	500.0	-9.6	-32.3	255.8	25.7	24.0	6.1	321.4	323.1	0.5	13.7	12.9	8.
18.4	60.3	6158.9	475.0	-12.4	-34.3	255.5	25.3	24.5	5.6	322.7	324.2	0.4	13.5	14.9	8.
19.6	63.7	6609.1	450.0	-15.0	-37.1	259.0	28.8	26.2	5.6	324.1	324.3	0.3	14.2	16.2	7.
21.3	67.1	7037.1	425.0	-19.2	-39.5	259.7	27.6	27.2	5.0	324.4	325.4	0.3	14.5	19.4	8.
22.6	70.6	7484.9	400.0	-23.2	-42.6	263.3	29.6	28.9	3.4	324.9	325.7	0.2	14.9	22.0	8.
24.3	74.3	7954.3	375.0	-26.5	-45.1	270.3	28.2	28.2	-0.2	326.5	327.1	0.2	15.1	24.5	9.
25.8	78.3	8449.6	350.0	-30.7	-48.5	275.3	27.8	27.8	-1.1	327.3	327.8	0.1	15.5	27.0	8.
27.6	82.3	8970.7	325.0	-34.0	-51.1	268.2	32.4	32.4	1.0	329.7	330.1	0.1	15.2	30.2	8.
29.5	86.5	9524.3	300.0	-38.5	-59.9	270.4	33.0	33.0	-0.2	331.0	330.9	99.9	99.9	34.3	8.
31.5	91.2	10117.6	275.0	-43.7	-69.9	267.3	35.3	35.3	1.7	331.9	330.9	99.9	99.9	37.0	8.
33.6	95.8	10753.0	250.0	-47.6	-69.9	268.4	40.0	45.9	4.1	335.3	332.9	99.9	99.9	43.0	8.
36.3	101.3	11440.2	225.0	-53.1	-69.9	265.5	50.0	49.9	3.9	337.2	333.9	99.9	99.9	50.8	8.
39.0	106.5	12190.7	200.0	-58.6	-69.9	260.1	53.2	52.4	9.1	340.0	333.9	99.9	99.9	59.4	8.
42.0	112.5	13015.4	175.0	-64.5	-69.9	255.7	50.7	49.8	9.1	343.5	339.9	99.9	99.9	68.7	8.
45.2	118.8	13956.6	150.0	-64.6	-69.9	265.5	40.4	40.3	3.1	358.9	333.8	99.9	99.9	77.0	8.
49.2	126.0	15071.3	125.0	-65.2	-69.9	247.3	28.4	25.9	10.9	376.9	339.9	99.9	99.9	85.8	8.
54.2	134.3	16431.6	100.0	-65.9	-69.9	265.0	22.9	22.6	2.0	400.5	349.9	99.9	99.9	95.3	6.
59.9	142.7	18187.2	75.0	-66.4	-69.9	268.0	4.3	4.3	0.3	433.7	349.9	99.9	99.9	100.6	4.
68.0	151.7	20685.7	50.0	-57.7	-69.9	232.2	6.9	5.4	4.2	507.7	349.9	99.9	99.9	102.4	4.
81.8	161.7	25150.2	25.0	-49.1	-69.9	0.1	6.4	-0.0	-0.4	643.8	349.9	99.9	99.9	102.3	8.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 304

MATTERAS, NC

24 APRIL 1975

2315 GMT

155 15. 0

TIME MIN	CATCT	WEIGHT GPH	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SLC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	4.0	1010.4	21.1	16.3	230.0	6.7	5.1	4.3	294.3	324.3	11.5	74.0	0.9	0.
0.5	5.8	161.8	1000.0	19.7	15.2	210.3	17.3	10.2	17.9	294.3	322.8	10.9	75.0	0.9	35.
1.4	7.8	379.9	975.0	18.3	14.3	217.6	17.8	10.9	14.1	294.9	322.7	10.6	77.7	1.4	36.
2.1	5.8	602.0	950.0	15.0	13.0	217.6	21.0	12.9	16.7	294.6	320.8	10.0	83.3	2.3	37.
2.8	11.5	825.6	925.0	14.4	10.9	220.6	22.5	14.7	17.1	295.2	318.9	8.9	76.4	3.1	17.
3.6	13.9	1059.7	900.0	13.2	4.3	222.8	28.5	13.9	15.0	295.9	311.8	5.9	55.1	4.2	36.
4.4	15.7	1296.7	875.0	12.0	-3.2	220.6	17.8	11.6	13.5	297.8	307.7	3.5	32.6	5.1	30.
5.2	17.9	1539.6	850.0	11.6	2.3	220.9	17.4	11.4	12.9	299.0	314.2	5.5	54.3	5.9	39.
6.0	20.1	1718.7	825.0	10.0	1.8	224.1	18.6	13.4	12.9	299.8	314.6	5.3	50.9	6.8	40.
6.9	22.1	2044.5	800.0	9.8	-3.6	230.1	17.8	15.3	9.2	302.0	312.6	3.7	38.9	7.9	41.
7.9	24.4	2307.9	775.0	8.3	0.1	252.5	18.4	15.6	4.9	303.4	317.5	4.8	58.3	8.6	44.
8.7	26.5	2578.8	750.0	7.8	-1.0	255.5	14.1	13.9	3.6	305.6	319.3	4.8	53.8	9.3	47.
9.7	28.9	2857.6	725.0	6.0	-1.1	267.3	13.4	13.4	0.6	306.6	320.7	4.9	60.6	10.0	44.
10.5	31.5	3144.6	700.0	4.7	-1.8	279.3	13.9	13.7	-2.3	308.3	321.4	4.5	59.0	10.4	52.
11.5	34.3	3440.2	675.0	3.2	-3.8	279.7	18.3	16.0	-2.7	309.7	322.3	4.3	59.9	11.1	51.
12.4	36.3	3746.2	650.0	2.0	-6.3	283.0	15.3	14.9	-3.9	311.6	322.6	3.7	54.1	11.7	59.
13.5	39.0	4061.3	625.0	-1.0	-7.2	288.7	15.8	15.0	-5.1	311.7	322.4	3.6	62.8	12.3	62.
14.4	41.6	4382.3	600.0	-3.2	-7.9	286.3	17.5	16.6	-5.5	312.9	323.5	3.5	69.9	13.0	75.
15.4	44.3	4722.0	575.0	-5.8	-10.2	289.2	17.5	16.6	-5.8	313.6	323.0	3.1	70.8	13.8	68.
16.5	47.2	5058.8	550.0	-8.7	-12.6	289.1	17.1	16.5	-4.2	314.1	324.2	2.6	73.0	14.7	71.
17.6	50.2	5428.4	525.0	-10.7	-14.7	283.2	16.6	16.2	-2.8	315.8	323.1	2.3	72.5	15.7	73.
18.9	53.0	5801.8	500.0	-13.0	-18.3	286.5	16.3	15.5	-5.2	317.3	323.1	1.8	64.3	16.7	75.
19.9	56.0	6181.3	475.0	-15.5	-20.9	287.7	15.8	15.2	-4.3	318.9	323.8	1.5	63.5	17.5	77.
21.1	59.3	6597.0	450.0	-18.0	-25.0	282.5	16.4	16.0	-3.5	319.7	323.3	1.1	58.1	18.5	79.
22.3	62.6	7020.9	425.0	-21.8	-29.9	280.7	16.3	16.0	-3.0	321.1	323.6	0.7	47.7	19.7	80.
23.6	65.9	7423.4	400.0	-26.0	-30.7	280.4	17.3	17.0	-3.1	321.2	323.7	0.7	44.7	21.0	81.
25.2	69.6	7927.0	375.0	-29.9	-33.2	274.8	18.3	18.0	-2.8	322.0	324.1	0.6	73.4	22.5	83.
26.9	73.2	8416.6	350.0	-31.8	-35.5	274.8	11.5	11.5	-1.3	325.4	326.5	0.2	24.0	24.0	84.
28.4	77.2	8937.7	325.0	-35.3	-38.9	268.9	9.8	9.8	0.5	328.0	328.5	0.1	23.1	24.9	84.
30.1	81.3	9485.2	300.0	-40.6	-42.6	258.8	13.6	13.3	2.4	328.2	329.9	99.9	99.9	26.0	84.
32.0	85.7	10075.2	275.0	-45.8	-45.8	272.0	14.6	14.5	-0.5	328.9	329.9	99.9	99.9	27.6	84.
33.9	90.4	10702.8	250.0	-51.1	-49.9	272.8	13.1	13.1	-0.6	330.1	329.9	99.9	99.9	28.9	84.
35.9	95.5	11378.9	225.0	-57.3	-49.9	278.0	10.6	10.5	-1.5	330.8	329.9	99.9	99.9	30.6	85.
38.1	100.7	12113.5	200.0	-63.1	-49.9	298.8	12.6	10.9	-6.3	332.9	329.9	99.9	99.9	32.1	86.
40.5	106.9	12727.6	175.0	-64.7	-49.9	291.6	23.1	21.5	-6.5	343.2	329.9	99.9	99.9	34.7	88.
43.3	113.3	13665.4	150.0	-66.0	-49.9	294.4	26.4	24.0	-10.9	356.5	329.9	99.9	99.9	38.2	91.
46.6	120.3	14597.9	125.0	-59.7	-49.9	284.1	33.8	32.7	-8.2	386.9	329.9	99.9	99.9	44.3	92.
50.5	128.3	16376.5	100.0	-63.5	-49.9	302.2	11.5	9.7	-6.1	405.0	329.9	99.9	99.9	49.1	95.
55.2	137.3	18114.4	75.0	-66.4	-49.9	72.2	2.8	-2.7	-0.9	433.7	329.9	99.9	99.9	50.7	96.
62.2	145.3	20620.8	50.0	-60.0	-49.9	327.9	5.1	2.7	-4.3	502.2	329.9	99.9	99.9	52.4	96.
73.2	194.3	29020.3	25.0	-53.1	-49.9	0.8	4.8	-0.1	-4.8	632.3	329.9	99.9	99.9	51.6	96.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS

STATION NO. 311
ATHENS, GA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GFM	PPES MB	TEMP DG C	CLW BT DG C	DIR DG	SPEED M/SFC	U COMP M/SFC	V COMP M/SEC	POT Y DG K	E POT T DG K	MR PTO GM/KG	RM PCY	RANGE KM	AZ DG
0.0	7.9	246.0	980.5	24.7	16.7	220.0	4.2	2.7	3.2	300.5	333.1	12.2	41.0	0.0	0
0.9	9.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	6.3	366.5	975.0	23.4	13.0	222.0	8.4	5.7	6.2	300.1	327.5	10.2	54.8	0.3	45
1.4	10.5	552.0	950.0	22.0	13.7	225.1	10.2	7.3	7.2	300.9	327.9	10.8	54.8	0.7	45
2.2	12.4	823.0	925.0	19.3	12.7	225.8	11.0	8.6	8.3	300.4	326.2	9.6	62.3	1.3	46
3.2	13.2	1056.0	900.0	17.0	11.2	225.9	11.0	8.3	8.0	300.3	325.5	9.3	68.6	2.3	46
4.3	17.4	1208.0	875.0	14.6	10.9	226.7	12.9	9.8	8.3	300.2	325.5	9.3	77.7	2.6	46
4.9	19.3	1543.5	850.0	12.2	9.7	241.9	13.7	12.1	6.5	300.1	324.4	9.0	84.6	3.3	46
5.8	22.2	1764.2	825.0	10.8	8.5	242.5	14.4	13.7	4.3	301.2	324.4	8.5	95.7	4.0	52
6.7	24.7	2050.0	800.0	9.6	5.9	241.9	15.1	14.9	2.1	302.3	322.6	7.3	77.7	4.7	50
7.6	27.1	2314.2	775.0	7.4	4.3	268.7	15.4	15.4	0.3	302.6	321.3	6.7	80.4	5.5	60
8.6	29.4	2594.0	750.0	5.6	1.7	274.6	15.6	15.6	-1.2	303.5	319.8	5.8	75.8	6.3	65
9.5	32.4	2461.4	725.0	4.6	-4.2	272.2	15.0	14.2	-1.9	305.0	316.4	4.0	54.0	7.0	66
10.4	35.1	3147.5	700.0	4.3	-12.4	273.6	16.3	16.3	-1.0	307.5	314.3	2.1	28.9	7.9	71
11.3	37.7	3463.5	675.0	4.3	-19.8	276.6	20.9	20.9	-0.2	310.6	314.3	1.2	15.3	9.2	74
12.9	40.5	3750.3	650.0	3.4	-10.7	268.7	25.0	25.0	0.5	313.2	321.2	2.6	34.5	10.7	77
14.1	43.2	4067.2	625.0	1.2	-11.9	268.7	26.8	26.8	0.6	314.1	321.8	2.5	37.1	12.4	79
15.2	46.1	4594.3	600.0	-1.0	-14.9	272.1	26.8	26.8	-0.9	315.2	321.5	2.0	33.8	14.3	81
16.5	48.1	4732.3	575.0	-3.7	-22.4	275.7	28.4	28.3	-2.4	315.7	319.3	1.1	21.8	16.0	81
17.8	50.3	5081.4	550.0	-5.9	-24.6	275.7	26.0	25.6	-4.4	317.1	319.3	0.6	14.4	17.9	81
19.1	52.1	5442.5	525.0	-9.0	-31.0	287.2	24.8	23.7	-7.3	317.6	319.4	0.5	14.8	19.7	85
20.4	54.3	5818.5	500.0	-12.1	-33.3	294.0	23.7	22.6	-10.0	318.3	319.8	0.4	14.3	21.5	87
21.8	56.3	6509.5	475.0	-14.2	-37.1	294.4	23.9	21.8	-9.9	320.4	321.5	0.2	12.3	23.4	90
23.4	58.3	7042.9	450.0	-17.2	-39.3	291.6	23.9	24.1	-9.5	321.6	322.6	0.3	12.5	25.5	92
25.1	60.1	7487.7	425.0	-20.9	-41.3	297.3	20.5	19.6	-6.1	322.2	323.1	0.2	14.0	27.6	93
26.5	75.6	7954.0	400.0	-24.5	-42.4	298.6	21.1	19.9	-6.7	323.1	323.9	0.2	17.1	29.1	94
28.3	75.6	8444.1	350.0	-28.6	-44.7	294.1	21.0	20.3	-5.0	323.7	324.4	0.2	15.4	32.1	95
30.3	75.6	8844.1	350.0	-32.5	-47.9	285.8	21.0	20.3	-5.7	324.8	325.3	0.1	19.7	34.1	94
32.3	75.6	9242.7	325.0	-36.0	-49.2	291.0	18.9	17.6	-6.8	327.0	327.5	0.1	24.0	36.7	96
34.4	75.6	9714.6	300.0	-40.1	-50.9	292.6	17.6	16.2	-6.8	324.0	327.5	99.9	99.9	39.1	97
36.2	75.6	10102.8	275.0	-44.8	-52.3	317.9	17.0	11.4	-12.6	330.4	327.5	99.9	99.9	40.6	94
38.2	75.6	10731.2	250.0	-51.1	-59.9	311.3	17.3	13.0	-11.5	330.1	327.5	99.9	99.9	42.2	100
40.6	101.4	11426.2	225.0	-57.5	-60.9	307.4	12.7	10.1	-7.7	330.4	327.5	99.9	99.9	44.7	102
43.2	107.9	12141.6	200.0	-60.9	-60.9	307.4	12.7	15.0	-1.2	336.3	327.5	99.9	99.9	46.2	102
46.7	118.9	12969.3	175.0	-63.7	-63.7	298.0	30.9	29.6	-8.9	344.9	327.5	99.9	99.9	51.4	102
50.7	119.2	13917.2	150.0	-62.9	-63.7	298.0	30.1	33.4	-6.9	361.8	327.5	99.9	99.9	57.4	102
54.5	126.0	15044.7	125.0	-61.4	-63.7	272.0	27.5	27.5	-0.9	333.7	327.5	99.9	99.9	60.1	101
58.3	130.3	16416.5	100.0	-65.8	-63.7	294.0	14.9	13.6	-6.1	400.5	327.5	99.9	99.9	74.4	101
62.4	142.3	18140.8	75.0	-66.6	-63.7	292.1	11.5	10.6	-4.3	433.3	327.5	99.9	99.9	79.3	102
70.4	151.7	23620.4	50.0	-61.4	-63.7	101.5	2.5	-2.4	0.5	458.9	327.5	99.9	99.9	80.2	102
97.8	162.3	25034.2	25.0	-51.5	-59.9	40.4	0.9	-5.8	-6.8	436.6	327.5	99.9	99.9	86.2	106

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC26 APRIL 1975
2115 GMT

TIME MIN	CNTCT	HEIGHT GCM	PRES MB	TEMP DEG C	CLD PT DEG C	DIR °C	SPEED M/SEC	U COMP M/SEC	V CORR M/SEC	PCT T DEG C	E POT T DEG C	MR STD CM/KG	RM PCT	RANGE KM	AZ DEG
0.0	0.1	275.0	901.5	24.4	15.6	200.0	7.2	2.5	0.0	300.7	331.4	11.5	50.0	0.0	0.0
0.0	0.0	50.0	1000.0	29.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	0.0	333.3	975.0	23.9	12.6	223.4	12.3	0.5	9.0	360.5	320.1	9.5	49.3	0.3	21.0
0.7	11.0	550.7	925.0	22.1	12.0	225.4	13.9	10.0	9.7	300.9	320.2	9.3	52.7	0.5	31.0
1.2	12.5	700.6	925.0	19.5	11.1	223.2	14.9	10.2	10.9	300.4	320.3	9.1	58.7	1.0	30.0
1.9	15.0	1025.0	900.0	16.9	10.5	226.7	20.7	15.1	14.2	300.1	320.3	8.9	66.1	1.7	42.0
2.0	16.3	125.5	875.0	15.0	11.3	226.2	21.5	17.0	13.2	300.6	320.0	9.7	70.7	2.9	44.0
3.7	20.0	1510.0	850.0	12.7	11.4	230.2	22.2	14.9	11.7	300.8	320.9	10.1	92.2	3.3	47.0
4.5	22.2	1761.5	825.0	12.0	9.1	207.9	22.4	23.7	8.4	302.5	320.0	8.9	82.5	5.1	51.0
5.3	25.7	2019.0	800.0	11.5	6.5	257.0	22.9	22.0	4.9	304.4	325.6	7.6	71.5	6.3	54.0
6.0	28.3	2245.0	775.0	10.5	3.0	263.0	22.7	22.0	2.0	305.9	320.0	6.4	62.2	8.3	51.0
6.9	31.0	2557.1	750.0	8.0	2.4	267.0	23.1	23.1	1.0	306.1	323.3	6.1	67.5	9.3	01.0
7.0	33.3	2836.3	725.0	6.0	1.6	273.2	22.9	22.0	-1.3	306.0	323.7	5.9	73.2	9.3	04.0
9.1	36.4	3123.2	700.0	4.2	-0.3	275.0	26.5	24.4	-2.5	307.8	323.2	5.3	72.3	10.7	70.0
10.2	38.3	3414.3	675.0	2.1	-3.0	277.0	26.4	26.2	-3.2	308.5	321.0	4.6	69.1	12.3	74.0
11.3	42.0	3722.0	650.0	-0.3	-5.4	275.9	28.5	28.3	-2.9	309.1	323.7	3.9	68.4	14.0	72.0
12.5	45.0	4034.7	625.0	0.5	-15.9	265.1	25.3	25.1	2.2	313.2	315.8	1.0	27.9	15.5	74.0
13.5	48.1	4361.0	600.0	-1.5	-31.8	261.2	27.5	27.2	4.2	314.4	315.9	0.4	7.7	17.4	74.0
14.5	51.3	4650.9	575.0	-4.3	-30.5	261.1	27.4	27.1	4.2	315.0	316.0	0.5	10.8	19.2	74.0
15.5	54.1	5047.1	550.0	-7.3	-28.4	262.0	25.8	25.0	3.6	315.2	317.4	0.7	17.0	20.7	74.0
16.6	57.3	5407.8	525.0	-5.7	-48.4	262.0	25.5	25.4	1.4	316.7	317.0	0.1	2.5	22.4	40.0
17.7	60.5	5782.0	500.0	-13.0	-49.6	271.2	24.3	24.3	-0.5	317.2	317.5	0.1	2.9	24.3	43.0
18.9	64.3	6170.3	475.0	-14.2	-50.0	271.7	24.2	24.2	-0.7	320.4	320.7	0.1	3.0	25.7	41.0
20.1	67.3	6579.5	450.0	-17.6	-51.5	270.9	22.4	22.6	-0.4	321.0	321.3	0.1	3.3	27.5	42.0
21.5	70.3	7004.7	425.0	-20.6	-52.9	272.1	22.7	22.7	-0.4	322.5	322.7	0.1	3.6	29.1	42.0
22.7	74.6	7450.1	400.0	-24.1	-56.7	277.9	18.7	18.5	-2.6	323.4	323.8	0.1	4.0	30.6	43.0
23.0	78.5	7910.9	375.0	-29.3	-56.9	277.2	23.2	23.0	-2.9	324.1	324.3	0.0	4.4	32.0	44.0
25.0	82.3	8474.5	350.0	-32.1	-59.1	280.9	18.5	18.1	-3.5	325.4	325.6	0.0	4.8	33.5	44.0
26.3	86.3	8926.7	325.0	-36.4	-61.7	284.4	18.6	18.0	-4.6	326.4	326.6	0.0	5.3	35.0	45.0
27.6	90.4	9477.5	300.0	-40.3	-69.9	292.5	16.0	15.8	-6.1	328.5	328.9	99.9	99.9	36.0	46.0
29.2	95.4	10064.0	275.0	-45.3	-69.9	294.1	13.2	12.8	-3.2	329.0	329.9	99.9	99.9	37.3	47.0
31.1	100.2	10692.0	250.0	-50.9	-69.9	296.1	15.0	14.7	2.0	330.4	330.9	99.9	99.9	39.9	47.0
33.1	105.2	11370.7	225.0	-56.3	-69.9	298.7	12.6	12.6	0.2	332.2	332.6	99.9	99.9	41.5	47.0
34.9	110.7	12106.4	200.0	-61.9	-69.9	291.5	11.7	11.5	-2.3	334.0	334.9	99.9	99.9	41.4	47.0
36.9	116.3	12925.1	175.0	-64.0	-69.9	273.4	21.6	21.5	-1.3	341.0	341.9	99.9	99.9	43.4	47.0
39.3	123.0	13872.6	150.0	-61.2	-69.9	289.3	28.9	27.3	-9.6	346.7	346.9	99.9	99.9	47.6	47.0
42.4	125.0	15006.4	125.0	-62.0	-69.9	288.2	25.0	25.0	0.0	347.7	347.9	99.9	99.9	52.1	47.0
46.1	127.0	16381.7	100.0	-62.7	-69.9	282.1	17.3	16.9	-3.6	404.6	399.9	99.9	99.9	54.1	41.0
51.3	144.7	19137.0	75.0	-64.2	-69.9	300.1	2.0	2.4	-1.4	438.3	438.9	99.9	99.9	61.3	42.0
59.2	172.0	20651.5	50.0	-60.8	-69.9	499.9	99.9	99.9	99.9	500.7	500.9	99.9	99.9	99.9	99.9
99.0	95.6	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* PV SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

* PV TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** PV SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 327
NASHVILL, TENN24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.7	5.2	100.0	991.4	24.3	19.8	190.0	3.2	0.6	3.2	300.2	339.5	14.9	76.0	0.0	0.
0.9	9.9	59.9	1000.0	99.9	92.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
0.5	6.5	326.9	975.0	24.7	19.1	307.9	3.0	3.0	-2.4	302.0	340.7	14.5	71.1	0.3	42.
1.3	6.7	555.2	950.0	24.3	17.3	230.9	14.3	8.0	11.9	303.6	339.3	13.2	65.3	0.8	44.
2.2	10.9	788.4	925.0	22.1	15.5	230.0	14.8	11.4	9.5	303.5	336.2	12.1	64.3	1.5	44.
2.9	13.1	1026.1	900.0	20.1	14.3	237.8	15.1	12.8	8.1	301.8	335.0	11.5	69.3	2.1	44.
3.7	15.3	1209.1	875.0	17.9	13.5	237.3	17.2	14.5	9.3	303.6	334.4	11.2	75.2	2.9	44.
4.4	17.5	1516.7	850.0	15.4	12.6	241.7	19.3	17.0	9.2	303.7	333.3	10.9	83.4	3.6	44.
5.3	20.3	1769.8	825.0	14.1	9.3	259.9	19.8	19.5	3.5	306.7	329.4	9.0	73.1	4.6	55.
6.2	22.2	2035.7	800.0	12.7	0.8	272.0	17.2	17.2	-0.6	305.7	327.5	7.8	67.0	5.5	55.
7.1	24.7	2255.8	775.0	10.6	4.5	279.5	16.8	16.5	-2.8	306.1	325.4	6.8	65.8	6.2	64.
7.9	26.0	2508.4	750.0	8.9	3.9	280.3	16.0	15.8	-2.9	307.1	326.4	6.8	71.1	7.9	73.
8.9	28.6	2848.7	725.0	6.7	3.4	279.9	16.3	16.1	-2.8	307.7	327.0	6.8	79.4	7.7	73.
9.8	32.2	3136.5	700.0	5.0	1.8	280.1	17.3	17.1	-3.0	308.8	326.7	6.3	80.1	8.6	74.
10.8	34.9	3472.5	675.0	2.5	-0.1	278.4	19.6	19.4	-2.9	309.2	325.4	5.6	82.5	9.5	74.
11.8	37.6	3737.5	650.0	0.8	-4.4	280.1	20.7	20.3	-3.6	310.4	322.9	4.2	67.9	10.7	71.
12.9	40.3	4031.5	625.0	-1.7	-8.7	278.7	22.2	21.9	-3.4	310.5	320.5	3.2	58.9	12.1	71.
14.2	43.0	4375.0	600.0	-4.2	-12.0	280.2	22.9	22.5	-4.0	311.6	319.4	2.5	54.2	13.8	74.
15.1	46.3	4709.5	575.0	-6.4	-21.2	280.1	22.8	22.5	-4.0	312.6	316.5	1.2	29.7	15.2	77.
16.5	49.0	5055.8	550.0	-9.2	-28.1	280.6	24.5	24.0	-4.5	314.4	316.7	0.7	18.2	16.8	71.
17.8	51.9	5416.9	525.0	-9.3	-29.5	283.9	29.4	28.6	-7.1	317.3	319.4	0.6	17.4	19.9	70.
19.1	54.0	5793.4	500.0	-10.5	-28.1	280.8	29.7	29.2	-5.5	320.2	322.8	0.8	22.0	21.3	71.
20.5	56.1	6186.1	475.0	-13.4	-30.4	278.3	28.1	27.9	-4.1	321.4	323.6	0.6	22.2	23.5	74.
22.0	61.6	6594.8	450.0	-17.1	-33.5	277.0	26.9	26.7	-3.3	321.7	323.4	0.5	22.4	24.0	72.
23.4	65.0	7020.7	425.0	-20.6	-35.6	280.2	24.5	24.1	-4.4	322.5	324.0	0.4	24.6	24.2	73.
25.0	68.4	7455.7	400.0	-24.5	-37.0	282.0	24.6	24.0	-5.4	323.1	324.5	0.4	30.1	30.4	73.
26.3	72.0	7931.6	375.0	-28.7	-40.7	284.3	24.6	23.7	-6.9	323.6	324.6	0.3	30.1	32.4	74.
27.9	75.9	8421.9	350.0	-32.4	-44.9	278.1	27.5	27.2	-3.9	325.0	325.7	0.2	27.2	34.8	75.
29.5	78.8	8919.7	325.0	-36.4	-49.1	274.6	26.5	26.4	-2.1	326.4	326.9	0.1	25.4	37.4	76.
31.4	82.8	9439.1	300.0	-41.0	-49.9	272.0	25.5	25.5	-0.9	327.6	326.9	0.1	25.4	40.0	76.
33.9	86.2	10075.1	275.0	-45.5	-49.9	269.2	20.5	20.5	0.3	329.2	329.9	0.1	25.4	42.2	74.
36.5	93.0	10702.9	250.0	-50.9	-49.9	259.6	22.9	22.5	4.1	330.4	329.9	0.1	25.4	47.4	74.
39.1	98.0	11381.4	225.0	-55.7	-49.9	251.4	23.3	22.1	7.3	333.2	329.9	0.1	25.4	50.8	72.
41.8	103.3	12119.6	200.0	-62.4	-49.9	252.2	26.6	25.3	8.1	333.9	329.9	0.1	25.4	54.5	71.
44.9	109.3	12933.5	175.0	-67.1	-49.9	263.3	34.8	34.6	4.1	339.2	329.9	0.1	25.4	60.2	70.
48.8	115.5	13881.7	150.0	-56.3	-49.9	276.1	36.5	36.3	-3.9	367.7	329.9	0.1	25.4	65.7	97.
53.1	122.7	15034.3	125.0	-59.3	-49.9	253.0	27.7	26.5	8.1	387.7	329.9	0.1	25.4	76.3	90.
58.2	130.8	16414.4	100.0	-62.1	-49.9	265.7	18.8	18.8	1.4	467.7	329.9	0.1	25.4	83.3	74.
64.5	139.3	19174.6	75.0	-63.3	-49.9	270.1	5.2	5.2	-0.0	440.3	329.9	0.1	25.4	88.3	70.
73.4	148.7	20926.6	50.0	-59.3	-49.9	285.5	2.8	2.7	-0.7	503.8	329.9	0.1	25.4	96.3	70.
87.3	156.3	25145.9	25.0	-49.1	-49.9	347.5	6.4	1.4	-6.3	644.0	329.9	0.1	25.4	96.3	72.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 340
LITTLE ROCK, ARK

24 APRIL 1975
2315 GMT

TIME MIN	CATCY	HEIGHT GFN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR ATO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	5.0	79.0	1001.7	28.3	19.5	210.0	4.6	2.3	4.0	303.3	342.0	14.4	59.0	0.0	0.
0.1	6.0	94.1	1000.0	28.5	20.1	201.3	6.8	2.5	6.3	303.7	344.0	15.0	60.4	0.2	28.
0.8	8.3	310.5	975.0	27.4	18.2	198.2	7.2	2.2	6.8	304.6	341.5	13.7	57.4	0.3	24.
1.5	10.6	548.9	950.0	24.7	16.3	201.6	8.6	3.2	7.9	303.9	337.5	12.4	59.8	0.6	21.
2.3	12.9	782.2	925.0	22.5	15.1	213.7	11.0	6.1	9.1	303.9	335.8	11.7	62.8	1.1	24.
3.2	15.2	1020.4	900.0	20.4	14.7	219.2	12.2	7.7	9.4	304.1	336.3	11.8	70.0	1.7	24.
4.1	17.5	1263.5	875.0	18.1	14.0	224.6	13.1	9.2	9.3	304.2	335.7	11.6	76.4	2.4	32.
5.0	20.1	1511.5	850.0	16.0	12.7	227.3	15.1	11.1	10.3	304.4	334.3	10.9	80.5	3.2	36.
5.8	22.4	1765.3	825.0	13.9	11.8	230.2	16.3	12.5	10.4	304.8	333.9	10.6	85.9	3.9	34.
6.7	25.0	2024.7	800.0	12.3	9.2	237.7	15.3	12.9	8.2	305.5	331.0	9.2	81.6	4.7	41.
7.4	27.4	2290.9	775.0	10.7	7.4	240.8	15.7	13.7	7.7	306.4	329.9	8.4	80.1	5.7	45.
8.9	30.1	2563.9	750.0	8.8	6.0	235.8	15.3	12.7	6.6	307.1	329.3	7.9	82.7	6.5	47.
9.3	32.9	2844.2	725.0	8.2	-3.0	227.6	15.0	11.1	10.1	309.0	321.7	4.3	85.0	7.5	47.
10.7	35.5	3135.0	700.0	6.9	-11.1	232.0	12.7	10.0	7.8	312.6	319.8	2.3	17.7	9.0	44.
11.7	38.4	3434.7	675.0	7.0	-15.9	245.4	11.8	11.8	4.7	313.6	318.8	1.6	18.1	9.7	50.
12.4	41.1	3743.3	650.0	4.7	-17.5	250.8	12.5	11.8	4.1	314.4	319.1	1.5	18.1	10.1	54.
13.9	44.1	4051.2	625.0	1.8	-17.1	255.8	14.7	13.4	6.1	314.7	319.7	1.6	22.9	10.6	51.
15.1	47.3	4382.6	600.0	-1.1	-17.6	261.6	17.0	14.7	8.1	315.0	320.1	1.6	27.3	11.4	53.
16.1	50.3	4724.5	575.0	-3.7	-14.8	262.2	19.3	17.0	9.0	315.9	322.5	2.1	41.7	12.4	53.
17.3	53.4	5075.7	550.0	-6.9	-16.6	265.5	19.4	17.8	7.7	316.1	322.1	1.9	46.1	13.1	54.
19.4	56.6	5436.9	525.0	-9.5	-16.6	261.9	22.1	21.0	6.9	317.2	323.5	2.0	58.0	15.4	56.
19.6	60.0	5311.5	500.0	-13.0	-17.4	256.3	23.8	23.1	5.6	317.4	323.6	1.9	69.5	17.1	57.
20.0	63.6	6200.3	475.0	-16.5	-23.3	261.6	26.4	26.1	3.8	317.7	322.9	1.6	72.5	18.4	60.
22.3	67.0	6605.9	450.0	-17.6	-29.3	259.8	24.8	24.4	4.4	321.1	321.4	0.1	4.7	20.9	62.
23.3	70.6	7031.1	425.0	-21.1	-30.9	255.3	23.5	24.7	6.5	321.8	322.1	0.1	4.4	23.0	63.
25.4	74.3	7475.1	400.0	-25.1	-32.9	258.5	23.8	23.3	4.7	322.3	322.6	0.1	5.4	25.4	64.
27.0	78.5	7940.6	375.0	-28.8	-32.9	260.0	24.8	24.4	4.3	323.4	323.7	0.1	7.7	27.7	66.
28.9	82.6	8430.2	350.0	-32.7	-35.4	258.6	28.3	27.7	5.6	324.5	324.8	0.1	8.3	30.4	67.
30.6	86.9	8948.1	325.0	-36.8	-31.0	267.7	30.4	30.4	1.2	325.9	326.3	0.1	21.5	33.7	69.
32.7	91.4	9497.1	300.0	-41.4	99.9	266.7	34.6	34.6	2.0	327.1	997.9	99.9	99.9	36.9	71.
34.8	96.0	10081.9	275.0	-45.7	99.9	271.9	26.8	26.8	-0.2	329.1	997.9	99.9	99.9	41.3	74.
37.2	101.0	10709.5	250.0	-50.6	99.9	267.9	30.5	30.5	1.3	330.0	999.9	99.9	99.9	45.5	74.
39.7	106.4	11381.1	225.0	-55.5	99.9	271.3	42.1	42.0	-1.0	333.5	999.9	99.9	99.9	51.4	76.
42.2	112.0	12124.9	200.0	-61.1	99.9	268.2	41.6	41.8	1.3	336.0	999.9	99.9	99.9	57.5	77.
45.4	118.3	12951.1	175.0	-63.6	99.9	271.4	37.1	37.1	-0.9	344.9	999.9	99.9	99.9	65.1	79.
48.9	125.0	13902.7	150.0	-61.3	99.9	262.1	39.2	38.8	5.4	344.5	999.9	99.9	99.9	73.4	80.
53.4	132.3	15035.7	125.0	-61.7	99.9	270.3	39.4	39.4	-0.2	383.3	999.9	99.9	99.9	82.1	81.
58.9	140.0	16410.4	100.0	-61.8	99.9	280.1	22.9	22.5	-4.0	408.3	999.9	99.9	99.9	92.4	81.
65.0	148.0	18177.5	75.0	-65.7	99.9	273.6	14.5	14.5	-0.9	435.1	999.9	99.9	99.9	97.1	82.
73.6	157.2	23671.9	50.0	-59.1	99.9	20.5	5.4	-1.9	-0.9	504.3	999.9	99.9	99.9	100.5	93.
86.6	166.5	25111.0	25.0	-55.9	99.9	20.6	3.7	-1.3	-3.5	638.6	999.9	99.9	99.9	102.2	95.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 349
MONETTE, MO

20 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGF KM	AZ DG
0.0	8.4	439.0	958.0	23.8	19.1	160.0	5.2	-1.8	4.9	302.6	341.9	14.7	75.0	0.0	0
9.9	56.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0
9.9	59.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0
0.2	9.2	511.8	950.0	24.2	19.9	183.8	6.9	0.5	6.9	303.9	346.0	15.7	99.9	0.2	153
1.0	11.3	746.4	925.0	23.1	21.9	199.2	7.4	1.2	7.3	305.4	354.4	15.3	93.5	0.4	154
1.9	13.5	685.6	900.0	20.5	19.5	204.5	9.2	3.8	8.4	304.7	343.5	15.2	98.6	0.9	154
2.8	15.3	1229.2	875.0	18.8	17.2	211.6	9.9	5.2	8.5	305.2	343.9	14.3	90.5	1.4	15
3.7	19.1	1478.1	850.0	16.9	15.3	224.3	11.0	7.7	7.9	305.6	341.0	13.0	90.8	1.9	22
4.6	20.4	1732.7	825.0	14.8	13.5	226.5	12.1	8.9	8.3	305.8	339.4	11.9	91.9	2.5	24
5.5	22.3	1453.0	800.0	12.7	11.3	230.8	10.8	8.3	6.8	306.1	335.3	10.6	91.1	3.1	12
6.6	25.3	2259.1	775.0	10.3	8.9	239.2	11.1	9.5	5.7	306.1	331.9	9.3	91.3	3.8	16
8.2	27.7	2531.9	750.0	8.4	7.1	248.1	14.0	13.3	5.2	306.9	330.5	8.5	91.2	4.6	4
11.5	30.3	2811.5	725.0	5.9	5.2	242.1	14.6	15.9	4.5	306.9	328.6	7.7	95.2	7.5	4
12.3	32.9	3098.9	700.0	4.3	3.6	251.1	16.7	15.9	5.4	308.2	328.6	7.2	96.2	8.6	56
13.8	35.5	3394.9	675.0	2.6	2.0	250.7	18.9	17.8	6.2	309.4	328.3	6.8	95.7	9.7	57
15.6	38.1	3699.7	650.0	0.7	-0.1	249.5	19.4	18.1	6.8	310.5	328.3	5.9	94.1	10.6	59
15.4	40.3	4014.1	625.0	-1.8	-4.3	249.3	19.4	18.2	6.9	311.0	324.1	4.5	83.0	11.5	54
16.2	43.9	4337.5	600.0	-4.2	-8.7	248.6	20.9	19.4	7.6	311.6	321.6	3.3	71.1	12.4	60
17.4	46.5	4671.6	575.0	-7.3	-12.5	243.2	25.9	23.2	11.7	311.8	319.6	2.6	66.3	14.2	51
18.4	49.5	5016.7	550.0	-9.7	-15.0	242.5	26.4	23.4	12.2	312.4	319.5	2.2	64.9	16.1	51
19.7	52.4	5378.8	525.0	-12.0	-17.5	244.6	22.9	20.7	9.8	314.2	320.0	1.8	63.7	17.7	61
21.3	55.5	5747.6	500.0	-13.6	-19.2	256.1	23.5	22.8	5.7	316.6	322.0	1.7	62.6	19.9	62
23.1	58.5	6136.1	475.0	-16.1	-21.7	256.0	24.5	23.8	5.9	318.2	322.9	1.4	61.8	22.4	64
24.4	62.0	6591.0	450.0	-19.2	-24.9	249.3	24.7	22.9	5.1	319.2	322.9	1.1	59.9	24.5	65
26.5	65.4	6864.2	425.0	-22.3	-28.0	253.3	26.9	25.7	7.7	320.5	323.5	0.9	59.4	27.5	65
28.1	68.9	7406.3	400.0	-26.2	-31.4	249.9	26.5	24.9	9.1	321.0	323.2	0.7	58.2	30.1	66
29.7	72.4	7859.6	375.0	-30.0	-35.6	211.2	28.8	25.2	13.8	321.8	323.5	0.5	57.7	32.8	66
31.6	76.3	8356.6	350.0	-34.4	-40.0	239.1	30.6	26.2	15.7	322.3	323.4	0.3	56.5	36.2	65
33.8	80.4	8876.6	325.0	-38.7	-45.9	242.4	30.8	27.3	18.3	323.3	323.4	0.3	56.5	40.1	65
35.6	84.5	9410.0	300.0	-42.2	-49.9	250.5	29.2	27.5	9.7	325.9	323.4	0.3	56.5	45.2	65
38.7	88.8	9958.9	275.0	-46.7	-53.9	256.8	31.4	30.8	7.2	327.6	323.4	0.3	56.5	50.1	65
40.6	93.6	10422.6	250.0	-52.8	-59.9	259.4	32.1	31.6	5.9	327.6	323.4	0.3	56.5	55.6	66
42.9	98.4	11231.0	225.0	-59.6	-66.9	259.4	39.4	37.6	7.7	327.2	323.4	0.3	56.5	60.1	67
46.1	102.9	12027.4	200.0	-60.7	-69.9	256.2	43.1	41.9	10.3	326.7	323.4	0.3	56.5	65.3	67
50.3	105.3	12852.1	175.0	-63.4	-73.9	259.1	50.8	49.9	9.7	326.7	323.4	0.3	56.5	70.7	70
56.2	115.8	13955.9	150.0	-61.6	-71.9	266.8	36.8	36.7	2.0	326.7	323.4	0.3	56.5	75.7	70
63.7	123.3	14932.4	125.0	-61.2	-71.9	268.8	27.5	27.5	2.0	326.7	323.4	0.3	56.5	80.0	72
71.5	131.7	16312.2	100.0	-63.8	-73.9	253.6	23.3	22.5	5.8	326.7	323.4	0.3	56.5	85.4	74
82.4	139.3	19090.2	75.0	-65.3	-73.9	284.5	11.6	11.3	-2.9	326.7	323.4	0.3	56.5	90.9	75
98.0	148.5	20376.5	50.0	-61.2	-69.9	257.2	8.3	8.1	1.8	326.7	323.4	0.3	56.5	95.9	76
99.9	99.7	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
• BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 363
AMARILLO, TEX

24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WX RTC GM/KG	RM PCT	RANGE KM	AZ DG
0.0	12.9	1055.0	886.6	24.4	2.5	20.0	6.2	-2.1	-5.8	308.7	373.7	5.2	24.0	0.0	0.
59.9	59.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	59.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	13.9	1204.9	875.0	22.7	0.5	37.2	4.5	-2.7	-3.6	308.0	321.2	4.6	23.1	0.2	20.2
1.3	15.9	1460.6	850.0	19.7	-0.4	42.3	4.7	-3.2	-2.5	307.4	320.1	4.4	25.8	0.4	21.4
2.4	17.9	1716.1	825.0	17.1	-1.2	59.5	5.8	-5.0	-2.9	307.2	319.6	4.2	28.6	0.7	22.5
3.3	20.1	1977.3	800.0	14.7	-2.6	55.9	3.2	-2.7	-1.8	307.4	318.9	3.9	30.1	1.0	22.7
4.2	22.2	2244.6	775.0	12.1	-3.7	52.9	2.3	-1.9	-1.8	307.3	318.3	3.8	33.1	1.1	22.8
5.2	24.5	2510.0	750.0	9.6	-4.0	28.8	1.7	-0.8	-1.5	307.5	318.6	3.8	37.8	1.2	22.9
6.1	26.6	2798.3	725.0	7.4	-6.2	167.0	1.9	-0.4	1.9	308.0	317.8	3.3	37.2	1.2	22.9
7.0	29.0	3085.7	700.0	4.9	-7.4	206.1	3.5	1.5	3.1	308.3	317.7	3.1	40.5	1.1	23.3
8.0	31.3	3350.8	675.0	1.9	-8.5	224.7	5.9	4.2	4.2	308.3	317.1	3.0	46.0	0.8	23.9
9.1	34.0	3683.7	650.0	-0.8	-10.2	234.7	7.4	6.0	4.3	308.3	316.5	2.7	48.9	0.4	25.0
10.3	36.3	3957.5	625.0	-0.4	-24.5	259.3	11.2	11.0	2.1	312.1	314.9	0.8	14.1	0.3	52.
11.4	39.0	4322.1	600.0	-3.0	-27.4	266.8	14.1	14.1	0.0	312.7	314.9	0.7	13.1	1.1	81.
12.3	41.5	4658.1	575.0	-4.6	-27.5	271.4	16.4	16.4	-0.4	315.7	317.0	0.7	14.6	1.9	86.
13.1	44.1	5006.0	550.0	-7.6	-25.4	270.9	17.7	17.7	-0.3	315.2	318.1	0.9	22.3	2.4	87.
14.3	47.0	5365.7	525.0	-11.0	-27.1	272.8	18.3	18.2	-0.9	315.2	317.8	0.8	25.1	4.0	88.
15.7	49.9	5739.1	500.0	-13.6	-34.9	282.6	17.9	17.4	-3.9	316.5	317.9	0.4	14.5	5.5	91.
17.5	52.9	6126.8	475.0	-16.3	-38.7	292.1	17.4	16.1	-6.5	317.7	318.7	0.3	12.4	7.4	95.
17.2	55.8	6531.0	450.0	-19.7	-41.5	297.2	17.9	16.0	-8.2	318.4	319.2	0.2	12.3	9.3	99.
20.7	59.0	6952.3	425.0	-23.2	-44.1	291.5	20.2	18.8	-7.4	319.2	319.8	0.2	12.6	10.7	102.
22.2	62.4	7393.0	400.0	-27.2	-47.1	288.6	20.6	19.5	-6.6	319.6	320.1	0.1	12.9	12.5	103.
23.7	65.9	7854.0	375.0	-31.4	-50.3	282.7	22.3	21.8	-4.9	320.0	320.4	0.1	13.3	14.5	103.
25.2	69.5	8338.9	350.0	-35.4	-53.5	280.5	22.2	21.9	-4.1	320.9	321.2	0.1	13.7	16.5	103.
27.0	73.2	8850.6	325.0	-39.3	-56.9	276.4	26.2	26.0	-2.9	322.5	322.5	99.9	99.9	19.0	102.
29.0	77.3	9390.2	300.0	-41.6	-59.9	270.4	28.0	28.0	-0.2	325.8	325.8	99.9	99.9	22.2	101.
31.1	81.4	9581.9	275.0	-45.5	-59.9	271.1	34.0	34.0	-0.6	329.4	329.4	99.9	99.9	26.0	99.
33.2	85.8	10611.1	250.0	-49.8	-59.9	275.0	42.1	41.9	-4.0	332.1	332.1	99.9	99.9	30.7	98.
35.6	90.4	11295.4	225.0	-53.3	-59.9	281.0	41.7	40.8	-8.6	336.9	336.9	99.9	99.9	37.1	99.
38.1	96.0	12040.4	200.0	-58.2	-59.9	259.1	29.6	29.1	5.6	340.6	340.6	99.9	99.9	42.4	98.
40.5	101.5	12878.6	175.0	-62.8	-59.9	257.6	38.6	37.7	8.3	346.3	346.3	99.9	99.9	47.5	98.
43.9	108.0	13837.5	150.0	-57.2	-59.9	271.4	32.8	32.8	-0.8	371.6	371.6	99.9	99.9	54.8	95.
47.7	115.3	14984.2	125.0	-59.5	-59.9	260.3	30.1	29.7	5.0	387.3	387.3	99.9	99.9	61.7	93.
52.3	123.7	16367.9	100.0	-63.4	-59.9	269.8	28.4	28.4	0.2	405.2	405.2	99.9	99.9	68.4	92.
58.3	133.7	18139.0	75.0	-60.6	-59.9	273.6	24.1	24.0	-1.5	445.9	445.9	99.9	99.9	76.5	92.
65.6	144.5	22672.9	50.0	-58.7	-59.9	263.0	7.0	6.9	0.9	505.2	505.2	99.9	99.9	80.1	92.
77.6	156.0	25138.5	25.0	-49.7	-59.9	340.8	9.3	3.1	-8.8	641.9	641.9	99.9	99.9	83.2	93.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 402
WALLOPS ISLAND, VA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GEN	PRES MR	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	PH PCT	RANGE NM	AZ DG
0.0	4.9	4.0	1011.0	13.9	11.1	999.9	99.9	99.9	99.9	287.2	309.4	8.2	83.7	999.9	99.9
0.4	5.5	97.2	1000.0	16.3	13.1	999.9	99.9	99.9	99.9	290.7	315.5	9.6	81.1	999.9	99.9
1.2	7.6	315.4	975.0	21.8	13.0	999.9	99.9	99.9	99.9	298.4	324.5	9.7	57.5	999.9	99.9
1.9	6.3	541.0	950.0	21.3	12.2	999.9	99.9	99.9	99.9	300.1	325.6	9.5	56.1	999.9	99.9
2.4	11.3	771.4	925.0	19.1	10.7	999.9	99.9	99.9	99.9	300.1	323.9	8.8	58.3	999.9	99.9
3.7	14.2	1006.4	900.0	17.0	9.9	999.9	99.9	99.9	99.9	300.2	323.4	8.5	62.0	999.9	99.9
4.6	16.3	1246.1	875.0	14.8	9.3	999.9	99.9	99.9	99.9	300.2	323.3	8.5	69.9	999.9	99.9
5.5	18.6	1491.0	850.0	12.9	8.9	999.9	99.9	99.9	99.9	300.8	323.7	8.4	75.9	999.9	99.9
6.4	20.9	1741.6	825.0	11.1	8.5	999.9	99.9	99.9	99.9	301.5	324.6	8.5	82.7	999.9	99.9
7.4	23.3	1990.7	800.0	10.4	5.5	999.9	99.9	99.9	99.9	303.2	323.0	7.1	71.5	999.9	99.9
8.4	25.7	2253.3	775.0	9.6	4.4	999.9	99.9	99.9	99.9	305.0	324.1	6.8	70.1	999.9	99.9
9.5	28.1	2535.2	750.0	8.6	3.3	999.9	99.9	99.9	99.9	306.7	325.1	6.5	65.4	999.9	99.9
10.6	30.7	2815.3	725.0	7.0	-1.4	999.9	99.9	99.9	99.9	307.8	321.6	4.8	55.2	999.9	99.9
11.7	33.4	3103.1	700.0	5.0	-2.7	999.9	99.9	99.9	99.9	308.6	321.7	4.5	57.3	999.9	99.9
12.8	35.9	3395.3	675.0	3.5	-4.1	999.9	99.9	99.9	99.9	310.1	322.5	4.2	57.4	999.9	99.9
13.9	38.7	3704.6	650.0	1.1	-5.2	999.9	99.9	99.9	99.9	310.7	322.6	4.0	63.0	999.9	99.9
14.9	41.3	4015.3	625.0	-1.2	-6.2	999.9	99.9	99.9	99.9	311.6	324.9	4.5	80.3	999.9	99.9
16.1	44.3	4344.1	600.0	-2.7	-8.1	999.9	99.9	99.9	99.9	313.4	323.8	3.5	66.4	999.9	99.9
17.2	47.3	4690.7	575.0	-4.8	-5.9	999.9	99.9	99.9	99.9	314.2	327.8	4.3	93.0	999.9	99.9
18.3	50.3	5029.0	550.0	-7.7	-8.6	999.9	99.9	99.9	99.9	315.4	326.5	3.6	93.3	999.9	99.9
19.4	53.4	5385.2	525.0	-10.7	-12.6	999.9	99.9	99.9	99.9	315.8	324.4	2.8	85.9	999.9	99.9
20.7	56.5	5762.5	500.0	-13.7	-19.2	999.9	99.9	99.9	99.9	316.4	321.8	1.7	67.3	999.9	99.9
22.0	59.9	6151.2	475.0	-15.2	-27.2	999.9	99.9	99.9	99.9	319.2	322.1	0.9	34.9	999.9	99.9
23.5	63.4	6572.2	450.0	-18.6	-29.7	999.9	99.9	99.9	99.9	319.9	322.6	0.8	43.7	999.9	99.9
24.9	66.9	6980.7	425.0	-21.9	-23.3	999.9	99.9	99.9	99.9	321.1	325.6	1.4	86.8	999.9	99.9
26.4	70.4	7426.8	400.0	-23.1	-27.7	999.9	99.9	99.9	99.9	325.0	328.4	1.0	65.8	999.9	99.9
27.9	74.2	7895.0	375.0	-27.0	-32.0	999.9	99.9	99.9	99.9	325.8	328.2	0.7	62.7	999.9	99.9
29.3	78.3	8383.4	350.0	-31.0	-32.5	999.9	99.9	99.9	99.9	326.9	323.4	0.7	66.4	999.9	99.9
31.3	82.4	8910.4	325.0	-35.3	-37.8	999.9	99.9	99.9	99.9	327.9	329.6	0.4	78.0	999.9	99.9
33.1	86.7	9461.0	300.0	-39.7	99.9	999.9	99.9	99.9	99.9	329.4	999.9	99.9	999.9	999.9	99.9
35.0	91.4	10051.4	275.0	-44.9	99.9	999.9	99.9	99.9	99.9	330.2	999.9	99.9	999.9	999.9	99.9
36.7	96.3	10640.2	250.0	-50.9	99.9	999.9	99.9	99.9	99.9	330.4	999.9	99.9	999.9	999.9	99.9
39.1	101.4	11354.4	225.0	-57.2	99.9	999.9	99.9	99.9	99.9	330.9	999.9	99.9	999.9	999.9	99.9
41.5	107.3	12087.6	200.0	-64.1	99.9	999.9	99.9	99.9	99.9	331.3	999.9	99.9	999.9	999.9	99.9
44.1	113.3	12894.4	175.0	-68.3	99.9	999.9	99.9	99.9	99.9	337.3	999.9	99.9	999.9	999.9	99.9
47.3	120.0	13827.2	150.0	-65.6	99.9	999.9	99.9	99.9	99.9	337.1	999.9	99.9	999.9	999.9	99.9
50.8	127.3	14957.2	125.0	-60.5	99.9	999.9	99.9	99.9	99.9	335.5	999.9	99.9	999.9	999.9	99.9
55.3	135.5	16346.4	100.0	-61.3	99.9	999.9	99.9	99.9	99.9	409.3	999.9	99.9	999.9	999.9	99.9
61.1	143.7	18115.6	75.0	-66.2	99.9	999.9	99.9	99.9	99.9	436.1	999.9	99.9	999.9	999.9	99.9
69.1	152.3	20623.0	50.0	-61.2	99.9	999.9	99.9	99.9	99.9	499.3	999.9	99.9	999.9	999.9	99.9
93.0	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 405
STERLING, VA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.5	85.0	999.2	16.5	16.3	300.0	4.2	5.4	-3.1	293.3	323.8	11.8	87.0	6.7	0.
99.9	99.9	59.9	1009.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
1.0	8.9	245.8	975.0	17.8	15.5	311.4	12.5	4.4	-2.3	294.6	324.5	11.5	86.8	0.4	13.
1.9	11.2	518.9	950.0	18.0	13.2	301.4	11.4	4.7	-5.9	296.8	323.5	10.1	73.3	1.3	13.
2.4	13.9	747.1	925.0	16.6	12.9	278.4	10.6	10.4	-1.7	297.6	323.1	9.6	73.6	1.8	12.
3.9	16.1	980.2	900.0	14.8	11.8	270.2	9.2	9.4	1.6	298.1	324.1	9.7	81.9	2.5	11.
4.6	18.9	1218.5	875.0	13.2	11.1	233.9	11.7	9.4	6.9	298.8	324.4	9.5	86.0	2.7	10.
5.4	21.1	1462.4	850.0	11.6	9.6	232.1	15.9	12.5	9.7	299.5	323.5	8.9	87.6	3.1	9.
6.1	23.8	1712.1	825.0	9.9	8.8	228.4	17.2	12.9	11.4	300.3	323.8	8.7	92.6	3.4	9.
7.0	26.2	1967.6	800.0	8.3	7.4	228.4	18.0	13.4	11.9	301.0	323.3	8.1	94.2	4.1	8.
7.9	29.1	2229.9	775.0	6.9	6.1	235.4	19.3	15.1	10.4	302.2	323.3	7.6	94.3	5.3	7.
8.5	31.9	2469.5	750.0	5.5	4.7	242.8	18.6	16.7	8.6	303.5	323.5	7.2	94.4	6.2	7.
9.7	34.6	2776.6	725.0	4.0	3.2	247.1	18.6	17.2	7.2	304.7	323.4	6.7	94.6	7.3	7.
10.7	37.3	3062.1	700.0	2.8	2.0	252.3	19.1	18.2	5.8	305.3	324.3	6.3	94.5	8.3	7.
11.6	40.2	3356.2	675.0	1.0	0.2	256.4	18.9	19.4	4.5	307.5	324.0	5.8	94.2	9.4	7.
12.7	43.0	3659.6	650.0	-0.0	-0.9	253.6	16.9	18.6	3.1	309.6	325.7	5.5	94.1	10.5	7.
13.8	46.1	3973.6	625.0	-1.7	-2.5	262.7	18.0	17.8	2.3	311.2	326.1	5.1	93.8	11.7	7.
15.0	49.3	4298.1	600.0	-3.5	-4.4	268.2	18.3	14.1	2.5	312.6	326.3	4.6	93.6	12.9	7.
16.0	52.1	4634.0	575.0	-5.4	-6.3	261.7	18.0	17.8	2.6	314.2	326.6	4.1	93.0	14.1	7.
17.3	55.4	4982.1	550.0	-7.5	-8.8	264.2	20.4	20.3	2.1	315.6	326.5	3.6	90.6	15.5	7.
18.5	58.6	5343.2	525.0	-9.7	-11.1	265.4	21.8	21.7	1.8	317.1	326.7	3.1	89.5	17.1	7.
19.9	62.1	5718.5	500.0	-12.0	-14.0	268.4	24.0	23.8	3.2	318.7	326.8	2.6	84.9	18.9	7.
21.4	65.6	6109.5	475.0	-14.7	-16.9	264.3	23.2	23.1	2.3	320.0	326.8	2.1	83.4	21.0	7.
22.9	69.0	6516.8	450.0	-17.3	-19.6	265.8	24.6	24.5	1.8	321.7	327.5	1.8	82.1	23.1	7.
24.6	72.6	6942.9	425.0	-20.5	-22.7	265.3	27.0	26.9	2.2	322.5	327.7	1.4	82.3	25.8	7.
26.3	76.5	7388.9	400.0	-24.0	-26.8	273.9	26.5	26.5	-1.8	323.8	327.4	1.1	77.6	28.6	8.
28.2	80.4	7857.1	375.0	-27.5	-30.5	269.3	24.0	24.0	0.4	325.3	328.0	0.8	74.9	31.4	8.
30.1	84.5	8349.7	350.0	-31.4	-35.3	266.8	26.9	26.9	1.5	326.4	328.3	0.5	68.0	34.4	8.
32.4	88.5	8869.9	325.0	-35.8	-40.7	268.4	30.5	30.5	0.9	327.3	324.5	0.3	60.0	36.7	9.
34.9	93.3	9420.5	300.0	-40.4	-45.7	268.0	30.4	30.3	2.1	328.5	999.9	99.9	999.9	43.4	9.
37.5	97.5	10006.9	275.0	-45.7	-50.9	268.4	29.8	29.8	0.6	329.1	999.9	99.9	999.9	46.4	8.
40.6	102.3	10634.1	250.0	-51.5	-56.9	267.4	32.1	32.1	1.5	329.6	999.9	99.9	999.9	54.2	8.
43.2	107.3	11309.4	225.0	-57.5	-61.7	257.8	33.2	33.2	7.0	330.4	999.9	99.9	999.9	58.7	8.
46.0	113.3	12041.3	200.0	-64.5	-69.9	255.5	28.0	23.2	6.0	330.6	999.9	99.9	999.9	63.3	8.
49.2	119.3	12845.1	175.0	-69.8	-74.3	270.0	16.9	16.9	0.0	334.7	999.9	99.9	999.9	68.3	8.
53.5	125.8	13773.9	150.0	-64.3	-68.9	268.1	24.1	24.0	2.5	339.4	999.9	99.9	999.9	73.4	8.
59.4	133.3	14901.8	125.0	-61.7	-61.7	267.8	26.7	25.4	-8.2	333.3	999.9	99.9	999.9	73.1	8.
65.9	141.0	16292.3	100.0	-58.6	-58.6	268.2	11.0	10.9	1.1	414.6	999.9	99.9	999.9	89.4	8.
73.6	149.0	18067.0	75.0	-66.4	-66.4	268.4	3.1	3.1	-5.3	433.8	999.9	99.9	999.9	94.4	8.
84.4	158.7	20572.5	50.0	-59.9	-59.9	268.7	3.4	3.2	-0.9	502.5	999.9	99.9	999.9	95.8	8.
101.0	169.0	24942.0	25.0	-54.7	-54.7	999.9	99.9	99.9	69.9	627.5	999.9	99.9	999.9	996.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 1 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 425
HUNTINGTON, WA24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MD	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	HOT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	7.3	246.0	982.8	17.2	16.1	310.0	3.2	2.5	-2.1	253.4	321.9	11.8	93.0	0.0	0
59.9	99.5	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	7.9	314.2	975.0	16.9	15.8	311.3	8.2	6.1	-5.4	293.7	324.1	11.7	93.4	0.1	11.1
1.0	10.1	536.0	950.0	15.8	14.9	304.4	7.8	6.4	-4.4	294.7	324.3	11.3	94.4	0.4	11.1
1.9	12.1	762.7	925.0	14.6	13.9	304.5	8.3	6.0	-2.2	295.7	324.0	10.8	94.8	0.8	11.1
2.8	14.3	994.7	900.0	13.5	12.5	278.7	11.9	11.7	-1.8	296.7	323.8	10.2	94.0	1.3	11.1
3.6	16.4	1232.3	875.0	12.7	11.4	273.2	10.6	10.0	-0.6	298.3	324.3	9.7	91.6	1.7	11.1
4.4	18.7	1475.8	850.0	11.3	10.0	265.2	14.9	14.9	0.2	299.2	323.9	9.1	91.4	2.4	11.1
5.1	20.3	1725.5	825.0	10.3	9.0	271.0	14.7	14.7	-0.3	300.7	324.5	8.8	91.1	3.1	11.1
6.1	23.3	1931.8	800.0	9.2	7.7	272.0	15.5	15.5	-0.7	302.0	324.7	8.3	90.5	3.9	11.1
7.2	25.5	2244.9	775.0	7.5	6.0	269.0	17.9	17.9	0.3	302.8	323.8	7.6	90.2	5.3	11.1
8.4	27.9	2514.4	750.0	5.2	3.3	270.4	19.3	19.3	-0.1	303.1	321.9	6.8	91.1	6.4	11.1
9.4	30.5	2791.0	725.0	3.4	2.1	276.1	20.0	19.9	-2.1	304.0	321.3	6.1	90.7	7.7	11.1
10.7	33.1	3075.4	700.0	1.9	0.5	279.9	22.0	21.7	-3.8	305.3	321.4	5.7	90.2	9.2	11.1
11.3	35.5	3368.7	675.0	0.5	-0.8	281.0	23.6	23.1	-4.5	306.9	322.3	5.4	90.4	10.2	11.1
12.9	38.1	3671.5	650.0	-0.9	-2.0	278.9	23.8	23.5	-3.7	308.6	323.4	5.1	92.2	12.2	11.1
14.0	40.7	3984.6	625.0	-2.1	-3.1	275.1	22.6	22.5	-2.0	310.7	325.0	4.9	92.8	13.7	11.1
15.1	43.4	4308.6	600.0	-3.5	-4.5	271.3	19.3	19.2	-0.4	312.6	326.2	4.6	92.6	15.1	11.1
16.1	45.3	4644.7	575.0	-5.1	-6.1	269.8	18.2	18.2	0.1	314.6	327.2	4.2	92.0	16.2	11.1
17.2	48.3	4992.6	550.0	-8.1	-10.9	273.4	20.7	20.7	-1.2	314.9	324.1	3.0	78.7	17.4	11.1
18.4	51.9	5352.1	525.0	-11.2	-20.2	274.0	22.0	21.9	-1.5	315.1	319.9	1.5	47.6	18.7	11.1
19.5	55.0	5724.6	500.0	-13.3	-34.1	277.9	21.9	21.6	-3.0	316.9	314.3	0.4	15.4	20.4	11.1
20.7	58.0	6114.0	475.0	-14.9	-29.2	279.9	23.9	23.6	-4.1	319.5	321.9	0.7	28.4	22.1	11.1
21.9	61.3	6520.8	450.0	-18.3	-30.7	283.1	25.7	25.0	-5.4	320.2	322.5	0.7	32.8	23.1	11.1
23.2	64.4	6845.2	425.0	-21.0	-41.7	285.0	26.4	25.5	-6.9	322.0	322.8	0.2	13.8	25.4	11.1
24.4	67.6	7190.8	400.0	-23.7	-53.4	284.1	30.2	29.3	-7.4	324.1	324.4	0.1	4.5	27.4	11.1
25.7	70.9	7559.7	375.0	-27.4	-55.5	283.7	32.3	31.4	-7.7	325.2	325.4	0.1	4.9	30.3	11.1
27.0	74.6	8150.9	350.0	-31.9	-58.2	277.0	29.8	28.6	-2.5	325.6	325.8	0.0	5.3	32.4	11.1
28.6	78.5	8869.5	325.0	-36.1	-65.9	264.6	28.5	28.4	2.7	326.8	327.5	0.2	36.9	35.4	11.1
30.3	82.3	9420.9	300.0	-40.2	-69.9	258.2	31.3	30.6	6.4	328.7	328.9	0.9	99.9	37.4	11.1
31.5	85.3	10009.1	275.0	-44.5	-74.9	254.8	30.9	29.8	8.1	330.7	329.9	0.9	99.9	40.4	11.1
33.1	90.8	10640.0	250.0	-49.5	-79.9	250.4	32.0	31.1	7.5	332.4	329.9	0.9	99.9	43.3	11.1
35.0	95.5	11320.8	225.0	-55.8	-85.9	257.0	29.7	29.0	6.4	333.0	329.9	0.9	99.9	46.4	11.1
37.2	100.3	12058.9	200.0	-62.4	-92.9	265.5	29.9	29.8	2.2	333.5	329.9	0.9	99.9	51.2	11.1
39.5	105.3	12876.5	175.0	-65.6	-99.9	276.2	28.4	26.3	-2.8	341.7	329.9	0.9	99.9	58.6	11.1
41.9	111.9	13819.2	150.0	-60.0	-99.9	276.7	29.0	28.0	-2.4	346.7	329.9	0.9	99.9	58.6	11.1
44.6	116.3	14950.7	125.0	-55.3	-93.0	262.0	29.9	29.6	4.2	387.7	329.9	0.9	99.9	62.7	11.1
47.4	125.3	16357.0	100.0	-60.1	-99.9	275.2	20.3	20.2	-1.8	411.7	329.9	0.9	99.9	68.2	11.1
51.4	134.5	18135.0	75.0	-61.9	-99.9	313.1	3.1	2.3	-2.1	443.3	329.9	0.9	99.9	70.4	11.1
54.1	142.3	20669.9	50.0	-59.2	-99.9	956.9	99.9	99.9	99.9	504.1	999.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 429
DAYTON, OHIO

24 APRIL 1975
2315 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT T DG K	NA MK TO GM/KG	RM PCT	RANGE KM	AT %
0.0	5.0	299.0	975.0	18.8	15.1	255.0	6.2	6.0	1.6	295.5	324.7	11.1	79.0	3.0	7.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	6.1	306.9	975.0	18.7	14.9	99.9	99.9	99.9	99.9	255.5	324.5	11.0	78.4	99.9	99.9
0.8	10.2	529.9	950.0	17.3	13.9	99.9	99.9	99.9	99.9	296.2	324.2	10.6	80.3	99.9	99.9
1.7	12.2	757.4	925.0	15.3	13.1	281.5	7.7	7.5	-1.5	296.3	323.7	10.4	87.1	0.4	4.0
2.5	14.4	982.4	900.0	13.1	12.1	287.3	7.3	6.9	-2.2	296.3	322.7	10.0	94.2	1.2	6.0
3.2	16.4	1226.4	875.0	11.5	10.6	294.6	7.4	6.8	-3.1	297.0	321.7	9.3	98.2	1.4	7.0
4.1	18.6	1468.3	850.0	9.4	8.5	301.2	7.5	6.4	-3.9	297.1	319.2	8.2	93.7	1.2	7.0
5.0	20.9	1715.9	825.0	9.1	4.0	295.0	6.6	6.0	-2.8	299.0	316.0	6.2	70.3	2.2	1.5
5.9	23.2	1970.5	800.0	7.6	3.8	305.5	7.2	5.9	-4.2	300.1	317.5	6.3	76.5	2.5	1.0
6.6	25.4	2232.0	775.0	6.0	3.4	313.4	7.6	5.7	-5.4	301.1	317.9	6.4	83.6	2.8	1.0
7.5	27.7	2500.1	750.0	3.9	1.8	311.3	7.6	5.7	-5.0	301.6	317.9	5.8	85.7	3.2	1.2
8.4	30.1	2775.4	725.0	2.9	-3.1	306.9	7.7	6.2	-4.6	303.2	315.2	4.2	64.2	3.6	1.4
9.5	32.6	3059.2	700.0	1.5	-6.5	294.0	7.5	6.9	-3.1	304.5	314.4	3.4	55.9	4.1	1.5
10.5	35.2	3311.3	675.0	-0.4	-7.3	280.8	7.6	7.4	-1.4	305.6	315.2	3.3	55.8	4.6	1.5
11.5	37.6	3652.1	650.0	-2.9	-9.3	281.5	8.9	8.7	-1.8	306.1	315.4	3.1	66.3	5.0	1.3
12.5	40.2	3962.1	625.0	-4.8	-11.1	284.0	12.2	11.8	-3.0	307.4	317.2	3.3	77.6	5.4	1.2
13.5	42.8	4292.5	600.0	-6.6	-13.2	285.5	15.3	14.7	-4.1	308.9	319.9	3.7	85.6	6.5	1.1
14.5	45.6	4614.9	575.0	-7.7	-15.4	283.6	17.3	16.8	-4.1	311.4	322.1	3.6	96.1	7.5	1.1
15.4	48.4	4959.9	550.0	-9.6	-18.2	281.4	20.9	20.5	-4.1	313.0	324.7	3.2	95.6	8.4	1.0
16.7	51.1	5316.6	525.0	-12.9	-22.0	273.4	25.3	25.2	-1.5	312.9	318.6	0.5	19.1	12.2	1.4
18.0	54.3	5694.5	500.0	-16.0	-25.0	266.0	27.0	26.9	1.9	313.5	315.6	0.1	6.1	12.2	1.4
19.4	57.1	6071.2	475.0	-18.1	-25.4	267.4	28.6	28.5	1.3	315.5	315.6	0.0	2.2	14.4	1.3
20.9	60.3	6471.3	450.0	-20.7	-28.0	272.0	29.7	29.7	-1.0	317.3	318.1	0.2	14.4	14.3	1.0
22.3	62.6	6894.2	425.0	-23.2	-30.9	271.3	30.7	30.7	-0.7	319.2	320.1	0.2	17.9	19.6	9.0
23.8	66.9	7335.2	400.0	-26.4	-34.0	269.0	34.3	34.3	0.2	323.7	321.6	0.3	24.1	22.3	7.0
25.4	70.2	7794.4	375.0	-30.0	-38.0	266.2	36.9	36.8	2.4	321.9	322.5	0.2	21.4	25.4	9.0
27.1	73.8	8285.1	350.0	-34.6	-41.9	268.3	37.0	37.0	1.1	322.0	322.3	0.1	15.2	29.5	7.0
29.0	77.7	8790.1	325.0	-37.9	-43.0	269.1	38.2	38.2	0.6	324.3	324.4	0.0	5.2	33.7	7.0
31.0	81.5	9345.3	300.0	-41.4	-45.9	270.4	41.1	41.1	-0.6	327.0	999.9	99.9	99.9	34.7	7.0
33.2	85.6	9930.8	275.0	-46.2	-49.9	267.6	40.5	40.5	1.7	328.4	999.9	99.9	99.9	44.1	7.0
35.7	90.0	10555.2	250.0	-49.7	-54.9	258.5	41.0	41.0	8.3	332.2	999.9	99.9	99.9	49.6	7.0
38.2	94.9	11241.7	225.0	-53.7	-59.9	251.8	36.3	36.4	11.3	334.6	999.9	99.9	99.9	55.4	7.0
40.8	99.8	11984.0	200.0	-60.6	-65.9	256.4	43.0	41.8	10.1	336.8	999.9	99.9	99.9	61.1	7.0
43.7	105.0	12803.6	175.0	-68.2	-72.9	259.4	35.7	35.1	6.3	340.7	999.9	99.9	99.9	68.1	7.0
47.2	110.8	13745.7	150.0	-72.0	-79.9	263.2	28.1	28.0	3.3	343.3	999.9	99.9	99.9	75.1	7.0
51.3	117.3	14834.3	125.0	-76.0	-86.9	265.7	25.8	24.8	0.1	349.6	999.9	99.9	99.9	82.1	7.0
56.1	124.5	16302.5	100.0	-77.6	-90.9	267.4	31.2	31.1	1.4	416.5	999.9	99.9	99.9	90.6	7.0
62.5	132.3	19090.7	75.0	-82.2	-99.9	285.2	2.7	2.6	-0.7	442.6	999.9	99.9	99.9	95.5	7.0
70.9	140.3	20632.2	50.0	-87.6	-109.9	267.3	1.9	1.9	0.1	507.8	999.9	99.9	99.9	98.0	7.0
84.2	148.7	25070.7	25.0	-91.9	-119.9	999.9	99.9	99.9	65.9	635.7	999.9	99.9	99.9	999.9	99.9

BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 433
SALEM, ILL24 APRIL 1975
2315 GMT

157 16. C

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PUT T UG K	E POT T DG K	MR RTO GM/KG	RM PCT	PANGF KM	AZ DG
0.3	5.3	175.0	991.0	21.2	12.6	150.0	2.6	-1.3	2.3	296.4	321.1	9.3	58.0	0.0	0.
99.9	59.3	99.9	1000.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	6.3	316.1	975.0	20.3	12.2	136.8	2.0	-1.9	0.5	296.9	321.5	9.2	59.6	0.1	3.1
1.2	8.3	539.7	950.0	18.2	11.2	88.0	2.5	-2.5	-0.1	296.8	320.4	8.8	63.7	0.2	31.1
2.5	10.3	767.7	925.0	15.9	10.0	76.8	3.2	-3.2	-0.6	296.7	319.1	8.4	57.9	0.3	27.0
2.9	12.3	999.9	900.0	14.2	8.6	55.3	4.7	-3.9	-2.7	297.2	318.3	7.8	69.2	0.4	27.3
3.7	14.4	1237.7	875.0	13.2	7.5	58.5	3.2	-2.8	-1.7	298.5	318.8	7.5	68.1	0.5	25.8
4.5	16.4	1481.5	850.0	12.7	4.0	25.5	1.7	1.6	0.4	300.2	316.9	6.0	55.2	0.7	25.8
5.3	18.5	1732.0	825.0	11.8	1.5	99.9	99.9	99.9	99.9	301.8	316.4	5.2	49.1	55.5	99.9
6.1	20.7	1889.5	800.0	9.7	99.9	99.9	99.9	99.9	99.9	301.6	316.4	99.9	99.9	99.9	99.9
7.0	23.0	2250.7	775.0	8.2	99.9	99.9	99.9	99.9	99.9	302.7	316.4	99.9	99.9	99.9	99.9
7.9	25.3	2523.5	750.0	6.8	99.9	99.9	99.9	99.9	99.9	303.9	316.4	99.9	99.9	99.9	99.9
8.7	27.6	2797.3	725.0	4.7	99.9	99.9	99.9	99.9	99.9	304.6	316.4	99.9	99.9	99.9	99.9
10.0	30.7	3082.1	700.0	2.2	1.6	99.9	99.9	99.9	99.9	305.7	316.4	6.2	55.7	99.9	99.9
11.1	32.6	3375.9	675.0	1.9	-14.8	99.9	99.9	99.9	99.9	308.0	313.5	1.8	28.0	99.9	99.9
12.2	35.2	3679.3	650.0	0.1	-16.9	267.8	17.1	17.1	0.7	309.3	314.1	1.6	26.4	5.8	9.4
13.3	37.7	3992.1	625.0	-2.4	-15.6	268.8	19.0	19.7	0.4	309.3	315.5	1.8	35.4	7.0	4.5
14.3	40.4	4314.9	600.0	-4.8	-20.6	267.5	20.8	20.9	0.9	310.6	316.6	1.2	27.8	9.2	4.5
15.4	43.1	4647.5	575.0	-7.8	-22.7	265.2	21.5	21.4	1.8	310.5	316.6	1.1	29.1	9.7	9.5
16.4	46.0	4991.3	550.0	-10.3	-22.9	268.5	21.7	21.7	0.6	311.9	315.5	1.1	34.6	11.2	4.5
17.9	49.3	5348.1	525.0	-12.4	-23.7	273.5	20.6	20.6	-1.3	313.5	317.0	1.1	36.3	12.4	8.4
19.2	52.3	5719.5	500.0	-14.0	-40.5	270.0	26.1	26.1	-0.0	316.0	316.7	0.2	8.4	14.6	47.5
20.5	55.1	6107.4	475.0	-16.4	-42.1	265.0	31.8	31.8	0.6	317.6	318.3	0.2	8.7	16.7	47.5
21.7	58.3	6512.1	450.0	-19.1	-42.6	266.1	36.9	36.9	2.5	319.2	319.9	0.2	10.4	19.5	47.5
23.3	61.7	6916.4	425.0	-22.6	-42.0	268.1	38.3	38.3	4.0	320.0	320.8	0.2	15.1	22.9	47.5
24.7	65.4	7376.2	400.0	-26.1	-31.9	261.0	36.7	36.7	5.7	321.1	323.3	0.7	58.4	26.2	9.4
27.1	68.9	7840.0	375.0	-29.1	-35.1	263.4	37.4	37.4	4.3	322.6	324.4	0.5	57.8	29.9	9.4
29.1	72.5	8328.6	350.0	-32.6	-43.4	267.0	34.2	38.1	2.0	323.3	324.5	0.3	50.2	33.7	47.5
29.3	76.7	8843.9	325.0	-37.8	-46.9	267.0	40.8	40.8	2.1	324.5	325.1	0.2	37.5	36.1	0.0
31.9	80.9	9390.3	300.0	-42.4	99.9	264.8	40.7	40.6	3.7	325.6	325.9	99.9	99.9	43.2	4.4
34.2	85.4	9972.6	275.0	-47.1	99.9	263.0	42.5	42.1	5.2	327.0	327.0	99.9	99.9	48.4	9.4
36.6	90.2	10596.5	250.0	-51.8	99.9	261.7	41.0	40.6	5.9	329.1	329.9	99.9	99.9	53.9	8.4
39.1	95.4	11273.6	225.0	-55.9	99.9	263.9	36.8	36.6	3.9	332.9	332.9	99.9	99.9	60.7	8.5
41.8	101.2	12014.3	200.0	-60.3	99.9	265.8	34.6	34.0	6.1	337.3	337.3	99.9	99.9	67.3	8.5
44.4	107.3	12819.8	175.0	-64.4	99.9	266.7	33.2	32.3	7.7	343.6	343.6	99.9	99.9	73.7	4.4
48.1	114.3	13789.0	150.0	-68.0	99.9	266.4	35.5	35.4	2.2	366.7	366.7	99.9	99.9	81.5	4.4
52.6	122.3	14941.3	125.0	-66.8	99.9	262.0	26.9	26.6	3.7	392.1	392.1	99.9	99.9	90.0	4.4
57.6	130.3	16332.6	100.0	-59.3	99.9	263.8	14.2	13.8	-2.4	413.2	413.2	99.9	99.9	97.2	9.4
63.4	139.3	18129.6	75.0	-63.5	99.9	264.8	14.2	14.2	1.3	439.8	439.8	99.9	99.9	102.6	9.4
72.2	148.3	20659.6	50.0	-58.2	99.9	45.4	1.5	-1.1	-1.0	506.4	506.4	99.9	99.9	106.9	8.5
85.0	157.7	21106.7	25.0	-52.9	99.9	19.4	2.6	-0.9	-2.4	633.1	633.1	99.9	99.9	107.6	8.6

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 451
DODGE CITY, KAN
24 APRIL 1975
2315 CDT

TIME MIN	CNTCT	HEIGHT GPH	PRES HG	TEMP DG C	CFW PT DG C	DIR DG	SPEED M/SEC	COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO CM/KG	RH PCT	RANGE KM	A7 DU
0.0	12.4	791.0	920.6	21.1	9.4	60.0	6.2	-5.4	-3.1	302.4	324.6	0.1	47.0	0.0	C
99.9	99.9	99.9	1000.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.8	15.4	696.3	900.0	10.5	10.2	99.9	99.9	99.9	99.9	301.8	325.6	0.7	58.2	99.9	99.9
1.7	17.5	1227.4	875.0	16.6	9.6	99.9	99.9	99.9	99.9	302.1	325.7	0.6	63.4	99.9	99.9
2.5	20.1	1472.6	850.0	14.1	9.5	49.1	5.3	-4.0	-3.5	302.1	325.7	0.6	63.4	99.9	99.9
3.3	22.3	1725.2	825.0	11.7	9.0	40.8	5.1	-3.3	-3.5	302.1	325.7	0.6	63.4	99.9	99.9
4.2	24.3	1982.2	800.0	9.8	7.7	30.3	3.4	-1.7	-3.8	302.1	325.7	0.6	63.4	99.9	99.9
5.2	27.3	2245.9	775.0	8.0	6.2	31.7	3.4	0.7	-0.6	303.4	325.7	0.6	63.4	99.9	99.9
6.4	30.0	2516.0	750.0	6.0	3.5	29.2	3.4	3.2	-1.2	303.9	325.7	0.6	63.4	99.9	99.9
7.4	32.4	2753.3	725.0	4.2	-0.6	27.3	5.3	5.3	-0.3	304.7	319.2	5.1	71.1	1.4	21.6
8.5	35.3	3079.1	700.0	4.3	-14.2	27.0	8.2	8.2	-0.3	307.2	313.1	1.8	24.6	1.2	15.4
9.5	37.8	3373.6	675.0	1.8	-17.8	26.7	8.7	8.6	0.3	307.8	312.2	1.4	21.7	1.2	16.7
10.7	40.6	3676.4	650.0	-1.0	-18.2	27.5	8.5	8.5	-0.7	308.0	312.4	1.4	25.5	1.4	14.4
11.4	43.4	3984.0	625.0	-3.2	-18.6	28.3	9.4	9.3	-1.7	309.0	313.4	1.4	29.1	1.5	13.6
13.0	46.3	4365.2	600.0	-5.2	-22.0	27.9	11.6	11.6	-0.8	310.2	313.7	1.1	25.3	2.5	12.2
14.1	49.1	4642.9	575.0	-6.8	-27.9	27.2	13.9	13.9	-0.7	312.1	314.3	0.7	16.6	3.3	11.5
15.3	52.0	4987.7	550.0	-9.3	-30.6	27.2	13.8	13.7	-1.7	313.1	314.9	0.5	15.7	4.3	11.0
16.7	55.2	5345.5	525.0	-12.2	-37.4	28.5	12.4	12.1	-2.5	313.7	314.7	0.3	10.2	5.3	10.4
18.0	58.1	5716.3	500.0	-15.2	-40.1	28.2	15.0	14.6	-3.4	314.4	315.2	0.2	9.8	6.4	10.4
19.3	61.5	6101.4	475.0	-18.6	-40.7	28.6	17.1	16.9	-3.1	314.9	315.7	0.2	12.1	7.7	10.7
20.7	65.0	6501.6	450.0	-21.7	-43.0	27.2	17.3	17.2	-5.2	315.9	316.5	0.2	12.4	9.1	11.4
22.2	68.1	6919.8	425.0	-25.4	-46.6	27.8	19.2	19.0	-6.4	316.5	316.9	0.1	11.6	10.7	10.4
23.7	71.6	7350.7	400.0	-29.1	-47.8	26.6	21.2	21.1	-6.4	317.2	317.6	0.1	14.3	12.7	10.3
25.3	75.4	7814.1	375.0	-33.3	-48.9	26.3	21.5	21.4	2.5	317.5	317.6	0.1	19.0	14.5	10.2
27.0	79.3	8294.4	350.0	-37.2	-51.9	26.3	26.0	25.8	3.0	318.5	318.6	0.1	19.7	16.7	9.4
28.7	83.2	8802.4	325.0	-41.2	99.9	25.6	25.4	25.4	6.1	318.8	318.8	99.9	99.9	19.7	9.4
30.5	87.3	9340.5	300.0	-46.1	99.9	25.6	28.9	28.7	6.2	320.4	319.9	99.9	99.9	22.2	9.4
32.6	91.9	9914.0	275.0	-50.4	99.9	25.2	31.8	30.4	7.6	322.2	319.9	99.9	99.9	25.9	9.4
34.7	96.4	10534.2	250.0	-52.5	99.9	25.5	30.4	29.4	7.6	324.1	319.9	99.9	99.9	29.5	9.4
36.9	101.3	11213.4	225.0	-53.8	99.9	26.0	33.8	33.2	5.9	326.0	319.9	99.9	99.9	34.0	9.4
39.4	106.8	11964.1	200.0	-56.2	99.9	25.9	35.3	34.8	6.3	328.7	319.9	99.9	99.9	38.5	9.4
42.3	112.5	12810.0	175.0	-58.4	99.9	27.0	33.5	33.5	-0.1	330.8	319.9	99.9	99.9	43.6	9.4
45.6	119.2	13785.5	150.0	-57.6	99.9	26.3	32.2	32.0	3.9	330.9	319.9	99.9	99.9	48.4	9.4
49.3	126.2	14935.7	125.0	-57.7	99.9	25.8	22.4	22.4	4.0	330.5	319.9	99.9	99.9	51.6	8.4
53.9	134.2	16344.8	100.0	-59.2	99.9	25.4	26.4	25.4	7.1	415.2	319.9	99.9	99.9	58.4	8.4
59.7	142.3	18145.9	75.0	-58.3	99.9	26.1	22.6	22.5	1.9	450.6	319.9	99.9	99.9	73.2	9.4
67.5	151.7	20690.5	50.0	-57.0	99.9	26.1	7.3	7.1	-1.5	509.4	319.9	99.9	99.9	77.3	9.4
80.5	162.0	23163.8	25.0	-50.2	99.9	25.2	6.1	5.9	-1.6	640.3	319.9	99.9	99.9	78.8	9.4

• PT SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• PT TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
• PT SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 456
TOPEKA, KAN

26 APRIL 1975
2325 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	6.5	285.0	979.0	21.1	17.3	70.0	4.6	-4.3	-1.6	237.8	331.6	12.8	79.0	0.0	0.0
0.9	9.0	49.9	1000.0	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9
7.1	6.9	307.5	975.0	20.5	14.8	126.0	3.6	-2.9	2.1	247.3	326.4	11.0	70.0	0.2	26.0
0.9	9.2	527.3	950.0	18.0	12.6	93.7	3.0	-3.0	0.2	290.8	322.7	9.7	70.7	0.3	22.7
1.8	11.3	755.3	925.0	16.0	10.9	26.9	7.4	-4.4	-5.9	296.9	320.7	8.9	71.7	0.6	22.7
2.6	13.6	947.8	900.0	14.0	11.3	31.1	7.7	-4.0	-6.6	297.2	322.3	9.4	83.9	0.7	22.7
3.5	15.9	1225.6	875.0	13.1	10.7	11.1	4.9	-1.0	-4.8	298.7	323.6	9.3	85.1	1.1	21.7
4.3	18.3	1469.3	850.0	11.8	9.1	33.1	3.1	1.1	-2.9	299.6	322.8	8.6	83.7	1.4	21.2
5.1	20.6	1715.1	825.0	10.3	8.0	22.1	2.0	1.5	1.4	300.6	322.9	8.2	85.5	1.6	21.0
6.3	23.1	1975.7	800.0	10.4	7.2	218.9	5.9	3.7	4.6	303.2	325.3	8.0	80.7	1.2	20.7
7.1	25.5	2230.8	775.0	8.5	5.8	224.7	7.1	5.0	5.1	303.9	324.8	7.5	83.4	0.4	19.0
8.3	28.0	2510.5	750.0	7.0	2.6	224.8	5.4	3.9	3.7	305.0	322.4	6.2	73.4	0.5	17.7
9.3	30.3	2788.6	725.0	5.2	-1.5	276.1	12.0	15.0	-1.3	305.8	319.4	4.7	61.7	0.5	15.0
10.1	32.4	3074.9	700.0	4.2	-7.0	244.6	19.4	15.3	1.8	307.6	317.2	3.2	43.7	1.7	10.0
11.5	34.0	3370.0	675.0	2.7	-16.5	241.9	14.2	12.6	6.7	308.9	313.7	1.6	22.7	2.5	4.7
12.8	36.9	3673.8	650.0	-0.1	-17.2	270.8	15.0	15.0	-0.2	309.0	313.7	1.5	26.1	3.6	6.0
13.7	41.6	3986.2	625.0	-2.9	-18.0	273.3	14.8	14.8	-0.8	309.3	313.9	1.5	30.0	4.7	8.0
15.1	48.6	4307.6	600.0	-5.7	-18.9	273.7	14.8	14.8	-1.0	309.6	314.1	1.4	34.3	5.7	9.0
16.2	47.6	4619.5	575.0	-8.7	-19.7	270.4	14.8	14.8	-0.1	310.0	314.3	1.4	40.3	6.7	9.1
17.5	50.7	4942.0	550.0	-12.0	-21.5	268.3	13.5	13.5	0.4	310.0	313.9	1.2	44.9	7.4	9.0
18.4	53.9	5316.1	525.0	-14.5	-27.7	267.5	14.2	14.2	0.6	311.0	313.4	0.7	31.6	8.4	9.0
20.0	56.3	5703.9	500.0	-17.3	-31.0	257.4	17.1	16.7	1.3	312.0	315.0	0.6	37.3	11.2	9.0
21.4	60.4	6096.3	475.0	-20.2	-31.0	257.4	17.1	16.7	3.6	313.0	315.0	0.6	44.2	16.0	9.0
22.7	63.7	6484.8	450.0	-22.9	-29.5	254.6	22.4	22.0	6.1	314.5	316.9	0.7	54.3	12.7	4.7
24.2	67.0	6901.9	425.0	-25.3	-32.9	253.1	23.5	22.5	6.8	316.6	318.5	0.6	48.6	14.9	4.5
25.6	70.6	7339.5	400.0	-28.6	-38.6	253.4	23.0	22.0	6.6	317.5	318.7	0.3	38.1	14.9	4.5
27.4	74.3	7797.2	375.0	-32.8	-45.5	247.5	26.5	24.5	10.1	318.1	318.7	0.2	26.6	15.3	4.2
29.2	78.3	8290.1	350.0	-35.8	-51.3	250.0	31.6	29.7	10.8	320.4	320.7	0.1	17.1	22.3	5.0
30.9	82.4	8791.3	325.0	-39.5	-47.7	248.2	39.0	30.2	14.4	322.2	322.7	0.2	41.0	25.6	7.0
32.6	86.8	9334.4	300.0	-43.7	90.9	239.7	37.4	31.9	19.5	323.8	903.9	90.9	90.9	26.9	7.0
34.1	91.5	9912.4	275.0	-49.2	90.9	239.7	40.1	34.7	20.1	324.0	909.9	90.9	90.9	33.5	7.0
36.4	96.4	10523.9	250.0	-54.1	90.9	247.0	44.7	32.2	17.5	325.7	903.9	90.9	90.9	38.6	7.0
38.9	101.6	11204.2	225.0	-55.7	90.9	249.3	41.9	35.2	14.8	333.2	909.9	90.9	90.9	45.5	7.0
41.4	107.6	11950.6	200.0	-57.6	90.9	253.5	39.8	37.2	11.0	341.6	909.9	90.9	90.9	52.7	7.0
44.9	113.6	12795.0	175.0	-56.7	90.9	251.4	30.4	28.6	9.7	356.4	909.9	90.9	90.9	57.6	7.0
48.1	120.7	13705.8	150.0	-57.6	90.9	263.9	26.3	24.1	2.8	370.8	909.9	90.9	90.9	64.0	7.0
52.2	128.3	14915.8	125.0	-59.3	90.9	255.6	28.7	27.8	7.1	387.7	909.9	90.9	90.9	70.3	7.0
57.5	136.7	16319.6	100.0	-58.4	90.9	263.5	27.7	27.5	3.1	414.8	909.9	90.9	90.9	79.1	7.0
63.6	144.7	18120.3	75.0	-58.7	90.9	254.9	16.7	16.1	4.3	449.8	909.9	90.9	90.9	85.7	7.0
72.0	153.7	23667.4	50.0	-56.3	90.9	315.1	5.7	4.0	-4.0	510.0	909.9	90.9	90.9	90.9	7.0
90.9	50.9	90.9	250.0	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 486
PORT TOTTEN, N.Y.24 APRIL 1975
2359 GMT

TIME MIN	CNCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.5	6.0	1008.2	13.0	12.8	999.9	99.9	99.9	99.9	260.7	310.4	9.3	99.0	995.9	999.
0.3	5.1	77.1	1000.0	13.7	13.7	999.9	99.9	99.9	99.9	260.1	113.5	9.9	102.0	999.9	999.
1.0	7.1	292.4	975.0	15.8	15.8	999.9	99.9	99.9	99.9	262.6	322.8	11.7	102.3	999.9	999.
1.8	9.3	513.6	950.0	14.9	14.9	999.9	99.9	99.9	99.9	263.8	323.3	11.3	102.2	999.9	999.
2.6	11.3	739.7	925.0	13.7	13.7	999.9	99.9	99.9	99.9	264.8	322.9	10.8	102.0	999.9	999.
3.4	13.5	670.7	900.0	12.1	12.1	999.9	99.9	99.9	99.9	265.3	321.4	9.7	101.8	999.9	999.
4.4	15.6	1206.9	875.0	10.7	10.7	999.9	99.9	99.9	99.9	266.2	320.9	9.3	10.6	999.9	999.
5.4	17.9	1448.5	850.0	9.2	9.2	999.9	99.9	99.9	99.9	266.9	320.0	8.6	101.3	999.9	999.
6.4	20.2	1655.9	825.0	7.5	7.5	999.9	99.9	99.9	99.9	267.6	318.9	7.9	101.1	999.9	999.
7.5	22.4	1949.5	800.0	6.0	5.8	999.9	99.9	99.9	99.9	268.5	318.3	7.3	99.3	999.9	999.
8.5	24.9	2239.4	775.0	4.8	4.8	999.9	99.9	99.9	99.9	269.0	318.1	7.0	100.3	999.9	999.
9.4	27.1	2476.9	750.0	3.4	3.4	999.9	99.9	99.9	99.9	301.1	319.2	6.6	100.3	999.9	999.
10.4	29.6	2752.0	725.0	2.0	2.0	999.9	99.9	99.9	99.9	302.5	319.6	6.1	100.1	999.9	999.
11.5	32.2	3335.2	700.0	1.0	1.0	999.9	99.9	99.9	99.9	304.4	321.0	5.9	99.9	999.9	999.
12.5	34.9	3327.7	675.0	0.2	0.2	999.9	99.9	99.9	99.9	306.6	323.1	5.8	99.8	999.9	999.
13.6	37.4	3630.3	650.0	-1.2	-1.2	999.9	99.9	99.9	99.9	309.3	323.9	5.4	100.6	999.9	999.
14.9	40.2	3942.8	625.0	-2.9	-2.9	999.9	99.9	99.9	99.9	309.7	324.1	4.9	100.3	999.9	999.
16.1	42.9	4265.7	600.0	-4.6	-4.6	999.9	99.9	99.9	99.9	311.4	324.7	4.5	99.4	999.9	999.
17.3	45.3	4600.2	575.0	-6.4	-6.4	999.9	99.9	99.9	99.9	313.0	325.2	4.1	98.3	999.9	999.
18.8	48.9	4966.9	550.0	-8.5	-8.5	999.9	99.9	99.9	99.9	314.4	325.1	3.6	97.3	999.9	999.
20.0	51.8	5337.1	525.0	-10.4	-11.0	999.9	99.9	99.9	99.9	316.3	325.9	3.1	95.3	999.9	999.
21.3	54.3	5710.6	500.0	-12.9	-14.0	999.9	99.9	99.9	99.9	317.6	325.7	2.6	91.7	999.9	999.
22.4	56.1	6070.6	475.0	-15.7	-17.1	999.9	99.9	99.9	99.9	318.7	325.4	2.1	88.9	999.9	999.
24.3	61.0	6470.6	450.0	-18.6	-20.3	999.9	99.9	99.9	99.9	320.0	325.5	1.7	86.5	999.9	999.
25.8	65.2	6910.4	425.0	-21.9	-23.7	999.9	99.9	99.9	99.9	321.6	325.4	1.3	84.9	999.9	999.
27.3	68.7	7344.2	400.0	-25.2	-27.2	999.9	99.9	99.9	99.9	322.4	325.8	1.0	83.2	999.9	999.
29.9	72.3	7899.6	375.0	-28.9	-31.4	999.9	99.9	99.9	99.9	323.3	325.9	0.7	78.9	999.9	999.
30.5	74.4	8256.8	350.0	-32.6	-35.6	999.9	99.9	99.9	99.9	324.7	326.6	0.5	74.6	999.9	999.
32.2	76.5	8617.3	325.0	-37.0	-40.9	999.9	99.9	99.9	99.9	325.7	326.9	0.9	69.9	999.9	999.
34.1	78.5	9055.4	300.0	-41.4	-45.9	999.9	99.9	99.9	99.9	327.0	327.0	0.9	69.9	999.9	999.
36.3	80.4	9455.8	275.0	-46.4	-49.9	999.9	99.9	99.9	99.9	328.0	328.0	0.9	69.9	999.9	999.
38.5	84.5	10574.7	250.0	-52.1	-56.9	999.9	99.9	99.9	99.9	330.1	328.1	0.9	69.9	999.9	999.
40.8	88.6	11245.4	225.0	-57.7	-62.9	999.9	99.9	99.9	99.9	331.7	328.6	0.9	69.9	999.9	999.
43.4	105.3	11930.8	200.0	-63.8	-69.9	999.9	99.9	99.9	99.9	334.0	329.0	0.9	69.9	999.9	999.
46.1	111.3	12791.3	175.0	-68.4	-74.9	999.9	99.9	99.9	99.9	335.4	329.4	0.9	69.9	999.9	999.
48.4	117.9	13727.4	150.0	-74.2	-80.9	999.9	99.9	99.9	99.9	337.2	329.9	0.9	69.9	999.9	999.
54.9	125.3	14860.7	125.0	-80.6	-86.9	999.9	99.9	99.9	99.9	338.2	329.9	0.9	69.9	999.9	999.
61.5	133.2	16268.0	100.0	-86.7	-92.9	999.9	99.9	99.9	99.9	338.3	329.9	0.9	69.9	999.9	999.
70.0	141.0	18048.7	75.0	-92.9	-98.9	999.9	99.9	99.9	99.9	341.0	329.9	0.9	69.9	999.9	999.
81.6	149.5	20562.4	50.0	-98.7	-104.9	999.9	99.9	99.9	99.9	345.1	329.9	0.9	69.9	999.9	999.
99.9	99.9	99.9	25.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 518
ALBANY, N.Y.

24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT CFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MA RTD GM/RC	RM PCT	RANGE KM	AZ DG
0.0	0.3	86.0	938.5	13.8	13.2	170.0	5.2	-0.9	5.1	289.3	312.9	9.6	96.0	0.0	0
0.9	0.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	0.6	287.1	975.0	13.0	12.0	181.2	5.4	0.1	5.4	286.5	312.9	9.1	93.1	0.2	34.3
1.5	10.6	506.7	950.0	14.0	12.1	225.3	5.1	4.2	2.9	29.6	317.1	9.4	88.3	0.2	34.3
2.4	12.9	731.6	925.0	12.6	10.8	262.8	7.7	7.6	1.0	293.4	316.6	8.8	88.7	0.7	31.8
3.2	15.2	961.4	900.0	10.9	9.3	276.5	9.1	9.1	-1.0	293.8	315.6	8.2	90.2	0.9	30.0
4.1	17.3	1192.3	875.0	9.4	8.0	287.2	9.5	9.1	-2.8	294.5	315.1	7.7	90.9	1.3	71.0
5.1	19.7	1436.6	850.0	7.6	6.2	275.4	6.7	6.6	-1.1	295.0	313.9	7.1	91.4	1.4	71.0
6.1	22.2	1642.8	825.0	7.0	5.5	273.3	5.6	5.6	-0.3	290.9	312.6	6.9	90.2	2.1	71.0
7.0	24.5	1835.9	800.0	6.1	1.7	293.7	5.8	5.3	-2.3	298.4	313.4	5.4	73.2	2.4	55.0
8.1	26.5	2192.2	775.0	5.2	-0.4	301.9	5.0	4.7	-2.9	303.0	313.6	4.8	67.2	2.6	31.8
9.7	29.5	2422.7	750.0	3.8	-1.3	286.7	7.0	6.7	-2.0	301.3	314.5	4.6	65.1	3.0	31.8
9.0	32.1	2718.4	725.0	1.7	-1.4	275.9	7.6	7.5	-0.8	301.9	315.3	4.8	79.8	3.3	34.0
11.0	34.3	3020.6	700.0	-0.1	-2.3	270.3	9.9	8.9	-0.1	302.9	316.1	4.6	84.9	3.4	34.0
12.0	37.3	3311.6	675.0	-1.8	-3.6	273.4	10.0	10.0	-0.6	304.2	316.7	4.3	87.4	4.5	31.8
13.2	40.2	3611.4	650.0	-2.7	-6.8	270.1	12.7	12.7	-0.0	305.2	315.6	3.5	79.1	5.2	9.0
14.3	42.9	3920.7	625.0	-4.7	-35.1	277.0	13.6	13.5	-1.7	307.2	309.9	0.6	12.9	6.2	93.0
15.6	45.9	4231.1	600.0	-6.5	-37.1	283.7	15.1	14.7	-3.6	308.4	309.5	0.3	6.7	7.2	94.0
16.9	48.3	4572.5	575.0	-8.4	-39.7	276.5	16.0	14.5	-1.7	310.1	311.0	0.2	7.1	8.4	94.0
19.2	51.7	4915.2	550.0	-11.3	-39.7	273.6	17.0	17.0	-1.1	310.7	311.4	0.2	7.4	9.7	94.0
19.6	54.3	5276.1	525.0	-13.7	-41.3	275.3	19.1	19.0	-1.8	311.9	312.6	0.2	7.6	11.1	94.0
21.0	56.0	5641.1	500.0	-14.4	-49.5	268.3	20.1	20.1	0.6	315.5	315.8	0.1	3.2	12.4	94.0
22.4	61.3	6027.6	475.0	-17.6	-51.0	273.6	23.0	22.9	2.6	316.1	316.4	0.1	3.5	14.4	94.0
23.9	64.8	6439.0	450.0	-20.5	-36.7	261.1	26.1	25.8	4.0	317.5	319.9	0.4	25.5	16.4	92.0
25.4	68.0	6850.4	425.0	-23.5	-34.4	255.7	28.5	27.6	7.0	318.9	323.6	0.5	34.9	19.4	91.0
27.1	71.6	7292.6	400.0	-25.8	-37.8	251.6	27.4	26.0	8.7	321.4	323.7	0.4	31.3	22.3	94.0
28.9	75.4	7750.6	375.0	-29.3	-33.2	256.8	31.4	30.5	7.2	322.8	324.9	0.6	69.1	24.7	90.0
32.6	79.5	8290.3	350.0	-32.6	-36.1	258.8	34.8	34.1	6.7	324.7	326.5	0.5	71.0	28.4	94.0
32.4	83.4	8743.3	325.0	-37.5	-42.7	241.4	34.6	34.2	5.2	324.5	325.9	0.3	58.2	32.1	94.0
34.4	87.6	9310.5	300.0	-42.1	-59.9	267.6	38.5	38.5	1.6	326.1	326.9	99.9	99.9	36.3	94.0
36.4	92.2	9893.1	275.0	-47.0	99.9	268.4	38.3	39.2	1.1	327.1	327.9	99.9	99.9	41.4	94.0
38.8	97.0	10516.4	250.0	-52.3	99.9	269.0	42.2	42.1	1.5	328.3	328.9	99.9	99.9	46.7	94.0
41.3	102.3	11198.0	225.0	-58.3	99.9	269.0	44.9	44.9	0.1	329.2	329.9	99.9	99.9	53.2	94.0
44.0	107.6	11616.5	200.0	-64.7	99.9	277.0	45.4	45.3	-2.9	330.4	330.9	99.9	99.9	61.5	87.0
47.2	113.5	12722.1	175.0	-69.5	99.9	277.0	40.9	40.9	-5.0	335.4	335.9	99.9	99.9	71.3	94.0
51.3	120.2	13646.6	150.0	-61.5	99.9	276.8	36.6	36.3	-4.3	344.1	344.9	99.9	99.9	90.2	94.0
54.7	127.3	14839.6	125.0	-57.9	99.9	289.1	32.4	30.6	-10.6	390.2	390.9	99.9	99.9	88.9	90.0
61.3	135.5	16219.9	100.0	-57.1	99.9	284.2	23.2	21.1	-9.5	417.5	417.9	99.9	99.9	96.5	92.0
67.4	143.3	18027.8	75.0	-59.8	99.9	296.3	14.2	12.8	-8.3	447.6	447.9	99.9	99.9	104.6	94.0
76.9	152.1	20509.7	50.0	-57.8	99.9	292.4	9.5	9.8	-3.6	507.3	507.9	99.9	99.9	125.0	94.0
93.0	161.3	24971.6	25.0	-54.4	99.9	305	1.9	-0.1	-1.9	628.2	628.9	99.9	99.9	105.3	97.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 520
PITTSBURGH, PA

24 APRIL 1975
2315 GMT

TIME MIN	CATLT	WEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	CIR DEG	SPEED M/SEC	U COMP M/SEC	V CORR M/SEC	POT T DEG K	E POT T DEG K	WZ CM/SEC	RM PCT	RANGE KM	AZ DEG
00	00.0	359.0	967.0	15.0	13.9	270.0	3.1	3.1	0.0	292.3	319.3	3.4	93.0	0.0	0.
01	00.0	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
02	00.0	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
03	00.0	99.9	950.0	15.9	13.6	280.5	8.0	7.6	-2.6	294.7	322.0	10.4	85.9	0.2	95.
04	10.0	735.0	925.0	14.4	12.6	309.2	7.3	5.7	-4.6	295.3	321.7	10.0	89.1	0.5	127.
05	10.0	962.0	900.0	12.7	12.1	325.7	6.4	4.7	-6.9	295.9	322.0	9.9	96.1	0.9	121.
06	10.0	1204.7	875.0	11.1	10.7	320.1	8.3	5.3	-6.3	296.5	321.2	9.3	97.1	1.2	124.
07	10.0	1446.8	850.0	9.6	9.1	309.2	7.6	5.9	-6.9	297.3	320.3	8.6	96.9	1.6	110.
08	20.0	1664.7	825.0	8.3	7.8	308.6	9.4	7.3	-5.9	298.5	320.4	8.1	96.7	2.0	120.
09	20.0	1708.0	800.0	6.3	5.2	287.2	7.9	7.0	-3.6	298.7	317.8	7.8	92.8	2.5	120.
10	20.0	2208.7	775.0	4.5	2.6	292.9	7.9	7.2	-3.1	299.4	315.9	6.0	87.4	2.6	124.
11	27.6	2475.5	750.0	3.1	1.6	291.4	7.1	6.6	-2.6	300.6	316.6	5.7	89.8	3.3	124.
12	30.1	2745.9	725.0	1.4	0.2	285.6	6.3	6.0	-1.7	301.7	316.8	5.4	91.5	3.6	123.
13	32.7	3032.4	700.0	0.3	-0.4	271.6	8.5	8.5	-0.2	303.5	316.6	5.3	95.2	4.0	121.
14	35.1	3224.1	675.0	-0.9	-1.5	261.9	11.9	11.7	1.7	305.3	319.9	5.1	95.6	4.5	116.
15	37.6	3425.2	650.0	-2.3	-2.6	253.9	14.9	14.3	4.1	307.0	320.9	4.8	96.1	5.3	117.
16	40.5	3636.4	625.0	-3.9	-4.4	250.4	17.7	16.6	5.9	308.6	321.4	4.4	95.8	6.1	104.
17	43.2	4258.1	600.0	-5.6	-6.2	253.3	19.9	18.1	5.4	310.1	322.0	4.0	95.6	7.2	92.
18	46.1	4991.0	575.0	-7.7	-8.3	250.2	20.6	20.0	4.2	311.4	322.0	3.6	95.4	8.5	95.
19	49.1	4936.6	550.0	-9.4	-10.0	243.6	21.7	21.5	2.3	313.3	323.1	3.2	95.1	10.1	92.
20	51.9	5245.3	525.0	-11.1	-11.9	240.0	22.0	21.9	1.1	315.4	324.4	2.9	94.4	11.7	92.
21	54.1	5660.6	500.0	-13.5	-14.3	236.9	21.9	21.3	5.1	316.8	324.7	2.5	93.6	13.4	91.
22	56.1	6077.3	475.0	-16.3	-17.3	233.1	21.6	20.7	6.3	318.0	324.6	2.1	92.3	15.2	90.
23	58.6	6482.9	450.0	-19.2	-20.3	228.5	22.2	21.2	5.9	319.1	324.7	1.7	90.8	17.2	87.
24	61.1	6885.0	425.0	-22.3	-23.6	224.9	24.4	23.6	5.9	319.1	324.7	0.8	82.1	19.0	85.
25	63.5	7324.5	400.0	-26.3	-27.7	262.9	25.5	25.3	3.2	320.8	324.6	0.5	44.4	21.0	85.
26	65.9	7790.2	375.0	-29.6	-30.0	267.0	27.6	27.3	3.4	322.5	324.6	0.5	52.4	23.3	85.
27	68.2	8278.0	350.0	-33.5	-34.0	263.5	29.5	29.3	3.4	323.5	324.7	0.3	52.4	26.0	85.
28	70.3	8795.4	325.0	-37.3	-38.5	258.1	34.3	33.5	7.1	325.2	324.1	0.2	52.1	29.0	84.
29	72.1	9343.1	300.0	-41.5	-42.9	252.4	35.5	34.9	10.7	326.9	324.9	99.9	99.9	32.1	84.
30	74.0	9927.9	275.0	-46.1	-47.9	246.9	36.5	36.1	13.1	328.5	324.9	99.9	99.9	36.0	82.
31	75.4	10546.3	250.0	-51.4	-52.9	240.6	37.7	37.8	14.2	329.6	324.9	99.9	99.9	39.7	81.
32	76.9	11228.0	225.0	-57.6	-59.9	244.0	39.2	38.5	16.7	330.2	324.9	99.9	99.9	43.9	79.
33	78.3	11961.1	200.0	-64.3	-66.9	248.2	38.5	37.7	14.3	331.0	324.9	99.9	99.9	48.7	79.
34	79.8	12775.1	175.0	-65.0	-67.9	270.7	36.3	36.3	-0.4	332.2	324.9	99.9	99.9	54.6	78.
35	81.4	13721.6	150.0	-60.9	-63.9	276.2	35.1	35.1	-0.1	333.5	324.9	99.9	99.9	60.3	76.
36	83.1	14856.1	125.0	-59.5	-62.9	276.0	34.3	34.3	-2.3	334.3	324.9	99.9	99.9	67.0	74.
37	84.7	16031.2	100.0	-59.2	-62.9	276.0	33.4	33.4	-1.9	335.5	324.9	99.9	99.9	72.9	72.
38	86.3	17219.4	75.0	-64.1	-67.9	216.5	1.7	1.0	1.4	336.5	324.9	99.9	99.9	76.2	72.
39	87.9	20531.1	50.0	-68.3	-71.9	242.1	3.3	2.9	1.8	501.5	99.9	99.9	99.9	77.9	93.
40	89.6	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY 5-SEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY 5-SEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 528
RUFFALO, N Y

24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
00.0	6.4	218.0	984.4	11.1	7.9	10.0	3.2	-0.6	-3.2	285.4	303.9	6.8	40.0	0.0	0
00.3	99.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.3	7.2	238.4	975.0	11.5	6.2	34.6	3.0	0.9	-2.9	297.5	303.6	5.1	99.9	0.1	175
1.0	5.4	515.1	950.0	5.5	6.3	33.6	2.9	1.0	-2.7	287.6	304.1	6.3	80.4	0.2	163
1.8	11.4	735.9	925.0	7.4	5.9	307.4	3.6	2.9	-2.2	287.7	304.2	6.3	90.3	0.3	143
2.5	13.6	961.6	900.0	7.0	6.4	285.0	6.7	6.4	-1.7	289.6	307.3	6.7	95.6	0.3	143
3.1	15.9	1193.5	875.0	7.6	0.1	290.7	8.2	7.6	-2.9	292.2	304.3	4.4	59.5	0.4	127
4.0	18.1	1432.7	850.0	8.4	-2.7	281.7	8.5	8.3	-1.7	295.4	305.7	3.7	45.6	0.4	121
4.8	20.4	1679.4	825.0	7.7	-0.8	288.4	8.8	8.3	-2.8	297.3	309.5	4.4	54.9	0.4	117
5.6	22.9	1932.6	800.0	6.3	0.1	283.3	9.0	8.7	-2.1	298.4	311.9	4.8	64.7	0.4	117
6.5	25.2	2192.8	775.0	5.3	-1.0	285.1	11.0	10.7	-2.9	300.1	313.0	4.6	63.8	0.4	113
7.4	27.6	2460.1	750.0	3.3	-2.2	285.1	11.4	11.0	-3.0	302.8	313.1	4.4	67.0	0.4	111
8.3	30.2	2734.5	725.0	2.1	-8.0	289.9	10.0	9.7	-2.6	302.1	310.7	2.9	48.1	0.3	110
9.1	32.3	3015.9	700.0	0.2	-13.9	289.0	9.6	9.1	-3.1	303.0	308.6	1.9	33.6	0.4	110
10.0	35.3	3372.4	675.0	-1.9	-18.4	291.5	10.5	9.8	-3.8	305.6	307.3	1.9	37.6	0.7	110
10.9	38.1	3608.7	650.0	-3.0	-25.9	285.0	11.8	11.2	-3.9	305.6	307.9	0.7	15.0	0.5	110
11.9	40.3	3915.2	625.0	-4.2	-34.1	275.2	12.3	12.1	-2.0	307.7	306.8	0.3	7.7	0.6	110
12.0	42.3	4235.5	600.0	-6.5	-33.7	280.8	11.4	11.2	-2.1	308.6	309.8	0.4	9.3	0.4	104
13.9	46.8	4567.4	575.0	-8.9	-34.9	282.6	12.9	12.5	-3.0	308.6	310.8	0.3	10.0	0.3	107
14.9	49.9	4909.8	550.0	-11.7	-37.1	279.8	14.3	14.1	-2.4	310.1	311.1	0.3	10.0	0.3	107
16.1	52.9	5265.3	525.0	-13.5	-40.2	277.6	14.9	14.8	-2.0	312.2	311.1	0.2	8.3	0.3	107
17.3	56.0	5614.5	500.0	-15.7	-43.0	268.7	17.5	17.5	0.4	313.9	314.5	0.2	7.4	0.4	107
18.5	59.4	6020.3	475.0	-18.0	-32.5	263.7	18.4	18.3	2.0	315.7	317.4	0.5	26.8	0.5	103
20.0	63.0	6425.8	450.0	-22.2	-32.3	265.5	19.2	19.2	1.2	315.4	317.3	0.6	35.2	0.6	101
21.4	66.4	6840.3	425.0	-23.5	-27.1	255.4	21.3	20.7	5.0	314.9	322.2	1.0	72.3	1.0	9
22.7	70.1	7280.6	400.0	-27.0	-30.9	250.6	20.3	19.1	6.7	319.9	322.4	0.7	69.1	0.7	9
24.2	74.0	7743.3	375.0	-29.8	-31.8	250.8	23.6	22.3	7.8	325.2	324.6	0.7	82.8	0.7	9
25.6	78.2	8231.5	350.0	-33.3	-35.7	254.5	28.6	25.6	7.1	323.8	325.6	0.5	78.5	0.5	91
27.1	82.3	8747.7	325.0	-37.7	-39.9	261.4	28.4	28.1	4.2	324.6	325.9	0.5	99.9	0.5	91
29.1	86.7	9295.5	300.0	-41.5	-39.9	264.1	34.3	34.1	3.7	326.9	326.9	0.5	99.9	0.5	91
30.4	91.5	9890.3	275.0	-46.1	-39.9	254.9	43.2	43.0	5.8	328.4	328.4	0.5	99.9	0.5	91
33.0	95.4	10500.3	250.0	-51.5	-39.9	253.6	43.9	43.1	12.7	329.5	329.5	0.5	99.9	0.5	91
35.5	101.6	11191.8	225.0	-57.2	-39.9	250.5	47.2	44.5	15.7	330.9	329.9	0.5	99.9	0.5	91
38.0	107.5	11915.5	200.0	-62.9	-39.9	250.0	41.0	39.4	11.3	333.2	329.9	0.5	99.9	0.5	91
41.0	113.0	12736.3	175.0	-64.1	-39.9	250.3	33.0	32.5	6.1	340.2	329.9	0.5	99.9	0.5	91
44.3	120.7	13695.1	150.0	-58.5	-39.9	265.1	31.7	31.7	1.0	365.3	329.9	0.5	99.9	0.5	91
48.5	126.3	14845.6	125.0	-54.9	-39.9	275.4	24.8	28.7	-2.7	395.6	329.9	0.5	99.9	0.5	91
53.5	136.3	16277.2	100.0	-52.6	-39.9	99.9	99.9	99.9	99.9	428.2	329.9	0.5	99.9	0.5	91
59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 532
PEORIA, ILL

24 APRIL 1975
2315 GMT

159 140 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE KM	A7 DG
0.0	5.6	205.0	989.5	11.7	6.9	70.0	4.6	-4.3	-1.6	286.7	305.4	7.3	83.0	0.3	C.
00.3	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	99.9
0.3	6.6	321.6	975.0	10.7	8.0	75.9	5.7	-5.6	-1.4	286.9	306.0	7.0	88.5	0.2	257.
1.1	8.7	535.8	950.0	6.7	8.4	82.5	6.5	-4.5	-0.1	287.0	305.9	7.3	97.9	0.4	259.
1.4	10.7	761.8	925.0	10.2	10.2	94.8	2.9	-2.9	0.2	290.9	313.0	8.5	99.6	0.5	265.
2.4	12.6	589.9	900.0	9.1	9.1	86.7	1.2	-1.2	-0.1	292.0	313.2	8.1	99.4	0.5	265.
3.1	15.0	1224.1	875.0	9.0	6.7	247.3	0.3	0.3	0.1	294.1	313.0	7.1	85.4	0.6	267.
3.9	17.1	1464.9	850.0	10.4	-25.4	314.6	2.3	1.7	-1.6	297.1	303.3	1.1	11.4	0.5	267.
4.7	19.4	1711.2	825.0	10.6	-18.2	297.4	3.2	2.9	-1.5	299.9	303.6	1.7	15.5	0.4	267.
5.3	21.5	1964.3	800.0	8.6	-16.2	303.5	2.8	2.3	-1.5	300.5	305.7	1.3	22.4	0.4	267.
6.1	23.8	2230.4	775.0	6.2	-13.8	297.0	1.9	3.4	-1.8	301.6	305.7	1.6	23.4	0.4	267.
6.8	26.0	2456.9	750.0	4.4	-14.6	298.9	5.2	4.9	-1.7	301.6	305.7	1.6	23.4	0.4	267.
7.7	28.5	2772.0	725.0	2.8	-16.0	283.0	7.5	7.4	-1.7	302.8	307.4	1.5	23.5	0.5	267.
8.4	31.3	3054.9	700.0	1.7	-16.9	278.2	7.8	7.8	-1.1	302.8	309.1	1.5	23.5	0.9	267.
9.4	33.7	3346.8	675.0	-0.7	-18.3	265.5	7.4	7.4	0.6	305.0	309.2	1.3	24.9	1.2	267.
10.3	36.1	3646.6	650.0	-3.2	-18.1	255.9	6.4	6.1	2.0	305.7	309.9	1.4	30.4	1.4	267.
11.1	38.8	3955.4	625.0	-6.0	-17.0	252.3	10.3	9.8	3.1	305.7	312.7	1.6	41.5	1.9	267.
12.0	41.2	4273.6	600.0	-8.2	-15.0	260.3	14.1	13.9	2.4	306.9	312.9	2.0	57.7	2.5	267.
12.9	44.1	4603.2	575.0	-9.3	-27.3	265.7	20.0	20.0	0.1	308.2	311.5	0.7	21.4	3.4	267.
14.0	46.9	4945.9	550.0	-11.8	-26.1	272.7	22.7	22.6	-1.1	310.2	312.8	0.8	29.1	4.9	267.
15.1	50.0	5259.8	525.0	-14.9	-25.2	273.0	21.3	21.3	-1.1	310.6	313.6	0.9	40.9	6.4	267.
16.1	52.9	5607.7	500.0	-16.9	-27.6	269.1	19.5	19.5	0.7	312.5	315.1	0.8	38.8	7.6	267.
17.3	55.9	6051.1	475.0	-19.4	-35.5	263.1	19.3	19.1	2.3	313.9	315.2	0.4	22.5	8.2	267.
18.6	58.3	6451.0	450.0	-21.8	-50.0	265.3	21.5	21.4	1.8	315.8	316.1	0.1	5.7	10.5	267.
19.9	62.5	6864.2	425.0	-25.9	-38.9	268.9	23.1	23.1	0.5	315.8	316.9	0.3	29.6	12.3	267.
21.4	65.9	7305.0	400.0	-28.8	-49.2	268.4	24.6	24.6	0.7	317.5	317.9	0.1	12.3	14.4	267.
22.9	69.4	7743.6	375.0	-32.7	-52.5	269.6	26.5	26.5	0.2	318.3	318.6	0.1	11.9	16.4	267.
24.4	73.0	8246.1	350.0	-36.1	-73.2	274.1	33.3	33.2	-0.4	320.0	320.1	0.0	1.0	19.1	267.
26.1	77.1	8757.6	325.0	-39.2	99.3	272.1	37.8	37.8	-1.4	322.7	999.9	99.9	999.9	23.3	267.
27.8	81.2	9307.6	300.0	-44.3	99.9	266.5	39.9	39.9	2.5	323.0	999.9	99.9	999.9	26.4	267.
29.5	85.4	9876.1	275.0	-49.0	99.9	263.7	45.3	45.1	5.0	325.2	999.9	99.9	999.9	31.2	267.
31.5	90.0	10496.0	250.0	-54.4	99.9	263.0	48.1	47.8	5.9	325.2	999.9	99.9	999.9	36.7	267.
33.9	95.0	11164.1	225.0	-58.7	99.9	264.6	51.4	51.2	4.8	326.6	999.9	99.9	999.9	44.3	267.
36.6	100.2	11901.5	200.0	-60.5	99.9	270.0	40.2	40.2	-0.0	326.6	999.9	99.9	999.9	51.4	267.
39.7	106.0	12729.4	175.0	-58.8	99.9	253.7	41.6	39.9	11.7	352.8	999.9	99.9	999.9	57.8	267.
42.9	112.3	13700.0	150.0	-58.9	99.9	262.3	24.1	23.9	3.2	368.6	999.9	99.9	999.9	63.5	267.
47.1	119.5	14643.4	125.0	-59.5	99.9	263.1	29.6	29.6	3.6	367.3	999.9	99.9	999.9	70.5	267.
52.1	127.7	16246.1	100.0	-59.4	99.9	271.1	23.9	23.9	-0.5	413.0	999.9	99.9	999.9	79.9	267.
58.5	137.0	18049.4	75.0	-62.2	99.9	279.3	15.5	15.3	-2.5	442.6	999.9	99.9	999.9	84.0	267.
67.1	147.0	23590.8	50.0	-59.5	99.9	45.3	0.7	-0.5	-0.5	503.3	999.9	99.9	999.9	86.7	267.
80.5	148.0	25016.7	25.0	-53.0	99.9	93.5	9.4	-5.4	0.3	632.3	999.9	99.9	999.9	87.5	267.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 543
OPAMA, NEB

24 APRIL 1975
2316 GMT

TIME MIN	CNTCT	HEIGHT GEN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD CM/KG	MH PCT	RANGE KM	13. 9
0.0	7.1	400.0	963.7	16.6	13.1	90.0	4.2	-4.2	0.0	294.2	320.2	9.9	80.0	0.0	0.0
99.9	99.9	50.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	8.2	522.0	950.0	15.5	11.7	87.7	5.3	-5.3	-0.2	294.1	319.2	9.2	78.4	0.2	0.2
1.5	10.1	747.8	925.0	13.2	10.7	94.5	6.0	-5.9	0.9	294.0	317.1	8.8	84.9	0.5	0.5
2.3	11.8	678.2	900.0	11.2	9.9	97.2	4.5	-3.7	-2.4	294.2	316.9	8.6	91.5	0.2	0.2
3.3	12.9	1214.1	875.0	13.1	2.7	355.7	6.9	0.5	-6.9	298.1	312.9	5.4	49.7	1.0	1.0
4.2	15.9	1457.8	850.0	12.6	0.0	312.7	5.4	4.0	-3.7	300.0	313.5	4.8	44.7	1.0	1.0
5.2	17.9	1767.8	825.0	11.3	-0.9	240.4	5.0	4.9	-0.9	301.1	313.4	4.4	42.9	0.7	0.7
6.1	20.1	1964.2	800.0	10.0	-2.6	259.3	6.1	6.0	1.1	302.3	313.6	3.9	41.0	0.7	0.7
7.2	22.1	2227.0	775.0	7.8	-6.5	249.4	8.5	8.0	3.0	302.6	311.5	3.0	35.2	0.7	0.7
8.2	24.3	2496.5	750.0	5.7	-7.8	234.6	8.5	6.9	4.9	303.2	311.5	2.8	37.1	0.7	0.7
9.3	26.5	2772.9	725.0	3.6	-8.1	220.5	9.7	6.3	7.4	303.7	312.2	2.9	42.4	1.2	1.2
10.3	28.7	3056.8	700.0	1.4	-7.8	221.7	11.5	7.7	8.6	304.5	313.4	3.0	50.2	1.5	1.5
11.3	31.2	3348.2	675.0	-1.4	-9.2	230.0	12.5	9.6	8.0	304.5	312.8	2.8	55.2	2.1	2.1
12.4	33.7	3647.7	650.0	-4.2	-10.5	228.4	12.6	10.7	6.6	304.6	312.4	2.6	61.0	3.1	3.1
13.5	36.1	3955.5	625.0	-6.7	-11.6	243.7	12.5	11.2	5.5	305.1	312.6	2.5	68.3	4.0	4.0
14.6	38.6	4273.7	600.0	-8.5	-10.7	246.5	12.8	11.7	5.1	306.6	315.0	2.8	84.0	4.9	4.9
15.8	41.2	4602.5	575.0	-10.7	-14.7	256.8	12.7	12.3	2.9	307.7	314.1	2.1	71.0	5.7	5.7
16.9	44.0	4943.0	550.0	-13.3	-17.1	266.5	13.8	13.8	0.8	308.5	314.1	1.8	72.5	6.0	6.0
18.3	46.9	5296.7	525.0	-14.3	-36.3	276.4	18.7	18.6	-2.1	311.2	312.4	0.3	13.4	9.4	9.4
19.7	49.3	5664.8	500.0	-16.9	-37.2	278.4	22.0	21.8	-3.2	312.4	313.5	0.3	15.1	11.1	11.1
21.3	52.9	6047.4	475.0	-20.1	-39.4	276.1	21.5	21.4	-2.3	313.0	314.0	0.3	15.9	11.1	11.1
22.7	55.8	6445.0	450.0	-23.9	-43.1	273.0	20.7	20.7	-1.1	313.0	313.8	0.2	15.0	13.1	13.1
24.2	58.1	6850.1	425.0	-27.6	-46.2	274.3	19.9	19.8	-1.5	313.5	314.0	0.1	14.9	14.8	14.8
25.7	62.6	7291.5	400.0	-31.7	-49.5	269.6	20.7	20.7	0.1	313.7	314.2	0.1	16.9	16.6	16.6
27.3	66.0	7743.7	375.0	-35.5	-51.5	264.8	21.7	21.6	2.2	314.5	314.8	0.1	17.4	18.4	18.4
29.0	69.9	8221.0	350.0	-36.8	-47.8	251.7	23.7	22.5	7.4	316.3	316.8	0.1	38.3	21.2	21.2
30.9	73.7	8725.2	325.0	-43.1	99.7	242.5	23.9	21.2	11.0	317.3	319.9	99.9	99.9	23.7	23.7
32.9	78.0	9259.7	300.0	-47.4	99.7	238.2	26.4	22.4	13.7	318.6	319.9	99.9	99.9	24.7	24.7
34.8	82.2	9828.4	275.0	-52.6	99.9	240.0	28.2	24.4	18.1	319.0	319.9	99.9	99.9	26.6	26.6
37.0	86.8	10440.0	250.0	-53.9	99.9	251.6	39.4	37.4	12.4	325.9	325.9	99.9	99.9	33.9	33.9
39.6	91.8	11117.4	225.0	-53.4	99.9	256.9	38.5	37.5	8.7	336.7	336.7	99.9	99.9	40.2	40.2
42.4	97.2	11871.6	200.0	-55.2	99.9	260.1	35.7	35.2	6.1	345.3	345.3	99.9	99.9	44.4	44.4
45.3	103.0	12719.2	175.0	-58.3	99.9	253.7	33.6	32.3	9.5	353.8	353.8	99.9	99.9	51.7	51.7
49.0	110.0	13697.0	150.0	-56.9	99.9	248.4	30.0	27.9	11.0	372.0	372.0	99.9	99.9	59.1	59.1
53.1	117.3	14851.9	125.0	-55.7	99.9	241.6	34.4	34.0	5.0	394.2	394.2	99.9	99.9	66.7	66.7
58.1	125.7	16273.2	100.0	-56.3	99.9	250.4	21.4	20.1	7.2	419.0	419.0	99.9	99.9	75.0	75.0
64.8	138.3	18095.9	75.0	-56.8	99.9	252.7	19.8	18.9	5.9	453.6	453.6	99.9	99.9	83.9	83.9
73.3	144.7	23668.1	50.0	-55.5	99.9	269.2	3.0	3.0	0.0	512.9	512.9	99.9	99.9	90.2	90.2
87.1	154.3	25155.2	25.0	-50.1	99.9	63.0	3.6	-3.2	-1.6	641.0	641.0	99.9	99.9	87.5	87.5

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE 10
OF POOR QUALITY

STATION NO. 562
NORTH PLATTE, NEB
24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.9	847.0	913.3	22.2	-3.2	320.0	7.7	4.9	-5.9	303.6	313.2	3.3	18.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	15.3	973.9	906.0	21.3	-7.2	595.9	99.9	99.9	99.9	303.8	311.1	2.5	14.0	99.9	99.9
1.2	17.2	1216.2	875.0	18.6	-9.1	999.9	99.9	99.9	99.9	303.5	310.0	2.2	14.2	99.9	99.9
1.9	15.7	1463.1	850.0	16.0	-10.9	278.0	7.7	7.7	-0.7	303.2	309.5	2.1	15.9	3.8	35.
2.5	21.9	1715.1	825.0	13.5	-10.9	278.6	7.3	7.3	-1.0	303.1	307.1	2.0	17.2	10.1	97.
3.1	24.4	1972.8	800.0	11.1	-11.0	278.2	6.8	6.8	-1.0	303.2	309.4	2.1	19.9	1.4	96.
3.7	26.7	2236.4	775.0	8.8	-11.5	273.6	6.0	6.0	-1.0	303.5	309.6	2.1	22.5	1.6	97.
4.5	29.3	2506.2	750.0	5.9	-12.5	270.4	6.9	6.9	-0.1	303.3	309.1	1.9	25.1	1.9	97.
5.5	32.0	2782.1	725.0	3.2	-12.1	271.6	7.2	7.2	-0.2	303.2	309.4	2.1	31.4	2.3	95.
6.3	34.7	3065.0	700.0	0.2	-12.5	278.7	7.7	7.7	-0.9	303.0	309.2	2.1	37.9	2.7	95.
7.4	37.2	3355.1	675.0	-2.5	-12.6	279.0	9.1	9.0	-1.4	303.1	309.5	2.1	45.4	3.2	96.
8.4	40.0	3653.8	650.0	-4.8	-12.8	273.9	13.8	13.8	-0.9	303.2	308.3	0.8	16.0	3.9	96.
9.5	42.6	3954.3	625.0	-7.7	-13.3	271.5	14.0	14.9	-0.9	303.2	309.1	0.3	5.8	4.9	96.
10.7	45.4	4285.1	600.0	-10.3	-13.8	280.6	13.7	13.5	-2.5	308.9	309.7	0.2	6.1	5.9	95.
11.9	48.4	4616.2	575.0	-13.6	-14.0	285.9	13.4	12.9	-3.7	309.9	310.8	0.3	8.1	6.9	97.
13.3	51.1	4958.7	550.0	-16.6	-14.0	286.7	14.0	13.4	-4.0	310.3	311.1	0.2	7.4	8.0	97.
14.8	54.3	5313.1	525.0	-19.6	-14.6	283.0	14.5	14.5	-3.4	310.9	312.0	0.3	13.5	9.3	99.
16.2	57.3	5690.5	500.0	-17.5	-17.1	287.1	15.9	15.2	-4.7	311.7	312.7	0.3	16.2	10.5	100.
17.5	60.6	6062.4	475.0	-20.5	-18.9	288.7	17.2	16.3	-5.5	312.6	313.6	0.3	17.2	11.9	101.
18.9	64.0	6459.7	450.0	-24.3	-20.3	287.3	17.7	16.9	-5.3	312.7	313.4	0.2	16.8	13.3	101.
20.5	67.3	6873.5	425.0	-27.6	-21.6	292.2	18.5	17.1	-7.0	313.6	314.2	0.1	16.0	15.1	102.
22.2	70.7	7306.2	400.0	-31.6	-23.4	297.8	18.9	16.7	-8.8	313.9	314.3	0.1	17.0	17.0	104.
24.0	74.5	7758.7	375.0	-35.9	-25.9	297.1	18.0	16.5	-8.4	314.0	314.3	0.1	17.4	19.0	105.
25.8	78.3	8234.1	350.0	-39.9	-28.9	291.1	19.7	17.9	-6.9	314.9	314.9	99.9	99.9	20.9	106.
27.6	82.3	8735.8	325.0	-44.4	-31.9	289.3	17.1	16.1	-5.7	315.5	315.5	99.9	99.9	22.9	107.
29.6	86.2	9267.8	300.0	-48.0	-34.9	294.6	16.7	15.2	-7.0	317.7	317.7	99.9	99.9	24.9	107.
31.8	90.7	9835.5	275.0	-52.2	-37.9	296.0	12.7	12.0	-3.9	319.6	319.6	99.9	99.9	26.8	108.
34.1	95.1	10447.7	250.0	-56.2	-40.9	292.4	20.4	19.9	-4.4	324.1	324.1	99.9	99.9	29.1	107.
36.5	100.0	11118.4	225.0	-59.6	-43.9	278.9	19.7	19.5	-3.0	334.9	334.9	99.9	99.9	31.7	107.
39.4	105.2	11870.7	200.0	-55.0	-46.9	264.5	19.9	19.8	1.9	345.6	345.6	99.9	99.9	35.1	107.
42.4	110.8	12720.6	175.0	-54.9	-49.9	272.7	19.8	19.8	-0.9	359.2	359.2	99.9	99.9	39.8	108.
45.9	116.9	13704.0	150.0	-53.0	-52.9	270.5	21.2	21.0	-2.4	375.3	375.3	99.9	99.9	43.3	108.
49.8	123.9	14857.1	125.0	-50.3	-55.9	259.1	19.7	19.7	3.8	387.7	387.7	99.9	99.9	47.4	100.
55.0	131.0	16263.3	100.0	-56.5	-59.9	270.6	21.5	21.5	-0.3	418.6	418.6	99.9	99.9	51.2	98.
61.6	136.3	18081.1	75.0	-57.5	-62.9	245.6	15.4	14.0	6.4	452.4	452.4	99.9	99.9	59.4	98.
70.6	147.0	20665.8	50.0	-56.2	-65.9	312.4	6.6	4.9	-4.4	511.1	511.1	99.9	99.9	66.7	95.
83.9	155.3	25104.6	25.0	-50.0	-69.9	323.5	3.2	1.9	-2.5	641.4	641.4	99.9	99.9	69.8	96.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 606
PORTLAND, ME24 APRIL 1975
2115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PC	RANGE KM	AZ DG
0.0	5.7	20.0	1308.2	6.7	6.3	340.0	3.1	1.1	-2.9	280.0	295.0	5.9	97.0	0.0	0.
0.2	6.3	67.3	1000.0	6.6	6.1	13.1	4.2	-0.5	-2.1	280.5	295.6	5.9	97.1	0.1	130.
0.4	8.5	294.8	975.0	5.0	5.0	324.8	2.1	1.2	-1.7	280.9	295.4	5.6	101.3	0.2	151.
1.7	10.6	507.7	950.0	6.4	6.4	254.7	6.5	6.3	1.7	284.6	301.0	6.4	101.6	0.3	110.
2.5	12.9	728.2	925.0	9.0	9.0	240.8	12.9	11.2	6.3	289.6	310.0	7.9	101.9	0.7	87.
3.3	15.2	956.0	900.0	9.5	9.5	246.6	11.7	10.7	4.6	292.4	314.3	8.3	101.6	1.3	74.
3.9	17.4	1199.6	875.0	8.2	4.4	254.2	12.1	11.7	3.3	293.1	309.2	6.0	76.6	1.7	74.
4.3	19.3	1420.7	850.0	8.5	3.7	258.1	12.0	11.7	2.5	295.9	311.9	5.9	71.5	2.3	75.
5.5	22.1	1676.2	825.0	6.8	2.3	261.6	11.8	11.7	1.7	296.5	311.6	5.5	72.9	2.7	77.
6.4	24.6	1928.9	800.0	5.5	2.0	265.0	10.5	10.4	0.9	297.8	313.0	5.5	77.8	3.4	77.
7.7	26.5	2188.4	775.0	4.5	0.4	272.7	9.1	9.1	-0.4	299.3	313.5	5.1	74.4	3.9	75.
8.0	28.5	2455.1	750.0	2.5	0.9	283.0	9.0	8.9	-2.0	300.0	315.2	5.5	69.2	4.3	67.
8.9	32.1	2728.6	725.0	0.3	-0.2	286.8	9.4	9.0	-2.7	300.5	315.1	5.2	66.3	4.9	61.
10.0	34.3	3095.5	700.0	-1.7	-2.3	289.2	9.5	9.2	-2.5	301.2	314.3	4.6	64.0	5.3	80.
11.0	37.3	3299.0	675.0	-3.1	-3.2	291.7	10.0	9.8	-2.0	302.8	315.5	4.5	98.6	5.7	47.
12.0	40.2	3556.6	650.0	-5.4	-14.1	278.5	11.2	11.0	-1.6	303.1	309.3	2.1	53.1	6.5	94.
13.1	42.9	3903.9	625.0	-6.2	-19.6	284.9	12.2	11.8	-3.1	305.5	309.5	1.3	33.7	7.2	90.
14.1	45.4	4222.1	600.0	-8.5	-13.0	283.1	13.9	13.6	-3.2	306.5	313.6	2.3	70.0	8.0	42.
15.1	48.3	4551.0	575.0	-10.8	-13.7	275.6	13.6	13.5	-1.3	307.6	314.6	2.3	70.0	8.0	42.
16.2	51.6	4851.9	550.0	-12.4	-14.4	262.4	13.1	13.0	1.7	309.6	316.6	2.3	84.6	8.7	92.
17.6	54.9	5246.5	525.0	-14.2	-16.6	264.5	17.0	16.9	1.6	311.6	317.8	2.0	81.9	13.9	91.
18.9	57.9	5614.8	500.0	-17.0	-20.0	272.0	22.8	22.8	-0.8	312.4	317.4	1.6	177.2	12.4	92.
20.2	61.3	5937.9	475.0	-20.0	-22.1	277.8	19.0	18.8	-2.6	313.3	317.7	1.4	83.2	14.2	91.
21.8	64.7	6320.6	450.0	-23.2	-30.2	272.7	21.0	21.0	-1.0	314.1	316.4	0.7	52.5	15.9	94.
23.2	68.0	6813.1	425.0	-25.3	-60.1	277.9	25.1	24.8	-3.4	316.5	316.6	0.0	1.0	17.9	92.
24.9	71.4	7231.4	400.0	-27.6	-67.6	277.6	32.3	32.0	-4.2	319.0	319.0	0.0	1.0	32.3	91.
25.3	75.3	7711.9	375.0	-31.2	-69.9	272.8	35.3	35.2	-1.7	320.2	320.3	0.0	1.0	20.8	91.
26.2	79.3	8159.0	350.0	-34.1	-71.9	271.3	38.0	38.0	-0.9	322.7	322.7	0.0	1.0	27.9	91.
27.2	83.2	8712.9	325.0	-37.7	-74.3	281.1	39.2	38.5	-7.5	324.6	324.6	0.0	1.0	32.3	91.
32.2	87.3	9258.8	300.0	-43.0	-99.9	283.8	39.2	38.0	-9.4	324.6	324.6	0.0	1.0	32.3	91.
34.1	92.3	9838.6	275.0	-48.0	-99.9	285.5	44.3	42.6	-12.1	325.6	325.6	0.0	1.0	32.3	91.
36.4	96.5	10451.3	250.0	-52.7	-99.9	284.5	51.2	49.5	-12.9	327.7	327.7	0.0	1.0	32.3	91.
38.9	101.5	11133.9	225.0	-57.6	-99.9	282.4	48.5	47.3	-10.4	330.2	330.2	0.0	1.0	32.3	91.
41.2	107.3	11866.4	200.0	-63.8	-99.9	281.8	32.8	32.1	-6.7	331.8	331.8	0.0	1.0	32.3	91.
43.7	113.0	12475.8	175.0	-65.2	-99.9	281.9	49.6	47.6	-10.7	332.4	332.4	0.0	1.0	32.3	91.
46.4	119.7	13632.7	150.0	-59.5	-99.9	291.5	28.5	28.6	-10.5	337.6	337.6	0.0	1.0	32.3	91.
51.1	127.0	14776.9	125.0	-59.0	-99.9	290.2	26.0	26.4	-9.0	338.2	338.2	0.0	1.0	32.3	91.
55.7	135.3	16157.0	100.0	-55.0	-99.9	294.3	11.4	10.4	-4.7	421.4	421.4	0.0	1.0	32.3	91.
61.1	143.3	18021.4	75.0	-59.3	-99.9	301.9	11.4	9.7	-6.0	428.7	428.7	0.0	1.0	32.3	91.
68.3	152.7	20584.1	50.0	-54.9	-99.9	311.6	2.0	1.5	-1.3	434.3	434.3	0.0	1.0	32.3	91.
83.0	161.7	25021.9	25.0	-52.7	-99.9	70.6	2.5	-2.4	-0.6	633.5	633.5	0.0	1.0	32.3	91.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 637
FLINT, MICH24 APRIL 1975
2315 GMT

165 17. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	CEV PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCNP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.1	5.8	236.0	985.6	8.9	4.5	30.0	4.7	-2.3	-4.1	283.9	297.9	5.4	74.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.0	999.9	99.9
0.3	6.9	326.9	975.0	7.0	1.6	3.0	3.8	-0.2	-3.8	282.8	294.3	4.4	68.2	0.2	134.
1.2	5.0	535.8	950.0	4.8	3.0	1.0	4.5	-0.1	-4.5	282.7	295.8	5.0	86.2	0.4	163.
2.0	11.0	756.7	925.0	3.0	2.4	355.4	5.9	0.5	-5.9	283.0	295.8	4.9	95.8	0.6	185.
2.9	13.3	978.2	900.0	1.1	0.5	345.1	5.4	1.4	-5.2	283.2	294.7	4.4	95.9	0.5	130.
3.9	15.5	1206.8	875.0	5.8	-3.3	325.4	3.9	2.8	-3.2	290.3	300.1	3.6	55.0	1.1	175.
4.6	17.7	1444.3	850.0	6.4	-7.4	323.3	4.6	2.8	-3.7	293.2	300.5	2.6	36.6	1.3	171.
5.4	20.2	1688.9	825.0	5.9	-6.4	304.2	5.0	4.1	-2.8	255.3	303.4	2.9	40.7	1.5	161.
6.2	22.4	1940.6	800.0	5.3	-6.2	298.0	4.5	4.0	-2.0	297.1	305.7	3.0	43.4	1.7	159.
7.1	24.9	2199.1	775.0	3.6	-6.6	285.1	5.3	5.1	-1.4	298.0	306.7	3.0	47.3	1.9	158.
8.1	27.3	2464.9	750.0	2.7	-17.9	284.6	7.6	7.3	-1.9	259.6	303.4	1.2	20.2	2.1	145.
9.0	29.4	2738.6	725.0	1.7	-19.8	291.2	8.0	7.4	-2.9	301.4	304.8	1.1	18.5	2.5	139.
10.0	32.5	3020.4	700.0	0.0	-20.7	294.7	9.1	6.2	-3.8	302.6	305.9	1.1	19.3	2.9	131.
10.9	35.2	3310.6	675.0	-1.9	-21.6	292.3	10.4	9.6	-3.9	303.6	307.7	0.9	20.4	3.4	132.
12.0	37.7	3605.5	650.0	-3.7	-23.3	289.8	11.3	10.6	-3.8	304.8	307.7	0.9	20.1	4.1	124.
13.0	40.4	3918.1	625.0	-5.4	-27.8	293.5	12.3	11.2	-4.9	306.3	306.3	0.6	15.1	4.8	124.
14.1	43.2	4237.0	600.0	-7.6	-29.2	296.0	13.9	12.5	-6.1	307.4	309.3	0.6	15.6	5.7	124.
15.1	46.3	4566.5	575.0	-10.5	-31.5	291.0	14.7	13.7	-5.3	307.7	309.3	0.5	15.9	6.5	123.
16.2	49.1	4905.9	550.0	-13.2	-33.6	286.1	15.5	14.9	-4.3	308.4	307.8	0.4	16.1	7.5	121.
17.3	52.1	5255.4	525.0	-15.7	-35.5	280.0	15.0	14.8	-2.6	309.6	310.8	0.3	16.3	8.5	117.
18.7	55.4	5625.7	500.0	-18.6	-37.8	276.6	15.5	15.4	-1.8	310.4	311.4	0.3	16.4	9.6	117.
19.9	58.5	6006.2	475.0	-21.3	-31.6	277.4	16.0	15.8	-2.1	311.6	313.6	0.6	40.6	10.7	114.
21.3	62.0	6404.0	450.0	-23.0	-30.0	278.1	15.5	15.3	-2.2	314.3	316.6	0.7	52.5	12.0	112.
22.5	65.4	6820.3	425.0	-26.5	-33.2	272.4	16.2	16.2	-0.4	315.0	316.8	0.5	53.0	13.1	111.
24.0	69.0	7255.3	400.0	-29.1	-31.3	273.0	19.3	16.3	-1.0	317.1	319.5	0.7	61.1	14.5	104.
25.5	72.6	7714.1	375.0	-32.2	-36.8	274.0	19.2	16.1	-1.3	319.0	320.5	0.4	63.2	16.3	104.
27.2	76.7	8197.6	350.0	-35.5	-51.1	267.1	21.1	21.1	-1.0	320.9	321.2	0.1	16.8	18.3	106.
29.0	80.7	8709.1	325.0	-39.7	99.7	270.0	20.7	20.7	-0.0	321.9	999.9	99.9	999.9	20.3	104.
30.8	85.3	9250.6	300.0	-44.4	99.7	272.7	24.0	24.0	-1.1	322.8	999.9	99.9	999.9	22.9	104.
32.9	89.5	9426.6	275.0	-49.8	99.9	271.5	25.4	25.4	-0.6	323.2	999.9	99.9	999.9	25.8	101.
35.0	94.6	10442.7	250.0	-54.4	99.9	272.4	31.1	31.1	-1.3	323.8	999.9	99.9	999.9	29.2	104.
37.2	99.6	11109.5	225.0	-58.8	99.9	260.8	32.4	32.4	5.2	328.4	999.9	99.9	999.9	33.5	94.
39.7	105.2	11847.9	200.0	-58.0	99.9	261.0	33.2	32.3	5.2	340.0	999.9	99.9	999.9	38.1	96.
42.3	111.3	12665.5	175.0	-58.0	99.9	260.5	32.8	32.3	7.4	354.2	999.9	99.9	999.9	43.0	94.
45.3	118.2	13662.4	150.0	-58.5	99.9	264.0	25.2	25.1	2.6	369.3	999.9	99.9	999.9	48.4	91.
49.0	125.9	14512.8	125.0	-56.5	99.9	262.4	23.5	23.3	3.1	392.7	999.9	99.9	999.9	54.3	92.
53.3	134.5	16231.4	100.0	-55.9	99.9	271.4	20.0	20.0	-0.5	419.7	999.9	99.9	999.9	60.2	92.
58.7	147.3	19068.8	75.0	-58.8	99.9	249.5	4.9	4.6	1.7	498.7	999.9	99.9	999.9	64.7	91.
66.0	154.3	20405.0	50.0	-56.7	99.9	246.3	4.4	4.0	1.4	510.0	999.9	99.9	999.9	66.5	91.
77.5	166.7	25046.1	25.0	-53.1	99.9	90.7	3.9	-3.9	0.0	632.1	999.9	99.9	999.9	66.9	92.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 645
GREEN BAY, WIS

24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	6.7	210.0	999.8	8.9	1.8	50.0	4.2	-3.2	-2.7	283.5	295.0	4.4	61.0	7.3	0.
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	9.2	334.6	975.0	7.8	1.7	75.7	3.5	-3.5	-0.6	283.6	295.2	4.4	65.3	9.2	215.
1.4	10.5	548.1	950.0	5.8	1.3	37.9	4.7	-2.9	-3.7	283.6	295.3	4.4	73.1	0.4	212.
2.3	12.8	765.9	925.0	4.2	0.9	41.6	6.7	-4.5	-5.1	284.1	295.7	4.4	78.0	0.7	277.
3.1	14.2	988.4	900.0	2.6	-0.7	44.8	8.7	-6.1	-6.1	284.7	295.4	4.0	78.4	1.0	275.
3.9	17.5	1216.3	875.0	2.6	-3.5	53.9	8.8	-7.1	-5.2	287.0	296.2	3.4	65.0	1.5	258.
4.8	20.0	1451.6	850.0	4.1	-0.3	63.4	9.2	-4.7	-2.2	290.8	298.6	2.8	46.8	1.8	259.
5.7	22.3	1694.1	825.0	3.1	-0.9	45.4	2.6	-1.9	-1.8	292.2	300.0	2.8	47.8	2.0	213.
6.7	25.0	1942.7	800.0	1.4	-0.6	45.1	2.7	-1.9	-1.9	293.0	301.2	2.9	55.1	2.2	413.
7.7	27.4	2198.3	775.0	1.3	-23.2	331.1	3.9	1.9	-3.4	295.3	298.5	1.1	20.6	2.3	277.
8.5	30.1	2462.2	750.0	1.5	-35.7	321.7	5.8	3.6	-4.6	298.2	299.0	0.2	4.2	2.3	270.
9.5	32.7	2734.0	725.0	-0.3	-38.6	311.6	7.2	5.1	-5.0	299.2	299.9	0.2	4.4	2.4	272.
10.7	35.5	3014.2	700.0	-1.3	-37.1	304.6	8.2	6.6	-4.9	301.1	301.9	0.2	4.5	2.6	177.
11.7	38.3	3302.8	675.0	-3.0	-38.0	303.1	9.3	7.8	-5.1	302.3	303.0	0.2	4.7	2.8	177.
12.8	40.9	3600.4	650.0	-5.3	-20.5	296.1	10.3	9.2	-4.6	303.0	304.6	1.1	29.2	3.0	177.
13.8	43.8	3907.1	625.0	-7.2	-32.7	293.2	12.1	11.2	-4.8	305.3	305.6	0.4	11.2	3.4	177.
14.9	46.9	4224.5	600.0	-8.9	-29.0	288.5	13.8	13.1	-4.4	305.9	307.7	0.6	17.7	4.3	177.
16.1	49.3	4552.1	575.0	-11.8	-33.3	288.4	15.5	14.7	-4.9	306.2	307.6	0.4	14.7	4.7	177.
17.3	52.3	4891.5	550.0	-13.7	-37.1	281.8	16.1	15.8	-3.3	307.8	308.7	0.3	11.7	5.6	177.
18.4	55.9	5243.3	525.0	-16.3	-39.0	275.3	16.0	15.8	-2.5	308.6	309.7	0.2	12.0	6.5	177.
19.7	59.1	5607.9	500.0	-19.3	-41.3	275.3	18.9	18.8	-1.7	309.5	310.2	0.2	12.1	7.6	177.
21.0	62.5	5977.7	475.0	-21.6	-43.1	275.2	21.4	21.3	-1.9	311.3	311.9	0.2	12.2	9.1	177.
22.5	65.3	6383.5	450.0	-24.6	-47.8	272.1	22.0	22.0	-0.8	312.2	312.6	0.1	9.5	10.9	177.
23.9	68.5	6737.3	425.0	-27.8	-50.2	265.2	20.6	20.5	1.7	313.3	313.6	0.1	9.6	12.4	177.
25.5	73.0	7224.5	400.0	-31.6	-52.9	261.7	18.2	18.0	2.6	313.9	314.1	0.1	10.0	14.0	177.
27.0	78.9	7683.4	375.0	-34.9	-55.0	271.3	15.7	15.7	-0.4	315.3	315.6	0.1	10.8	15.4	177.
28.5	80.8	8160.6	350.0	-39.3	-58.5	271.9	17.8	17.7	-0.6	315.7	316.0	0.1	23.0	16.8	177.
27.3	85.0	8604.1	325.0	-43.0	-60.0	265.2	20.5	20.4	1.7	317.4	317.4	99.9	99.9	17.9	177.
32.1	89.2	9155.3	300.0	-47.2	-59.9	263.6	24.2	24.1	2.7	318.9	318.9	99.9	99.9	21.1	177.
34.0	93.8	9749.5	275.0	-51.8	-58.9	260.7	27.7	27.3	4.4	320.3	320.3	99.9	99.9	24.0	177.
36.2	98.6	10140.8	250.0	-56.7	-58.9	258.2	30.1	29.1	7.7	321.8	321.8	99.9	99.9	27.5	177.
39.7	103.9	11043.8	225.0	-59.4	-59.9	258.6	30.0	32.8	9.0	327.5	327.5	99.9	99.9	31.9	177.
41.2	108.3	11783.6	200.0	-59.0	-59.9	259.5	28.3	27.8	5.1	339.4	339.4	99.9	99.9	36.8	177.
44.2	114.2	12427.0	175.0	-56.5	-59.9	263.1	26.4	26.3	3.2	356.6	356.6	99.9	99.9	42.1	177.
47.7	121.7	13004.5	150.0	-56.6	-59.9	268.0	28.0	25.0	0.9	372.6	372.6	99.9	99.9	47.7	177.
51.9	128.5	14764.4	125.0	-56.3	-59.9	268.0	22.5	22.3	3.9	393.0	393.0	99.9	99.9	51.7	177.
57.2	136.3	16191.4	100.0	-54.6	-59.9	261.0	24.8	24.5	1.6	422.3	422.3	99.9	99.9	51.1	177.
63.8	143.8	18047.7	75.0	-56.0	-59.9	254.0	5.8	5.6	1.6	455.7	455.7	99.9	99.9	67.0	177.
72.7	151.7	20614.8	50.0	-55.8	-59.9	248.3	4.6	4.3	1.6	512.1	512.1	99.9	99.9	64.4	177.
86.4	159.7	25081.8	25.0	-51.4	-59.9	50.4	4.4	-3.4	-2.8	637.3	637.3	99.9	99.9	63.1	177.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 654
MURUN. S D26 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.3	392.0	962.1	12.0	10.0	120.0	9.3	-8.1	4.6	290.2	311.2	8.1	83.0	0.0	0.
99.9	99.9	99.9	1003.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	10.4	459.7	950.0	12.6	10.6	136.2	12.3	-8.5	8.9	291.1	313.2	8.5	87.6	0.4	30.5
1.1	12.5	722.3	925.0	10.9	9.5	147.9	11.5	-6.1	9.8	291.6	312.8	8.1	90.9	0.8	31.5
1.8	14.9	550.8	900.0	9.6	7.8	174.2	9.7	-1.0	9.7	292.4	312.0	7.4	88.5	1.2	32.3
2.4	17.0	1194.7	875.0	8.7	6.5	196.0	8.6	2.4	8.3	293.7	312.3	7.0	86.1	1.4	33.4
3.4	19.4	1424.0	850.0	6.2	5.9	211.7	6.5	4.4	7.2	293.6	312.0	6.9	98.1	1.8	34.5
4.2	21.5	1605.7	825.0	4.7	4.7	240.1	9.8	8.5	4.9	294.4	311.9	6.5	99.9	2.0	35.5
5.7	24.0	1719.0	800.0	2.6	2.6	247.1	14.0	12.9	5.5	294.7	310.4	5.8	100.4	2.6	18.
6.7	26.3	2175.5	775.0	1.1	0.1	247.6	16.2	15.0	6.2	295.7	309.4	5.0	92.8	3.3	31.
7.7	28.9	2438.8	750.0	-0.7	-2.2	242.8	16.4	14.6	7.5	296.3	309.4	4.3	89.8	4.1	38.
8.5	31.4	2705.2	725.0	-2.3	-4.2	238.6	16.3	14.0	8.5	297.4	308.3	3.9	86.9	4.9	42.
9.3	34.1	2987.0	700.0	-4.6	-4.9	235.4	16.3	13.4	9.2	297.9	308.5	3.8	97.5	5.7	44.
10.2	36.6	3272.8	675.0	-6.5	-6.7	234.1	16.4	13.3	9.6	298.8	308.6	3.4	98.1	6.5	45.
11.2	39.3	3560.9	650.0	-8.9	-9.2	235.3	16.4	13.5	9.3	299.3	307.8	2.9	97.5	7.5	46.
12.2	41.9	3869.6	625.0	-11.1	-11.8	236.8	17.0	14.2	8.3	300.1	307.3	2.5	94.1	8.4	48.
13.4	44.8	4181.8	600.0	-13.5	-20.2	241.8	17.2	15.2	8.1	300.6	304.5	1.3	57.0	9.7	49.
14.7	47.7	4504.6	575.0	-15.1	-45.8	250.0	17.5	16.5	6.0	302.2	302.6	0.1	5.5	10.9	51.
15.8	50.6	4830.0	550.0	-17.6	-45.6	251.3	17.5	16.6	5.6	303.1	303.6	0.1	6.6	12.1	53.
17.0	53.6	5185.1	525.0	-20.5	-47.4	246.3	16.8	15.4	6.8	303.7	304.1	0.1	6.9	13.3	54.
18.1	56.5	5544.1	500.0	-23.4	-47.1	244.9	15.3	13.8	4.5	304.5	304.9	0.1	11.6	14.4	55.
19.3	59.7	5917.8	475.0	-25.7	-35.6	244.8	9.6	8.7	4.1	306.1	307.5	0.4	43.4	15.2	56.
20.5	63.1	6308.4	450.0	-27.5	-30.7	252.4	7.4	7.1	2.2	308.7	310.8	0.6	73.5	15.8	58.
21.6	66.4	6718.4	425.0	-29.7	-33.4	270.6	10.1	10.1	-0.1	311.0	312.8	0.5	69.8	16.3	57.
22.8	69.9	7147.6	400.0	-33.4	-37.6	283.5	12.0	11.7	-2.8	311.6	312.8	0.4	65.1	16.9	59.
24.3	73.5	7597.9	375.0	-36.7	-41.6	294.9	11.2	10.2	-4.7	313.0	313.9	0.3	59.9	17.6	62.
25.9	77.2	8072.0	350.0	-40.7	-45.9	285.8	9.1	8.7	-2.5	313.8	999.9	99.9	99.9	18.2	64.
27.3	81.1	8573.0	325.0	-43.6	-49.9	253.0	15.4	14.7	4.5	316.7	999.9	99.9	99.9	19.0	65.
29.0	85.3	9108.4	300.0	-46.3	-49.9	257.4	19.2	17.8	3.8	320.1	999.9	99.9	99.9	20.7	66.
31.2	89.4	9622.3	275.0	-49.0	-49.9	254.9	17.9	17.2	4.7	324.3	999.9	99.9	99.9	23.4	67.
33.7	94.0	10307.6	250.0	-50.6	-49.9	273.1	14.8	14.8	-0.8	330.9	999.9	99.9	99.9	25.5	69.
35.8	98.0	10991.4	225.0	-52.7	-49.9	270.7	16.9	16.9	-0.2	337.7	999.9	99.9	99.9	27.2	70.
38.3	103.8	11745.9	200.0	-53.8	-49.9	260.9	23.0	22.7	3.6	347.6	999.9	99.9	99.9	30.3	72.
41.2	109.8	12606.8	175.0	-54.1	-49.9	267.9	17.9	17.9	0.6	360.6	999.9	99.9	99.9	33.4	73.
44.9	115.8	13595.5	150.0	-54.4	-49.9	281.9	16.8	16.8	-3.4	376.4	999.9	99.9	99.9	37.7	76.
48.0	122.8	14756.8	125.0	-57.2	-49.9	999.9	99.9	99.9	99.9	391.5	999.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 655
ST CLOUD, MINN

24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	EN PCT	RANGE KM	AZ DG
0.0	6.4	316.0	978.3	10.4	4.1	90.0	2.6	-2.6	0.0	286.0	299.4	5.3	65.0	0.0	0.
00.9	59.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.8	344.2	975.0	10.4	4.2	117.7	2.9	-2.5	1.3	286.3	300.3	5.3	65.5	0.0	319.
0.9	9.1	559.8	950.0	8.3	3.5	128.8	3.0	-2.4	1.9	286.3	300.0	5.2	71.6	0.1	311.
1.5	11.1	779.4	925.0	6.0	3.6	115.6	3.1	-2.8	1.3	285.2	300.3	5.4	84.2	0.3	303.
2.2	13.4	1003.4	900.0	3.7	2.9	97.9	4.4	-4.4	0.6	286.0	299.8	5.3	94.2	0.4	236.
3.1	15.5	1231.8	875.0	1.9	1.6	104.2	6.2	-6.0	1.5	286.4	299.4	4.9	97.7	0.7	259.
4.0	17.8	1465.4	850.0	1.1	0.6	123.6	5.9	-4.9	3.2	287.8	300.4	4.7	96.6	1.0	290.
5.0	20.2	1705.7	825.0	0.8	-3.0	158.1	4.2	-1.6	3.9	289.9	300.0	3.7	75.7	1.3	236.
6.0	22.4	1953.3	800.0	1.6	-14.5	245.5	1.8	1.7	0.8	293.0	297.8	1.7	31.6	1.4	392.
6.9	24.9	2209.3	775.0	1.5	-24.3	274.0	3.3	3.3	-0.2	255.5	297.6	0.7	12.6	1.2	305.
7.7	27.1	2472.3	750.0	-0.3	-22.8	234.9	3.7	3.1	2.2	296.4	298.9	0.8	16.2	1.1	312.
8.4	29.7	2742.5	725.0	-2.2	-19.9	205.0	5.3	2.6	4.6	297.1	300.5	1.1	24.7	1.1	321.
9.3	32.3	3020.0	700.0	-4.0	-4.1	202.4	7.9	3.0	7.3	298.5	309.9	4.0	99.7	1.4	334.
10.5	35.0	3307.0	675.0	-4.9	-5.0	210.6	10.5	5.3	9.0	300.7	311.8	3.9	99.4	1.	349.
11.5	37.4	3603.7	650.0	-6.3	-6.6	224.5	12.7	8.9	9.1	302.2	312.6	3.6	98.2	2.4	2.
12.5	40.2	3909.5	625.0	-8.5	-8.7	236.4	14.0	11.7	7.8	303.1	312.3	3.2	98.6	3.0	14.
13.5	42.3	4225.0	600.0	-10.9	-11.1	248.3	14.3	13.3	5.3	303.8	311.8	2.7	98.5	3.6	24.
14.5	45.9	4551.1	575.0	-13.1	-13.9	255.9	12.9	12.5	3.2	304.9	311.7	2.3	93.9	4.2	31.
15.8	48.9	4888.5	550.0	-15.2	-19.8	255.6	11.6	11.2	2.9	306.2	310.6	1.4	87.8	4.9	40.
16.8	51.6	5238.5	525.0	-17.9	-21.3	252.2	12.4	11.9	3.8	307.0	311.1	1.3	74.4	5.6	45.
18.1	54.9	5501.0	500.0	-20.9	-24.8	253.2	12.6	12.4	3.6	307.6	310.9	1.0	70.9	6.5	49.
19.5	58.0	5578.4	475.0	-23.5	-26.1	252.0	12.0	11.4	3.7	308.9	312.0	0.9	79.0	7.4	52.
20.9	61.3	6371.2	450.0	-27.0	-30.2	250.2	13.0	12.2	4.4	309.4	311.6	0.7	73.6	8.4	54.
22.3	64.9	6780.9	425.0	-30.0	-36.4	245.5	15.1	13.7	6.3	310.5	311.0	0.4	53.5	9.5	56.
23.6	68.0	7209.7	400.0	-32.2	-39.8	245.1	17.0	15.4	7.1	311.9	312.9	0.3	50.0	10.7	57.
25.1	71.4	7659.4	375.0	-37.4	-40.2	246.1	16.5	15.0	6.7	312.1	312.2	0.0	7.2	12.3	58.
26.8	75.3	8131.6	350.0	-41.7	99.9	245.1	17.0	15.4	7.2	312.5	999.9	99.9	99.9	14.3	59.
28.5	79.5	8629.0	325.0	-46.3	99.9	245.1	18.4	16.4	8.4	312.9	999.9	99.9	99.9	15.7	60.
30.3	83.6	9155.5	300.0	-51.1	99.9	242.5	21.3	18.8	5.8	313.3	999.9	99.9	99.9	17.4	60.
32.0	87.8	9716.8	275.0	-54.4	99.9	238.7	22.7	19.4	11.8	316.5	999.9	95.9	99.9	20.2	60.
34.0	92.7	10321.9	250.0	-57.4	99.9	242.1	22.0	19.4	10.3	320.7	999.9	99.9	99.9	22.8	60.
36.2	97.8	10990.4	225.0	-56.3	99.9	249.8	19.1	17.9	6.6	332.3	999.9	99.9	99.9	25.4	61.
38.8	103.0	11736.7	200.0	-56.2	99.9	250.9	24.5	23.1	8.0	343.9	999.9	99.9	99.9	28.7	62.
41.5	108.0	12581.5	175.0	-56.2	99.9	263.9	26.1	26.0	2.8	357.2	999.9	99.9	99.9	31.0	63.
44.8	115.3	13567.3	150.0	-55.7	99.9	256.6	19.3	18.8	4.5	374.2	999.9	99.9	99.9	36.8	60.
48.8	122.7	14728.6	125.0	-57.0	99.9	260.6	17.4	17.1	2.8	391.7	999.9	99.9	99.9	41.1	67.
53.5	130.7	16151.0	100.0	-55.3	99.9	245.6	15.7	14.3	6.5	421.0	999.9	99.9	99.9	45.7	69.
59.8	139.3	18001.0	75.0	-51.1	99.9	243.7	8.9	8.0	3.9	465.8	999.9	99.9	99.9	51.1	69.
68.3	148.7	20596.2	50.0	-53.1	99.9	248.7	1.8	1.6	0.6	518.3	999.9	99.9	99.9	52.8	66.
81.1	156.5	25067.7	25.0	-51.6	99.9	352.2	4.3	0.6	-4.3	636.5	999.9	99.9	99.9	52.9	72.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMPERATURE MEANS ELEVATION OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 662
RAPID CITY, S D20 APRIL 1975
2115 GMT

TIME MIN	CNTCT	HEIGHT GPH	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT K DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	15.1	966.0	901.1	15.6	2.4	10.0	9.3	-1.6	-9.2	258.2	312.2	5.1	41.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	15.2	976.4	900.0	15.4	2.4	99.9	99.9	99.9	99.9	258.1	312.1	5.1	41.4	99.9	99.9
1.0	17.4	1213.8	875.0	12.2	2.0	99.9	99.9	99.9	99.9	257.1	311.1	5.1	49.5	99.9	99.9
2.0	19.8	1455.6	850.0	9.6	1.0	0.0	12.0	-0.0	-12.0	256.8	310.2	4.9	55.2	1.4	197.
2.9	22.1	1702.7	825.0	7.5	1.1	346.1	9.8	2.4	-9.5	257.1	311.0	5.0	64.0	2.0	193.
4.0	24.6	1955.3	800.0	5.5	-2.7	326.2	8.0	4.4	-6.6	257.5	308.6	3.9	55.5	2.5	178.
5.0	27.3	2218.3	775.0	3.9	-4.9	284.1	8.8	8.5	-2.1	258.5	308.2	3.4	52.5	2.8	170.
6.0	29.6	2480.5	750.0	2.7	-9.1	263.9	11.7	11.7	1.3	259.9	307.9	2.8	44.9	3.1	158.
7.2	32.2	2752.9	725.0	0.7	-10.5	251.8	13.7	13.0	4.3	300.5	307.4	2.4	42.8	3.3	143.
8.4	34.9	3034.7	700.0	-1.1	-16.2	257.5	15.2	14.8	3.3	301.4	306.1	1.5	30.7	3.9	126.
9.5	37.4	3324.8	675.0	-0.6	-28.1	271.1	14.4	14.4	-0.3	305.0	306.8	0.6	10.3	4.6	119.
10.4	40.2	3625.0	650.0	-2.8	-29.6	276.2	12.3	12.1	-2.0	305.9	307.5	0.5	10.5	5.3	115.
11.4	42.7	3934.1	625.0	-5.3	-31.3	289.9	10.1	9.5	-3.4	306.4	307.9	0.4	10.8	5.9	114.
12.5	45.8	4253.5	600.0	-8.0	-31.6	300.8	10.9	9.4	-5.6	308.3	309.8	0.4	11.7	6.6	115.
13.7	48.3	4594.0	575.0	-9.5	-31.0	297.6	12.6	11.2	-5.8	308.9	310.5	0.5	15.3	7.4	115.
15.0	51.6	4923.8	550.0	-12.4	-33.4	292.6	11.9	11.0	-4.6	309.4	310.8	0.4	15.3	8.4	115.
16.5	54.9	5278.9	525.0	-15.7	-35.6	292.5	13.4	12.4	-5.1	309.5	310.7	0.3	16.1	9.5	115.
17.9	57.4	5645.0	500.0	-18.5	-37.8	291.5	15.0	14.0	-5.5	310.5	311.5	0.3	16.4	10.7	115.
19.4	61.1	6025.6	475.0	-21.2	-39.9	290.1	16.2	14.1	-7.9	311.7	312.5	0.2	16.6	12.1	114.
20.7	64.8	6422.5	450.0	-24.2	-42.2	308.5	18.3	13.5	-9.3	312.8	313.5	0.2	16.9	13.3	115.
22.1	67.9	6834.3	425.0	-28.0	-45.2	301.2	17.7	15.1	-9.2	313.1	313.7	0.2	17.2	14.8	115.
23.6	71.3	7269.1	400.0	-31.0	-47.6	293.8	15.6	17.0	-7.5	314.7	315.1	0.1	17.5	16.4	116.
25.3	75.2	7722.7	375.0	-35.3	-51.1	284.4	20.4	18.7	-8.5	314.8	315.2	0.1	17.9	18.4	116.
26.9	79.2	8159.2	350.0	-38.7	-54.9	266.1	18.4	16.8	-8.3	315.2	315.2	99.9	99.9	20.3	116.
28.5	83.2	8701.0	325.0	-44.1	-59.9	298.1	19.7	17.4	-9.3	316.0	316.0	99.9	99.9	22.1	116.
30.0	87.2	9232.7	300.0	-48.9	-59.9	298.8	22.9	20.5	-10.3	316.4	316.4	99.9	99.9	24.0	116.
31.8	91.8	9798.1	275.0	-53.7	-59.9	296.6	24.4	21.8	-10.9	317.5	317.5	99.9	99.9	26.7	116.
34.1	96.4	10435.4	250.0	-56.7	-59.9	297.1	28.5	22.7	-11.6	321.7	321.7	99.9	99.9	30.1	116.
36.5	101.4	11074.0	225.0	-57.4	-59.9	301.8	28.0	20.4	-12.7	330.5	330.5	99.9	99.9	33.9	117.
39.2	107.0	11912.1	200.0	-59.2	-59.9	281.3	21.5	21.1	-4.4	339.1	339.1	99.9	99.9	37.0	117.
42.1	112.9	12422.9	175.0	-56.8	-59.9	286.3	23.0	22.1	-6.5	356.2	356.2	99.9	99.9	41.2	115.
45.5	119.0	13635.5	150.0	-55.3	-59.9	271.0	21.1	21.1	-0.4	374.7	374.7	99.9	99.9	45.0	114.
49.0	126.0	14791.7	125.0	-58.8	-59.9	255.8	19.9	19.3	4.6	388.5	388.5	99.9	99.9	48.4	111.
53.5	134.2	16203.5	100.0	-55.8	-59.9	265.0	20.1	20.1	0.3	419.9	419.9	99.9	99.9	53.6	109.
59.1	142.0	18044.6	75.0	-52.2	-59.9	260.8	20.4	20.2	3.3	423.5	423.5	99.9	99.9	57.7	106.
66.7	151.0	20634.8	50.0	-54.2	-59.9	1.1	3.4	-0.1	-3.4	515.7	515.7	99.9	99.9	60.3	105.
78.4	160.5	25173.7	25.0	-49.1	-59.9	99.9	99.9	99.9	99.9	643.7	643.7	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

24 APRIL 1975
2315 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR CG	SPEED M/SFC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTD GM/KG	PH PCT	RANGE NM	AZ DG
0.3	0.2	190.0	994.1	25.7	17.4	200.0	4.2	1.4	3.9	301.1	334.9	12.7	60.0	0.0	0
09.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	7.9	351.0	975.0	25.0	17.3	205.2	11.0	5.4	9.6	302.1	336.5	12.8	62.1	0.2	23
1.3	10.3	578.8	950.0	23.0	16.3	207.0	12.1	5.5	10.8	302.3	335.6	12.4	65.9	0.7	27
2.2	12.7	810.3	925.0	15.6	14.5	211.8	12.4	6.7	10.9	300.9	331.3	11.4	72.6	1.4	27
3.0	14.3	1046.2	900.0	17.8	14.1	225.9	11.9	8.5	8.3	301.4	331.8	11.3	78.5	2.0	31
3.9	16.3	1287.3	875.0	16.3	13.7	238.9	11.6	9.9	6.0	302.2	333.0	11.4	84.9	2.6	36
4.8	18.3	1533.8	850.0	14.5	12.7	247.1	12.8	11.9	5.0	302.8	332.4	10.9	88.9	3.2	41
5.7	20.8	1786.2	825.0	12.8	11.3	252.7	13.5	12.9	4.0	303.5	331.6	10.3	90.6	3.9	47
6.6	23.3	2044.3	800.0	10.5	10.1	258.1	12.8	12.5	2.6	303.7	330.4	9.8	97.1	4.4	51
7.6	25.4	2304.7	775.0	8.4	8.1	264.2	13.3	13.2	1.3	304.0	328.4	8.8	97.9	5.1	55
8.6	27.7	2579.7	750.0	7.0	5.9	265.4	14.9	14.8	1.2	305.2	326.9	7.8	92.7	5.8	60
9.6	30.2	2856.7	725.0	6.2	2.8	264.5	16.7	16.7	1.0	307.1	325.5	6.5	79.2	6.8	63
10.8	32.8	3145.8	700.0	4.7	-2.9	273.6	17.2	17.2	-1.1	308.2	321.2	4.5	58.3	7.9	47
12.0	35.4	3411.8	675.0	3.0	-5.7	282.9	18.1	17.6	-4.0	309.5	320.5	3.7	52.9	9.0	72
13.3	37.9	3746.2	650.0	0.5	-7.4	285.5	19.3	18.6	-5.1	310.0	320.1	3.4	55.1	10.1	76
14.3	40.5	4060.2	625.0	-1.1	-18.6	291.2	20.0	18.6	-7.2	311.3	318.3	1.6	28.1	11.2	79
15.4	43.3	4384.1	600.0	-3.8	-30.7	294.2	21.0	19.1	-8.6	311.8	313.4	0.5	10.2	12.4	83
16.5	46.3	4719.8	575.0	-5.6	-45.2	295.6	21.9	19.8	-9.5	313.5	314.6	0.3	7.4	13.6	86
17.6	49.3	5055.2	550.0	-8.7	-37.2	297.2	24.8	22.1	-11.3	313.8	314.8	0.3	7.8	15.2	89
19.3	52.1	5424.0	525.0	-11.0	-38.6	296.1	27.1	24.3	-11.9	315.2	316.1	0.3	6.1	17.2	93
20.6	55.2	5777.2	500.0	-13.0	-39.9	296.3	25.1	24.1	-7.0	317.9	317.9	0.2	8.3	19.3	96
22.1	58.4	6171.2	475.0	-14.9	-59.3	276.9	22.7	22.5	-2.7	319.5	319.6	0.0	1.0	21.4	98
23.5	61.8	6593.5	450.0	-18.2	-61.5	274.9	24.2	24.1	-2.1	320.3	320.4	0.0	1.0	23.3	98
25.7	65.3	7017.3	425.0	-21.9	-59.7	276.3	23.3	23.1	-3.4	320.8	321.0	0.0	2.1	25.5	98
26.7	68.3	7460.2	400.0	-25.7	-53.6	276.2	23.2	23.0	-2.5	321.6	321.8	0.1	5.3	27.9	98
29.4	72.3	7924.7	375.0	-29.2	-55.7	274.5	19.8	19.7	-1.6	322.8	323.1	0.1	5.7	30.1	98
30.1	76.3	8413.7	350.0	-33.0	-57.9	275.1	20.6	20.4	-3.3	324.2	324.4	0.0	6.1	32.1	98
31.9	80.5	8930.2	325.0	-37.4	-60.7	280.9	20.4	20.0	-3.2	325.0	325.2	0.0	6.7	34.4	98
34.1	84.8	9478.3	300.0	-41.1	99.9	271.4	20.0	20.0	-0.5	327.4	999.9	99.9	99.9	37.1	98
36.5	89.3	10064.1	275.0	-45.7	99.9	263.0	20.9	20.7	2.6	329.0	999.9	99.9	99.9	39.9	98
38.8	94.2	12692.4	250.0	-50.5	99.9	263.5	19.3	19.2	2.2	331.0	999.9	99.9	99.9	42.5	98
41.0	99.4	11371.6	225.0	-55.9	99.9	273.5	18.5	18.5	-1.1	332.8	999.9	99.9	99.9	44.9	98
43.4	105.0	12110.1	200.0	-61.8	99.9	275.7	25.1	24.9	-2.5	334.8	999.9	99.9	99.9	48.1	98
46.2	111.3	12747.3	175.0	-66.2	99.9	276.4	29.2	29.0	-3.3	340.7	999.9	99.9	99.9	52.5	98
49.2	118.3	13669.7	150.0	-61.2	99.9	271.1	35.5	35.5	-0.8	344.6	999.9	99.9	99.9	58.2	98
53.0	126.3	15004.1	125.0	-61.5	99.9	267.0	31.2	31.1	1.6	383.6	999.9	99.9	99.9	65.3	98
57.4	135.3	16378.8	100.0	-65.3	99.9	268.7	18.9	18.9	0.4	401.6	999.9	99.9	99.9	72.2	98
62.6	144.3	18105.0	75.0	-66.6	99.9	281.4	11.2	11.0	-2.3	433.3	999.9	99.9	99.9	76.7	98
70.1	155.0	20506.8	50.0	-60.2	99.9	301.9	6.1	5.1	-3.2	500.2	999.9	99.9	99.9	78.4	98
81.9	167.3	24902.2	25.0	-52.2	99.9	332.0	8.3	3.9	-7.3	634.5	999.9	99.9	99.9	78.9	98

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 22302
PT. SILL, CALA

25 APRIL 1975
50 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIF DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MAX RTD CM/KG	RM PCT	RANGE KM	AZ DL
0.0	99.9	362.0	963.4	26.0	18.9	100.0	5.1	0.0	5.1	305.1	344.2	14.5	62.0	0.0	0.
99.9	99.9	99.9	1200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	10.4	466.3	950.0	26.7	18.9	109.3	11.2	1.8	11.0	306.3	346.1	14.6	62.2	0.2	35.0
1.1	12.9	721.0	925.0	24.8	17.3	192.9	10.1	2.3	5.9	306.6	343.7	13.6	63.1	0.6	6.
1.7	15.3	962.3	900.0	23.2	16.3	205.0	7.6	3.2	6.9	307.2	343.2	13.1	65.2	0.9	10.
2.5	17.9	1207.8	875.0	21.4	14.3	229.8	5.3	4.1	3.4	307.6	340.3	11.9	64.2	1.2	16.
3.2	20.3	1458.7	850.0	19.3	12.5	265.5	4.2	4.2	8.3	307.6	337.6	10.8	64.5	1.3	23.
4.1	22.9	1715.0	825.0	17.4	10.7	270.6	4.7	4.7	-0.0	308.3	335.9	9.9	64.7	1.4	32.
4.9	25.4	1977.4	800.0	14.8	8.9	272.1	4.3	4.3	-0.2	308.2	333.2	8.9	67.0	1.5	39.
5.8	28.3	2245.4	775.0	12.7	6.0	265.3	4.5	4.5	0.4	308.5	330.0	7.6	63.8	1.7	45.
6.5	30.3	2520.0	750.0	10.4	4.0	262.5	6.0	5.9	0.8	308.7	328.1	6.8	64.4	1.9	49.
7.5	33.7	2801.0	725.0	8.2	0.7	263.7	8.5	8.5	0.9	309.2	325.3	5.6	58.9	2.2	55.
8.5	36.3	3030.3	700.0	5.7	-5.9	258.8	11.3	11.1	2.2	309.3	319.8	3.5	43.8	2.8	61.
9.5	39.2	3386.7	675.0	3.6	-11.3	259.3	14.0	13.7	2.6	310.0	317.2	2.4	32.6	3.5	64.
10.6	42.0	3681.5	650.0	1.1	-12.6	256.9	16.9	16.9	99.9	310.5	317.3	2.2	35.0	99.9	99.9
11.6	45.1	4005.7	625.0	-1.1	-21.4	999.9	99.9	99.9	99.9	311.3	314.9	1.1	19.4	99.9	99.9
12.5	48.1	4330.1	600.0	-3.3	-27.1	999.9	99.9	99.9	99.9	312.4	314.7	0.7	13.9	99.9	99.9
13.5	51.1	4616.2	575.0	-6.1	-62.5	999.9	99.9	99.9	99.9	315.2	315.8	0.2	3.1	99.9	99.9
14.4	54.4	5015.0	550.0	-9.5	-29.4	999.9	99.9	99.9	99.9	316.0	316.8	0.2	5.2	99.9	99.9
15.4	57.6	5376.1	525.0	-13.1	-20.3	996.9	99.9	99.9	99.9	317.2	322.1	1.5	54.3	99.9	99.9
16.3	61.0	5750.5	500.0	-16.5	-22.8	999.9	99.9	99.9	99.9	317.6	321.8	1.3	58.1	99.9	99.9
17.5	64.6	6139.2	475.0	-19.2	-26.4	996.9	99.9	99.9	99.9	319.2	322.5	1.0	52.4	99.9	99.9
18.8	67.9	6543.8	450.0	-22.5	-31.0	999.9	99.9	99.9	99.9	320.2	322.5	0.7	45.8	99.9	99.9
20.1	71.4	6966.4	425.0	-25.7	-50.1	254.7	34.6	33.4	9.2	321.5	321.8	0.1	6.1	19.9	70.
21.4	75.3	7407.8	400.0	-29.9	-64.7	253.7	39.0	37.4	11.0	321.9	322.6	0.2	21.9	22.4	80.
22.6	79.3	7872.8	375.0	-31.1	-68.5	250.4	42.2	39.8	14.2	322.8	327.0	0.0	4.7	25.2	73.
23.7	83.2	8363.4	350.0	-35.0	-68.4	252.4	44.1	42.0	13.3	326.4	328.5	0.0	5.1	27.9	78.
24.8	87.2	8864.5	325.0	-38.0	-63.3	256.3	45.3	44.1	10.7	330.4	330.5	0.0	5.6	31.4	78.
26.0	91.4	9438.2	300.0	-43.0	99.9	264.7	44.0	43.8	5.2	332.9	332.9	99.9	99.9	38.7	79.
27.3	95.4	10030.2	275.0	-46.3	99.9	263.0	42.9	42.6	10.2	335.4	335.4	99.9	99.9	42.6	79.
28.8	101.2	10645.5	250.0	-54.3	99.9	256.3	43.1	41.8	79.9	339.6	339.6	99.9	99.9	99.9	99.9
30.3	106.3	11351.1	225.0	-58.8	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
32.2	112.0	12049.2	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OF TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

Intentionally Left Blank

CONFIDENTIAL

Sounding Data

25 April 1975

0600 GMT

RECEIVED APR 25 1975

ORIGINAL PAGE IS

STATION NO. 208
CHARLESTON, SC25 APRIL 1975
600 GMT

TIME ..IN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	CEW PT DG C	DIR DC	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	9. 0	0
0.0	4.5	13.0	1017.6	20.0	17.2	190.0	4.1	0.7	4.0	293.3	325.0	12.3	84.0	0.0	0.0	0.
0.5	5.8	163.9	1000.0	19.5	16.3	211.7	12.5	6.6	10.7	294.2	324.8	11.7	81.5	0.3	1.6	1.
1.4	6.0	361.9	975.0	19.0	13.0	214.2	10.8	9.4	13.8	295.6	321.3	9.7	68.0	1.1	2.9	2.
2.3	10.2	605.2	950.0	18.4	12.2	220.5	14.6	9.5	11.1	297.2	322.4	9.5	67.0	1.9	3.2	3.
3.3	12.3	834.4	925.0	18.1	12.3	241.9	11.6	10.2	5.5	299.1	325.4	9.8	69.0	2.7	3.7	3.
4.1	14.5	1068.6	900.0	16.3	11.2	250.9	12.5	11.9	4.1	299.5	324.8	9.4	72.2	3.2	4.1	4.
5.1	16.5	1308.2	875.0	14.4	10.5	256.4	12.3	12.0	2.9	300.0	324.8	9.2	77.0	3.8	4.8	4.
6.1	18.9	1552.8	850.0	12.5	9.7	260.0	11.6	11.6	0.4	300.5	324.8	9.0	82.9	4.5	5.4	5.
7.1	21.0	1803.5	825.0	11.7	8.2	276.9	13.3	13.3	-0.2	302.1	324.9	8.3	79.1	5.0	5.8	5.
8.1	23.5	2060.7	800.0	10.0	6.9	281.9	13.7	13.4	-2.8	302.8	324.4	7.8	81.1	5.7	6.3	6.
9.1	25.8	2324.8	775.0	9.5	3.8	284.0	13.4	12.9	-3.7	304.6	323.2	6.5	67.5	6.3	6.8	6.
10.2	28.2	2596.6	750.0	8.7	-4.0	284.0	12.6	12.2	-3.0	306.5	318.0	4.0	42.4	7.0	7.3	7.
11.2	30.9	2876.9	725.0	8.5	-20.2	287.7	13.1	12.7	-3.1	308.9	312.3	1.1	11.1	7.7	7.5	7.
12.4	33.4	3165.7	700.0	6.5	-21.8	282.9	14.5	14.1	-3.2	309.8	312.9	0.9	10.9	8.5	7.9	7.
13.5	35.9	3462.5	675.0	4.0	-20.4	280.5	15.6	15.3	-2.8	310.3	313.9	1.1	14.8	9.5	8.1	8.
14.7	38.6	3764.0	650.0	1.5	-20.8	276.5	15.3	15.1	-2.5	310.8	314.4	1.1	17.0	10.6	8.3	8.
16.0	41.2	4082.4	625.0	-0.8	-17.4	277.0	15.0	14.9	-1.8	311.7	316.6	1.6	27.0	11.7	8.4	8.
17.3	44.1	4407.2	600.0	-2.8	-23.3	275.5	13.6	13.6	-1.3	313.0	316.2	1.0	18.8	12.8	8.0	8.
18.6	47.0	4742.7	575.0	-5.4	-28.0	268.3	12.0	12.0	0.1	313.7	316.3	0.8	17.9	13.8	8.6	8.
20.2	50.1	5049.8	550.0	-7.8	-34.5	271.3	10.7	10.7	-0.2	314.9	316.2	0.4	9.5	14.9	8.0	8.
21.4	53.0	5450.2	525.0	-9.1	-44.5	272.2	9.4	9.4	-0.4	317.4	317.9	0.1	3.7	15.6	8.6	8.
23.0	56.0	5825.7	500.0	-11.7	-27.5	268.4	8.2	7.2	-3.9	318.8	321.5	0.8	25.4	16.4	8.7	8.
24.6	59.3	6216.9	475.0	-14.4	-32.3	259.3	11.3	10.0	-5.4	320.2	322.0	0.5	20.1	17.2	9.0	9.
26.6	62.7	6623.8	450.0	-17.9	-38.6	296.5	11.7	10.2	-5.8	320.7	322.0	0.4	17.6	18.4	9.1	9.
28.4	65.1	7048.1	425.0	-21.6	-38.3	301.4	13.8	11.8	-7.2	321.2	322.4	0.3	20.4	19.6	9.3	9.
30.4	69.7	7491.3	400.0	-25.4	-33.4	286.8	15.6	14.8	-5.0	322.0	324.6	0.6	47.0	21.1	9.5	9.
32.3	73.3	7956.0	375.0	-29.5	-33.7	295.0	15.4	13.9	-6.5	322.6	324.6	0.6	68.3	23.0	9.6	9.
34.3	77.2	8444.7	350.0	-33.2	-36.9	302.8	15.6	10.6	-6.8	324.0	325.6	0.5	68.3	24.4	9.6	9.
36.5	81.2	8961.1	325.0	-37.8	-41.6	300.7	14.2	12.2	-7.3	324.6	325.6	0.3	67.1	25.1	9.6	9.
38.9	85.4	9507.9	300.0	-42.1	-49.9	299.1	15.9	13.9	-7.7	326.0	326.0	99.9	99.9	28.1	10.1	10.
41.7	90.0	10091.1	275.0	-46.4	99.9	285.2	17.6	17.0	-4.6	328.0	328.0	99.9	99.9	30.8	10.2	10.
44.7	94.8	10717.9	250.0	-51.0	99.9	284.4	15.7	15.0	-4.4	330.2	328.0	99.9	99.9	33.9	10.2	10.
47.6	99.8	11395.0	225.0	-56.0	99.9	287.0	18.4	18.0	-5.5	332.7	328.0	99.9	99.9	36.4	10.3	10.
50.9	105.0	12114.5	200.0	-61.0	99.9	300.0	20.6	16.6	-12.1	336.2	328.0	99.9	99.9	39.9	10.4	10.
54.7	111.0	12960.9	175.0	-62.3	99.9	301.3	24.8	21.2	-12.9	347.1	328.0	99.9	99.9	43.9	10.6	10.
59.1	117.3	13912.1	150.0	-61.5	99.9	295.1	26.0	23.5	-11.0	364.2	328.0	99.9	99.9	48.9	10.6	10.
64.2	124.7	15045.5	125.0	-63.1	99.9	280.3	23.0	22.6	-4.1	380.7	328.0	99.9	99.9	52.9	10.8	10.
70.4	132.7	16403.8	100.0	-68.4	99.9	270.7	15.7	15.7	-0.2	395.7	328.0	99.9	99.9	60.9	10.7	10.
78.0	141.3	18122.9	75.0	-68.4	99.9	297.0	9.2	8.2	-4.2	429.5	328.0	99.9	99.9	73.4	10.6	10.
88.3	150.5	20591.5	50.0	-62.6	99.9	59.0	4.4	-3.7	-2.2	496.1	328.0	99.9	99.9	76.7	10.6	10.
100.4	160.5	24962.4	25.0	-54.3	99.9	63.2	3.0	-2.7	-1.3	628.6	328.0	99.9	99.9	76.6	10.7	10.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA

25 APRIL 1975
530 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T OG K	E POT T OG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	6.0	1019.4	19.8	17.4	60.0	1.5	-1.3	-0.7	293.0	324.9	12.4	86.0	0.0	0.
0.6	6.2	174.3	1000.0	20.7	16.0	130.3	8.7	-5.8	6.5	295.4	325.7	11.6	74.5	0.1	263.
1.4	8.5	304.0	975.0	20.8	14.2	147.6	8.5	-4.6	7.2	297.5	325.4	10.5	66.1	0.5	311.
2.3	10.7	610.4	950.0	19.4	13.1	161.4	6.5	-2.1	6.2	298.2	325.0	10.0	66.9	0.9	322.
3.2	13.0	847.4	925.0	17.4	13.4	167.8	6.6	-1.4	6.5	298.5	326.6	10.5	77.2	1.2	328.
4.2	15.3	1081.7	900.0	15.9	12.7	183.1	5.4	0.3	5.4	299.3	327.0	10.4	81.3	1.6	334.
5.3	17.6	1321.2	875.0	15.0	9.9	184.9	3.6	0.3	3.6	300.6	324.5	8.8	71.5	1.8	338.
6.2	20.1	1560.3	850.0	13.0	9.7	192.4	3.7	1.2	3.5	300.9	325.3	9.0	80.6	2.0	342.
7.2	22.3	1817.2	825.0	11.4	7.7	205.6	3.6	1.5	3.2	301.7	323.7	8.0	78.1	2.2	346.
8.3	24.9	2074.6	800.0	12.1	1.0	66.8	0.9	-0.8	-0.4	304.8	319.5	5.2	46.5	2.3	347.
9.3	27.2	2340.3	775.0	11.6	-10.0	70.1	5.5	-5.2	-1.9	306.6	313.6	2.3	21.1	2.2	347.
10.3	29.9	2613.9	750.0	10.9	-4.8	67.0	8.0	-7.4	-3.1	308.9	310.5	3.6	32.9	2.3	331.
11.4	32.6	2896.4	725.0	9.9	-4.4	53.9	8.0	-6.4	-4.7	310.8	322.1	3.8	36.5	2.3	316.
12.5	35.2	3186.6	700.0	7.7	-4.3	43.8	7.8	-5.4	-5.7	311.5	323.4	4.0	42.4	2.4	305.
13.7	37.9	3485.4	675.0	5.6	-5.9	40.2	8.8	-5.7	-6.7	312.3	323.3	3.7	43.3	2.5	290.
15.0	40.5	3793.2	650.0	3.7	-8.8	43.3	7.2	-5.4	-4.8	313.5	322.7	3.0	39.4	2.8	279.
16.2	43.3	4110.4	625.0	1.4	-10.0	36.7	5.8	-3.5	-4.7	314.4	323.2	2.9	42.5	3.1	273.
17.4	46.3	4437.9	600.0	-0.6	-11.7	13.5	7.3	-1.7	-7.1	315.7	323.8	2.6	42.7	3.4	265.
18.6	49.3	4777.6	575.0	-1.9	-13.7	348.7	7.4	1.5	-7.3	318.0	325.3	2.3	40.2	3.5	254.
20.1	52.1	5130.0	550.0	-3.9	-17.4	332.4	7.7	3.5	-6.8	319.7	325.4	1.8	34.1	3.4	245.
21.5	55.3	5493.2	525.0	-7.2	-18.1	326.1	7.3	4.1	-6.1	319.9	325.6	1.7	41.2	3.4	234.
22.8	58.4	5873.2	500.0	-10.4	-21.2	320.2	6.8	3.5	-5.5	320.5	325.1	1.4	40.6	3.5	225.
24.4	61.6	6265.5	475.0	-13.7	-23.9	331.2	7.6	3.7	-6.7	321.1	324.9	1.2	41.9	3.7	215.
25.8	65.1	6673.6	450.0	-17.3	-24.0	328.7	7.2	3.8	-6.2	321.6	325.6	1.2	55.7	4.1	207.
27.5	68.6	7095.3	425.0	-20.7	-25.6	312.1	10.2	7.6	-6.8	322.2	326.2	1.1	64.5	4.5	197.
29.2	72.0	7544.5	400.0	-24.5	-28.1	302.8	12.7	13.3	-6.9	323.2	326.3	0.9	71.6	5.0	184.
31.1	75.8	8012.0	375.0	-27.4	-37.3	302.6	15.7	13.3	-8.5	325.3	326.8	0.4	38.3	6.0	170.
33.1	79.7	8505.0	350.0	-31.2	-43.3	297.7	19.4	17.2	-9.0	326.6	327.5	0.2	29.1	7.4	158.
35.0	83.5	9025.9	325.0	-34.6	99.9	303.8	18.6	15.4	-10.4	329.1	999.9	99.9	99.9	9.5	149.
37.3	87.7	9579.9	300.0	-38.9	99.9	309.8	19.3	14.8	-12.4	330.6	999.9	99.9	99.9	11.7	145.
39.6	92.2	10171.1	275.0	-43.6	99.9	312.1	23.0	17.1	-15.4	332.0	999.9	99.9	99.9	14.3	142.
42.1	96.8	10804.4	250.0	-48.8	99.9	314.8	30.5	21.7	-21.5	333.6	999.9	99.9	99.9	18.4	140.
44.9	101.8	11493.3	225.0	-54.0	99.9	311.3	33.8	25.4	-22.3	335.2	999.9	99.9	99.9	23.8	136.
47.9	107.3	12233.3	200.0	-60.6	99.9	309.9	36.0	27.7	-22.9	336.9	999.9	99.9	99.9	30.1	137.
51.3	113.0	13054.3	175.0	-65.3	99.9	308.3	28.6	24.7	-14.5	342.2	999.9	99.9	99.9	36.6	135.
55.0	119.5	14004.5	150.0	-61.6	99.9	301.6	21.8	18.6	-11.4	344.0	999.9	99.9	99.9	42.9	133.
59.5	126.7	15123.8	125.0	-65.8	99.9	276.9	20.3	20.2	-2.4	375.8	999.9	99.9	99.9	47.2	129.
64.8	135.0	16455.7	100.0	-72.2	99.9	271.9	12.1	12.1	-0.4	388.3	999.9	99.9	99.9	52.4	127.
71.2	143.3	18142.7	75.0	-72.7	99.9	312.7	6.0	4.4	-4.1	420.6	999.9	99.9	99.9	55.9	126.
80.3	153.3	20580.4	50.0	-63.7	99.9	26.0	5.4	-2.3	-4.8	423.5	999.9	99.9	99.9	56.9	127.
95.5	164.5	24961.3	25.0	-53.6	99.9	83.5	4.8	-4.7	-0.5	630.9	999.9	99.9	99.9	56.7	130.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 213
WAYCROSS, GA

25 APRIL 1975
600 GMT

TIME MIN	CATC	REL. V. KT	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX ATO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	3.8	12.4	1013.0	17.5	16.5	180.0	2.1	0.0	2.1	291.1	321.4	11.8	94.0	0.0	0.
0.4	4.8	12.4	1000.0	20.8	16.5	187.7	3.5	0.5	3.5	295.8	326.8	12.0	76.8	0.2	5.
1.3	6.7	12.4	975.0	20.6	11.2	225.0	5.2	3.7	3.7	297.0	320.1	8.6	55.0	0.3	17.
2.0	8.8	12.4	950.0	20.6	11.4	228.0	6.0	6.0	5.3	295.4	323.5	9.0	55.4	0.6	31.
2.8	10.8	12.4	925.0	19.1	12.1	220.8	7.6	5.0	5.7	300.1	320.1	9.6	63.7	1.0	38.
3.6	12.8	12.4	900.0	17.2	11.1	215.4	7.8	4.5	6.4	300.5	325.6	9.3	67.3	1.4	37.
4.6	15.1	12.4	875.0	14.9	9.7	222.9	9.1	6.2	6.7	300.4	324.0	8.7	71.3	1.9	36.
5.4	17.3	12.4	850.0	12.7	2.1	225.7	9.7	8.0	5.5	301.2	316.2	5.4	46.3	2.3	40.
6.3	19.6	12.4	825.0	12.8	-17.0	222.9	8.2	7.8	2.4	302.3	306.1	1.2	11.0	2.8	44.
7.2	21.7	12.4	800.0	12.4	-6.1	228.0	6.9	6.9	0.2	305.0	316.8	4.1	36.5	3.1	46.
8.1	24.1	12.4	775.0	11.6	-2.5	227.0	5.6	5.4	-1.7	306.8	314.9	4.1	37.2	3.3	54.
9.0	26.3	12.4	750.0	10.8	-13.6	224.4	6.1	6.1	-0.5	308.5	314.3	1.9	17.4	3.5	57.
10.0	28.9	12.4	725.0	10.1	-7.9	229.2	6.7	6.7	0.1	310.9	320.1	3.0	28.5	3.9	61.
10.9	31.3	12.4	700.0	7.9	-11.9	224.1	8.0	7.7	-1.9	311.5	319.3	2.2	23.7	4.1	63.
12.0	34.0	12.4	675.0	6.0	-15.0	301.4	10.2	8.7	-5.3	312.6	319.1	1.8	20.3	4.6	69.
13.0	36.4	12.4	650.0	4.2	-32.7	310.3	9.0	6.9	-5.8	313.2	315.9	0.6	6.2	4.9	75.
14.1	39.2	12.4	625.0	1.8	-48.8	319.4	8.3	5.4	-6.3	314.5	314.8	0.1	1.0	5.2	80.
15.1	41.8	12.4	600.0	-1.1	-50.6	316.9	7.6	5.2	-5.6	314.2	315.1	0.1	1.0	5.5	85.
16.3	44.7	12.4	575.0	-4.2	-52.6	310.1	6.3	4.8	-4.0	315.0	315.2	0.0	1.0	5.8	96.
17.4	47.7	12.4	550.0	-7.0	-54.3	313.9	8.2	5.9	-5.7	315.8	316.0	0.0	1.0	6.1	91.
18.6	50.9	12.4	525.0	-9.1	-55.7	313.1	9.2	6.7	-7.2	317.5	317.6	0.0	1.0	6.6	95.
19.9	53.8	12.4	500.0	-11.9	-57.5	307.5	7.9	6.3	-4.8	318.4	318.6	0.0	1.0	7.2	98.
21.2	56.6	12.4	475.0	-15.3	-59.6	297.9	8.9	7.9	-4.2	319.0	319.1	0.0	1.0	7.9	100.
22.7	60.1	12.4	450.0	-18.4	-61.6	250.1	11.2	10.5	-3.8	320.0	320.1	0.0	1.0	8.6	101.
24.1	63.7	12.4	425.0	-21.2	-63.4	287.8	14.9	14.2	-4.6	321.7	321.8	0.0	1.0	9.7	102.
25.8	67.1	12.4	400.0	-24.7	-65.7	287.1	15.2	14.5	-4.7	322.8	322.9	0.0	1.0	11.3	103.
27.4	70.8	12.4	375.0	-28.5	-68.2	281.2	16.1	15.0	-5.8	323.8	323.9	0.0	1.0	12.7	104.
29.1	74.8	12.4	350.0	-32.6	-70.8	287.1	17.8	17.0	-5.2	324.8	324.8	0.0	1.0	14.5	104.
30.9	79.0	12.4	325.0	-36.7	-71.3	290.1	18.7	17.6	-6.4	326.0	326.0	0.0	1.4	16.5	105.
32.9	83.2	12.4	300.0	-40.8	99.9	266.3	20.7	18.5	-9.1	327.8	327.8	99.9	99.9	18.7	106.
34.3	87.6	12.4	275.0	-44.6	99.9	301.3	23.1	19.7	-12.0	330.7	330.7	99.9	99.9	21.1	106.
37.0	92.8	12.4	250.0	-49.6	99.9	310.9	31.0	23.4	-20.3	332.3	332.3	99.9	99.9	24.5	110.
39.4	94.9	12.4	225.0	-55.4	99.9	305.9	35.7	28.9	-20.9	333.6	333.6	99.9	99.9	28.9	113.
42.1	103.5	12.4	200.0	-60.8	99.9	305.4	37.7	30.8	-21.9	334.6	334.6	99.9	99.9	34.6	115.
45.1	110.0	12.4	175.0	-62.9	99.9	282.5	26.8	24.7	-10.3	336.2	336.2	99.9	99.9	41.0	116.
48.5	116.7	12.4	150.0	-63.3	99.9	290.1	25.9	24.4	-8.9	366.2	366.2	99.9	99.9	46.4	115.
52.6	124.7	12.4	125.0	-63.0	99.9	284.0	24.6	23.8	-6.0	360.9	360.9	99.9	99.9	51.6	113.
57.2	133.3	12.4	100.0	-65.3	99.9	278.5	13.4	13.2	-2.0	393.8	393.8	99.9	99.9	56.4	113.
62.5	142.3	12.4	75.0	-68.2	99.9	264.6	8.0	8.0	0.2	430.0	430.0	99.9	99.9	60.3	112.
70.4	152.5	12.4	50.0	-61.8	99.9	2.5	4.6	-0.2	-4.8	497.8	497.8	99.9	99.9	62.0	113.
82.9	163.3	12.4	25.0	-52.6	99.9	367.9	2.7	2.1	-1.7	633.5	633.5	99.9	99.9	61.4	114.

• BY SPEED MEAN. ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• BY TEMP MEAN. TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
• BY SPEED MEAN. ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 220
APALACHICOLA, FLA

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCOMP M/SEC	POT T DG K	E POT T DG K	MM RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.8	11.0	1018.4	17.8	17.0	360.0	0.0	0.0	0.0	291.0	322.0	12.1	99.0	0.0	0.
0.5	6.1	108.4	1000.0	20.4	15.1	166.7	3.4	-0.8	3.3	295.0	323.7	11.0	72.6	0.1	351.
1.4	6.3	387.9	975.0	22.2	5.1	175.7	4.4	-0.3	4.4	298.3	314.0	5.7	32.8	0.3	350.
2.	12.4	613.0	550.0	21.1	5.4	177.8	4.6	-0.2	4.6	299.5	315.9	5.9	35.8	0.5	353.
2.4	12.5	843.3	925.0	19.8	4.3	175.9	4.0	-0.3	4.0	300.6	316.3	5.7	36.4	0.7	354.
3.6	14.8	1078.3	900.0	17.7	5.7	176.6	4.5	-0.1	4.5	300.6	318.4	6.4	45.6	0.9	355.
4.4	16.9	1316.7	875.0	16.5	4.0	180.6	5.5	0.1	5.5	301.7	318.0	5.8	43.3	1.1	356.
5.3	19.3	1555.1	850.0	15.7	-5.7	188.6	6.6	1.0	6.5	303.0	311.6	3.0	22.5	1.5	358.
6.1	21.4	1817.9	825.0	15.0	-7.1	194.2	5.0	1.2	4.9	304.5	314.6	3.4	20.4	1.8	0.
7.2	23.9	2077.3	800.0	13.1	-2.6	219.1	2.8	1.8	2.2	305.9	322.3	5.8	48.7	1.9	3.
8.0	26.2	2344.2	775.0	13.1	-6.6	217.2	2.9	1.8	2.3	308.3	317.5	3.1	25.6	2.0	6.
9.0	28.7	2619.4	750.0	12.6	-11.5	209.8	3.0	1.5	2.6	310.5	317.1	2.1	17.5	2.2	8.
10.0	31.3	2903.0	725.0	11.2	-12.3	191.9	3.7	0.8	3.6	312.0	316.4	2.1	18.0	2.4	9.
11.1	34.0	3194.3	700.0	8.8	-5.4	200.9	2.6	0.9	2.4	312.7	323.6	3.6	36.1	2.7	10.
12.1	36.5	3454.7	675.0	7.5	-11.3	280.6	1.9	1.9	-0.4	314.4	321.7	2.4	24.8	2.7	13.
13.1	39.2	3803.9	650.0	4.7	-11.8	330.3	3.1	1.5	-2.7	314.6	322.0	2.4	29.0	2.7	16.
14.2	41.9	4122.0	625.0	2.0	-10.2	351.9	5.2	0.7	-5.1	315.1	323.7	2.8	39.9	2.4	16.
15.2	44.8	4450.1	600.0	-0.6	-10.0	351.7	6.6	1.0	-6.5	315.8	325.0	3.0	49.1	2.1	20.
16.5	47.8	4782.8	575.0	-3.4	-11.4	332.8	6.0	2.7	-5.3	316.3	324.9	2.8	53.9	1.7	30.
17.8	50.7	5139.5	550.0	-5.3	-12.9	319.4	6.5	4.2	-4.9	318.1	326.1	2.6	55.0	1.6	45.
19.1	53.6	5503.2	525.0	-7.8	-14.7	323.8	6.8	4.0	-5.5	319.3	326.7	2.3	57.6	1.6	66.
20.4	56.6	5860.7	500.0	-11.0	-19.7	314.8	7.5	5.3	-5.3	319.6	325.0	1.4	48.4	1.8	82.
21.7	59.9	6272.9	475.0	-13.1	-23.6	299.5	9.5	8.3	-4.7	321.2	325.8	1.2	41.1	2.3	94.
23.3	63.3	6682.3	450.0	-16.6	-28.7	291.4	10.4	9.7	-3.8	322.5	325.2	0.8	33.9	3.2	99.
24.8	66.5	7109.2	425.0	-20.3	-28.6	285.6	11.4	10.7	-3.8	323.0	325.9	0.8	47.1	4.2	102.
26.3	70.1	7554.7	400.0	-24.1	-31.5	294.5	15.2	13.9	-6.3	323.7	326.0	0.7	50.1	5.3	104.
27.9	73.7	8022.5	375.0	-26.7	-31.5	297.6	16.2	14.3	-7.5	326.4	326.9	0.1	9.9	6.9	107.
29.7	77.8	8517.1	350.0	-30	-53.0	300.6	17.5	15.1	-8.9	328.0	328.3	0.1	8.6	8.6	110.
31.6	81.8	9039.5	325.0	-34.	-55.9	301.0	17.3	14.8	-8.9	329.3	329.5	0.1	9.0	10.7	112.
33.6	86.0	9554.3	300.0	-38.3	-58.7	310.6	19.7	15.0	-12.8	331.3	331.5	0.0	9.4	12.7	114.
35.7	90.5	10186.9	275.0	-43.2	-99.9	323.0	25.9	15.6	-20.7	332.7	331.5	99.9	99.9	15.3	118.
37.9	95.3	10822.9	250.0	-47.7	-99.9	316.5	31.4	21.2	-25.8	335.2	335.2	99.9	99.9	19.1	122.
40.6	100.4	11555.4	225.0	-53.7	-99.9	320.2	26.0	16.6	-20.0	336.2	336.2	99.9	99.9	24.1	125.
43.7	106.0	12250.8	200.0	-60.5	-99.9	318.5	31.0	20.5	-23.2	337.0	337.0	99.9	99.9	28.9	128.
46.7	112.0	13074.9	175.0	-65.4	-99.9	321.7	31.8	19.7	-24.9	342.1	339.9	99.9	99.9	34.7	130.
50.3	118.5	14019.0	150.0	-62.4	-99.9	304.2	27.7	22.9	-15.6	362.6	362.6	99.9	99.9	40.4	129.
54.7	126.0	15144.4	125.0	-64.6	-99.9	296.9	20.6	16.4	-5.3	376.0	376.0	99.9	99.9	46.3	128.
59.7	134.7	16488.5	100.0	-70.6	-99.9	283.2	14.7	14.3	-3.4	391.4	391.4	99.9	99.9	50.9	127.
65.4	143.0	15194.7	75.0	-71.1	-99.9	294.1	6.9	6.3	-2.8	423.9	423.9	99.9	99.9	55.3	126.
74.0	152.0	20654.3	50.0	-61.8	-99.9	110.7	4.8	-4.5	1.7	457.9	457.9	99.9	99.9	56.8	126.
89.0	163.3	25055.6	25.0	-53.3	-99.9	140.9	1.3	-0.8	1.0	632.0	632.0	99.9	99.9	55.5	128.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 226
CENTERVILLE, ALA

25 APRIL 1975
515 GMT

104 19. 9

TIME MIN	CRCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V CCHP M/SEC	POT T DG K	E POT T DG K	MX RTC GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.8	140.0	1000.7	20.8	19.6	200.0	5.1	1.7	4.6	255.8	233.6	14.6	93.0	0.0	0.
0.0	5.9	146.1	1000.0	20.9	19.3	201.2	10.3	3.7	9.6	295.9	331.0	14.3	90.7	0.1	4.
1.2	6.4	366.0	975.0	20.4	18.7	204.0	16.5	6.7	15.1	267.5	334.4	14.1	90.1	0.4	21.
2.4	10.8	590.3	950.0	18.2	16.7	207.5	16.3	7.5	14.5	267.4	330.8	12.7	90.8	2.0	25.
3.5	13.2	818.6	925.0	16.2	10.2	212.3	16.8	9.0	14.2	267.0	319.8	8.5	67.7	3.1	24.
4.5	15.6	1052.8	900.0	16.0	9.2	215.9	13.9	8.2	11.3	301.1	321.4	8.2	56.5	4.0	20.
5.6	18.1	1291.5	875.0	16.4	8.9	223.5	10.4	7.2	7.6	301.9	324.4	8.2	61.3	4.8	30.
6.7	20.6	1540.2	850.0	15.3	7.4	223.0	10.5	7.2	7.7	303.1	324.3	7.6	59.4	5.5	32.
7.4	21.2	1792.8	825.0	14.0	5.5	221.3	8.8	6.9	5.5	304.4	323.7	6.9	56.6	6.1	33.
9.0	25.7	2052.0	800.0	12.4	3.4	226.2	11.3	8.4	7.5	305.2	322.5	6.1	53.9	6.4	35.
10.1	26.4	2317.5	775.0	10.3	-3.4	224.7	10.8	7.6	7.7	305.5	317.4	4.2	40.6	7.5	36.
11.1	31.2	2585.7	750.0	9.0	-15.3	223.0	9.5	6.5	7.0	306.6	311.4	1.6	16.3	8.2	37.
12.3	34.1	2856.2	725.0	7.2	-22.6	224.0	11.8	8.2	8.5	307.4	310.2	0.9	10.1	8.8	37.
13.6	36.8	3157.2	700.0	6.8	-45.7	213.6	15.7	12.7	9.3	310.0	310.4	0.1	1.0	9.8	36.
14.4	38.7	3455.4	675.0	4.2	-46.1	244.8	17.4	15.6	7.4	312.6	312.9	0.1	1.0	11.1	40.
16.1	42.5	3763.3	650.0	4.4	-45.0	257.7	17.9	17.4	3.8	314.0	314.3	0.1	1.3	12.2	44.
17.3	45.5	4080.9	625.0	1.9	-33.5	257.4	16.5	16.1	3.6	314.7	315.9	0.4	5.1	13.3	47.
18.5	48.4	4404.0	600.0	-1.1	-26.9	253.4	14.3	13.7	4.1	314.9	317.2	0.7	12.0	14.3	47.
19.3	51.5	4745.6	575.0	-3.7	-52.3	256.4	13.8	13.4	3.2	315.7	315.8	0.1	1.0	15.4	51.
21.2	54.8	5094.2	550.0	-7.1	-46.9	267.5	12.9	12.9	0.6	315.7	316.1	0.1	2.6	16.3	53.
22.6	57.9	5454.4	525.0	-10.4	-31.9	271.0	12.8	12.8	-0.2	315.9	317.6	0.5	15.2	17.1	55.
24.1	61.3	5827.2	500.0	-14.1	-35.9	260.4	15.7	15.4	-2.8	315.9	317.9	0.6	24.2	18.1	57.
25.7	64.7	6215.9	475.0	-15.4	-59.7	277.7	17.5	17.4	-2.3	318.9	319.0	0.0	1.0	19.3	61.
27.3	68.1	6621.6	450.0	-18.1	-61.4	276.3	16.7	16.6	-1.8	320.5	320.6	0.0	1.0	20.7	64.
28.9	71.6	7046.2	425.0	-21.1	-63.3	271.6	20.7	20.7	-0.6	321.9	322.0	0.0	1.0	22.2	64.
30.4	74.4	7491.4	400.0	-24.1	-65.1	273.2	23.0	24.9	-1.3	323.6	323.7	0.0	1.0	24.0	64.
32.0	78.3	7938.8	375.0	-27.8	-67.7	277.0	22.8	22.7	-2.8	324.7	324.7	0.0	1.0	26.0	70.
33.8	82.2	8450.6	350.0	-31.7	-70.2	270.9	25.0	23.0	-0.4	325.5	325.9	0.0	1.0	28.5	74.
35.4	87.3	8970.1	325.0	-35.8	-73.0	263.9	23.6	23.5	2.5	327.3	327.3	0.0	1.0	31.0	74.
37.8	91.3	9521.3	300.0	-40.3	99.9	260.8	22.2	22.0	3.5	328.6	328.6	99.9	99.9	33.9	74.
39.8	95.3	10104.3	275.0	-44.8	99.9	275.1	20.4	20.3	-2.5	330.4	330.4	99.9	99.9	36.9	74.
42.0	101.0	10738.9	250.0	-50.2	99.9	282.4	35.0	34.2	-7.5	331.5	331.5	99.9	99.9	40.7	74.
44.8	106.4	11419.0	225.0	-55.2	99.9	295.0	37.2	33.8	-15.7	333.9	333.9	99.9	99.9	45.9	82.
47.4	111.9	12100.1	200.0	-61.1	99.9	293.7	32.5	29.7	-13.0	336.1	336.1	99.9	99.9	50.7	84.
51.2	117.8	12703.3	175.0	-63.7	99.9	295.9	29.6	26.6	-12.9	344.9	344.9	99.9	99.9	56.9	84.
54.4	124.5	13930.9	150.0	-64.0	99.9	279.4	30.3	29.9	-5.0	358.2	358.2	99.9	99.9	61.6	90.
59.4	131.7	15044.9	125.0	-66.0	99.9	276.9	25.9	25.7	-3.1	375.4	375.4	99.9	99.9	70.5	92.
65.0	139.3	16386.4	100.0	-68.2	99.9	263.8	22.2	21.5	-5.3	396.0	396.0	99.9	99.9	79.4	92.
72.3	147.3	18110.7	75.0	-68.0	99.9	300.0	5.2	4.5	-2.6	430.4	430.4	99.9	99.9	84.8	92.
82.0	156.7	20592.3	50.0	-62.1	99.9	291.3	3.0	2.8	-1.1	497.2	497.2	99.9	99.9	87.4	93.
99.0	165.7	24973.4	25.0	-53.1	99.9	105.4	3.6	-3.5	1.0	632.5	632.5	99.9	99.9	84.4	94.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 232
BOOTHVILLE, LA25 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RM PCT	RANGE A7 KM	A7 DG
0.0	5.0	1.0	1017.2	21.2	20.9	140.0	3.6	-2.3	2.8	295.0	334.9	15.5	98.0	0.0	0.0
0.4	6.4	149.9	1000.0	22.3	21.7	163.5	13.6	-3.9	13.1	297.7	341.0	16.6	96.4	0.4	32.5
1.2	8.8	371.0	975.0	21.5	20.9	162.3	13.0	-2.6	12.7	298.9	341.3	16.2	96.2	0.9	31.7
2.0	11.1	556.5	950.0	19.8	19.1	174.2	13.6	-1.4	13.5	299.2	348.2	14.8	92.9	1.6	34.3
2.9	13.6	826.6	925.0	18.6	17.3	176.2	12.2	-0.2	12.2	300.1	356.1	13.6	92.1	2.2	34.7
3.8	15.9	1022.0	900.0	17.4	16.1	180.2	9.8	0.0	5.8	301.1	355.7	13.0	92.5	2.8	35.0
4.6	18.5	1302.9	875.0	15.8	14.0	177.8	9.8	-0.4	5.7	301.8	353.0	11.6	89.2	3.3	35.1
5.6	20.9	1549.1	850.0	15.5	7.0	177.1	10.5	-0.5	10.5	303.3	353.0	7.4	57.2	3.8	35.2
6.5	23.6	1802.5	825.0	15.7	-7.1	176.2	10.4	-0.7	10.4	305.6	353.7	2.7	20.1	4.4	35.3
7.4	26.1	2062.5	800.0	14.0	-3.2	177.7	12.0	-0.5	12.0	308.6	357.6	3.8	30.0	5.0	35.1
8.5	28.9	2329.4	775.0	12.5	-8.4	176.8	11.4	-0.2	11.4	307.5	355.4	2.6	22.5	5.8	35.4
9.5	31.7	2614.0	750.0	12.6	-35.2	180.5	10.1	0.1	10.1	310.3	351.6	0.4	3.2	6.4	35.4
10.5	34.6	2887.9	725.0	12.1	-25.1	178.9	8.5	-0.2	8.5	312.8	351.1	0.7	5.7	7.0	35.5
11.5	37.3	3180.6	700.0	10.8	-29.4	171.2	8.3	-1.3	8.2	314.5	351.1	0.5	4.1	7.5	35.5
12.7	40.2	3482.0	675.0	8.5	-20.4	167.8	8.0	-1.7	7.8	315.3	350.9	1.1	10.8	8.1	35.5
13.8	43.1	3791.9	650.0	5.6	-16.4	176.5	7.9	0.5	7.9	315.5	320.5	1.6	17.8	8.6	35.4
14.9	46.3	4111.3	625.0	3.3	-13.5	187.0	9.7	1.2	9.6	316.4	323.2	2.2	28.0	9.1	35.5
16.1	48.4	4440.6	600.0	0.5	-12.9	155.5	9.4	2.5	9.0	317.0	324.4	2.4	35.6	9.8	35.6
17.3	52.4	4780.5	575.0	-2.0	-19.3	213.1	8.6	4.7	7.2	317.8	322.5	1.4	25.2	10.4	35.7
18.5	55.7	5132.4	550.0	-4.1	-20.4	229.1	8.7	6.6	5.7	319.3	323.6	1.3	25.6	10.9	36.0
19.9	59.0	5497.3	525.0	-7.1	-19.6	259.2	9.0	8.8	1.7	320.0	325.9	1.5	35.4	11.2	3.0
21.2	62.5	5876.1	500.0	-9.4	-31.2	272.4	10.5	10.5	-0.4	321.6	323.5	0.6	14.9	11.3	7.0
22.7	66.0	6270.2	475.0	-12.1	-41.9	276.5	12.3	12.2	-1.4	323.0	323.7	0.2	6.2	11.4	12.0
24.0	69.7	6681.4	450.0	-15.4	-37.4	275.8	14.3	14.3	-1.5	323.9	325.1	0.4	14.1	11.5	17.0
25.5	73.3	7109.7	425.0	-19.2	-29.8	276.2	18.5	18.3	-2.0	324.4	327.8	0.8	38.3	11.9	24.0
27.0	77.3	7558.5	400.0	-21.8	-38.3	278.1	21.0	20.8	-2.9	325.6	327.8	0.3	20.8	12.6	32.0
28.6	81.3	8030.3	375.0	-25.4	-31.3	278.1	21.7	21.5	-3.1	328.0	330.6	0.7	57.4	13.5	40.0
30.4	85.6	8527.8	350.0	-29.0	-34.8	282.2	19.7	19.3	-4.2	329.7	331.7	0.6	56.9	14.8	48.0
32.3	89.8	9052.4	325.0	-33.3	-39.6	285.4	22.0	21.2	-5.8	330.7	332.0	0.4	52.9	16.2	54.0
34.5	94.6	9609.7	300.0	-37.8	-46.3	290.9	24.7	23.1	-8.8	332.0	332.8	0.2	40.1	18.1	62.0
36.6	99.2	10234.6	275.0	-42.0	-49.9	288.5	26.9	25.5	-8.5	334.5	334.5	99.9	99.9	20.4	69.0
39.0	104.3	10842.0	250.0	-47.0	-49.9	281.0	32.0	31.3	-6.3	336.2	336.2	99.9	99.9	24.1	75.0
41.7	110.0	11532.2	225.0	-52.4	-49.9	285.9	32.5	30.6	-11.1	338.3	338.3	99.9	99.9	28.8	80.0
44.5	115.9	12282.8	200.0	-58.7	-49.9	293.1	36.0	33.1	-14.1	339.8	339.8	99.9	99.9	33.9	85.0
47.5	121.3	13107.2	175.0	-65.7	-49.9	296.0	39.9	35.8	-17.5	341.5	341.5	99.9	99.9	39.8	90.0
50.6	129.3	14030.8	150.0	-69.6	-49.9	288.9	28.6	27.0	-8.3	350.2	350.2	99.9	99.9	46.4	94.0
54.8	137.0	15135.6	125.0	-64.8	-49.9	265.3	27.1	27.0	2.2	377.7	377.7	99.9	99.9	53.8	94.0
59.6	144.3	16477.3	100.0	-70.1	-49.9	270.6	20.0	20.0	-0.2	392.4	392.4	99.9	99.9	60.0	94.0
65.4	152.3	18182.2	75.0	-71.8	-49.9	289.9	11.1	10.4	-3.8	422.3	422.3	99.9	99.9	64.2	94.0
73.7	161.0	20436.2	50.0	-63.6	-49.9	11.3	5.7	-1.1	-1.6	493.7	493.7	99.9	99.9	68.0	95.0
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 235
JACKSON, MISS25 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.4	100.0	1003.8	23.9	20.8	200.0	6.2	2.1	5.8	298.8	339.9	15.7	83.0	0.0	0.
0.1	4.7	133.3	1000.0	23.2	21.0	196.0	10.9	3.0	10.5	298.5	340.0	15.9	87.3	0.2	5.
1.0	6.6	354.5	975.0	21.4	20.3	192.1	14.7	4.6	14.0	298.8	339.5	15.6	93.4	0.7	16.
1.7	8.9	579.8	950.0	19.4	18.5	201.0	16.5	5.9	15.4	298.8	336.4	14.3	94.4	1.4	18.
2.4	10.8	809.7	925.0	17.8	16.7	203.4	17.8	7.1	16.3	299.3	333.9	13.1	93.4	2.1	19.
3.2	13.0	1044.1	900.0	16.3	14.3	207.0	16.7	7.6	14.9	299.8	330.6	11.5	88.1	3.0	21.
4.1	15.2	1294.5	875.0	14.3	10.6	206.5	16.4	7.3	14.7	302.4	327.6	9.2	67.2	3.8	22.
5.0	17.3	1531.6	850.0	14.0	8.2	208.1	17.6	8.3	15.5	303.8	323.5	7.1	52.4	4.8	23.
6.0	19.5	1784.9	825.0	14.7	3.7	216.7	16.2	9.7	13.0	305.0	322.3	6.1	47.9	5.7	25.
6.9	21.3	2044.7	800.0	13.1	3.7	217.4	17.9	10.9	14.2	306.0	323.7	6.3	52.7	6.7	27.
7.9	24.3	2311.4	775.0	13.0	-9.1	217.4	16.0	9.7	12.7	308.1	315.6	2.5	20.6	7.7	28.
8.9	26.5	2597.1	750.0	13.5	-14.7	218.2	14.9	9.2	11.6	311.5	310.6	1.6	12.7	8.6	29.
9.9	29.0	2871.1	725.0	12.0	-15.4	218.5	14.4	8.6	11.6	312.8	317.8	1.6	13.1	9.4	30.
10.9	31.7	3163.4	700.0	9.5	-13.5	220.1	13.5	8.7	10.4	313.3	319.3	1.9	18.1	10.2	30.
12.0	34.4	3463.5	675.0	7.1	-14.5	224.2	14.6	10.2	10.5	313.8	319.6	1.8	19.7	11.1	31.
13.1	37.0	3772.2	650.0	4.7	-14.8	222.0	15.7	10.5	11.7	314.5	320.4	1.9	22.7	12.1	31.
14.1	39.3	4090.4	625.0	2.1	-13.6	225.0	17.0	12.0	12.0	315.1	321.8	2.1	36.0	13.1	33.
15.3	42.4	4418.8	600.0	-0.4	-14.0	238.5	17.9	15.2	9.4	316.0	322.7	2.2	34.7	14.3	35.
16.4	45.4	4757.4	575.0	-3.0	-16.5	253.0	15.3	14.7	4.5	316.6	322.5	1.8	34.4	15.3	37.
17.8	48.5	5108.0	550.0	-5.6	-20.3	268.4	15.8	15.8	0.4	317.6	322.1	1.4	30.1	16.2	40.
19.0	51.4	5470.7	525.0	-8.8	-20.8	272.8	17.2	17.2	-0.8	318.0	322.6	1.4	37.0	16.9	43.
20.1	54.6	5846.2	500.0	-12.5	-20.3	270.5	18.1	18.1	-0.2	318.0	322.9	1.5	51.8	17.8	46.
21.6	57.9	6215.3	475.0	-16.2	-20.5	268.5	19.2	19.2	0.5	318.0	323.1	1.6	65.4	18.3	70.
23.1	61.3	6639.3	450.0	-19.6	-23.7	263.4	18.9	18.9	2.2	318.6	322.6	1.2	69.7	20.5	33.
24.7	65.0	7064.4	425.0	-20.3	-37.8	249.7	19.6	18.4	6.8	322.9	324.1	0.3	15.1	22.1	34.
26.3	68.7	7510.9	400.0	-23.3	-40.3	256.7	18.5	18.0	4.2	324.6	325.6	0.3	19.3	23.9	56.
28.0	72.4	7979.6	375.0	-27.2	-43.4	254.5	19.4	18.7	5.2	325.5	326.3	0.2	19.6	25.7	57.
29.7	76.5	8472.7	350.0	-31.2	-46.7	256.2	19.4	18.6	4.6	326.6	327.2	0.2	19.9	27.6	58.
31.5	80.7	8993.3	325.0	-35.4	-40.8	263.1	21.6	21.7	2.6	327.9	329.1	0.3	57.2	29.5	60.
33.3	85.2	9455.8	300.0	-39.5	99.9	274.0	27.2	27.1	-1.9	329.7	329.9	99.9	99.9	31.9	62.
35.3	90.0	10134.8	275.0	-44.7	99.9	276.3	31.2	31.1	-3.4	330.4	329.9	99.9	99.9	34.9	66.
37.8	95.2	10765.2	250.0	-50.1	99.9	280.2	36.0	35.4	-6.4	331.7	329.9	99.9	99.9	36.3	69.
40.4	100.5	11466.5	225.0	-54.9	99.9	284.8	36.7	34.7	-11.8	334.4	329.9	99.9	99.9	44.2	74.
43.1	106.5	12191.4	200.0	-60.0	99.9	294.7	32.9	29.9	-13.7	337.8	329.9	99.9	99.9	48.6	78.
45.9	112.8	13014.6	175.0	-65.3	99.9	281.2	26.9	26.4	-5.2	342.2	329.9	99.9	99.9	53.2	81.
49.3	119.7	13946.0	150.0	-64.9	99.9	265.1	36.2	36.1	3.1	358.3	329.9	99.9	99.9	58.7	82.
53.3	127.5	15060.2	125.0	-63.5	99.9	274.9	29.4	29.3	-2.5	380.0	329.9	99.9	99.9	66.1	83.
58.0	136.0	16421.8	100.0	-67.2	99.9	283.6	21.6	20.9	-5.1	357.9	329.9	99.9	99.9	73.9	85.
63.7	144.0	18147.9	75.0	-67.4	99.9	275.5	12.5	12.5	-1.2	431.6	329.9	99.9	99.9	77.7	85.
72.0	152.3	23623.1	50.0	-55.8	99.9	24.3	5.2	-2.1	-4.8	502.8	329.9	99.9	99.9	78.9	86.
86.9	160.7	25028.9	25.0	-52.0	99.9	27.7	2.7	-1.2	-2.4	635.6	329.9	99.9	99.9	76.8	86.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 240
LAKE CHARLES, LA

25 APRIL 1975
515 GMT

TIME MIN	CNTCY	HEIGHT GEN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	3.5	5.0	1014.4	23.3	21.6	170.0	7.2	-1.3	7.1	297.4	339.6	16.2	90.0	0.0	0.0
0.3	4.6	130.4	1000.0	22.5	21.6	169.5	11.7	-2.1	11.2	297.4	340.8	16.5	94.4	0.4	34.0
1.0	6.4	351.1	975.0	20.9	20.0	173.9	11.3	-1.2	11.2	298.3	338.4	15.3	94.7	0.7	34.0
1.7	8.4	576.3	950.0	19.4	18.5	187.4	11.5	1.5	11.4	298.8	336.4	14.3	94.5	1.2	35.1
2.4	10.3	803.8	925.0	18.0	17.1	200.9	10.5	4.8	9.4	299.1	326.8	10.4	73.7	1.6	35.0
3.2	12.3	1041.5	900.0	18.8	12.1	205.5	11.5	5.1	10.3	302.3	323.3	10.0	65.0	2.1	6.0
4.0	14.4	1293.1	875.0	17.1	12.0	204.9	12.2	5.1	11.1	302.9	330.4	10.1	71.9	2.6	11.0
4.9	16.4	1530.4	850.0	15.6	9.9	201.5	12.3	4.5	11.4	303.8	328.7	9.1	68.8	3.2	14.0
5.7	18.6	1743.6	825.0	14.3	6.0	188.7	13.9	1.6	13.4	304.6	324.5	7.1	57.3	3.9	14.0
6.5	20.7	2042.9	800.0	12.4	5.8	181.9	13.7	0.5	13.7	305.3	325.7	7.3	64.1	4.6	12.0
7.4	22.9	2308.5	775.0	10.8	2.1	183.6	14.1	0.9	14.1	306.2	322.6	5.8	55.0	5.3	11.0
8.3	25.2	2581.5	750.0	11.2	-23.0	184.4	16.0	1.8	15.9	308.9	312.1	1.0	9.4	6.1	10.0
9.3	27.4	2868.6	725.0	11.8	-34.5	187.3	17.0	2.2	16.9	312.5	313.6	0.3	2.7	7.1	10.0
10.4	29.8	3157.2	700.0	11.0	-24.4	196.4	17.3	4.9	16.6	314.8	317.3	0.8	4.4	8.2	10.0
11.4	32.3	3456.4	675.0	9.5	-29.0	207.3	15.0	6.9	13.3	316.3	318.1	0.5	4.9	9.3	11.0
12.6	34.9	3771.3	650.0	8.1	-23.1	218.4	10.9	8.1	7.2	318.2	320.9	0.8	7.9	10.1	13.0
13.7	37.2	4093.1	625.0	5.2	-15.2	248.3	10.2	9.3	4.1	318.6	324.6	1.9	21.3	10.5	14.0
14.8	39.9	4428.2	600.0	2.1	-14.0	252.4	10.1	9.6	3.0	318.8	325.6	2.2	29.2	10.9	19.0
16.0	42.2	4765.7	575.0	-1.3	-13.5	249.5	10.9	10.2	2.8	319.8	326.2	2.3	38.9	11.4	22.0
17.3	45.1	5117.6	550.0	-4.9	-12.9	254.1	10.6	10.2	2.9	318.6	326.7	2.6	53.3	11.9	25.0
18.6	48.0	5481.1	525.0	-8.6	-10.2	260.2	11.1	10.9	1.9	318.3	324.8	2.0	53.9	12.5	28.0
19.9	50.8	5857.6	500.0	-11.4	-23.0	270.5	12.9	12.9	-0.1	319.2	323.2	1.2	37.6	13.0	31.0
21.1	53.8	6248.5	475.0	-14.9	-24.9	273.8	13.6	13.6	-0.9	319.6	323.1	1.1	41.7	13.5	35.0
22.6	56.8	6655.4	450.0	-18.0	-31.0	273.2	17.8	17.7	-1.0	320.7	322.9	0.6	30.8	14.3	40.0
24.1	60.0	7090.5	425.0	-20.2	-40.4	277.4	10.7	18.6	-2.4	323.1	324.0	0.3	14.4	15.3	45.0
25.6	63.4	7528.4	400.0	-22.6	-58.1	273.3	23.0	23.0	-1.3	325.5	325.8	0.1	3.6	16.4	50.0
27.0	66.6	7990.3	375.0	-25.6	-30.1	267.4	25.7	25.7	1.2	327.7	330.6	0.8	66.2	18.1	54.0
28.5	70.3	8455.4	350.0	-28.6	-35.0	272.8	25.4	25.4	-1.2	328.9	330.8	0.6	54.2	20.2	56.0
30.3	74.0	9020.2	325.0	-33.0	-43.7	279.5	25.7	26.3	-4.4	331.1	332.0	0.2	33.0	22.3	62.0
32.3	78.0	9575.4	300.0	-36.8	-73.7	279.8	26.2	25.8	-4.5	333.3	333.4	0.0	1.0	24.8	67.0
34.5	82.0	10174.7	275.0	-42.1	99.9	282.3	28.3	27.6	-6.0	334.2	999.9	99.9	99.9	27.9	71.0
36.8	86.3	10812.7	250.0	-47.2	99.9	285.9	32.7	31.4	-9.0	335.6	999.9	99.9	99.9	31.5	75.0
39.2	91.2	11501.4	225.0	-52.9	99.9	291.4	33.9	33.5	-13.1	337.5	999.9	99.9	99.9	35.9	80.0
41.7	96.0	12251.2	200.0	-58.6	99.9	263.3	38.0	36.0	-9.0	340.0	999.9	99.9	99.9	40.7	83.0
45.0	101.5	13070.3	175.0	-65.1	99.9	288.3	39.5	37.5	-12.4	342.4	999.9	99.9	99.9	48.1	87.0
48.6	107.8	14009.4	150.0	-64.0	99.9	278.3	27.7	27.4	-4.0	350.4	999.9	99.9	99.9	56.0	90.0
53.4	114.7	15123.1	125.0	-64.6	99.9	277.6	28.7	28.5	-3.2	378.1	999.9	99.9	99.9	63.3	90.0
58.8	122.5	16472.1	100.0	-68.5	99.9	282.7	18.4	18.0	-3.6	435.1	999.9	99.9	99.9	70.6	90.0
65.6	132.0	18173.6	75.0	-67.1	99.9	269.5	17.4	17.4	0.2	432.4	999.9	99.9	99.9	76.0	90.0
74.9	143.0	20652.3	50.0	-62.9	99.9	288.0	3.6	3.4	-1.1	405.4	999.9	99.9	99.9	78.8	91.0
90.6	157.0	25056.3	25.0	-50.4	99.9	334.4	4.5	1.9	-4.0	630.6	999.9	99.9	99.9	75.9	94.0

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

• BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

• BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 248
SHREVEPORT, LA25 APRIL 1975
510 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.4	79.0	1002.7	23.3	18.4	180.0	6.2	0.0	6.2	298.0	333.4	13.4	74.0	104	0
0.1	4.6	102.7	1000.0	23.3	19.1	187.9	6.8	1.2	8.7	299.3	335.4	14.1	77.6	0.1	4
0.6	6.5	324.2	975.0	22.0	20.5	195.0	14.5	4.7	13.6	299.4	340.9	15.8	90.9	0.6	10
1.7	6.7	550.3	950.0	20.6	19.4	207.2	18.3	8.3	16.3	300.1	340.1	16.2	93.1	1.4	18
2.6	10.9	781.4	925.0	19.9	18.5	215.1	19.6	11.3	16.0	301.6	340.5	16.6	91.6	2.4	24
3.3	15.0	1017.9	900.0	18.4	16.9	217.8	20.7	12.7	16.4	302.3	338.7	1.6	90.6	3.3	27
4.3	15.3	1201.6	875.0	20.4	11.3	222.2	20.0	13.4	14.8	306.3	333.1	9.7	56.1	4.4	31
5.2	17.6	1311.3	850.0	18.1	9.5	220.0	20.6	13.2	15.9	306.6	331.2	8.9	56.4	5.6	33
6.2	22.0	1766.4	825.0	16.0	8.4	220.2	19.5	12.6	14.9	307.1	330.1	8.4	60.7	6.8	34
7.3	22.3	2027.5	800.0	13.9	7.6	221.7	20.0	13.3	14.9	307.1	330.2	8.3	66.0	8.0	35
8.2	24.8	2295.0	775.0	12.9	-1.9	227.7	21.1	15.6	14.2	308.2	320.9	4.3	36.1	9.2	36
9.3	27.2	2570.3	750.0	13.3	-15.7	233.5	21.5	17.3	12.8	311.2	315.9	1.5	11.8	10.5	38
10.5	29.9	2954.0	725.0	11.4	-18.5	234.7	21.1	17.2	12.2	312.1	316.0	1.2	10.5	12.0	40
11.6	32.6	3145.7	700.0	9.3	-18.9	234.6	21.1	17.2	12.2	312.9	316.8	1.2	11.7	13.3	42
12.7	35.3	3445.6	675.0	6.9	-15.8	232.8	23.1	18.4	13.9	313.6	318.8	1.6	17.9	14.8	43
13.9	38.0	3754.1	650.0	5.1	-19.2	230.4	24.5	18.9	15.6	314.8	319.0	1.3	15.2	16.5	44
15.1	40.9	4072.7	625.0	2.7	-21.2	234.8	22.0	18.0	12.7	315.7	319.4	1.1	15.2	18.2	45
16.5	43.9	4301.5	600.0	0.6	-46.7	240.0	20.3	17.6	10.1	316.8	317.2	0.1	1.4	19.9	46
17.8	46.8	4741.2	575.0	-1.9	-19.7	242.4	20.2	17.9	9.3	317.5	323.1	1.6	28.2	21.3	47
18.9	49.9	5053.3	550.0	-4.6	-9.5	238.5	23.5	20.0	12.3	319.0	329.5	3.4	68.5	22.8	48
20.0	52.9	5457.6	525.0	-7.9	-13.2	239.5	24.6	21.2	12.5	319.3	327.5	2.6	65.5	24.4	49
21.3	55.0	5834.6	500.0	-11.3	-13.9	240.3	25.1	21.8	12.4	319.5	327.8	2.6	81.3	26.3	49
22.6	58.4	6226.1	475.0	-14.6	-16.0	247.3	25.7	23.7	9.9	320.1	327.4	2.3	80.2	28.1	50
23.9	63.0	6633.4	450.0	-17.7	-19.4	244.5	27.3	25.6	9.6	321.1	327.1	1.6	80.7	30.2	52
25.4	66.6	7058.9	425.0	-21.0	-22.3	256.6	28.2	27.4	6.5	322.2	327.1	1.5	88.8	32.4	53
27.2	70.4	7504.3	400.0	-23.9	-26.3	261.8	25.6	25.3	3.7	324.0	327.8	1.1	80.0	35.3	54
29.2	74.2	7973.4	375.0	-26.1	-32.2	270.4	26.4	26.4	-0.2	327.1	329.5	0.7	55.8	37.8	58
30.6	78.3	8468.9	350.0	-30.0	-36.5	275.7	25.3	25.1	-2.5	328.2	329.9	0.5	52.8	39.7	59
31.5	82.5	8991.8	325.0	-34.8	-39.4	277.0	27.9	27.7	-3.4	330.6	330.0	0.4	62.9	40.6	61
33.1	87.0	9546.0	300.0	-39.0	-47.2	284.6	29.3	29.3	-7.4	330.4	331.0	0.2	40.6	42.7	63
35.3	92.0	10136.2	275.0	-44.0	99.9	290.2	23.9	22.5	-8.3	331.6	999.9	99.9	999.9	45.5	66
37.6	96.8	10770.5	250.0	-48.3	99.9	280.2	39.2	38.6	-7.0	334.3	999.9	99.9	999.9	48.4	64
40.4	102.3	11455.8	225.0	-54.0	99.9	280.6	45.0	44.2	-8.2	335.8	999.9	99.9	999.9	55.5	73
43.5	108.3	12200.6	200.0	-60.6	99.9	279.7	48.7	48.0	-8.2	336.8	999.9	99.9	999.9	62.3	77
46.6	114.7	13019.7	175.0	-66.3	99.9	276.7	51.2	50.9	-6.0	340.5	999.9	99.9	999.9	68.8	80
50.3	121.3	13948.5	150.0	-66.7	99.9	271.6	35.3	35.3	-1.0	355.1	999.9	99.9	999.9	77.4	82
54.7	129.0	15067.5	125.0	-64.1	99.9	266.3	27.6	27.5	1.8	379.0	999.9	99.9	999.9	87.6	82
59.8	137.0	16429.8	100.0	-65.4	99.9	268.6	28.6	28.6	0.7	401.3	999.9	99.9	999.9	95.2	82
65.7	145.0	18150.0	75.0	-71.0	99.9	274.3	20.6	20.5	-1.5	424.3	999.9	99.9	999.9	100.8	83
74.9	154.0	20636.6	50.0	-60.7	99.9	36.4	5.6	-3.3	-4.5	500.5	999.9	99.9	999.9	104.0	83
89.2	162.7	25029.1	25.0	-53.8	99.9	334.2	2.2	1.0	-2.0	630.5	999.9	99.9	999.9	103.5	85

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 255
VICTORIA, TEX

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCOMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	3.7	33.0	1008.2	24.8	22.7	170.0	8.2	-1.4	8.1	259.6	345.4	17.5	88.0	0.0	0.
0.2	4.3	105.3	1030.0	25.4	24.0	999.9	99.9	99.9	99.9	301.1	351.5	19.2	92.0	999.9	99.9
1.0	6.2	328.4	975.0	23.4	22.2	999.9	99.9	99.9	99.9	301.1	347.5	17.6	93.1	999.9	99.9
1.7	6.3	255.8	950.0	22.0	20.8	178.4	15.5	-0.4	15.5	301.7	345.4	16.5	92.8	1.3	354.
2.4	10.3	786.0	925.0	20.7	19.3	955.9	99.9	99.9	99.9	302.5	343.9	15.5	92.1	999.9	99.9
3.2	12.3	1024.8	900.0	18.3	17.0	999.9	99.9	99.9	99.9	302.2	339.0	13.7	92.2	999.9	99.9
4.0	14.5	1267.6	875.0	20.3	17.9	999.9	99.9	99.9	99.9	305.9	327.5	7.7	44.6	999.9	99.9
4.8	16.5	1517.1	850.0	18.5	5.5	185.0	20.5	2.0	20.4	305.9	325.4	6.7	42.5	4.4	0.
5.5	18.3	1772.2	825.0	17.1	-11.2	184.5	18.3	1.4	18.2	307.0	314.0	2.4	15.8	5.3	1.
6.4	21.0	2034.7	800.0	19.0	-38.3	186.2	15.7	1.7	15.6	311.4	312.0	0.2	1.0	6.2	2.
7.1	23.3	2305.8	775.0	17.5	-39.2	191.1	12.7	2.4	12.4	312.6	313.2	0.2	1.0	6.8	2.
7.9	25.6	2584.2	750.0	15.7	-40.3	199.9	11.7	4.0	11.0	313.7	314.2	0.1	1.0	7.4	3.
9.7	28.0	2870.1	725.0	14.3	-41.1	210.0	10.8	5.4	9.4	315.2	315.7	0.1	1.0	7.9	5.
9.6	30.6	3165.2	700.0	13.1	-41.9	228.8	8.2	6.2	5.4	317.0	317.5	0.1	1.0	8.3	7.
10.5	33.1	3465.2	675.0	11.1	-43.0	253.5	6.0	5.7	1.7	318.1	318.6	0.1	1.0	8.5	9.
11.5	35.6	3781.9	650.0	8.0	-19.5	255.4	6.5	6.3	1.6	318.2	322.9	1.4	13.9	8.6	11.
12.4	38.3	4102.6	625.0	5.1	-16.7	243.9	8.2	7.4	3.6	318.5	323.9	1.7	18.9	8.9	13.
13.5	40.8	4435.2	600.0	2.9	-22.7	231.7	10.9	8.6	6.8	319.4	322.8	1.0	13.2	9.3	16.
14.5	43.6	4777.0	575.0	-0.5	-8.3	234.1	11.2	9.1	6.0	319.9	330.9	3.6	55.4	9.9	18.
15.7	46.6	5131.1	550.0	-3.8	-10.2	244.2	13.2	11.9	5.8	319.9	323.9	3.2	61.1	10.5	21.
16.0	48.6	5496.8	525.0	-6.8	-11.5	257.5	15.9	15.5	3.4	320.6	335.1	3.0	69.3	11.3	25.
18.3	52.4	5875.8	500.0	-9.9	-17.8	274.0	15.7	15.7	-1.1	321.2	327.3	1.9	52.3	12.0	31.
18.6	55.3	6265.9	475.0	-12.4	-23.9	271.7	16.6	16.6	-0.5	322.8	328.7	1.2	37.7	12.6	36.
20.8	58.6	6681.1	450.0	-14.6	-32.0	267.3	17.8	17.8	0.8	324.9	327.1	0.6	23.4	13.4	40.
22.1	61.9	7111.3	425.0	-17.9	-37.8	269.2	18.7	18.7	0.3	325.9	327.2	0.3	15.6	14.3	45.
23.6	65.4	7562.1	400.0	-21.1	-27.9	264.0	18.9	18.8	2.0	327.6	330.9	1.0	54.3	15.6	49.
25.1	68.9	8035.4	375.0	-24.6	-33.4	266.1	17.6	17.6	1.2	329.0	331.1	0.6	43.7	17.0	52.
26.8	72.5	8534.6	350.0	-28.1	-37.3	275.4	20.6	20.5	-1.9	330.9	332.5	0.4	40.5	18.6	54.
28.7	76.5	9062.2	325.0	-32.3	-40.4	279.0	22.5	22.2	-3.5	332.2	333.4	0.3	43.5	20.5	60.
30.4	80.6	9621.5	300.0	-36.9	-43.7	273.9	23.6	23.6	-1.6	333.3	334.3	0.3	48.9	22.5	64.
32.3	85.0	10217.2	275.0	-42.1	-49.9	270.6	27.4	27.4	-0.3	334.3	335.9	99.9	99.9	25.0	67.
34.4	89.4	10854.1	250.0	-48.0	-59.9	273.4	28.2	28.1	-1.7	334.7	335.9	99.9	99.9	28.2	70.
36.5	94.4	11540.0	225.0	-53.6	-69.9	283.9	31.6	30.7	-7.6	336.3	337.9	99.9	99.9	31.5	73.
39.0	99.5	12285.9	200.0	-60.2	-99.9	285.2	34.6	33.4	-9.1	337.5	338.9	99.9	99.9	36.0	77.
41.8	103.3	13105.3	175.0	-67.0	-99.9	282.8	40.0	39.0	-8.8	338.4	339.9	99.9	99.9	41.7	81.
44.9	111.5	14095.0	150.0	-63.7	-99.9	271.4	23.5	23.5	-0.6	340.3	340.9	99.9	99.9	47.4	84.
48.5	118.7	15144.4	125.0	-66.9	-99.9	273.2	27.5	27.4	-1.5	342.9	343.9	99.9	99.9	52.8	87.
53.3	127.0	16374.4	100.0	-72.7	-99.9	273.9	22.5	22.4	-1.5	347.4	347.4	99.9	99.9	59.5	85.
59.6	137.0	18161.8	75.0	-72.7	-99.9	248.7	8.7	8.1	3.2	420.6	420.6	99.9	99.9	63.6	86.
69.6	146.3	20622.3	50.0	-60.9	-99.9	5.1	5.6	-0.5	-5.6	500.0	500.0	99.9	99.9	65.5	86.
99.9	99.9	99.9	25.0	59.9	99.9	99.9	99.9	99.9	99.9	50.6	99.9	99.9	99.9	999.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 260
STEPHENSVILLE, TEX

25 APRIL 1975
515 GMT

TIME MIN	CATCY	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.6	309.0	968.0	23.0	15.7	180.0	6.2	0.0	6.2	300.2	331.6	11.5	62.0	0.0	0.
99.0	99.0	99.0	1000.0	59.9	3.0	60.0	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
0.3	10.9	526.9	950.0	22.8	16.7	181.4	16.1	0.4	16.1	302.0	336.1	12.7	68.6	0.4	356.
1.1	12.1	759.5	925.0	22.0	16.3	181.6	17.6	2.3	17.4	303.6	338.0	12.7	68.6	1.1	0.
1.9	15.4	568.5	905.0	22.4	15.3	205.2	15.5	7.0	15.0	306.3	339.9	12.3	64.3	1.8	5.
2.7	17.7	1243.9	875.0	21.4	14.6	223.0	15.8	10.8	11.5	307.7	340.9	12.0	65.0	2.5	12.
3.5	20.2	1494.9	850.0	14.5	14.3	235.5	13.5	11.1	7.6	309.2	341.9	12.2	72.2	3.2	22.
4.3	22.3	1751.9	825.0	17.5	13.6	245.9	9.6	8.7	3.9	308.9	342.0	12.0	77.8	3.7	24.
5.2	25.1	2014.9	800.0	16.7	9.7	273.2	8.1	8.0	-0.4	310.2	337.4	9.7	64.3	3.9	3.
6.3	27.0	2284.9	775.0	14.6	6.0	293.0	9.8	8.1	-3.4	310.5	332.2	7.6	50.3	4.1	3.
6.9	30.4	2561.2	750.0	12.1	6.2	302.6	9.2	7.8	-5.3	310.8	333.5	2.0	67.2	4.2	45.
7.3	32.3	2944.4	725.0	9.2	5.6	255.6	10.1	8.8	-5.0	310.6	333.2	7.9	76.2	4.3	51.
8.4	35.4	3135.0	700.0	7.4	-0.9	286.7	11.9	11.4	-3.4	311.3	320.4	5.1	57.7	4.6	51.
9.5	38.1	3423.0	675.0	5.2	-15.0	268.9	13.7	13.7	0.3	311.7	317.3	1.8	21.9	5.1	64.
10.5	40.9	3741.7	650.0	6.2	-38.6	250.9	14.2	13.4	4.6	316.0	317.1	0.3	3.7	5.9	60.
11.5	43.6	4061.4	625.0	3.9	-37.3	241.6	12.4	11.0	5.7	316.9	317.9	0.2	3.0	6.7	65.
12.4	46.0	4390.9	600.0	0.8	-38.5	245.2	11.0	10.0	4.6	317.1	317.9	0.2	3.3	7.4	65.
13.5	48.3	4730.7	575.0	-2.1	-39.7	258.9	11.0	10.8	2.1	317.5	318.2	0.2	3.6	8.1	65.
14.7	52.5	5081.9	550.0	-4.9	-33.2	276.0	11.8	11.8	0.0	318.3	319.8	0.4	8.8	8.8	67.
15.9	55.0	5445.8	525.0	-7.5	-30.0	271.7	15.9	15.9	-0.5	319.4	321.4	0.6	14.6	9.6	65.
17.0	58.7	5923.4	500.0	-10.1	-23.5	267.3	19.3	19.3	0.9	320.7	321.3	0.2	4.4	10.9	72.
18.2	64.3	6216.7	475.0	-12.8	-22.8	262.8	19.8	19.7	2.5	322.1	322.7	0.2	6.7	12.2	73.
19.6	65.4	6626.6	450.0	-16.1	-19.3	259.9	21.7	21.4	3.8	323.0	323.7	0.1	3.8	13.9	74.
20.9	68.9	7054.1	425.0	-19.1	-50.9	265.2	21.6	21.5	1.8	324.4	324.7	0.1	4.1	15.0	71.
22.2	72.3	7502.1	400.0	-22.8	-52.9	271.5	21.5	21.5	-0.5	325.4	325.6	0.1	4.5	17.2	71.
23.6	76.3	7971.3	375.0	-26.9	-55.1	270.5	23.1	23.1	-0.2	325.9	326.2	0.1	4.9	19.1	74.
25.1	80.0	8464.4	350.0	-31.4	-57.8	265.5	26.5	26.5	0.2	326.4	326.5	0.0	5.4	21.2	74.
26.6	83.5	8960.4	325.0	-34.4	-59.6	273.1	27.3	27.3	-1.5	327.1	329.3	0.0	5.7	23.6	80.
28.4	87.5	9541.1	300.0	-38.7	-52.4	273.2	30.5	30.4	-1.7	330.8	330.9	0.0	6.1	26.7	84.
30.5	92.3	10132.4	275.0	-41.9	99.9	275.6	36.5	36.4	-3.6	334.5	999.9	99.9	999.9	30.3	83.
33.5	96.0	10772.1	250.0	-40.8	99.9	270.5	40.6	40.6	-0.3	336.6	999.9	99.9	999.9	37.3	80.
36.7	101.6	11461.9	225.0	-52.7	99.9	270.7	45.0	45.0	-0.0	337.7	999.9	99.9	999.9	45.4	71.
39.5	107.0	12212.9	200.0	-58.5	99.9	270.9	45.6	45.6	-0.7	340.1	999.9	99.9	999.9	53.5	87.
42.3	112.6	13339.7	175.0	-64.7	99.9	271.8	46.5	46.5	-1.5	343.2	999.9	99.9	999.9	60.5	87.
45.5	119.0	13976.1	150.0	-64.4	99.9	267.4	22.4	22.4	1.0	359.2	999.9	99.9	999.9	67.8	84.
49.4	125.3	15070.1	125.0	-65.5	99.9	265.0	35.5	35.5	0.6	376.5	999.9	99.9	999.9	75.8	84.
53.6	132.7	16454.5	100.0	-64.7	99.9	263.2	14.2	13.8	-3.2	402.7	999.9	99.9	999.9	80.4	84.
58.6	141.7	18177.7	75.0	-68.5	99.9	268.4	13.4	13.4	0.1	427.3	999.9	99.9	999.9	84.0	84.
60.6	150.3	20679.6	50.0	-58.3	99.9	311.2	8.3	6.3	-5.5	506.2	999.9	99.9	999.9	86.4	84.
60.1	160.0	25092.0	25.0	-53.9	99.9	40.5	3.9	-2.5	-2.9	646.2	999.9	99.9	999.9	85.8	91.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

0 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 265
MIDLAND, TEX

25 APRIL 1975
017 GMT

TIME MIN	CHCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DU	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTO GM/KG	PH PCT	RANGE KM	AZ DU
0.0	11.6	873.0	911.6	15.4	-0.4	140.3	3.1	-2.0	2.4	256.2	308.3	4.1	34.0	0.3	0
0.9	96.9	99.9	1006.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	94.3	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	55.3	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	50.3	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	12.6	99.9	900.0	26.4	-2.0	99.9	99.9	99.9	99.9	309.2	320.2	3.7	15.3	99.9	99.9
1.3	14.7	1232.6	875.0	25.9	-2.3	99.9	99.9	99.9	99.9	311.3	323.3	3.7	15.4	99.9	99.9
2.2	14.6	1481.4	850.0	24.1	-3.6	222.9	3.3	2.2	2.4	311.6	322.3	3.4	15.5	0.1	3.4
3.2	18.9	1745.7	825.0	21.8	-5.4	235.4	4.4	3.6	2.5	312.2	320.7	2.8	15.6	0.1	1.1
4.1	20.9	2011.0	800.0	19.4	-7.1	270.5	5.5	4.6	3.0	312.2	320.7	2.8	15.6	0.1	1.1
5.0	25.3	2242.4	775.0	16.8	-8.2	247.2	6.8	6.3	2.6	312.2	320.3	2.7	17.2	1.0	4.4
5.8	25.5	2501.2	750.0	14.3	-10.2	241.4	8.5	7.5	4.1	312.4	319.6	2.3	17.3	1.3	4.4
6.8	27.8	2444.8	725.0	12.4	-11.5	231.1	13.1	10.2	8.2	313.4	320.2	2.2	17.6	2.4	4.4
7.9	29.2	3137.4	700.0	6.9	-13.1	233.1	13.7	10.9	8.2	313.7	319.9	2.0	18.3	2.4	4.4
8.9	24.7	3437.8	675.0	7.2	-17.2	241.5	10.8	9.5	5.2	313.9	319.6	1.5	18.6	3.7	4.4
10.0	35.3	3746.9	650.0	5.1	-19.0	249.2	9.5	8.9	3.4	314.8	319.1	1.3	18.5	4.3	4.4
11.2	37.7	4055.4	625.0	2.4	-17.5	259.4	11.4	11.2	2.1	315.4	320.3	1.5	21.3	4.3	4.4
12.4	40.3	4392.1	600.0	-1.1	-18.3	264.7	13.6	13.5	1.3	315.0	319.8	1.5	25.5	5.7	4.4
13.6	42.9	4730.3	575.0	-4.5	-20.1	265.8	15.6	15.5	1.2	314.9	319.2	1.3	26.3	7.4	4.4
14.9	45.8	5086.3	550.0	-4.9	-24.6	276.0	12.0	11.9	-1.3	314.3	320.5	0.6	13.5	7.4	4.4
16.1	48.7	5444.1	525.0	-7.7	-32.1	281.6	11.5	11.3	-2.3	319.2	321.2	0.6	14.5	7.4	4.4
17.7	51.5	5821.6	500.0	-10.0	-33.8	298.5	13.2	12.5	-4.2	320.8	322.6	0.4	12.2	4.5	7.4
19.0	54.6	6215.4	475.0	-12.6	-35.7	241.0	12.9	12.6	-2.6	322.3	323.7	0.4	12.4	10.4	7.4
20.4	57.6	6645.1	450.0	-16.2	-39.1	282.1	14.3	14.0	-3.0	322.8	324.0	0.3	13.0	11.3	6.4
21.7	60.9	7052.2	425.0	-19.9	-40.4	277.7	15.2	15.0	-2.1	323.4	324.4	0.3	14.1	14.5	5.4
23.3	64.6	7426.6	400.0	-23.7	-43.3	272.3	16.8	16.8	-0.7	324.2	324.9	0.2	14.4	13.3	4.4
24.9	67.7	7507.0	375.0	-27.1	-44.8	269.4	19.5	19.5	0.0	325.6	324.3	0.2	14.8	15.7	4.4
26.8	71.3	8400.0	350.0	-31.0	-48.6	274.4	21.8	21.7	-1.8	326.8	327.3	0.1	15.7	18.1	4.4
28.0	75.3	8940.9	325.0	-35.3	-51.0	270.6	24.0	24.0	-0.2	329.0	327.4	0.1	16.0	21.0	4.4
30.9	79.3	9514.7	300.0	-38.7	-54.7	269.7	30.4	30.2	0.5	330.8	329.4	0.1	16.0	24.0	4.4
33.1	83.6	10126.8	275.0	-42.4	-59.4	270.7	34.5	34.5	-0.4	332.4	329.4	0.1	16.0	28.4	4.4
35.8	88.0	11050.9	250.0	-46.0	-64.0	266.1	35.7	35.7	-2.5	334.7	329.4	0.1	16.0	28.4	4.4
38.5	93.0	11446.0	225.0	-54.3	-69.9	263.4	37.1	36.9	4.3	335.2	329.4	0.1	16.0	34.1	4.4
41.0	98.2	12186.7	200.0	-61.2	-74.9	263.9	36.6	36.4	2.9	335.9	329.4	0.1	16.0	34.1	4.4
43.3	104.0	13002.3	175.0	-68.2	-79.9	270.0	37.4	37.4	-0.0	337.4	329.4	0.1	16.0	45.5	4.4
46.0	110.3	13942.1	150.0	-64.8	-79.9	274.6	30.7	30.6	-2.5	358.5	329.4	0.1	16.0	50.7	4.4
50.2	117.5	15054.5	125.0	-65.4	-79.9	255.1	25.2	24.3	5.5	376.6	329.4	0.1	16.0	62.3	4.4
55.4	126.0	16353.7	100.0	-68.9	-79.9	273.2	25.9	25.0	-1.4	394.7	329.4	0.1	16.0	70.4	4.4
62.1	136.0	19126.1	75.0	-65.8	-79.9	232.2	8.6	5.2	4.0	424.7	329.4	0.1	16.0	76.4	4.4
72.7	146.0	20455.4	50.0	-58.2	-79.9	323.8	8.6	5.1	-7.0	566.3	329.4	0.1	16.0	80.1	4.4
81.3	157.3	25016.9	25.0	-54.0	-79.9	8.2	4.7	-0.7	-4.6	629.8	329.4	0.1	16.0	80.1	4.4

0 PV SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 304
WATTERS, NC27 APRIL 1975
515 GMT

TIME MIN	CHCT	HEIGHT GFM	PRES IN	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MR RTO CM/SEC	RM PCT	RANGE NM	AZ DEG
0.0	0.3	4.0	1017.3	20.3	10.3	230.0	7.2	5.5	4.0	233.8	323.0	11.0	70.0	0.0	0.0
0.5	9.7	155.1	1000.0	20.2	10.0	222.0	23.0	15.9	17.0	234.0	323.0	10.0	72.2	0.0	4.0
1.0	1.0	373.0	975.0	19.0	10.0	220.0	23.0	10.3	10.3	235.7	323.2	10.0	72.9	1.5	4.0
2.0	6.0	556.0	950.0	17.2	15.5	220.0	25.7	17.0	10.0	235.0	318.2	0.0	60.0	2.0	4.0
3.0	11.0	823.0	925.0	16.0	7.0	220.1	25.7	19.0	10.0	236.0	315.1	0.0	55.1	3.0	4.0
3.5	10.2	1026.0	900.0	15.5	-0.0	230.0	23.0	20.0	12.5	236.0	309.0	4.0	32.0	4.0	4.0
4.0	10.2	1295.2	875.0	15.2	3.1	245.2	22.0	20.5	7.0	300.3	315.0	5.5	30.1	5.5	4.0
5.0	10.5	1540.1	850.0	13.3	5.1	250.7	20.2	19.9	3.0	300.5	319.1	6.0	50.2	6.0	5.0
5.0	10.9	1701.2	825.0	12.2	6.0	265.0	20.0	20.7	3.0	302.5	322.0	7.3	50.2	7.0	5.0
6.0	23.2	2000.3	800.0	9.7	6.7	267.2	21.0	21.0	1.0	302.5	323.7	7.7	81.0	8.5	0.0
7.0	25.3	2311.0	775.0	7.0	6.5	272.5	19.2	19.1	-1.2	303.0	320.9	7.9	92.9	9.0	0.0
8.0	27.0	2581.0	750.0	4.0	4.5	270.1	17.0	17.6	-1.3	300.0	320.2	7.1	107.0	10.1	0.0
9.0	30.6	2959.0	725.0	4.7	1.0	265.7	15.0	15.0	0.1	305.0	322.3	6.0	80.0	11.0	0.0
10.1	32.2	3105.0	700.0	4.0	-0.0	245.2	12.0	12.0	1.0	307.0	322.3	5.2	71.2	11.0	0.0
11.0	30.0	3405.7	675.0	2.0	-3.0	260.3	13.1	12.9	1.0	308.0	319.0	3.0	50.1	12.0	0.0
12.0	30.4	3700.0	650.0	0.3	-11.3	250.0	15.3	10.8	3.7	305.0	317.2	2.5	41.0	13.1	71.0
13.0	01.1	4050.1	625.0	-0.7	-25.1	251.7	17.0	10.5	5.0	311.7	310.3	0.0	13.0	14.2	71.0
14.0	03.9	4302.0	600.0	-3.3	-27.0	250.7	20.0	19.5	4.0	312.3	310.0	0.7	13.0	15.3	71.0
15.0	07.0	4717.3	575.0	-6.1	-12.5	261.5	19.1	19.1	2.0	313.1	321.3	1.4	30.1	16.6	72.0
16.1	06.0	5060.0	550.0	-8.0	-20.2	260.0	10.0	10.0	2.0	310.7	319.2	1.0	30.1	17.7	72.0
17.0	03.3	5323.0	525.0	-11.0	-21.2	259.3	17.7	17.3	3.3	310.0	318.0	1.3	40.0	18.0	73.0
18.3	00.3	5556.0	500.0	-12.0	-27.7	243.7	17.0	17.7	2.0	317.0	317.5	0.0	10.0	19.0	73.0
19.5	00.4	6100.0	475.0	-15.0	-37.5	272.9	10.0	10.0	-0.0	319.0	319.5	0.0	1.0	20.0	74.0
20.0	02.0	6593.7	450.0	-17.7	-50.7	277.0	10.0	10.0	-2.1	320.0	321.0	0.0	1.0	22.0	75.0
20.3	00.1	7017.9	425.0	-21.0	-50.0	272.0	10.2	10.2	-0.7	321.5	321.0	0.0	2.0	23.0	76.0
23.0	00.9	7601.5	400.0	-25.1	-50.0	260.0	17.0	17.0	0.0	322.2	322.0	0.0	2.0	25.0	77.0
25.0	00.0	7927.3	375.0	-28.5	-60.0	270.2	10.0	10.0	-0.0	323.0	323.0	0.0	2.0	26.0	78.0
26.7	00.7	8017.0	350.0	-32.3	-62.5	267.0	10.0	10.0	-0.0	323.1	323.2	0.0	3.0	28.0	78.0
28.0	01.7	8300.0	325.0	-36.3	-60.0	263.0	17.0	17.5	1.0	320.0	320.7	0.0	3.0	30.0	79.0
30.3	02.0	8600.0	300.0	-40.5	-60.0	255.0	17.0	17.7	1.0	320.0	320.0	0.0	3.0	30.0	79.0
32.1	00.0	1072.0	275.0	-45.0	-60.0	240.0	10.0	10.0	7.0	325.3	325.3	0.0	3.0	30.0	79.0
30.1	00.3	10700.2	250.0	-51.3	-60.0	240.0	10.0	10.0	7.0	325.3	325.3	0.0	3.0	30.0	79.0
30.2	10.0	11375.3	225.0	-57.3	-60.0	243.5	17.0	15.2	7.0	320.7	320.7	0.0	3.0	30.0	79.0
30.4	10.0	12111.0	200.0	-62.0	-60.0	247.0	10.0	10.0	2.0	321.3	321.3	0.0	3.0	30.0	79.0
00.7	11.0	12920.5	175.0	-66.0	-60.0	275.0	21.0	21.0	-2.0	320.0	320.0	0.0	3.0	30.0	79.0
03.0	11.0	13000.0	150.0	-61.0	-60.0	280.1	23.0	23.0	-0.2	320.0	320.0	0.0	3.0	30.0	79.0
07.0	12.0	14100.0	125.0	-60.0	-60.0	280.1	31.0	29.3	-10.1	303.7	303.7	0.0	3.0	30.0	79.0
08.0	12.0	16372.0	100.0	-60.0	-60.0	270.5	10.2	17.0	-3.0	432.0	432.0	0.0	3.0	30.0	79.0
09.7	10.7	18119.0	75.0	-60.0	-60.0	257.1	0.7	0.5	1.0	432.0	432.0	0.0	3.0	30.0	79.0
00.0	10.0	20000.1	50.0	-61.1	-60.0	50.0	2.0	-2.0	-1.0	430.5	430.5	0.0	3.0	30.0	79.0
00.0	10.7	20002.1	25.0	-61.5	-60.0	90.0	0.5	-0.5	0.0	431.3	431.3	0.0	3.0	30.0	79.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE ON TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 0 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 311
ATHENS, GA25 APRIL 1975
600 GMT

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR LG	SPEED M/SEC	U COMP M/SEC	" COMP M/SEC	P. T DG	E PCT Y DG K	MX RTO GM/KG	RH PCT	RANGL KM	AZ DG
0.3	7.1	240.0	987.5	18.9	16.7	210.0	3.1	1.5	2.7	294.7	326.5	12.2	87.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	8.3	355.7	975.0	18.5	15.6	241.3	15.3	13.9	6.4	293.3	325.5	11.6	83.6	0.2	72.
1.2	10.5	579.6	957.0	19.0	15.9	242.6	17.1	15.2	7.9	294.1	330.0	12.1	82.0	0.4	54.
2.1	12.7	804.9	925.0	17.5	15.1	244.8	18.0	15.3	7.7	294.7	334.9	11.8	85.9	1.9	54.
2.9	15.3	1043.1	900.7	16.4	13.2	242.6	16.1	15.4	4.8	295.8	328.4	10.7	81.2	2.7	61.
3.7	17.1	1283.6	875.0	15.0	10.0	250.5	12.7	12.4	3.0	301.5	325.7	8.9	67.8	3.4	67.
4.6	19.5	1529.9	850.0	14.4	8.7	251.8	11.3	10.8	3.5	302.3	325.3	8.4	68.9	4.0	60.
5.5	21.9	1781.7	825.0	12.6	8.1	251.8	8.8	8.4	2.8	303.0	325.7	8.3	74.0	4.6	67.
6.3	24.3	2039.6	800.0	10.4	7.5	251.6	6.4	7.9	2.3	303.4	325.9	8.2	82.0	5.1	67.
7.2	26.6	2303.1	775.0	8.6	6.7	250.9	7.4	7.2	1.9	304.1	326.3	8.0	87.0	5.5	64.
8.6	29.2	2575.2	750.0	8.1	1.2	281.2	5.3	5.2	-1.0	305.1	322.0	5.6	61.7	5.9	50.
9.5	31.9	2854.6	725.0	6.3	-1.4	280.8	5.2	4.9	-1.7	307.0	320.8	4.8	57.9	6.1	71.
10.5	34.4	3142.4	700.0	6.2	-9.1	281.3	8.4	8.3	-1.7	309.7	317.9	2.7	32.0	6.4	77.
11.6	37.0	3439.6	675.0	5.2	-18.1	278.7	12.6	12.4	-1.9	311.6	315.9	1.4	16.6	7.1	75.
12.6	39.8	3746.2	650.0	2.6	-20.1	275.2	13.7	13.6	-1.2	315.1	315.9	1.2	16.8	7.2	77.
13.7	42.4	4061.8	625.0	0.2	-22.0	274.3	13.9	13.8	-1.5	318.8	316.2	1.0	17.0	8.9	79.
15.0	45.3	4387.7	600.0	-1.8	-23.5	284.7	14.7	14.2	-3.7	314.1	317.2	1.0	17.1	9.7	81.
16.2	48.3	4777.5	575.0	-4.5	-22.6	287.1	16.6	15.9	-5.5	314.8	318.3	.1	22.6	10.8	84.
17.5	51.0	5072.3	550.0	-7.8	-23.5	288.2	18.3	17.4	-5.7	314.9	318.2	1.0	26.9	12.0	87.
18.7	53.1	5431.9	525.0	-10.7	-33.6	288.3	16.1	15.3	-5.1	315.6	317.0	0.4	13.2	13.2	84.
20.1	57.1	5806.1	500.0	-12.6	-35.0	287.5	14.1	13.4	-4.2	317.7	319.0	0.4	13.3	14.4	90.
21.4	60.4	6197.2	475.0	-13.9	-36.0	283.5	14.3	13.9	-3.3	320.7	322.0	0.4	13.4	15.5	91.
22.9	63.9	6605.3	450.0	-17.0	-38.3	277.8	12.8	12.7	-1.5	321.8	322.9	0.3	13.7	16.6	94.
24.3	67.1	7070.8	425.0	-21.0	-41.3	272.4	13.0	13.0	-0.5	322.0	322.9	0.2	14.0	17.4	92.
25.9	70.6	7475.6	400.0	-24.7	-44.2	269.5	14.6	14.6	0.1	322.8	323.5	0.2	14.3	19.0	92.
27.3	74.3	7941.3	375.0	-28.9	-47.4	268.8	18.1	18.1	0.4	323.3	323.9	0.1	14.7	20.5	92.
29.0	78.2	8430.5	350.0	-33.3	-50.8	271.8	18.8	18.8	-0.6	323.8	324.2	0.1	15.1	22.2	94.
30.7	82.0	8947.1	325.0	-37.1	-53.9	276.0	21.5	20.8	-2.2	325.4	325.7	0.1	15.4	24.3	92.
32.7	86.3	9496.4	300.0	-40.9	-56.9	280.9	21.2	20.8	-4.7	327.7	327.9	99.9	99.9	26.9	93.
34.8	90.5	10082.8	275.0	-45.3	-59.9	284.9	24.4	21.6	-5.7	329.7	329.9	99.9	99.9	29.3	94.
37.2	95.3	10712.4	250.0	-50.3	-59.9	293.7	25.9	23.8	-10.4	331.3	331.9	99.9	99.9	33.1	95.
39.5	100.2	11391.0	225.0	-56.1	-59.9	299.4	24.3	21.3	-11.6	335.5	335.9	99.9	99.9	36.3	97.
42.0	105.4	12131.0	200.0	-61.3	-59.9	303.9	30.6	25.4	-17.1	335.7	335.9	99.9	99.9	40.1	99.
45.1	111.2	12951.6	175.0	-65.2	-59.9	308.9	30.2	23.5	-18.9	342.4	342.4	99.9	99.9	45.2	103.
48.6	117.5	13897.3	150.0	-63.6	-59.9	284.0	30.1	29.1	-7.3	360.5	360.5	99.9	99.9	51.2	105.
52.7	124.8	15014.9	125.0	-61.9	-59.9	275.7	29.3	28.2	-2.9	380.0	380.0	99.9	99.9	58.0	104.
57.2	132.7	16368.9	100.0	-65.9	-59.9	258.9	13.7	13.2	3.6	400.5	400.5	99.9	99.9	63.3	103.
63.0	141.3	18125.4	75.0	-68.5	-59.9	281.3	8.3	8.2	-1.6	420.3	420.3	99.9	99.9	67.4	123.
71.1	151.0	20603.7	50.0	-62.5	-59.9	26.0	7.4	7.3	-1.3	490.3	490.3	99.9	99.9	69.4	103.
83.5	161.9	24975.1	25.0	-54.2	-59.9	80.8	-4.4	-4.3	-0.7	620.0	620.0	99.9	99.9	73.2	174.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC

25 APRIL 1975
015 GMT

147 55. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCNP M/SEC	PCT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.9	275.0	982.8	21.1	16.5	210.0	5.1	2.5	4.4	297.3	329.3	12.1	75.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	210.0	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.1	8.6	344.1	975.0	20.5	12.9	226.4	11.9	9.0	7.7	297.1	322.8	9.7	61.9	0.3	41.
1.0	10.8	562.3	950.0	19.0	12.7	236.1	14.6	12.1	8.1	297.8	323.8	9.8	66.6	0.7	47.
1.9	13.2	797.1	925.0	17.1	12.4	246.1	18.5	16.9	7.5	298.1	324.4	9.8	73.6	1.5	55.
2.7	15.5	1031.3	900.0	16.4	11.5	256.2	20.7	19.9	5.6	299.7	325.4	9.5	72.6	2.5	61.
3.4	17.9	1271.0	875.0	15.4	10.0	258.5	19.1	15.8	3.2	300.9	325.1	8.9	70.5	3.3	55.
4.3	20.3	1516.5	850.0	13.5	9.8	268.1	13.6	13.6	0.4	301.9	324.3	8.4	73.2	4.0	68.
5.1	22.7	1767.6	825.0	11.5	8.6	278.2	18.6	16.4	-2.6	302.6	323.6	7.7	80.6	5.5	77.
6.0	25.3	2024.7	800.0	9.8	6.6	290.6	17.9	15.9	-8.4	303.6	320.8	6.1	88.4	6.3	83.
7.0	27.9	2288.2	775.0	8.4	2.0	297.8	18.3	15.6	-5.6	304.1	317.0	5.2	85.4	7.2	88.
7.9	30.4	2555.5	750.0	6.3	0.3	301.8	19.8	16.0	-9.9	304.7	318.5	4.8	68.0	8.1	72.
8.9	33.2	2835.8	725.0	4.2	-1.2	301.8	18.7	16.3	-9.1	305.3	321.9	5.9	94.0	9.0	90.
9.9	35.8	3120.4	700.0	1.8	0.9	299.2	19.2	16.8	-9.4	306.2	321.7	5.4	96.3	10.0	74.
10.9	38.5	3413.1	675.0	-0.1	-0.6	299.3	19.6	16.4	-10.8	307.8	308.4	0.2	3.1	11.1	10.
11.9	41.3	3715.0	650.0	-1.0	-40.6	303.3	19.6	15.6	-8.6	309.4	314.9	1.8	36.1	12.3	123.
12.9	44.2	4020.8	625.0	-2.9	-16.0	289.9	17.8	14.5	-5.1	311.5	311.7	0.0	1.0	13.4	104.
13.0	47.3	4345.7	600.0	-4.0	-52.3	289.4	15.4	14.5	-4.7	316.8	317.1	0.1	1.0	14.3	104.
14.0	50.3	4686.5	575.0	-2.7	-51.6	282.1	15.2	13.8	-6.5	318.0	318.2	0.1	1.1	15.2	104.
15.0	53.3	5037.1	550.0	-5.1	-52.1	293.2	15.2	13.6	-6.8	319.2	317.4	0.1	1.4	16.4	175.
16.1	56.3	5400.7	525.0	-7.7	-51.9	293.4	17.0	13.6	-7.5	319.4	319.7	0.1	1.4	17.6	150.
17.3	59.3	5777.5	500.0	-11.1	-52.3	290.7	21.4	20.0	-7.5	320.0	323.2	0.1	2.1	19.0	104.
18.4	62.3	6169.4	475.0	-14.5	-53.0	290.8	21.4	19.6	-6.4	320.9	321.1	0.1	2.9	20.5	170.
19.4	65.3	6575.2	450.0	-17.8	-54.0	286.0	20.6	19.6	-6.4	321.4	321.6	0.0	2.9	21.5	170.
20.6	68.3	6949.4	425.0	-21.4	-55.4	283.0	19.2	18.7	-6.3	321.8	323.0	0.0	3.2	23.3	104.
21.7	70.0	7343.6	400.0	-24.7	-56.8	280.0	20.0	18.7	-7.1	323.5	323.7	0.0	3.7	24.8	104.
22.9	73.5	7799.9	375.0	-28.7	-58.8	290.8	17.9	16.8	-6.4	324.6	324.7	0.0	4.1	26.5	104.
24.2	77.5	8399.4	350.0	-32.7	-60.9	290.8	21.4	21.0	-3.7	326.5	326.6	0.0	4.5	28.6	104.
25.8	81.3	8917.6	325.0	-36.4	-62.9	280.0	21.8	21.8	0.0	327.9	327.9	99.9	999.9	30.6	104.
27.4	85.5	9467.2	300.0	-40.8	-64.9	269.9	21.8	21.8	0.0	328.5	328.5	99.9	999.9	32.8	104.
29.0	89.9	10053.5	275.0	-45.4	-66.9	267.0	26.8	26.7	1.4	329.5	329.5	99.9	999.9	35.4	104.
30.3	94.6	10682.5	250.0	-50.4	-68.9	263.3	24.6	24.5	2.3	331.1	331.1	99.9	999.9	37.6	104.
32.5	99.9	11363.3	225.0	-55.1	-69.9	260.1	28.3	27.9	4.9	334.1	334.1	99.9	999.9	41.3	104.
34.2	104.5	12103.8	200.0	-61.1	-69.9	267.7	28.7	28.6	1.1	336.1	336.1	99.9	999.9	45.5	99.
36.2	110.2	12920.7	175.0	-65.7	-69.9	283.8	27.8	27.0	-0.6	341.5	341.5	99.9	999.9	49.9	104.
38.9	116.3	13861.3	150.0	-63.4	-69.9	284.7	29.5	28.5	-7.5	340.9	340.9	99.9	999.9	56.1	104.
41.7	123.0	14987.0	125.0	-62.1	-69.9	279.5	28.8	28.4	-4.7	342.6	342.6	99.9	999.9	63.1	104.
45.5	130.5	16370.0	100.0	-63.3	-69.9	276.0	19.0	18.9	-2.0	405.5	405.5	99.9	999.9	66.8	104.
50.2	134.3	18119.0	75.0	-65.8	-69.9	277.6	5.9	5.9	-0.8	435.0	435.0	99.9	999.9	66.8	104.
56.8	146.3	199.9	50.0	-69.9	-69.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	69.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 327
NASHVILLE, TENN25 APRIL 1975
520 GMT

142 76.0 U

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POI DG K	MAX WIND GM/KG	RM PCT	RANJF KM	AZ DG
7.0	5.5	147.0	949.4	21.0	17.6	180.0	5.1	0.0	5.1	290.8	330.7	13.0	81.0	0.0	0
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	6.7	308.0	975.0	22.6	17.7	200.3	15.2	5.3	14.2	299.7	336.8	13.3	74.1	0.4	35.4
1.2	8.9	534.4	950.0	21.8	17.1	207.4	17.5	8.1	15.5	301.1	335.9	13.1	74.7	0.9	1.4
1.9	10.3	765.9	925.0	20.6	15.7	220.7	21.2	13.9	16.1	302.1	335.1	12.3	73.5	1.7	23.4
2.7	13.2	1002.9	900.0	19.1	14.0	229.3	22.3	16.9	14.5	302.8	334.6	11.8	75.2	2.7	32.4
3.5	15.4	1245.1	875.0	16.9	14.5	230.9	22.2	17.2	14.0	303.0	335.3	12.0	85.4	3.8	37.4
4.3	17.6	1452.1	850.0	14.7	13.5	232.2	22.2	17.5	13.6	303.1	334.3	11.5	52.4	4.8	40.4
5.1	20.1	1744.5	825.0	12.7	11.5	232.6	19.6	15.6	11.9	303.4	331.9	10.4	92.6	5.9	43.4
5.9	22.3	2003.1	800.0	11.2	9.9	236.3	17.0	14.2	9.4	304.3	332.8	9.7	91.9	6.9	46.4
6.5	24.9	2246.1	775.0	9.2	8.0	233.0	14.4	11.5	8.7	304.8	329.0	8.7	91.7	7.5	49.4
7.6	27.1	2539.8	750.0	7.6	6.4	230.2	12.9	9.9	8.3	305.9	324.5	8.1	91.7	8.2	52.4
8.7	29.7	2819.2	725.0	6.0	2.9	236.4	12.6	10.5	6.9	306.8	325.3	6.5	60.3	8.9	55.4
9.7	32.3	3106.4	700.0	5.2	-5.0	245.0	15.3	13.9	6.3	308.8	320.0	3.6	48.1	9.4	58.4
10.7	35.1	3403.1	675.0	4.6	-15.8	249.4	18.0	16.9	6.4	311.0	315.2	1.7	21.1	10.7	61.4
11.8	37.7	3705.1	650.0	2.1	-21.1	252.3	20.9	19.9	6.5	311.5	315.0	1.1	14.0	11.2	64.4
12.8	40.5	4024.3	625.0	-0.2	-18.0	252.6	22.9	21.9	6.9	312.3	317.0	1.5	26.7	13.1	67.4
13.8	43.3	4349.2	600.0	-2.9	-18.5	250.5	25.3	23.9	8.4	312.9	317.6	1.5	28.9	14.3	70.4
14.0	46.3	4685.2	575.0	-4.9	-22.2	245.4	28.5	26.8	9.8	314.4	318.0	1.1	24.3	15.4	73.4
14.1	49.4	5023.1	550.0	-7.7	-17.8	251.1	29.4	27.8	9.5	315.2	320.6	1.7	43.4	16.4	76.4
17.4	52.4	5393.6	525.0	-10.2	-18.0	259.5	29.1	28.7	5.3	316.3	321.6	1.7	49.4	20.5	79.4
18.7	55.6	5767.9	500.0	-12.3	-32.7	261.2	29.6	29.3	4.5	316.0	321.6	0.5	17.0	22.6	82.4
19.9	58.9	6154.2	475.0	-14.2	-37.3	262.0	26.3	26.1	3.6	320.4	321.6	0.3	12.2	24.7	85.4
21.4	62.4	6556.3	450.0	-17.0	-60.7	261.7	27.6	27.3	4.0	321.8	321.8	0.0	1.0	26.4	88.4
22.4	66.0	6991.4	425.0	-20.3	-56.6	259.0	30.0	29.5	5.7	322.9	323.1	0.0	2.3	28.5	91.4
24.2	69.8	7437.5	400.0	-33.7	-52.2	261.3	33.4	33.0	5.0	324.2	324.5	0.1	5.5	31.9	94.4
25.7	73.5	7906.4	375.0	-26.7	-55.7	273.5	29.4	29.3	-1.6	326.2	325.5	0.1	6.6	34.0	97.4
27.1	77.7	8400.2	350.0	-30.8	-42.2	276.8	32.9	32.7	-3.9	327.2	328.1	0.3	31.2	36.3	100.4
28.8	82.3	8921.7	325.0	-35.3	-47.5	280.4	30.5	29.9	-5.7	327.9	328.5	0.2	27.4	38.4	103.4
30.4	86.4	9474.0	300.0	-40.2	-49.9	277.3	32.2	32.0	-4.1	328.6	329.9	99.9	99.9	42.9	106.4
32.1	91.2	10061.0	275.0	-45.5	-69.9	276.4	30.1	29.9	-3.6	329.3	329.9	99.9	99.9	45.4	109.4
34.3	96.4	10690.7	250.0	-50.2	-99.9	281.0	33.0	32.4	-6.3	331.4	329.9	99.9	99.9	48.1	112.4
36.3	102.3	11369.0	225.0	-56.3	-99.9	280.4	41.7	41.0	-7.7	332.2	329.9	99.9	99.9	53.5	115.4
38.2	108.0	12104.9	200.0	-63.2	-99.9	288.0	44.7	42.5	-13.8	332.6	329.9	99.9	99.9	58.1	118.4
40.2	114.5	12914.1	175.0	-65.5	-99.9	291.3	33.9	31.5	-12.3	341.8	329.9	99.9	99.9	62.3	121.4
43.2	121.7	13847.8	150.0	-66.1	-99.9	264.3	34.1	34.1	1.0	350.3	329.9	99.9	99.9	67.7	124.4
47.3	125.3	14946.2	125.0	-59.5	-99.9	287.0	19.8	18.9	-5.8	387.3	329.9	99.9	99.9	75.1	127.4
52.3	128.0	16358.5	100.0	-63.2	-99.9	258.8	23.2	22.8	4.5	405.5	329.9	99.9	99.9	81.2	130.4
99.9	99.9	99.9	75.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	-99.9	-99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

ORIGINAL PAGE IS
OF POOR QUALITY

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 • BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 • BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 34C
LITTLE ROCK, ARK

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCHP M/SEC	POT Y DG K	E POT Y DG K	MR RTO GM/KG	PH PCT	RANGE KM	AZ DG
0-0	5-9	79-0	1002-7	24-4	18-3	200-0	5-1	1-7	4-8	299-1	334-5	13-4	69-0	0-7	0-
0-1	6-1	102-9	1000-0	25-0	18-8	203-0	18-5	7-2	17-0	300-0	336-7	13-8	68-4	0-1	20-
0-8	8-5	325-4	975-0	23-8	18-1	204-2	17-4	7-1	15-9	301-0	337-2	13-6	70-7	0-4	24-
1-5	10-3	552-5	950-0	21-7	17-5	210-5	17-0	8-6	14-7	301-0	336-8	13-4	77-2	1-2	25-
2-4	13-3	784-1	925-0	20-3	17-3	222-6	20-0	13-6	14-7	301-9	334-3	13-6	82-8	2-1	30-
3-2	15-7	1020-9	900-0	18-8	16-0	230-2	21-3	16-4	13-6	302-6	337-2	12-8	83-7	3-1	30-
4-0	18-2	1252-9	875-0	17-4	14-7	235-8	19-7	16-3	11-1	303-5	336-3	12-1	83-7	4-0	40-
4-9	20-4	1510-7	850-0	15-9	12-2	247-8	17-4	16-1	6-6	304-3	333-3	10-6	78-7	5-7	44-
5-9	23-2	1764-2	825-0	14-3	10-9	259-8	16-0	15-8	2-8	305-0	332-6	10-0	80-2	5-9	44-
6-8	25-8	2023-9	800-0	12-8	8-4	267-3	17-5	17-4	0-8	305-9	330-1	8-7	74-7	6-7	54-
7-9	28-4	2250-4	775-0	11-0	6-4	276-7	16-9	16-8	-2-7	306-6	328-6	7-8	73-3	7-4	54-
8-7	31-2	2563-7	750-0	9-5	4-1	278-8	17-5	17-3	-2-7	307-8	327-3	6-9	69-4	8-2	63-
9-7	34-1	2843-5	725-0	6-8	0-7	271-2	18-0	18-0	-0-4	307-7	323-7	5-6	65-1	9-1	67-
10-6	36-3	3131-5	700-0	4-4	-1-4	254-1	19-3	18-5	5-3	308-0	322-3	4-9	65-7	12-0	64-
11-4	38-3	3427-4	675-0	3-5	-6-1	241-4	20-9	18-3	10-0	310-1	321-0	3-6	45-2	11-0	64-
12-3	42-5	3732-7	650-0	1-5	-7-7	233-7	23-8	19-2	14-1	311-1	321-0	3-3	50-2	12-1	67-
13-3	45-6	4047-6	625-0	-0-7	-9-7	232-1	30-3	23-9	18-6	312-0	321-0	2-9	50-5	13-6	64-
14-1	48-6	4372-3	600-0	-3-2	-14-4	233-2	32-5	26-0	19-5	312-6	319-1	2-1	41-5	15-2	64-
14-9	51-6	4707-3	575-0	-6-2	-15-4	235-2	31-4	25-7	17-9	313-0	319-2	2-0	48-1	16-7	61-
15-8	55-7	5053-0	550-0	-9-7	-16-5	236-9	32-3	27-1	17-6	312-7	318-7	1-9	57-5	18-4	61-
16-6	58-1	5411-0	525-0	-10-8	-18-8	235-3	33-7	27-7	19-2	315-9	325-7	3-2	99-6	20-1	62-
17-9	61-6	5786-3	500-0	-12-0	-20-1	236-7	30-7	25-1	17-7	318-7	328-2	3-0	99-4	22-3	61-
18-0	65-1	6176-8	475-0	-15-5	-22-4	237-5	33-5	29-3	17-7	319-1	326-3	2-3	94-9	24-6	61-
20-6	68-7	6582-2	450-0	-18-9	-20-4	234-3	40-5	34-5	21-3	319-6	323-0	1-7	88-3	28-1	61-
24-0	72-3	7005-6	425-0	-21-1	-23-5	231-7	31-3	34-6	19-4	322-1	326-5	1-3	80-7	31-3	60-
23-5	76-3	7451-8	400-0	-24-4	-27-1	236-9	33-1	27-8	18-1	323-3	326-8	1-0	78-2	33-8	54-
25-0	80-4	7319-2	375-0	-27-4	-29-8	250-7	39-3	37-1	13-0	325-4	328-3	0-9	79-8	37-5	61-
26-3	84-5	8414-4	350-0	-29-6	-31-9	264-7	33-5	37-4	3-1	328-9	331-5	0-7	79-5	40-2	61-
27-8	88-9	8939-1	325-0	-33-6	-36-6	253-5	18-0	16-5	-7-2	330-3	332-1	0-5	74-5	42-6	62-
29-6	93-5	9405-5	300-0	-38-5	-42-0	278-4	20-1	19-9	-2-9	331-1	332-2	0-3	69-3	43-4	62-
31-3	98-2	10087-6	275-0	-43-2	-49-9	283-6	26-9	26-2	-6-3	332-7	999-9	99-9	99-9	44-8	67-
33-3	103-0	10721-8	250-0	-48-6	-54-8	277-2	23-9	23-7	-3-0	333-8	999-9	99-9	99-9	47-2	64-
35-0	108-5	11405-0	225-0	-54-8	-61-9	275-4	26-0	25-9	-2-4	334-5	999-9	99-9	99-9	50-1	76-
37-2	114-3	12145-8	200-0	-61-9	-69-9	272-2	29-2	29-2	-1-1	334-8	999-9	99-9	99-9	53-5	71-
40-1	120-5	12961-4	175-0	-67-1	-77-1	270-7	31-8	31-8	-0-4	339-2	999-9	99-9	99-9	58-4	73-
43-1	127-3	13889-8	150-0	-64-3	-84-3	275-7	42-3	42-0	-4-2	356-4	999-9	99-9	99-9	64-6	75-
47-0	134-3	15026-4	125-0	-60-0	-92-9	286-0	20-3	19-0	-5-4	386-3	999-9	99-9	99-9	71-7	78-
51-9	141-0	16356-0	100-0	-65-7	-99-9	255-7	19-2	18-6	-4-7	400-9	999-9	99-9	99-9	76-3	74-
58-0	148-3	18135-2	75-0	-69-8	-99-9	277-9	2-2	2-2	-0-3	426-7	999-9	99-9	99-9	82-3	78-
69-7	155-3	23618-9	50-0	-60-5	-99-9	249-1	3-9	3-6	1-4	501-0	999-9	99-9	99-9	88-1	70-
90-9	99-3	99-9	25-0	99-9	99-9	99-9	99-9	99-9	99-9	99-9	999-9	99-9	99-9	999-9	99-9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE ON TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 363
AMARILLO, TEX

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MA RTO GM/KG	RH PCT	RANGE KM	AZ UG
0.0	13.2	1055.0	888.0	11.1	6.6	110.0	3.6	-3.4	1.2	295.0	313.6	6.9	74.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	14.3	1220.2	875.0	17.5	9.1	108.2	7.0	-6.6	2.2	303.0	326.0	8.3	58.1	0.2	27.5
1.4	16.1	1468.9	850.0	18.8	0.7	156.7	5.7	-2.2	5.2	306.5	320.2	4.8	29.6	0.5	21.3
2.4	18.2	1724.6	825.0	16.5	-5.0	191.4	7.2	1.4	7.0	308.6	318.1	3.2	19.7	0.7	32.1
3.2	20.3	1947.2	800.0	16.5	-6.7	214.0	7.8	4.3	6.4	309.1	317.8	2.9	15.8	1.0	34.1
4.2	22.3	2256.0	775.0	14.4	-6.3	227.5	10.1	7.4	6.8	309.6	317.6	2.6	19.9	1.3	34.
5.2	24.5	2531.5	750.0	12.0	-10.2	235.3	9.6	7.9	5.5	309.9	317.1	2.3	20.1	1.9	17.
6.2	26.5	2813.8	725.0	9.5	-12.2	249.0	9.4	8.6	3.4	310.2	316.5	2.1	20.2	2.2	24.
7.2	28.9	3103.0	700.0	6.5	-14.6	263.2	8.7	8.7	1.0	309.9	315.4	1.8	20.4	2.6	35.
8.2	31.3	3400.2	675.0	4.5	-17.2	287.4	5.4	5.1	-1.6	310.9	315.5	1.5	18.8	2.9	45.
9.4	33.7	3700.8	650.0	3.4	-20.2	347.5	3.1	0.9	-2.9	313.0	316.7	1.2	15.6	2.9	49.
10.6	36.0	4023.1	625.0	0.9	-24.2	337.9	3.9	1.5	-3.6	313.5	316.4	0.9	13.2	2.7	53.
11.8	38.6	4350.0	600.0	-1.2	-25.7	307.6	5.2	4.2	-3.2	315.9	317.4	0.8	13.4	2.8	61.
12.9	41.0	4687.3	575.0	-4.1	-27.9	292.8	5.9	5.5	-5.3	315.2	317.4	0.7	13.6	3.0	67.
14.0	43.4	5036.1	550.0	-6.7	-29.8	284.9	7.5	7.2	-1.9	316.1	318.1	0.6	13.9	3.3	71.
15.3	46.3	5397.9	525.0	-8.8	-31.4	289.8	9.4	8.8	-3.2	317.8	319.6	0.5	14.0	3.9	76.
16.5	49.2	5773.9	500.0	-11.6	-33.4	290.8	12.3	11.5	-4.4	318.9	320.5	0.4	14.3	4.5	43.
17.9	51.7	6104.5	475.0	-14.8	-35.9	295.2	13.6	12.3	-5.8	319.6	320.9	0.4	14.6	5.5	45.
19.1	54.9	6571.2	450.0	-18.1	-38.4	306.9	16.1	12.8	-9.7	320.4	321.5	0.3	14.8	6.6	94.
20.8	57.9	6995.1	425.0	-22.0	-41.4	304.9	18.2	15.0	-10.5	320.7	321.6	0.2	15.2	8.1	100.
22.4	61.0	7434.7	400.0	-25.0	-43.7	290.3	17.7	16.6	-6.2	322.5	323.2	0.2	15.4	9.6	134.
24.0	64.4	7904.7	375.0	-28.8	-46.8	282.7	17.9	17.5	-3.9	323.4	323.9	0.1	15.8	11.3	134.
25.6	67.7	8354.1	350.0	-32.9	-49.9	279.5	18.5	18.2	-3.0	324.3	324.8	0.1	16.1	13.3	134.
27.3	71.1	8910.4	325.0	-37.3	-53.9	275.2	22.4	22.3	-2.0	325.2	325.9	0.1	16.1	15.1	134.
29.2	75.0	9454.6	300.0	-41.3	-57.9	278.5	25.6	25.5	-3.8	327.2	327.9	0.1	16.1	17.8	134.
31.4	79.2	10045.4	275.0	-44.4	-61.4	277.8	33.0	32.7	-4.4	330.9	330.9	0.1	16.1	21.6	134.
33.6	83.2	10677.0	250.0	-47.6	-64.6	278.9	33.6	33.2	-5.2	332.3	332.3	0.1	16.1	26.0	134.
35.8	87.6	11356.4	225.0	-51.1	-67.9	277.3	35.5	35.2	-4.5	334.1	334.1	0.1	16.1	30.9	134.
38.1	92.9	12059.7	200.0	-55.7	-71.9	275.0	37.5	37.4	-3.3	335.7	335.7	0.1	16.1	35.6	134.
40.8	98.0	12917.4	175.0	-60.7	-75.9	278.1	40.0	39.6	-5.6	341.6	341.6	0.1	16.1	42.0	94.
44.1	103.8	13863.1	150.0	-63.8	-79.9	248.3	31.3	31.3	0.9	360.2	360.2	0.1	16.1	49.3	94.
47.7	110.3	14993.8	125.0	-69.8	-85.9	241.2	28.4	24.1	4.3	380.7	380.7	0.1	16.1	55.6	45.
52.2	118.0	16340.0	100.0	-63.3	-83.9	262.9	19.3	19.2	2.4	405.5	405.5	0.1	16.1	61.6	94.
58.5	124.0	19139.2	75.0	-61.0	-81.0	252.0	15.5	14.7	4.8	445.0	445.0	0.1	16.1	67.3	94.
64.5	140.0	20652.4	50.0	-58.1	-80.9	273.4	0.6	0.6	-0.0	506.5	506.5	0.1	16.1	70.3	94.
79.3	154.0	25091.0	25.0	-52.6	-80.9	322.4	6.1	3.7	-0.9	633.3	633.3	0.1	16.1	71.6	94.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 402
WALLOPS ISLAND, VA

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	4.5	4.0	1010.7	18.3	15.0	999.9	99.9	99.9	99.9	292.0	313.6	10.7	81.0	999.9	97.0
0.3	5.3	95.8	1000.0	16.2	15.5	999.9	99.9	99.9	99.9	293.8	313.6	11.2	76.3	999.9	97.0
1.1	7.3	313.9	975.0	18.5	15.4	999.9	99.9	99.9	99.9	295.3	325.2	11.4	82.1	999.9	97.0
2.0	6.3	537.3	950.0	18.5	13.7	999.9	99.9	99.9	99.9	297.4	325.2	10.5	73.5	999.9	97.0
2.8	1.3	765.1	925.0	17.3	12.3	999.9	99.9	99.9	99.9	298.3	324.5	9.8	72.4	999.9	97.0
3.7	13.5	1000.0	900.0	16.0	11.5	999.9	99.9	99.9	99.9	299.3	324.5	9.5	74.6	999.9	97.0
4.5	15.7	1239.4	875.0	14.5	11.0	999.9	99.9	99.9	99.9	300.1	325.7	9.5	79.6	999.9	97.0
5.6	17.3	1448.2	850.0	12.8	10.5	999.9	99.9	99.9	99.9	300.8	326.4	9.5	86.2	999.9	97.0
6.4	20.2	1735.0	825.0	11.1	9.4	999.9	99.9	99.9	99.9	301.5	326.1	9.0	85.2	999.9	97.0
7.4	22.4	1991.6	800.0	9.0	7.7	999.9	99.9	99.9	99.9	301.8	324.6	8.3	92.1	999.9	97.0
8.6	24.9	2254.3	775.0	7.4	6.2	999.9	99.9	99.9	99.9	302.4	324.1	7.7	92.4	999.9	97.0
9.5	27.2	2524.3	750.0	6.0	4.9	999.9	99.9	99.9	99.9	304.0	324.3	7.3	92.8	999.9	97.0
10.6	29.7	2801.9	725.0	4.4	3.3	999.9	99.9	99.9	99.9	305.1	324.0	6.7	92.9	999.9	97.0
11.7	32.3	3047.5	700.0	2.8	1.8	999.9	99.9	99.9	99.9	306.4	324.1	6.2	92.8	999.9	97.0
12.9	35.0	3341.5	675.0	1.0	-0.1	999.9	99.9	99.9	99.9	307.5	323.8	5.7	92.2	999.9	97.0
14.1	37.4	3694.9	650.0	-0.8	-1.9	999.9	99.9	99.9	99.9	308.6	323.7	5.1	92.2	999.9	97.0
15.3	40.3	3997.6	625.0	-2.6	-5.6	999.9	99.9	99.9	99.9	309.9	321.9	4.1	80.3	999.9	97.0
16.5	42.9	4320.8	600.0	-3.7	-8.0	999.9	99.9	99.9	99.9	312.3	322.7	3.5	71.7	999.9	97.0
17.8	45.9	4656.1	575.0	-6.0	-9.1	999.9	99.9	99.9	99.9	313.3	323.4	3.3	78.7	999.9	97.0
19.2	48.9	5003.4	550.0	-10.3	-13.0	999.9	99.9	99.9	99.9	314.8	324.6	3.2	84.7	999.9	97.0
20.4	51.4	5363.7	525.0	-10.3	-13.0	999.9	99.9	99.9	99.9	316.3	324.6	2.7	80.9	999.9	97.0
21.7	54.9	5738.6	500.0	-12.1	-17.9	999.9	99.9	99.9	99.9	318.4	324.6	1.9	72.3	999.9	97.0
22.9	57.9	6129.5	475.0	-14.0	-29.7	999.9	99.9	99.9	99.9	320.7	323.3	0.8	78.1	999.9	97.0
24.5	61.4	6538.1	450.0	-17.1	-36.5	999.9	99.9	99.9	99.9	321.8	323.1	0.4	17.2	999.9	97.0
26.1	65.0	6961.6	425.0	-20.6	-43.1	999.9	99.9	99.9	99.9	322.5	322.5	0.0	1.0	999.9	97.0
27.7	68.1	7409.3	400.0	-23.9	-45.2	999.9	99.9	99.9	99.9	323.8	323.9	0.0	1.0	999.9	97.0
29.4	72.0	7875.4	375.0	-28.1	-49.3	999.9	99.9	99.9	99.9	324.4	324.8	0.1	10.9	999.9	97.0
31.2	76.0	8367.3	350.0	-32.4	-46.6	999.9	99.9	99.9	99.9	325.0	324.7	0.5	66.1	999.9	97.0
31.0	80.2	8885.9	325.0	-36.3	-43.9	999.9	99.9	99.9	99.9	326.6	324.6	0.9	99.9	999.9	97.0
34.9	84.4	9435.6	300.0	-41.0	-49.9	999.9	99.9	99.9	99.9	327.7	324.9	0.9	99.9	999.9	97.0
36.8	89.3	10020.0	275.0	-46.2	-59.9	999.9	99.9	99.9	99.9	328.4	324.6	0.9	99.9	999.9	97.0
38.8	92.8	10546.2	250.0	-52.0	-59.9	999.9	99.9	99.9	99.9	328.8	324.6	0.9	99.9	999.9	97.0
41.2	95.0	11122.2	225.0	-56.2	-59.9	999.9	99.9	99.9	99.9	332.3	324.6	0.9	99.9	999.9	97.0
43.7	104.5	12360.2	200.0	-62.6	-59.9	999.9	99.9	99.9	99.9	333.3	324.6	0.9	99.9	999.9	97.0
46.6	110.4	12871.9	175.0	-67.0	-59.9	999.9	99.9	99.9	99.9	339.5	324.6	0.9	99.9	999.9	97.0
50.0	116.9	13406.3	150.0	-62.7	-59.9	999.9	99.9	99.9	99.9	342.1	324.6	0.9	99.9	999.9	97.0
54.2	124.7	14937.1	125.0	-61.0	-59.9	999.9	99.9	99.9	99.9	348.5	324.6	0.9	99.9	999.9	97.0
58.1	131.7	16326.9	100.0	-60.2	-59.9	999.9	99.9	99.9	99.9	411.4	324.6	0.9	99.9	999.9	97.0
65.6	139.7	18103.9	75.0	-64.7	-59.9	999.9	99.9	99.9	99.9	437.2	324.6	0.9	99.9	999.9	97.0
74.0	147.3	20548.4	50.0	-61.2	-59.9	999.9	99.9	99.9	99.9	499.4	324.6	0.9	99.9	999.9	97.0
87.9	155.3	24977.4	25.0	-55.8	-59.9	999.9	99.9	99.9	99.9	624.7	324.6	0.9	99.9	999.9	97.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 405
STERLING, VA25 APRIL 1975
517 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.2	85.0	1000.8	16.5	14.7	280.0	2.1	2.1	-0.4	291.0	318.3	10.6	89.0	0.0	0.
0.0	6.3	91.9	1000.0	16.6	14.8	285.6	2.5	2.4	-0.7	291.1	318.6	10.7	89.3	0.0	11.
0.8	8.7	304.3	975.0	16.2	15.2	308.8	6.3	4.9	-4.0	293.0	322.1	11.2	93.4	0.3	112.
1.7	10.3	529.3	950.0	15.0	14.1	315.7	7.6	5.3	-5.4	293.8	321.7	10.7	94.1	0.2	120.
2.6	13.4	755.4	925.0	13.8	12.2	314.0	9.3	6.7	-6.5	296.2	320.2	9.7	90.2	1.1	129.
3.5	15.9	986.6	900.0	13.1	11.5	312.9	11.5	8.4	-7.8	296.2	321.5	9.5	90.1	1.7	131.
4.4	18.3	1223.5	875.0	11.8	9.9	308.8	11.3	8.8	-7.1	297.1	320.6	8.7	97.2	2.3	131.
5.3	20.7	1466.3	850.0	11.2	8.5	301.7	12.1	10.3	-6.3	298.9	321.2	8.2	83.4	2.9	130.
6.3	23.3	1715.4	825.0	9.3	7.5	258.9	14.1	12.3	-6.9	299.4	320.9	7.9	88.4	3.7	127.
7.2	25.9	1970.3	800.0	7.6	6.1	258.8	16.8	14.7	-8.1	300.2	320.5	7.4	90.7	4.5	124.
8.0	28.4	2231.5	775.0	6.0	4.1	295.0	16.8	15.2	-7.1	301.1	319.6	6.7	88.0	5.3	124.
9.0	31.2	2500.2	750.0	4.9	2.3	294.5	16.5	15.0	-6.8	302.6	319.6	6.0	83.4	6.2	123.
9.8	34.0	2776.4	725.0	3.3	0.6	250.3	16.4	15.4	-6.7	303.8	319.5	5.5	82.5	7.1	127.
10.4	36.7	3060.5	700.0	1.4	-2.2	285.9	15.6	15.0	-4.3	304.7	319.1	4.7	77.0	8.0	120.
11.8	39.6	3353.4	675.0	0.6	-6.7	288.4	17.0	16.1	-5.4	306.7	318.8	3.4	58.1	8.5	119.
12.8	42.3	3655.8	650.0	-0.5	-7.8	284.0	18.5	17.9	-4.5	308.8	318.5	3.3	57.7	10.0	117.
14.0	45.3	3968.7	625.0	-2.2	-12.7	274.7	19.0	18.9	-1.6	310.2	317.2	2.3	44.5	11.3	115.
15.0	48.3	4292.6	600.0	-2.8	-27.9	271.1	22.0	22.0	-0.4	312.9	315.0	0.6	12.5	12.5	113.
16.1	51.3	4628.3	575.0	-5.0	-27.7	272.0	24.1	24.1	-0.8	314.2	315.5	0.7	14.8	13.8	111.
17.2	54.5	4976.5	550.0	-6.9	-33.1	269.7	25.6	25.6	0.1	315.6	317.4	0.4	10.3	15.4	107.
18.4	57.6	5338.1	525.0	-8.6	-41.5	265.1	26.4	26.4	0.4	318.1	318.8	0.2	5.0	17.2	107.
19.7	61.0	5713.6	500.0	-11.8	-39.1	274.3	24.8	24.7	-1.8	318.6	317.6	0.3	9.1	19.2	105.
21.0	64.4	6104.0	475.0	-15.1	-38.3	274.8	23.4	23.3	-2.0	319.3	320.3	0.3	11.7	20.5	104.
22.1	67.9	6509.8	450.0	-18.6	-38.2	278.2	24.6	24.4	-3.5	319.9	321.3	0.4	21.6	23.0	103.
24.1	71.3	6933.0	425.0	-22.3	-38.2	279.3	29.7	29.3	-4.8	320.4	321.6	0.3	21.8	25.7	103.
25.8	75.0	7375.5	400.0	-25.8	-40.8	276.4	28.4	28.2	-3.2	321.4	322.3	0.3	22.9	28.4	102.
27.6	78.0	7840.1	375.0	-29.4	-47.3	281.3	36.3	35.6	-7.1	322.6	323.1	0.1	15.6	32.1	102.
29.5	82.8	8331.1	350.0	-32.3	-56.4	285.1	29.8	28.8	-7.8	325.1	325.3	0.1	7.0	36.1	102.
31.2	86.8	8850.0	325.0	-35.8	-59.5	274.6	32.9	32.8	-8.7	327.2	327.4	0.0	7.5	39.2	104.
33.0	91.3	9431.0	300.0	-40.7	99.9	262.2	30.9	30.6	4.2	328.0	328.0	99.9	99.9	42.5	121.
35.3	95.7	9987.5	275.0	-45.4	99.9	256.8	32.9	32.1	7.5	329.5	329.5	99.9	99.9	47.1	97.
37.5	100.4	10615.5	250.0	-51.4	99.9	257.2	36.4	35.5	8.1	329.7	329.7	99.9	99.9	51.1	97.
40.2	105.6	11290.6	225.0	-57.0	99.9	259.7	33.0	32.4	5.9	331.2	331.2	99.9	99.9	56.7	95.
43.2	111.0	12026.0	200.0	-62.6	99.9	262.7	35.6	35.3	4.5	333.6	333.6	99.9	99.9	62.6	94.
46.6	117.0	12842.6	175.0	-64.5	99.9	267.9	23.8	23.8	0.9	343.5	343.5	99.9	99.9	67.6	93.
49.7	123.8	13783.1	150.0	-62.7	99.9	279.3	22.5	22.2	-3.7	342.2	342.2	99.9	99.9	74.0	92.
54.6	131.0	14916.5	125.0	-58.9	99.9	289.1	20.4	19.3	-6.7	388.4	388.4	99.9	99.9	82.2	93.
60.3	138.9	16321.0	100.0	-58.4	99.9	276.4	7.7	7.7	-0.9	414.9	414.9	99.9	99.9	88.2	94.
67.4	147.0	18106.7	75.0	-62.6	99.9	256.7	12.1	11.8	2.8	448.6	448.6	99.9	99.9	91.9	93.
77.3	157.0	20609.6	50.0	-59.9	99.9	279.3	8.9	8.8	-1.4	502.3	502.3	99.9	99.9	94.1	93.
93.3	167.5	25011.4	25.0	-53.3	99.9	103.2	6.4	-6.3	1.5	631.6	631.6	99.9	99.9	91.9	93.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 13 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 625
MUNTINGTON, WA25 APRIL 1975
(45 GMT)

TIME MIN	CATCY	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.0	246.0	983.4	13.3	13.3	90.0	2.1	-2.1	0.0	285.1	314.3	9.8	100.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	7.7	318.8	975.0	14.3	14.3	99.9	99.9	99.9	99.9	251.0	319.4	10.6	100.4	99.9	99.9
1.2	5.8	539.1	950.0	14.8	13.1	999.9	99.9	99.9	99.9	293.6	319.8	10.0	89.3	99.9	99.9
2.1	11.8	765.7	925.0	15.0	11.8	23.7	3.5	-1.4	-3.2	290.0	321.1	5.5	61.0	99.9	99.9
3.0	13.9	997.7	900.0	14.2	8.6	281.7	5.1	5.0	-1.0	297.2	318.3	7.8	68.7	99.9	99.9
3.7	15.9	1235.0	875.0	12.1	6.9	285.5	3.9	3.8	-1.1	297.3	316.6	7.1	70.1	99.9	99.9
4.6	18.1	1477.3	850.0	10.1	8.1	269.5	6.5	6.5	0.1	297.7	319.4	8.0	87.6	99.9	99.9
5.3	20.3	1725.9	825.0	9.3	4.5	262.2	9.1	9.1	1.2	298.3	317.0	6.4	71.9	99.9	99.9
6.2	22.5	1980.4	800.0	7.3	3.5	270.3	12.5	12.5	-0.1	299.7	316.7	6.2	76.9	99.9	99.9
7.2	24.8	2241.5	775.0	7.0	1.2	270.2	13.9	13.9	-0.1	302.1	317.3	5.4	66.6	99.9	99.9
8.2	26.5	2511.5	750.0	7.2	-7.2	270.5	15.5	15.5	-0.1	304.8	313.5	3.0	34.9	99.9	99.9
9.1	28.5	2787.4	725.0	6.4	-14.3	270.7	16.6	16.6	-2.0	306.7	312.1	1.7	21.0	99.9	99.9
10.0	31.8	3076.3	700.0	4.1	-15.5	261.3	16.8	16.8	-2.3	307.2	312.2	1.6	22.4	99.9	99.9
11.0	34.3	3370.6	675.0	1.1	-15.7	260.9	16.6	16.3	-3.1	307.1	311.8	1.5	24.9	99.9	99.9
12.0	36.7	3673.1	650.0	-0.7	-18.1	282.0	16.2	15.9	-1.4	308.3	312.6	1.4	24.9	99.9	99.9
13.0	39.3	3984.7	625.0	-3.4	-20.7	283.1	17.3	16.7	-4.5	308.7	312.4	1.2	24.9	99.9	99.9
14.0	41.9	4308.2	600.0	-5.8	-15.6	280.1	18.6	17.9	-5.2	309.6	313.8	1.3	32.6	99.9	99.9
15.0	44.6	4634.0	575.0	-8.4	-21.3	281.8	19.5	19.1	-4.0	310.3	314.2	1.2	34.3	99.9	99.9
16.1	47.4	4961.9	550.0	-10.3	-22.7	273.4	20.5	23.5	-1.3	312.0	315.6	1.1	35.3	99.9	99.9
17.3	50.3	5334.3	525.0	-12.0	-33.9	273.0	21.5	21.4	-1.1	314.0	315.5	0.4	14.2	99.9	99.9
18.6	53.0	5711.3	500.0	-13.5	-42.8	275.0	25.7	25.6	-2.2	316.5	317.1	0.2	6.4	99.9	99.9
19.8	56.0	6100.1	475.0	-14.7	-43.5	274.3	31.1	31.0	-2.2	319.8	320.4	0.2	6.5	99.9	99.9
21.1	58.1	6507.2	450.0	-17.7	-44.7	272.6	31.3	31.3	-1.5	321.0	321.6	0.2	7.4	99.9	99.9
22.3	62.3	6926.1	425.0	-20.7	-38.9	273.4	30.8	30.7	-1.8	322.5	323.6	0.3	17.6	99.9	99.9
23.6	65.5	7378.0	400.0	-24.1	-40.2	272.5	31.0	31.0	-1.4	323.6	324.6	0.3	21.0	99.9	99.9
25.1	69.0	7844.7	375.0	-28.1	-48.2	272.7	31.1	31.0	1.2	324.3	324.8	0.1	12.5	99.9	99.9
26.7	72.4	8317.2	350.0	-31.6	-47.5	268.8	33.6	33.6	0.7	326.1	326.6	0.1	18.4	99.9	99.9
28.3	76.3	8856.2	325.0	-36.4	-46.0	268.0	34.5	34.5	0.9	326.4	327.1	0.2	36.5	99.9	99.9
29.2	80.3	9426.1	300.0	-41.0	-50.9	268.0	40.1	40.0	1.4	327.6	327.9	99.9	99.9	99.9	99.9
31.7	84.4	9991.7	275.0	-45.7	99.9	268.4	42.7	42.7	0.4	329.0	329.6	99.9	99.9	99.9	99.9
33.6	89.8	10615.2	250.0	-51.4	99.9	268.5	41.8	41.8	1.1	329.6	329.9	99.9	99.9	99.9	99.9
35.4	97.6	11236.5	225.0	-56.3	99.9	272.8	47.9	47.8	-2.3	332.3	332.3	99.9	99.9	99.9	99.9
37.4	98.6	12037.6	200.0	-62.2	99.9	281.6	43.2	41.4	-12.3	334.2	334.2	99.9	99.9	99.9	99.9
39.0	104.0	12854.7	175.0	-64.3	99.9	295.0	34.3	31.1	-14.5	333.8	333.8	99.9	99.9	99.9	99.9
41.9	110.2	13791.5	150.0	-63.1	99.9	278.0	27.3	27.1	-3.8	331.4	331.4	99.9	99.9	99.9	99.9
45.1	116.9	14921.1	125.0	-61.7	99.9	270.1	23.0	23.0	-0.1	383.4	99.9	99.9	99.9	99.9	99.9
48.6	124.7	16300.8	100.0	-62.3	99.9	270.3	15.4	15.4	-0.1	407.4	99.9	99.9	99.9	99.9	99.9
55.0	132.3	18078.1	75.0	-62.0	99.9	248.2	4.9	4.4	2.1	433.0	99.9	99.9	99.9	99.9	99.9
63.3	142.0	20570.5	50.0	-51.9	99.9	308.5	1.8	1.5	-1.1	497.8	99.9	99.9	99.9	99.9	99.9
78.0	151.0	24970.9	25.0	-52.4	99.9	316.6	1.6	-0.9	-1.4	634.1	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 429
DAYTON, OHIO

25 APRIL 1975
515 GMT

TIME MIN	CN	7	HEIGHT GPM	PRES MB	TEMP JG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T UG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	7.3		258.0	979.8	13.7	13.4	85.0	3.6	-3.6	-0.3	289.8	315.4	9.9	98.0	0.0	0
99.9	6.9		5.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.2	7.9		339.5	975.0	13.4	12.6	34.4	2.7	-1.5	-2.2	289.9	314.4	9.5	95.1	0.1	231
1.1	10.1		558.6	950.0	13.5	12.7	38.0	1.7	-1.0	-1.3	292.2	317.6	9.8	98.6	0.2	256
1.9	12.1		783.4	925.0	12.2	11.3	356.1	0.7	0.1	-0.7	293.0	317.0	9.2	94.5	0.3	251
2.7	14.4		1013.4	900.0	11.3	10.3	273.8	3.6	3.6	-0.2	294.3	317.6	8.8	93.7	0.2	237
3.7	16.4		1248.7	875.0	10.0	8.3	259.4	6.2	6.2	0.1	295.2	316.3	7.9	89.1	0.2	183
4.7	18.7		1435.8	850.0	8.9	7.7	255.8	7.7	7.5	1.9	296.5	317.4	7.8	91.9	0.5	95
5.6	20.3		1737.1	825.0	7.9	5.4	258.1	9.0	7.8	1.7	297.8	316.5	6.9	84.6	1.0	94
6.6	23.3		1970.9	800.0	7.2	1.5	264.7	9.0	8.9	0.4	299.6	314.5	5.4	67.1	1.5	82
7.5	25.5		2252.2	775.0	6.4	-0.2	268.5	8.9	8.9	0.2	301.3	315.0	4.9	62.4	2.0	91
8.5	28.3		2520.4	750.0	5.2	-2.2	268.5	8.9	8.9	-0.3	302.8	315.2	4.3	58.7	2.5	87
9.6	30.6		2796.8	725.0	3.6	-6.8	276.5	9.5	8.3	-1.4	303.8	311.2	2.5	36.6	3.1	84
10.7	33.1		3082.6	700.0	2.3	-25.1	282.8	8.4	8.2	-1.9	305.1	307.4	0.7	11.0	3.6	71
12.0	35.3		3373.3	675.0	0.2	-22.6	282.3	10.2	10.0	-2.2	306.0	308.9	0.9	16.1	4.3	62
13.2	38.1		3674.1	650.0	-2.6	-17.2	284.1	11.9	11.6	-2.9	306.3	310.9	1.5	31.2	5.1	54
14.5	40.7		3983.9	625.0	-4.9	-20.7	289.3	12.9	12.2	-4.3	307.0	313.6	1.2	27.6	6.3	46
15.9	42.4		4303.6	600.0	-6.9	-20.0	290.9	12.9	12.1	-4.6	308.2	312.4	1.3	35.6	7.1	38
17.1	46.3		4634.2	575.0	-9.5	-17.0	285.1	14.2	13.7	-3.7	309.1	314.5	1.7	54.3	8.1	30
18.7	48.3		4976.2	550.0	-11.8	-22.3	281.6	16.9	16.6	-3.4	310.2	313.9	1.2	41.3	9.6	22
20.4	52.0		5330.2	525.0	-15.0	-25.0	278.4	19.7	19.5	-2.9	310.5	313.6	1.0	42.1	11.4	10
22.2	55.2		5698.2	500.0	-16.0	-24.5	270.6	23.0	23.0	-0.3	313.7	317.1	1.0	47.6	13.0	3
24.1	58.3		6082.7	475.0	-18.8	-27.7	267.8	27.6	27.5	1.0	314.7	317.4	0.8	45.4	16.4	7
26.0	61.3		6482.7	450.0	-22.4	-29.6	265.6	27.1	27.1	0.2	315.2	317.8	0.8	50.5	20.6	2
28.2	64.6		6900.4	425.0	-24.9	-31.1	272.2	20.3	20.3	-0.8	317.1	319.3	0.7	58.3	24.2	9
32.4	67.9		7335.8	400.0	-26.6	-34.3	276.0	23.2	23.1	-2.4	320.4	321.9	0.4	39.0	28.5	9
36.1	71.3		7803.6	375.0	-29.7	-43.8	999.9	99.9	96.9	96.9	322.2	323.0	0.2	28.0	999.9	999.9
99.9	64.9		99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9		99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 433
SALEM, ILL25 APRIL 1975
600 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MK RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.7	175.0	987.0	15.6	13.8	110.0	4.6	-4.3	1.6	291.2	317.3	10.1	89.0	0.0	0
00.9	90.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	6.7	275.3	975.0	15.7	13.4	88.8	10.6	-10.6	-1.0	292.2	319.2	10.0	86.4	0.3	29.1
1.2	8.8	500.0	950.0	17.7	8.8	83.6	8.0	-7.9	-0.9	298.1	316.3	7.5	56.0	0.7	27.1
1.9	10.8	729.1	925.0	17.5	7.8	68.6	3.4	-3.2	-1.2	298.2	317.8	7.2	52.8	1.0	27.0
2.6	13.0	963.3	900.0	17.2	6.7	288.3	3.9	3.8	-1.0	300.2	317.1	6.9	50.0	0.1	26.7
3.5	15.2	1201.6	875.0	16.6	6.4	261.5	11.1	11.0	1.6	302.0	321.2	6.9	50.0	0.1	26.7
4.2	17.4	1450.0	850.0	15.3	4.6	99.9	99.9	99.9	99.9	303.0	320.6	6.3	48.6	0.5	26.1
5.0	19.7	1701.8	825.0	13.1	9.9	99.9	99.9	99.9	99.9	303.5	320.6	6.3	48.6	0.5	26.1
5.7	21.3	1959.0	800.0	11.1	9.9	99.9	99.9	99.9	99.9	303.7	320.6	6.3	48.6	0.5	26.1
6.6	24.3	2227.7	775.0	8.9	3.8	280.4	15.8	15.5	-2.8	303.2	322.5	6.5	47.3	2.3	26.1
7.3	26.5	2474.6	750.0	6.6	2.5	254.5	17.4	15.6	-7.8	304.5	321.8	6.1	45.4	3.1	26.1
8.2	28.7	2772.1	725.0	4.5	0.1	291.7	14.9	13.9	-5.5	305.1	320.2	5.3	43.1	3.1	26.1
9.0	31.6	3057.2	700.0	1.8	-3.0	298.9	14.6	13.8	-4.7	305.0	317.6	4.4	40.7	4.5	26.1
10.0	34.2	3340.4	675.0	-0.7	-3.5	290.5	15.2	15.0	-2.8	305.4	314.0	4.4	41.5	5.3	26.1
10.6	36.7	3649.6	650.0	-3.5	-3.5	278.3	15.6	15.6	-2.3	305.5	314.6	4.5	40.4	6.1	26.1
11.4	38.4	3967.1	625.0	-3.3	-3.1	283.9	16.8	16.3	-4.0	305.3	322.5	4.5	43.0	7.1	26.1
13.1	42.1	4283.7	600.0	-3.9	-3.3	288.2	19.6	17.7	-5.8	312.2	325.0	4.0	40.2	8.3	26.1
14.5	45.3	4619.0	575.0	-5.5	-6.9	289.8	22.2	21.1	-7.2	314.1	326.0	4.0	40.2	10.0	26.1
15.7	48.3	4967.4	550.0	-9.4	-9.8	279.4	19.5	18.2	-3.0	314.5	324.6	3.3	40.1	11.4	26.1
16.0	50.9	5325.1	525.0	-11.4	-12.6	255.9	17.3	16.7	4.2	315.0	323.5	2.8	41.2	12.7	26.1
18.0	54.3	5658.3	500.0	-13.2	-14.1	240.3	20.9	18.2	10.4	317.3	325.3	2.6	42.6	13.4	26.1
19.7	57.0	6097.5	475.0	-15.5	-16.0	240.1	23.5	20.3	11.7	319.0	325.9	2.2	41.3	15.2	26.1
20.7	60.5	6494.4	450.0	-18.0	-19.5	230.4	24.4	20.3	13.5	320.8	326.6	1.8	47.7	17.0	26.1
22.1	64.7	6819.8	425.0	-20.2	-21.9	227.6	24.3	18.3	16.1	323.3	324.4	1.6	46.0	18.7	26.1
23.5	67.5	7260.4	400.0	-23.6	-25.8	223.9	26.0	18.0	18.7	325.3	324.3	1.2	42.5	20.4	26.1
25.1	71.2	7735.4	375.0	-27.2	-30.3	216.3	28.3	16.7	22.8	325.6	324.4	0.8	42.5	22.4	26.1
26.3	75.2	8324.7	350.0	-31.1	-34.5	221.7	31.1	20.7	23.2	326.7	324.8	0.6	42.2	24.9	26.1
28.3	78.4	8850.1	325.0	-34.5	-38.3	224.4	33.4	23.4	23.9	328.7	320.2	0.4	46.2	27.2	26.1
29.7	82.4	9404.1	300.0	-39.1	-42.9	221.2	35.7	23.6	26.9	330.2	331.3	0.3	46.4	30.7	26.1
31.1	86.2	9903.7	275.0	-44.4	-49.9	215.7	37.7	22.6	31.4	330.9	329.9	99.9	99.9	33.7	26.1
32.9	91.2	10625.2	250.0	-49.9	-55.7	216.8	43.2	25.9	34.6	331.9	329.9	99.9	99.9	36.4	26.1
34.7	96.4	11305.0	225.0	-55.7	-61.9	216.7	45.6	27.3	36.6	333.1	329.9	99.9	99.9	40.7	26.1
36.6	100.3	12044.0	200.0	-62.5	-69.9	214.4	46.6	28.3	38.4	333.8	329.9	99.9	99.9	45.7	26.1
38.5	110.3	12856.6	175.0	-67.7	-77.9	232.9	42.5	31.3	25.7	338.2	329.9	99.9	99.9	50.7	26.1
40.9	117.3	13600.6	150.0	-62.3	-69.9	99.9	99.9	99.9	99.9	362.8	329.9	99.9	99.9	55.9	26.1
49.0	55.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
50.3	58.3	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
50.9	58.3	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
50.9	58.3	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
50.9	58.3	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE AT TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 451
DODGE CITY, KAN25 APRIL 1975
530 GMT

TIME MIN	CATY	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.7	791.0	921.6	14.4	11.4	140.0	3.1	-2.0	2.4	295.6	320.0	9.2	82.0	0.0	0.
0.9	99.9	95.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	99.9	95.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	13.8	993.7	900.0	16.6	9.5	999.9	99.9	99.9	99.9	299.7	322.3	8.3	62.8	99.9	99.9
1.0	16.3	1233.3	875.0	15.2	6.7	999.9	99.9	99.9	99.9	300.5	314.9	7.1	56.9	99.9	99.9
2.3	20.7	1476.2	850.0	13.1	5.7	999.9	99.9	99.9	99.9	300.7	319.5	6.8	60.9	99.9	99.9
3.1	23.3	1129.4	825.0	10.8	3.4	999.9	99.9	99.9	99.9	300.8	317.3	6.0	60.4	99.9	99.9
3.3	25.3	1924.7	800.0	9.2	1.0	999.9	99.9	99.9	99.9	301.6	316.1	5.2	56.4	99.9	99.9
4.8	28.5	2247.5	775.0	7.6	-7.3	999.9	99.9	99.9	99.9	302.4	310.8	2.9	33.9	99.9	99.9
5.8	31.2	2516.7	750.0	6.9	-13.2	999.9	99.9	99.9	99.9	304.3	310.0	1.9	22.7	99.9	99.9
6.4	34.0	2755.2	725.0	7.2	-21.0	999.9	99.9	99.9	99.9	307.4	310.6	1.0	11.3	99.9	99.9
7.5	36.6	3087.0	700.0	5.9	-25.7	999.9	99.9	99.9	99.9	309.1	311.3	0.7	8.1	99.9	99.9
8.5	39.6	3378.8	675.0	3.6	-27.1	999.9	99.9	99.9	99.9	309.8	311.8	0.6	8.3	99.9	99.9
9.4	42.3	3683.6	650.0	1.2	-28.7	999.9	99.9	99.9	99.9	310.4	312.2	0.5	8.5	99.9	99.9
10.5	45.3	3967.3	625.0	-1.5	-30.4	999.9	99.9	99.9	99.9	310.8	312.4	0.5	8.7	99.9	99.9
11.5	48.4	4204.4	600.0	-4.6	-32.5	301.3	10.2	8.7	-5.3	310.8	312.2	0.4	9.1	9.4	127.
12.5	51.3	4453.4	575.0	-7.3	-34.3	301.1	9.9	8.2	-5.5	311.4	312.7	0.4	9.4	9.4	127.
13.6	54.6	4697.6	550.0	-10.3	-36.4	307.6	12.6	10.0	-7.7	311.6	312.6	0.3	9.7	5.2	127.
14.7	57.6	4937.9	525.0	-13.0	-38.1	303.2	13.5	13.0	-8.5	312.8	313.7	0.3	10.0	6.1	127.
15.9	60.4	5124.6	500.0	-14.7	-40.3	295.7	16.3	14.2	-8.1	315.9	315.9	0.2	10.1	7.3	126.
17.3	63.4	5311.4	475.0	-16.9	-42.0	302.0	17.4	14.8	-9.2	317.0	317.8	0.2	10.3	8.7	125.
18.6	65.9	5514.0	450.0	-20.7	-43.6	299.3	18.3	16.0	-8.9	317.2	317.8	0.2	10.7	10.1	124.
20.1	71.2	6033.0	425.0	-23.9	-45.9	308.5	18.3	15.8	-9.3	318.3	318.8	0.1	11.0	11.7	124.
21.6	75.3	7372.9	400.0	-26.0	-48.8	266.6	18.6	15.5	-9.0	318.6	319.0	0.1	11.5	13.1	123.
23.2	79.3	7612.7	375.0	-28.1	-51.8	294.2	20.9	14.7	-9.2	319.1	319.4	0.1	11.9	15.1	122.
24.9	82.4	8170.4	350.0	-30.2	-54.2	286.1	25.0	22.5	-11.0	321.2	321.5	0.1	12.2	17.5	122.
26.6	86.8	8711.1	325.0	-32.6	-57.4	294.7	25.2	22.9	-10.5	322.2	322.4	0.0	12.6	20.2	121.
28.4	91.2	9111.1	300.0	-34.1	-59.9	293.1	26.1	24.0	-10.2	323.9	323.9	99.9	99.9	22.4	120.
30.7	95.9	9511.1	275.0	-35.6	-62.4	284.0	24.9	24.0	-7.0	324.7	324.7	99.9	99.9	26.4	114.
32.8	100.9	10511.1	250.0	-37.1	-64.9	288.1	30.3	36.4	-11.9	326.4	326.4	99.9	99.9	30.7	117.
35.4	105.9	11241.1	225.0	-38.6	-67.4	258.6	37.4	33.4	-16.7	331.6	331.6	99.9	99.9	37.1	114.
37.9	111.3	11971.1	200.0	-40.1	-69.9	289.2	37.5	32.2	-7.7	337.7	337.7	99.9	99.9	41.7	114.
40.9	117.3	12901.1	175.0	-41.5	-72.4	276.0	32.7	32.5	-3.4	345.1	345.1	99.9	99.9	46.9	114.
44.1	124.3	13771.0	150.0	-43.0	-74.9	274.7	28.0	27.9	-2.3	367.4	367.4	99.9	99.9	52.0	112.
48.1	131.3	14701.0	125.0	-44.6	-77.4	252.3	27.1	26.9	3.4	383.4	383.4	99.9	99.9	57.4	104.
53.4	139.3	15289.0	100.0	-46.8	-80.9	255.6	21.3	20.7	4.9	406.3	406.3	99.9	99.9	64.4	104.
59.7	147.7	16711.9	75.0	-48.1	-83.4	230.7	7.4	5.7	4.7	451.2	451.2	99.9	99.9	70.5	104.
67.8	157.0	20582.7	50.0	-51.2	-86.9	300.1	1.9	1.6	-0.9	499.2	499.2	99.9	99.9	72.4	104.
80.9	167.5	25026.8	25.0	-55.8	-90.9	300.1	3.8	-1.3	-3.6	625.0	625.0	99.9	99.9	73.3	104.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY.

STATION NO. 456
TOPERA. RAN
25 APRIL 1975
520 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP EG C	DEW PT EG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y LCR	E POT Y DCR	MR RTD CM/KG	BN PCT	RANGE KM	AZ DG
0.7	6.2	268.0	975.0	16.1	15.6	320.0	2.6	1.7	-2.0	292.5	322.3	11.5	97.0	0.3	0
99.9	99.3	574.0	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	6.5	303.2	975.0	16.9	15.8	99.9	99.9	99.9	99.9	293.7	14.1	11.7	93.4	99.9	99.9
0.9	6.6	425.8	950.0	17.3	14.8	99.9	99.9	99.9	99.9	296.2	2.1	11.2	85.4	99.9	99.9
1.4	10.6	751.0	925.0	18.1	13.3	99.9	99.9	99.9	99.9	297.2	2.1	10.4	83.0	99.9	99.9
2.7	12.6	990.7	900.0	18.3	12.4	64.4	4.4	-7.5	-3.6	297.6	34.1	10.1	88.2	0.3	21.0
3.7	14.8	1224.5	875.0	12.6	10.2	57.9	5.8	-4.9	-3.1	299.3	3.2	9.0	83.7	0.7	24.0
4.6	16.9	1468.1	850.0	11.6	8.4	13.8	5.4	-1.3	-5.2	299.4	1.6	8.2	80.8	1.0	23.0
5.5	19.1	1717.4	825.0	10.2	5.2	351.5	7.4	1.1	-7.4	300.2	15.9	6.8	71.5	1.2	22.0
6.5	21.2	1971.3	800.0	10.3	-1.1	338.2	11.5	4.2	-10.0	302.7	315.3	4.4	45.0	1.5	21.0
7.5	23.5	2237.2	775.0	8.4	-1.7	328.7	13.5	7.0	-1.5	303.4	315.9	4.4	45.0	1.5	21.0
8.5	25.8	2537.7	750.0	7.6	-1.4	318.8	14.8	10.7	-1.5	304.4	315.9	4.4	45.0	1.5	21.0
9.7	28.2	2796.4	725.0	5.5	-4.1	308.8	15.1	12.4	-8.6	306.0	317.3	3.9	49.9	3.6	16.0
10.7	30.7	3072.1	700.0	2.8	-5.9	301.0	14.9	12.7	-7.7	306.0	316.3	3.5	52.8	4.4	15.0
11.4	33.3	3365.2	675.0	0.3	-9.7	295.7	13.7	12.4	-5.9	306.3	314.4	2.7	46.9	5.2	14.0
13.0	35.9	3668.9	650.0	-1.5	-14.0	286.3	12.3	11.8	-3.5	307.5	313.6	2.0	38.0	6.2	13.0
14.1	38.4	3978.5	625.0	-2.6	-21.3	291.7	10.9	10.1	-4.0	310.5	313.2	1.1	21.4	6.2	13.0
15.3	41.0	4300.9	600.0	-4.0	-23.1	300.2	11.4	9.9	-5.7	310.7	313.9	1.0	22.1	6.2	13.0
16.5	43.9	4638.3	575.0	-7.2	-25.1	308.1	12.2	9.6	-7.4	311.6	314.4	0.9	22.2	6.2	13.0
17.8	46.8	4978.7	550.0	-10.4	-27.0	310.7	13.5	10.4	-8.7	311.8	314.3	0.8	24.1	9.1	13.0
19.0	49.7	5234.6	525.0	-13.6	-28.2	312.1	13.4	10.5	-8.3	312.1	314.1	0.6	23.3	12.1	13.0
20.3	52.6	5703.3	500.0	-16.7	-30.5	304.9	13.5	11.1	-7.7	312.6	314.0	0.4	19.7	11.2	13.0
21.4	55.6	6088.3	475.0	-20.1	-32.2	296.2	13.0	11.6	-5.7	313.1	314.2	0.3	20.9	12.3	13.0
23.3	58.9	6484.1	450.0	-23.7	-34.1	286.1	14.9	14.3	-4.1	313.5	314.6	0.3	24.8	13.5	13.0
24.7	62.3	6836.8	425.0	-27.3	-37.4	279.9	17.2	16.9	-2.9	314.0	314.9	0.3	27.2	14.4	12.0
26.0	65.4	7131.7	400.0	-31.1	-40.4	280.1	18.6	18.5	-3.3	314.5	315.1	0.2	25.4	16.5	12.0
28.6	69.4	7781.3	375.0	-34.4	-43.3	276.5	20.3	20.0	-3.4	316.1	316.6	0.1	25.3	18.5	12.0
30.4	72.2	8265.4	350.0	-37.8	-45.3	274.3	18.1	16.0	-1.4	317.7	318.1	0.1	25.4	20.7	11.0
32.6	77.2	9772.7	325.0	-45.9	-53.9	277.3	18.0	17.8	-2.3	320.4	999.9	99.9	99.9	26.7	11.0
34.5	81.3	9311.8	300.0	-45.6	99.2	274.8	19.1	19.0	-1.9	321.2	999.9	99.9	99.9	28.7	11.0
36.4	85.7	9490.6	275.0	-46.7	99.9	257.7	10.7	16.3	3.6	327.6	999.9	99.9	99.9	24.7	11.0
38.7	90.5	10516.4	250.0	-50.3	99.9	241.7	21.0	18.5	10.0	331.3	999.9	99.9	99.9	28.5	11.0
41.5	95.6	11272.0	225.0	-51.8	99.9	226.3	23.9	21.6	20.6	339.2	999.9	99.9	99.9	31.4	11.0
44.2	101.0	11959.8	200.0	-54.8	99.9	244.0	23.6	21.5	10.2	344.4	999.9	99.9	99.9	34.4	11.0
47.7	107.3	12507.2	175.0	-57.9	99.9	256.0	23.4	23.0	4.5	354.3	999.9	99.9	99.9	39.4	9.0
51.4	114.0	13772.2	150.0	-57.3	99.9	256.8	22.0	27.3	6.4	371.4	999.9	99.9	99.9	44.7	9.0
55.6	122.3	14512.9	125.0	-60.9	99.9	269.6	25.2	25.2	0.2	384.7	999.9	99.9	99.9	52.2	9.0
61.1	131.3	16256.2	100.0	-59.7	99.9	273.4	23.4	25.4	-1.5	412.4	999.9	99.9	99.9	61.1	9.0
68.5	141.0	18111.2	75.0	-58.1	99.9	269.2	11.1	11.1	-1.1	451.0	999.9	99.9	99.9	72.3	9.0
77.5	152.5	20639.1	50.0	-60.6	99.9	280.4	6.3	6.2	-1.1	500.8	999.9	99.9	99.9	71.7	9.0
99.9	99.9	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
... MEANS ELEVATION ANGLE LESS THAN 1 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 486
FORT TOTTEN, N Y

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPH	PRES MB	TEMP DG C	DCW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T D/ K	E POT T DG K	MR BTD CM/SEC	RM PCT	RANGE KM	AZ DG
00.0	50.2	0.0	1007.3	15.1	14.4	000.0	99.9	99.9	99.9	289.0	315.0	10.5	97.0	990.0	030.
00.1	50.7	0.0	1000.0	15.0	14.5	000.0	99.9	99.9	99.9	289.5	314.4	10.5	97.2	990.0	030.
00.8	7.3	255.1	975.0	15.3	15.1	000.0	99.9	99.9	99.9	292.1	320.9	11.2	98.3	990.0	030.
1.7	10.1	505.0	950.0	14.3	14.0	000.0	99.9	99.9	99.9	293.1	320.7	10.6	98.2	990.0	030.
5.7	12.2	731.0	925.0	13.0	12.7	000.0	99.9	99.9	99.9	293.9	320.2	10.0	98.0	990.0	030.
3.5	14.5	961.3	900.0	11.4	10.7	000.0	99.9	99.9	99.9	294.4	318.6	9.2	96.9	990.0	030.
4.4	16.5	1196.3	875.0	9.5	9.0	000.0	99.9	99.9	99.9	294.1	309.9	9.9	99.9	990.0	030.
5.3	18.3	1435.7	850.0	8.2	9.0	000.0	99.9	99.9	99.9	294.7	309.9	9.9	99.9	990.0	030.
7.2	21.1	1651.2	825.0	7.0	9.0	000.0	99.9	99.9	99.9	294.0	309.9	9.9	99.9	990.0	030.
9.1	23.5	1932.1	800.0	5.8	9.0	000.0	99.9	99.9	99.9	294.0	309.9	9.9	99.9	990.0	030.
10.1	25.8	2191.9	775.0	4.4	9.0	000.0	99.9	99.9	99.9	294.5	309.9	9.9	99.9	990.0	030.
11.2	27.3	2457.7	750.0	3.0	9.0	000.0	99.9	99.9	99.9	294.8	309.9	9.9	99.9	990.0	030.
12.4	28.1	2731.6	725.0	1.5	0.0	000.0	99.9	99.9	99.9	301.8	317.6	5.7	96.1	990.0	030.
13.6	29.4	3006.0	700.0	0.3	-0.3	000.0	99.9	99.9	99.9	303.5	318.7	5.4	95.9	990.0	030.
14.4	30.4	3306.0	675.0	-0.3	-0.3	000.0	99.9	99.9	99.9	306.5	309.9	9.9	99.9	990.0	030.
15.1	31.2	3606.7	650.0	-2.2	-0.3	000.0	99.9	99.9	99.9	307.7	309.9	9.9	99.9	990.0	030.
16.1	32.5	3916.0	625.0	-4.2	-0.3	000.0	99.9	99.9	99.9	308.9	309.9	9.9	99.9	990.0	030.
17.7	33.7	4237.2	600.0	-6.3	-0.3	000.0	99.9	99.9	99.9	310.1	309.9	9.9	99.9	990.0	030.
18.7	34.2	4568.5	575.0	-8.3	-0.3	000.0	99.9	99.9	99.9	311.4	309.9	9.9	99.9	990.0	030.
19.9	35.7	4911.7	550.0	-10.7	-0.3	000.0	99.9	99.9	99.9	313.1	309.9	9.9	99.9	990.0	030.
21.3	36.0	5267.8	525.0	-12.8	-0.3	000.0	99.9	99.9	99.9	314.8	309.9	9.9	99.9	990.0	030.
22.7	36.3	5638.1	500.0	-15.0	-0.3	000.0	99.9	99.9	99.9	316.4	309.9	9.9	99.9	990.0	030.
24.2	36.6	6024.3	475.0	-17.4	-0.3	000.0	99.9	99.9	99.9	318.2	309.9	9.9	99.9	990.0	030.
25.4	36.9	6427.6	450.0	-19.9	-0.3	000.0	99.9	99.9	99.9	320.2	309.9	9.9	99.9	990.0	030.
27.2	37.3	6840.1	425.0	-22.3	-0.3	000.0	99.9	99.9	99.9	320.4	309.9	9.9	99.9	990.0	030.
28.6	37.5	7222.3	400.0	-25.0	-0.3	000.0	99.9	99.9	99.9	322.6	309.9	9.9	99.9	990.0	030.
30.6	37.8	7566.4	375.0	-28.6	-31.6	000.0	99.9	99.9	99.9	323.7	323.2	0.7	76.5	990.0	030.
32.3	38.0	7946.5	350.0	-32.3	-35.6	000.0	99.9	99.9	99.9	325.1	327.0	0.5	73.6	990.0	030.
34.5	38.0	8316.0	325.0	-36.9	-40.6	000.0	99.9	99.9	99.9	325.7	328.9	0.3	67.0	990.0	030.
36.7	38.0	8690.6	300.0	-41.1	-49.9	000.0	99.9	99.9	99.9	327.5	328.9	0.3	67.0	990.0	030.
38.7	38.5	9080.6	275.0	-46.4	-59.9	000.0	99.9	99.9	99.9	328.1	328.9	0.3	67.0	990.0	030.
41.2	38.5	9526.9	250.0	-51.4	-69.9	000.0	99.9	99.9	99.9	329.6	328.9	0.3	67.0	990.0	030.
43.0	38.5	10000.0	225.0	-57.0	-79.9	000.0	99.9	99.9	99.9	331.2	328.9	0.3	67.0	990.0	030.
46.8	38.5	10531.6	200.0	-63.1	-89.9	000.0	99.9	99.9	99.9	332.6	328.9	0.3	67.0	990.0	030.
50.2	38.5	11055.7	175.0	-68.6	-99.9	000.0	99.9	99.9	99.9	334.0	328.9	0.3	67.0	990.0	030.
54.6	38.5	11625.3	150.0	-74.3	-109.9	000.0	99.9	99.9	99.9	335.4	328.9	0.3	67.0	990.0	030.
60.4	38.5	12235.3	125.0	-80.5	-119.9	000.0	99.9	99.9	99.9	336.8	328.9	0.3	67.0	990.0	030.
66.7	38.5	12826.7	100.0	-87.0	-129.9	000.0	99.9	99.9	99.9	338.2	328.9	0.3	67.0	990.0	030.
70.5	38.5	13400.0	75.0	-93.2	-139.9	000.0	99.9	99.9	99.9	339.6	328.9	0.3	67.0	990.0	030.
74.2	38.5	13950.0	50.0	-100.1	-149.9	000.0	99.9	99.9	99.9	341.0	328.9	0.3	67.0	990.0	030.
77.2	38.5	14490.0	25.0	-107.7	-159.9	000.0	99.9	99.9	99.9	342.4	328.9	0.3	67.0	990.0	030.

0 PV SPEED MEANS ELEVATION ANGLE BETWEEN 0 AND 10 DEG
A PV TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 51P
ALBANY, N.Y.25 APRIL 1975
515 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT 7 DG K	E POT 7 DG K	MX RTO GN/KG	RM PCT	RANGE A/ KM	A/ CG
0.0	6.1	86.0	1000.2	10.9	8.1	310.0	6.7	5.1	-4.3	284.9	302.4	6.8	83.0	0.0	0.
0.2	6.1	87.7	1000.0	10.9	8.1	309.4	6.6	5.1	-4.2	284.9	302.4	6.8	82.9	0.0	2.
0.4	6.4	252.7	975.0	9.5	7.4	265.6	3.0	3.0	0.2	285.6	302.8	6.7	86.6	0.7	11.4
1.6	10.5	514.9	950.0	10.0	8.6	320.1	7.9	4.2	-6.7	280.3	307.5	7.4	91.1	0.9	12.5
2.5	12.9	737.1	925.0	10.4	8.8	332.5	5.8	2.7	-5.1	280.9	311.1	7.7	89.7	1.2	17.0
3.2	15.2	966.0	900.0	10.8	6.8	303.3	8.4	6.9	-4.8	273.5	312.0	6.9	76.5	1.6	17.0
4.0	17.5	1200.7	875.0	9.2	7.7	287.0	9.4	9.0	-2.7	294.4	314.6	7.6	90.2	2.3	12.7
4.9	19.9	1441.0	850.0	7.9	6.9	277.0	9.2	9.2	-1.1	295.4	315.2	7.4	93.1	2.5	12.7
5.8	22.2	1687.3	825.0	6.6	5.7	271.9	7.9	7.9	-0.3	294.4	315.3	7.0	94.0	2.5	11.0
6.6	24.3	1939.8	800.0	4.9	4.2	275.6	6.3	6.3	-0.6	294.4	314.6	6.4	93.7	3.2	11.0
7.4	27.1	2196.7	775.0	3.3	2.4	275.1	7.8	7.8	-0.7	298.1	314.6	5.9	93.8	3.4	11.0
8.1	29.9	2463.8	750.0	1.7	-7.7	273.4	8.3	8.3	-0.5	298.8	307.0	2.9	46.7	4.7	11.0
9.2	32.4	2737.5	725.0	1.4	-10.7	276.3	8.3	8.3	-0.9	301.2	305.5	1.4	24.4	4.4	11.0
10.1	35.2	3015.2	700.0	-0.2	-17.0	270.9	8.9	8.7	-1.5	302.5	306.8	1.4	26.8	4.4	10.0
11.2	37.8	3309.1	675.0	-2.3	-25.0	285.3	9.5	9.1	-2.5	303.2	305.3	0.7	15.6	5.4	10.0
12.7	40.5	3602.1	650.0	-3.1	-30.5	282.5	8.3	8.4	-1.8	305.4	305.6	0.1	1.0	6.2	10.0
14.1	43.3	3917.0	625.0	-4.3	-32.6	265.6	8.4	8.4	0.1	307.6	307.7	0.0	1.0	6.2	10.0
15.4	46.3	4238.0	600.0	-6.4	-34.0	265.4	10.3	10.2	0.9	308.7	308.8	0.0	1.0	7.4	10.0
16.7	49.3	4509.2	575.0	-8.4	-35.7	276.4	12.0	11.9	-1.3	310.1	310.9	0.1	3.2	8.4	10.0
17.8	52.1	4811.8	550.0	-11.6	-37.1	270.1	13.8	12.9	-4.7	310.4	311.3	0.3	9.9	9.4	10.0
19.1	55.3	5265.2	525.0	-15.1	-32.2	295.6	15.0	13.6	-6.2	310.3	311.3	0.5	21.6	10.4	10.0
20.3	58.4	5632.8	500.0	-18.2	-25.3	297.8	15.8	13.9	-7.4	310.9	314.1	1.0	45.1	11.4	10.0
21.7	61.8	6014.7	475.0	-20.1	-24.6	282.0	18.6	18.2	-3.9	313.2	316.7	1.1	67.3	12.4	10.0
23.2	65.2	6414.8	450.0	-21.7	-24.6	282.0	18.6	18.2	-3.9	313.2	316.7	1.1	67.3	12.4	10.0
24.8	68.6	6834.6	425.0	-23.6	-23.6	257.4	30.8	30.1	6.7	318.8	321.6	0.8	61.0	17.4	10.0
26.4	72.0	7275.1	400.0	-26.8	-31.3	255.4	30.9	29.9	7.8	320.2	322.5	0.7	65.4	20.1	10.0
28.0	76.0	7737.3	375.0	-30.5	-37.9	251.3	13.6	31.8	10.8	321.2	322.5	0.4	47.8	22.4	10.0
29.6	80.3	8224.8	350.0	-33.6	-37.9	244.9	33.6	29.6	13.8	323.4	323.4	0.3	53.1	25.4	10.0
31.3	83.9	8734.4	325.0	-37.9	-44.3	241.6	33.2	28.3	15.3	324.4	324.4	0.2	50.2	28.4	10.0
33.3	88.3	9286.0	300.0	-42.7	-44.3	235.7	33.2	28.6	15.8	325.2	325.2	0.2	50.2	28.4	10.0
35.4	92.5	9865.2	275.0	-48.6	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
37.6	97.4	10485.0	250.0	-53.2	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
39.9	102.5	11153.8	225.0	-58.1	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
42.9	108.3	11891.3	200.0	-62.0	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
46.2	114.3	12715.5	175.0	-62.3	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
49.7	120.7	13676.0	150.0	-58.8	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
54.1	129.0	14622.2	125.0	-58.0	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
59.8	136.3	16234.1	100.0	-56.5	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
66.3	144.7	18052.3	75.0	-58.7	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
75.3	154.3	22590.8	50.0	-57.2	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0
89.9	163.7	24992.7	25.0	-55.6	-44.3	235.7	33.0	31.1	19.1	326.9	326.9	0.2	50.2	32.4	10.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

* BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 520
PITTSBURGH, PA

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.9	359.0	971.0	12.0	9.9	300.0	3.1	2.7	-1.8	288.5	303.1	7.9	87.0	0.0	0.
99.9	99.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
4.0	99.3	99.9	973.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	9.9	582.7	953.0	11.6	11.2	999.9	99.9	99.9	99.9	290.1	313.0	8.0	97.0	99.9	99.9
1.4	12.2	765.6	925.0	12.8	11.0	999.9	99.9	99.9	99.9	293.6	317.1	9.0	88.7	99.9	99.9
2.1	14.3	996.9	900.0	11.6	9.8	104.2	4.3	3.6	-2.4	264.6	317.2	8.5	95.0	99.9	99.9
2.9	17.1	1232.8	875.0	10.4	9.3	290.6	6.1	5.7	-2.1	293.7	318.2	8.5	92.8	99.9	99.9
3.7	19.3	1474.0	850.0	8.6	7.8	283.4	7.0	6.8	-1.6	296.2	317.2	7.8	99.2	99.9	99.9
4.5	22.3	1720.6	825.0	6.5	5.9	285.9	6.0	5.8	-1.6	296.5	315.6	7.1	95.2	99.9	99.9
5.3	25.3	1973.0	800.0	5.1	4.3	290.0	7.3	6.8	-2.5	297.4	315.2	6.5	95.0	99.9	99.9
6.2	27.6	2232.4	775.0	4.6	3.4	287.9	9.7	9.2	-3.0	299.6	317.0	6.3	91.2	99.9	99.9
7.1	30.4	2499.1	750.0	2.7	0.8	284.3	10.4	10.1	-2.6	300.3	315.4	5.4	86.8	99.9	99.9
8.1	33.2	2773.0	725.0	0.6	-3.8	284.1	11.5	10.9	-3.6	300.6	312.1	4.0	72.9	99.9	99.9
9.0	35.9	3053.8	700.0	-1.1	-13.6	297.0	12.4	11.3	-5.7	301.5	307.2	1.9	36.0	99.9	99.9
10.1	38.5	3347.3	675.0	-1.7	-22.8	298.0	13.3	11.8	-6.3	303.8	306.7	0.9	18.1	99.9	99.9
11.0	41.4	3647.1	650.0	-2.6	-27.7	297.6	12.5	11.1	-5.8	307.1	309.3	0.7	15.4	99.9	99.9
12.0	44.5	3952.9	625.0	-4.7	-27.1	300.6	11.7	10.1	-6.0	308.2	308.9	0.9	17.8	99.9	99.9
13.1	47.7	4272.7	600.0	-7.0	-29.7	295.3	11.9	10.3	-5.8	308.0	309.8	0.5	14.4	99.9	99.9
14.1	50.7	4603.0	575.0	-9.5	-30.2	294.9	11.7	10.6	-4.9	308.8	310.5	0.5	16.8	99.9	99.9
15.3	54.3	4944.8	550.0	-11.5	-27.1	288.9	10.4	10.2	-3.5	310.5	312.9	0.7	25.9	99.9	99.9
16.5	57.1	5300.4	525.0	-13.8	-21.4	289.9	13.3	12.5	-4.5	312.0	316.2	1.3	52.3	99.9	99.9
17.7	60.4	5670.7	500.0	-15.0	-20.8	289.6	19.3	18.3	-6.1	314.6	317.4	0.9	37.2	99.9	99.9
19.0	64.1	6056.6	475.0	-17.7	-18.5	285.5	24.4	23.5	-6.5	316.0	316.6	0.1	7.4	99.9	99.9
20.3	67.7	6459.4	450.0	-20.1	-15.0	280.8	28.9	28.4	-5.4	317.9	318.1	0.0	2.6	99.9	99.9
21.6	71.2	6842.3	425.0	-21.4	-63.6	279.6	34.1	33.6	-5.7	321.5	321.5	0.0	1.0	99.9	99.9
23.2	75.2	7226.3	400.0	-24.8	-65.8	284.2	37.1	35.9	-9.1	322.7	322.8	0.0	1.0	99.9	99.9
24.8	79.2	7791.6	375.0	-25.4	-57.6	284.3	37.8	36.6	-9.3	323.6	323.6	0.0	4.6	99.9	99.9
26.4	83.2	8276.8	350.0	-33.7	-52.6	285.2	42.3	40.8	-11.1	323.3	323.5	0.0	8.0	99.9	99.9
28.3	87.3	8794.0	325.0	-38.6	99.9	284.4	40.5	38.5	-12.8	324.7	999.9	99.9	99.9	99.9	99.9
30.3	92.0	9338.3	300.0	-43.0	99.9	287.9	46.4	44.2	-14.3	324.7	999.9	99.9	99.9	99.9	99.9
32.3	96.4	9919.8	275.0	-47.0	99.9	283.0	46.6	45.4	-10.4	327.1	999.9	99.9	99.9	99.9	99.9
34.6	101.4	10546.0	250.0	-50.3	99.9	271.1	40.7	40.6	-0.7	331.3	999.9	99.9	99.9	99.9	99.9
36.9	106.9	11224.7	225.0	-56.2	99.9	265.8	38.1	38.0	2.8	334.4	999.9	99.9	99.9	99.9	99.9
39.3	112.3	11965.5	200.0	-50.0	99.9	262.0	45.1	44.7	6.3	337.8	999.9	99.9	99.9	99.9	99.9
42.1	118.3	12787.8	175.0	-44.1	99.9	261.1	30.1	29.8	4.7	344.2	999.9	99.9	99.9	99.9	99.9
44.9	125.0	13743.6	150.0	-61.3	99.9	259.5	21.4	21.0	3.9	368.4	999.9	99.9	99.9	99.9	99.9
48.6	131.5	14880.1	125.0	-58.1	99.9	272.5	27.9	27.9	-1.2	393.8	999.9	99.9	99.9	99.9	99.9
51.0	136.5	16255.0	100.0	-57.2	99.9	278.5	17.4	17.2	-2.6	417.4	999.9	99.9	99.9	99.9	99.9
58.5	145.8	18944.4	75.0	-62.5	99.9	242.6	10.7	9.5	4.9	441.8	999.9	99.9	99.9	99.9	99.9
66.3	153.5	21609.3	50.0	-58.1	99.9	289.6	8.1	7.6	-2.7	508.7	999.9	99.9	99.9	99.9	99.9
79.1	161.7	25629.8	25.0	-53.1	99.9	292.6	2.7	-2.7	0.1	632.4	999.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 528
BUFFALO, N Y25 APRIL 1975
515 GMT

159 17. 9

TIME MIN	CNTCT	HEIGHT GFN	PRES MB	TEMP DG C	DEV PT DG C	DIR DG	SPEED M/SEC	U CUMP M/SEC	V CUMP M/SEC	POT T DG K	C POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.8	218.0	989.2	6.1	3.3	300.0	2.6	0.0	-2.6	280.8	293.4	4.9	82.0	0.0	0.
99.9	99.9	99.9	1000.3	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	6.8	336.7	975.0	5.6	1.9	348.5	7.2	1.4	-7.1	281.4	293.1	4.5	77.4	0.0	100.
1.1	5.0	548.6	950.0	3.6	2.3	357.8	6.0	0.2	-6.0	281.5	293.8	4.7	90.7	0.2	171.
1.8	10.9	765.1	925.0	2.5	2.0	12.8	4.2	-0.9	-4.1	282.5	294.9	4.8	96.2	0.4	174.
2.5	13.1	986.2	900.3	0.9	0.5	359.5	3.7	0.0	-3.7	283.0	294.5	4.4	97.2	0.6	173.
3.3	15.2	1213.9	875.0	2.9	-1.8	305.1	4.6	3.8	-2.7	287.3	297.7	3.9	71.8	0.7	174.
4.0	17.3	1445.2	850.0	4.2	-6.3	312.5	7.3	5.4	-4.9	290.9	298.8	2.8	46.3	0.9	174.
4.7	10.5	1652.5	825.0	4.8	-10.7	310.4	7.2	5.5	-4.7	294.0	299.8	2.0	30.9	1.2	174.
5.5	21.6	1943.3	800.0	4.8	-16.0	294.5	8.9	8.1	-3.7	296.4	300.5	1.4	20.4	1.5	174.
6.2	24.0	2201.4	775.0	3.5	-12.2	298.7	11.2	9.9	-5.4	297.8	301.4	1.9	14.0	1.9	174.
7.0	25.2	2465.5	750.0	5.1	-22.6	298.5	12.2	10.8	-5.4	298.9	301.5	0.8	14.0	2.4	174.
7.8	28.7	2740.0	725.0	1.6	-19.9	295.7	11.6	10.4	-3.0	301.3	304.7	1.1	18.4	3.1	174.
8.4	31.2	3021.7	700.0	0.1	-23.0	290.0	10.7	10.1	-3.7	302.7	305.4	0.9	19.6	3.6	174.
9.5	33.8	3312.1	675.0	-1.6	-22.9	289.3	10.9	10.2	-3.6	303.9	306.7	0.9	17.8	4.2	174.
10.6	36.2	3611.3	650.0	-3.5	-24.3	287.4	11.6	11.1	-3.5	305.1	307.7	0.8	14.2	4.8	174.
11.5	38.3	3919.9	625.0	-5.8	-25.3	284.4	12.7	12.3	-3.2	305.9	308.4	0.8	19.7	5.4	174.
12.4	41.4	4238.8	600.0	-7.5	-28.6	282.3	13.1	12.8	-2.8	307.5	309.5	0.6	16.5	6.1	174.
13.4	44.2	4569.5	575.0	-10.1	-29.2	284.5	14.0	13.5	-3.5	308.2	310.1	0.6	19.2	6.8	174.
14.3	47.1	4905.1	550.0	-13.1	-30.3	283.0	15.0	14.6	-3.4	309.5	310.3	0.5	20.7	7.7	174.
14.3	50.1	5241.8	525.0	-15.7	-31.6	282.8	14.3	14.0	-3.2	309.6	311.3	0.5	23.9	8.6	174.
16.6	53.0	5628.3	500.0	-17.8	-28.4	290.5	16.1	15.1	-3.7	311.4	311.8	0.7	38.5	9.7	174.
17.7	56.0	6005.6	475.0	-21.1	-27.4	298.2	17.9	17.0	-3.6	311.9	314.6	0.8	56.0	10.4	174.
18.8	58.3	6406.2	450.0	-24.3	-28.2	279.8	17.3	17.0	-3.0	312.7	315.4	0.8	69.7	12.0	174.
20.2	62.7	6820.7	425.0	-27.4	-32.1	271.1	16.0	16.0	-2.3	313.9	315.9	0.6	64.2	13.2	174.
21.6	66.0	7254.1	400.0	-30.4	-34.9	269.6	17.4	17.4	0.1	315.5	317.2	0.5	63.9	14.5	174.
23.0	69.7	7713.8	375.0	-33.2	-39.2	275.7	22.0	21.9	-2.2	317.6	318.8	0.3	54.7	16.1	174.
24.6	73.3	8193.1	350.0	-36.3	-53.8	266.8	23.2	23.2	1.3	319.7	320.0	0.1	14.4	18.2	174.
24.3	77.5	8703.0	325.0	-40.7	99.9	263.0	24.0	23.8	1.3	320.7	320.9	99.9	99.9	20.5	174.
24.0	81.4	9242.6	300.0	-45.2	99.9	257.9	23.1	22.0	4.8	321.6	321.6	99.9	99.9	22.7	174.
30.0	85.7	9817.2	275.0	-50.2	99.9	253.7	24.2	23.8	4.3	322.5	322.5	99.9	99.9	25.3	174.
32.0	90.4	10432.1	250.0	-55.0	99.9	260.4	27.4	27.0	4.6	324.4	324.4	99.9	99.9	28.4	174.
34.2	95.4	11103.2	225.0	-58.5	99.9	264.5	30.1	30.0	2.9	332.0	332.0	99.9	99.9	32.2	174.
36.8	100.8	11846.6	200.0	-58.3	99.9	262.3	33.6	33.6	4.5	334.5	334.5	99.9	99.9	37.0	174.
39.6	106.8	12682.7	175.0	-59.1	99.9	265.0	34.4	34.3	3.0	352.4	352.4	99.9	99.9	42.6	174.
43.0	113.3	13657.2	150.0	-55.1	99.9	264.5	27.8	27.6	2.7	375.2	375.2	99.9	99.9	48.7	174.
46.9	120.7	14818.4	125.0	-56.7	99.9	264.3	21.1	21.0	2.1	392.3	392.3	99.9	99.9	55.3	174.
52.0	129.3	16217.7	100.0	-56.1	99.9	269.3	20.5	20.5	0.2	419.4	419.4	99.9	99.9	61.1	174.
59.4	139.0	18053.0	50.0	-61.7	99.9	267.8	15.2	15.2	0.6	443.6	443.6	99.9	99.9	67.3	174.
66.7	149.3	20552.1	0.0	-57.9	99.9	325.8	7.9	6.4	-4.6	507.1	507.1	99.9	99.9	70.7	174.
80.0	156.7	25022.8	0.0	-52.0	99.9	77.4	3.6	-3.6	-0.8	635.7	635.7	99.9	99.9	80.6	174.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 532
PEORIA, ILL

25 APRIL 1975
515 GMT

150 12. 0

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MR RTO CM/MG	PM PCT	RANGF KM	AZ DG
0.0	5.6	200.0	989.2	8.9	5.6	56.0	8.2	-4.7	-4.0	283.7	298.7	5.8	80.0	0.0	0.
0.9	5.3	90.9	1000.0	99.9	99.9	56.0	99.9	99.9	55.7	99.9	99.9	99.9	999.9	999.9	99.9
0.5	6.6	319.7	975.0	7.8	6.0	56.7	11.2	-0.4	-6.2	283.8	299.4	6.0	99.9	0.3	23.6
1.3	6.6	533.7	950.0	6.9	6.6	58.4	10.1	-8.6	-2.3	285.1	301.8	6.5	98.6	0.9	21.6
2.2	16.6	755.0	925.0	10.1	10.1	99.9	99.9	99.9	99.9	290.8	312.8	8.5	101.6	999.9	99.9
3.0	12.6	923.6	900.0	10.5	10.5	99.9	99.9	99.9	99.9	293.5	317.0	8.9	101.6	999.9	99.9
3.9	14.7	1218.9	875.0	10.0	9.9	99.9	99.9	99.9	99.9	295.4	318.8	8.8	99.9	999.9	99.9
4.8	16.4	1460.5	850.0	9.5	8.8	238.7	4.5	3.7	2.6	297.2	319.8	8.4	95.9	1.0	25.6
5.8	18.3	1707.9	825.0	7.5	4.9	250.9	3.4	3.2	1.1	297.4	315.4	6.6	83.4	0.8	25.4
6.6	20.3	1961.8	800.0	7.3	5.0	253.2	2.4	2.3	0.7	298.8	318.6	6.9	85.3	0.6	26.3
7.5	23.3	2222.9	775.0	6.0	0.3	239.9	2.1	1.8	1.0	300.9	315.1	5.1	67.2	0.5	26.4
8.6	25.5	2490.8	750.0	3.9	-2.2	240.2	1.9	1.6	0.9	301.4	313.8	4.4	64.4	0.4	27.6
9.5	27.8	2745.5	725.0	2.2	-7.5	246.1	1.5	1.3	0.6	302.3	311.0	3.0	48.7	0.3	24.6
10.6	30.2	3048.5	700.0	0.6	-9.8	293.1	2.2	2.0	-0.8	303.5	311.2	2.6	45.3	0.2	24.6
11.5	32.8	3335.6	675.0	-1.4	-7.9	99.9	99.9	99.9	99.9	304.3	313.6	3.1	61.0	999.9	99.9
12.6	35.3	3639.3	650.0	-4.0	-8.7	99.9	99.9	99.9	99.9	306.8	313.7	3.0	69.6	999.9	99.9
13.9	37.7	3948.0	625.0	-5.7	-10.7	99.9	99.9	99.9	99.9	308.2	314.3	2.7	68.0	999.9	99.9
15.1	40.4	4267.6	600.0	-7.1	-19.7	99.9	99.9	99.9	99.9	308.1	314.3	1.3	35.8	999.9	99.9
16.3	42.9	4597.3	575.0	-10.4	-21.5	280.9	11.3	11.1	-2.1	308.0	311.7	1.2	39.5	2.5	12.6
17.5	45.4	4938.2	550.0	-12.6	-21.3	273.7	9.9	9.8	-0.6	30.2	313.2	1.3	47.9	3.7	10.7
18.6	48.6	5291.2	525.0	-13.7	-22.3	268.0	10.0	10.0	0.7	309.6	313.5	1.2	57.1	4.2	13.4
19.7	51.4	5657.8	500.0	-17.8	-28.5	268.9	14.8	14.8	0.3	311.4	313.8	0.7	38.2	4.9	13.1
20.8	54.5	6039.6	475.0	-20.4	-33.2	268.9	18.9	18.9	0.4	312.7	314.3	0.5	30.8	6.1	7.9
22.1	57.5	6437.4	450.0	-23.6	-34.9	268.0	20.4	20.3	1.4	313.6	315.1	0.4	34.1	7.6	9.7
23.4	60.8	6853.3	425.0	-26.0	-41.3	268.9	23.3	23.0	3.7	315.7	314.5	0.2	22.1	9.3	9.4
24.9	64.1	7299.2	400.0	-28.6	-48.3	259.5	27.6	27.1	5.0	317.7	317.7	0.0	1.0	11.4	9.4
26.3	67.6	7748.4	375.0	-32.1	-70.6	259.3	33.1	32.6	6.2	319.0	319.0	0.0	1.0	14.0	9.4
27.9	71.1	8232.1	350.0	-35.3	-46.0	252.8	43.6	41.7	12.9	321.1	321.7	0.2	32.2	17.3	9.7
29.4	75.0	8745.2	325.0	-37.8	-42.7	243.1	52.5	46.8	23.7	324.8	325.8	0.3	59.4	21.8	8.1
31.2	79.2	9298.6	300.0	-41.7	99.9	238.7	64.9	44.5	31.4	328.6	328.6	99.9	99.9	27.1	7.4
33.1	82.2	9876.7	275.0	-46.4	99.9	232.2	52.9	41.8	32.4	328.1	328.1	99.9	99.9	32.7	7.3
35.0	87.4	10528.4	250.0	-51.7	99.9	233.6	56.9	42.4	33.8	329.3	329.3	99.9	99.9	38.6	7.0
37.2	92.5	11179.7	225.0	-55.9	99.9	230.3	67.3	51.8	43.0	332.8	332.8	99.9	99.9	46.7	6.7
39.9	97.3	11918.0	200.0	-61.0	99.9	237.9	64.9	51.8	34.5	336.1	336.1	99.9	99.9	56.3	6.4
42.7	103.3	12739.8	175.0	-65.5	99.9	254.8	51.9	50.1	13.6	341.9	341.9	99.9	99.9	67.8	6.2
46.1	109.9	13688.5	150.0	-61.4	99.9	270.0	35.5	35.5	-0.0	364.3	364.3	99.9	99.9	75.6	6.7
50.6	116.7	14823.3	125.0	-61.5	99.9	265.7	30.8	30.7	2.3	383.6	383.6	99.9	99.9	82.9	9.0
56.2	125.3	16217.3	100.0	-59.0	99.9	263.0	22.3	22.2	1.9	413.8	413.8	99.9	99.9	86.9	7.1
62.8	135.0	18017.6	75.0	-61.4	99.9	250.4	13.1	12.3	0.4	444.2	444.2	99.9	99.9	96.6	7.3
72.6	145.5	20525.5	50.0	-60.0	99.9	106.7	2.6	-2.5	0.7	502.2	502.2	99.9	99.9	99.6	7.2
86.5	157.0	24917.2	25.0	-53.8	99.9	55.9	6.5	-5.4	-3.6	629.9	629.9	99.9	99.9	100.0	7.2

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 553
OMAHA, NEB25 APRIL 1975
338 GMT

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG	146 JL 0
0.0	7.3	400.0	963.7	12.1	10.3	30.0	4.1	-2.0	-3.6	289.4	310.7	4.2	89.0	0.0	0.	
99.3	99.9	1000.0	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	
99.0	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	
0.5	8.2	521.0	950.0	14.4	12.7	37.8	6.3	-3.8	-5.0	293.1	318.7	9.8	89.8	0.2	309.	
1.2	10.1	746.4	925.0	13.3	11.6	159.0	0.5	-0.2	0.5	294.1	313.7	9.4	89.9	0.2	257.	
2.1	11.9	776.7	900.0	11.4	10.3	215.0	3.8	2.2	3.1	294.4	317.6	8.8	92.9	0.2	126.	
3.0	13.9	1212.0	875.0	10.1	9.1	212.9	5.4	4.4	3.4	295.3	317.5	8.1	93.5	0.3	9.	
3.9	15.3	1453.1	850.0	9.7	3.5	257.9	6.1	5.9	1.3	297.0	317.5	5.8	65.5	0.6	35.	
4.8	17.9	1700.7	825.0	8.2	1.1	290.4	6.7	6.3	-2.3	297.9	311.9	5.0	60.8	0.8	54.	
6.2	20.0	1953.8	800.0	6.1	0.9	296.9	8.2	7.3	-3.7	298.3	312.5	5.1	69.3	1.3	42.	
7.3	22.0	2213.2	775.0	4.1	-1.1	302.4	9.7	8.2	-5.2	298.8	311.5	4.6	69.0	1.4	51.	
8.4	24.2	2479.4	750.0	2.6	-9.8	297.3	9.4	8.3	-4.3	299.7	309.8	2.4	39.7	2.1	100.	
9.4	26.2	2752.5	725.0	0.4	-17.9	300.6	11.1	10.1	-6.0	300.1	304.0	1.3	23.6	2.9	174.	
10.6	28.5	3032.7	700.0	-2.1	-19.4	303.1	15.1	14.6	-8.2	300.3	303.9	1.2	25.0	3.9	179.	
11.7	30.9	3320.9	675.0	-2.2	-36.1	300.1	17.5	15.1	-8.6	303.2	304.1	0.3	5.7	5.0	112.	
12.9	33.3	3620.8	650.0	-2.3	-38.7	294.4	21.8	19.9	-9.0	306.4	307.1	0.2	4.1	6.3	117.	
13.9	35.7	3931.1	625.0	-4.1	-44.1	290.6	23.9	22.4	-8.4	307.7	308.2	0.1	2.7	7.7	112.	
15.1	38.1	4251.3	600.0	-6.5	-42.1	287.9	25.7	24.4	-7.9	308.6	309.2	0.2	3.9	9.5	112.	
16.1	40.6	4582.1	575.0	-9.4	-43.5	287.4	26.0	24.8	-7.8	309.0	309.4	0.1	4.2	11.3	111.	
17.5	43.1	4923.4	550.0	-12.5	-45.0	291.5	26.3	24.5	-6.6	309.2	309.7	0.1	4.6	13.3	111.	
18.8	46.0	5276.2	525.0	-15.8	-44.9	296.2	25.3	22.7	-11.2	309.4	309.9	0.1	6.1	15.2	111.	
20.2	49.3	5641.5	500.0	-18.9	-45.3	293.7	28.7	26.2	-11.5	309.9	310.4	0.1	7.6	17.5	112.	
21.4	51.7	6021.5	475.0	-21.8	-47.2	291.6	30.9	28.8	-11.4	310.9	311.3	0.1	7.9	19.7	112.	
22.8	54.9	6417.0	450.0	-24.9	-48.4	297.9	29.5	26.1	-13.6	311.9	312.3	0.1	9.1	22.1	112.	
24.2	57.6	6829.0	425.0	-28.4	-53.1	298.4	31.3	27.5	-14.9	312.6	312.8	0.1	7.2	24.8	113.	
25.7	61.3	7241.1	400.0	-31.8	-54.6	301.8	33.4	28.4	-17.6	313.5	313.7	0.1	8.4	27.6	114.	
27.3	64.5	7714.2	375.0	-35.4	-55.9	302.9	33.3	28.0	-18.1	314.6	314.8	0.0	10.2	30.9	115.	
29.0	67.9	8190.5	350.0	-39.5	-59.9	303.7	33.1	27.5	-18.4	315.5	315.9	99.9	99.9	34.3	115.	
30.8	71.5	8693.0	325.0	-43.9	-59.9	306.1	34.0	27.5	-20.0	316.2	316.2	99.9	99.9	37.9	116.	
32.9	75.5	9225.2	300.0	-48.2	-59.9	294.5	26.8	24.4	-11.1	317.5	317.5	99.9	99.9	41.6	117.	
35.1	79.9	9793.6	275.0	-51.9	-59.9	283.9	29.1	28.3	-7.0	320.1	320.1	99.9	99.9	44.9	116.	
37.7	84.2	10405.9	250.0	-54.9	-59.9	270.3	25.9	25.5	-4.7	324.4	324.4	99.9	99.9	49.9	115.	
40.0	88.9	11076.3	225.0	-54.4	-59.9	276.1	31.6	31.5	-3.3	335.1	335.1	99.9	99.9	53.3	114.	
42.7	94.2	11832.1	200.0	-53.6	-59.9	262.2	22.3	22.1	3.0	347.9	347.9	99.9	99.9	58.7	112.	
45.6	99.9	12685.6	175.0	-55.6	-59.9	254.1	24.9	24.5	4.7	358.1	358.1	99.9	99.9	60.4	110.	
49.3	106.0	13664.9	150.0	-57.5	-59.9	267.6	23.5	23.5	3.0	371.0	371.0	99.9	99.9	66.2	108.	
53.4	113.3	14804.6	125.0	-60.9	-59.9	277.1	30.2	29.9	-3.7	384.8	384.8	99.9	99.9	72.2	106.	
58.1	121.7	16189.4	100.0	-61.1	-59.9	267.2	25.8	25.9	1.3	404.7	404.7	99.9	99.9	79.3	104.	
64.5	132.0	18003.7	75.0	-56.7	-59.9	273.3	14.0	13.9	-6.8	454.1	454.1	99.9	99.9	89.6	104.	
72.5	143.0	20362.2	50.0	-58.0	-59.9	242.7	5.5	4.9	2.5	506.8	506.8	99.9	99.9	91.5	102.	
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 606
PORTLAND, ME

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTG GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.6	20.0	1007.7	6.1	6.1	360.0	2.6	0.0	-2.6	279.4	294.3	5.9	100.0	0.0	0.
0.2	6.1	83.1	1000.0	6.6	6.3	999.9	99.9	99.9	99.9	280.5	295.7	6.0	98.2	999.9	999.
0.4	8.3	290.8	975.0	5.6	5.6	999.9	99.9	99.9	99.9	280.5	295.7	5.9	101.3	999.9	999.
0.6	10.5	504.4	950.0	8.0	8.0	999.9	99.9	99.9	99.9	280.5	295.7	7.2	101.6	999.9	999.
0.8	12.5	725.4	925.0	10.6	10.6	259.1	10.3	10.1	1.9	291.2	313.9	8.7	101.9	999.9	999.
1.0	15.3	954.6	900.0	9.3	9.3	259.1	10.3	10.1	1.9	291.2	313.9	8.7	101.9	999.9	999.
1.2	17.2	1189.7	875.0	8.5	8.5	259.1	10.3	10.1	1.9	291.2	313.9	8.7	101.9	999.9	999.
1.4	19.2	1428.4	850.0	7.3	6.0	267.4	10.7	10.2	-3.4	292.6	314.8	8.0	101.4	999.9	999.
1.6	21.3	1674.0	825.0	5.9	3.7	275.6	10.3	10.1	-1.7	295.6	312.1	6.1	85.6	999.9	999.
1.8	23.5	1925.9	800.0	4.6	2.8	267.4	11.2	11.2	0.5	295.6	312.1	5.9	87.9	999.9	999.
2.0	25.5	2194.4	775.0	2.8	1.9	259.2	12.2	12.2	2.3	297.5	313.1	5.7	94.0	999.9	999.
2.2	27.4	2449.4	750.0	0.8	0.8	250.6	12.1	11.4	4.0	298.2	313.1	5.4	99.7	999.9	999.
2.4	29.1	2721.7	725.0	-0.7	-0.7	244.9	12.1	10.9	5.1	298.2	313.1	5.0	99.5	999.9	999.
2.6	31.7	3000.8	700.0	-3.0	-3.0	244.9	11.7	10.9	4.3	298.2	313.1	5.0	99.5	999.9	999.
2.8	34.3	3286.5	675.0	-5.2	-5.2	236.5	11.5	11.5	1.3	302.1	302.4	1.2	27.5	999.9	999.
3.0	36.9	3586.7	650.0	-7.3	-7.3	236.5	12.9	12.9	-0.3	304.8	304.9	0.0	2.4	999.9	999.
3.2	39.4	3895.7	625.0	-9.5	-9.5	236.5	13.7	13.7	-0.1	306.7	306.8	0.0	1.0	999.9	999.
3.4	41.9	4215.1	600.0	-11.7	-11.7	236.5	13.7	13.7	0.2	307.6	307.8	0.0	1.0	999.9	999.
3.6	44.5	4544.7	575.0	-14.0	-14.0	236.5	13.4	13.4	0.5	308.3	308.4	0.0	1.0	999.9	999.
3.8	47.1	4885.9	550.0	-16.5	-16.5	271.4	12.6	12.6	-0.3	309.2	309.3	0.0	1.0	999.9	999.
4.0	49.7	5219.4	525.0	-19.0	-19.0	271.4	12.9	12.9	-0.4	310.3	310.4	0.0	1.0	999.9	999.
4.2	52.3	5566.4	500.0	-21.5	-21.5	265.0	14.5	14.5	1.3	311.0	311.1	0.0	1.0	999.9	999.
4.4	54.9	5928.5	475.0	-24.0	-24.0	265.0	15.9	15.9	2.2	312.0	312.1	0.0	1.0	999.9	999.
4.6	57.5	6307.8	450.0	-26.5	-26.5	265.0	17.3	17.3	0.6	314.8	314.9	0.0	1.0	999.9	999.
4.8	60.1	6694.3	425.0	-29.0	-29.0	265.0	18.9	18.9	-1.4	316.7	316.8	0.6	48.2	999.9	999.
5.0	62.7	7086.2	400.0	-31.5	-31.5	255.9	20.8	20.8	3.4	320.2	320.3	0.7	62.7	999.9	999.
5.2	65.3	7483.4	375.0	-34.0	-34.0	255.9	33.1	33.1	6.1	321.7	321.8	0.5	59.2	999.9	999.
5.4	67.9	7885.9	350.0	-36.5	-36.5	251.9	33.7	33.7	10.5	323.3	323.4	0.3	54.9	999.9	999.
5.6	70.5	8294.2	325.0	-39.0	-39.0	251.9	33.7	33.7	12.9	325.0	325.1	99.9	999.9	999.9	999.
5.8	73.1	8709.2	300.0	-41.5	-41.5	251.9	35.5	35.5	10.7	325.0	325.1	99.9	999.9	999.9	999.
6.0	75.7	9138.6	275.0	-44.0	-44.0	255.0	38.7	38.7	10.0	325.9	325.9	99.9	999.9	999.9	999.
6.2	78.3	9584.3	250.0	-46.5	-46.5	255.0	41.2	41.2	8.4	326.9	326.9	99.9	999.9	999.9	999.
6.4	80.9	10036.4	225.0	-49.0	-49.0	255.0	43.6	43.6	6.3	326.9	326.9	99.9	999.9	999.9	999.
6.6	83.5	10494.7	200.0	-51.5	-51.5	255.0	46.0	46.0	4.1	330.9	330.9	99.9	999.9	999.9	999.
6.8	86.1	10957.7	175.0	-54.0	-54.0	255.0	48.4	48.4	-3.8	342.7	342.7	99.9	999.9	999.9	999.
7.0	88.7	11426.4	150.0	-56.5	-56.5	255.0	50.8	50.8	-1.8	365.9	365.9	99.9	999.9	999.9	999.
7.2	91.3	11899.5	125.0	-59.0	-59.0	263.6	20.2	20.2	2.3	398.0	398.0	99.9	999.9	999.9	999.
7.4	93.9	12378.5	100.0	-61.5	-61.5	263.6	21.5	21.5	-9.0	420.5	420.5	99.9	999.9	999.9	999.
7.6	96.5	12857.1	75.0	-64.0	-64.0	263.6	23.3	23.3	-7.9	454.3	454.3	99.9	999.9	999.9	999.
7.8	99.1	13336.2	50.0	-66.5	-66.5	263.6	25.2	25.2	-0.1	508.2	508.2	99.9	999.9	999.9	999.
8.0	101.7	13815.3	25.0	-69.0	-69.0	263.6	27.5	27.5	2.1	633.6	633.6	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 637
FLINT, MICH25 APRIL 1975
600 GMT

TIME MIN	CNTCT	HEIGHT GEM	PRES MB	TEMP DG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/K	RM PCT	RANGE KM	LAZ %
0.0	5.7	236.0	987.8	5.6	1.7	50.0	2.6	-2.0	-1.7	280.3	241.7	4.4	76.0	0.0	0.0
0.9	59.9	95.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	6.7	343.0	975.0	6.0	0.2	45.3	4.7	-3.6	-3.1	261.7	292.7	4.0	66.6	0.1	2.0
0.9	8.9	555.5	950.0	4.7	2.0	45.7	5.2	-3.6	-3.7	282.6	294.7	4.7	82.6	0.3	21.0
1.6	10.9	772.3	925.0	4.7	1.2	45.7	7.4	-5.2	-5.2	282.5	294.3	4.5	91.1	0.5	21.0
2.4	13.0	992.3	900.0	0.8	-0.0	50.5	7.4	-5.7	-4.7	282.8	294.0	4.2	94.4	0.9	27.0
3.1	15.2	1219.9	875.0	1.7	0.2	72.9	4.0	-3.8	-1.2	286.2	298.0	4.5	89.7	1.2	27.0
3.9	17.4	1458.8	850.0	3.7	-2.6	240.0	1.3	1.2	0.5	290.5	307.8	4.8	64.4	1.1	21.0
4.7	19.6	1698.2	825.0	4.9	-7.6	318.1	3.3	2.4	-2.3	294.1	301.6	4.6	39.9	1.1	21.0
5.4	21.8	1548.9	800.0	4.0	-5.0	288.6	4.6	4.4	-1.5	295.8	305.1	3.3	51.9	1.1	21.0
6.3	24.3	2206.5	775.0	2.8	-4.7	279.4	6.4	6.3	-1.1	297.2	307.1	3.5	57.8	1.0	21.0
7.1	26.5	2471.5	750.0	2.6	-31.6	278.2	7.6	7.6	-0.3	301.2	303.7	0.6	9.8	1.1	11.0
7.9	29.0	2745.2	725.0	2.1	-24.5	272.1	9.1	9.1	-0.1	299.5	300.7	0.4	13.5	1.4	11.0
8.9	31.6	3027.5	700.0	0.3	-24.7	268.8	9.7	9.7	0.2	302.9	305.3	0.7	20.9	1.5	12.0
9.0	24.3	3317.7	675.0	-1.0	-21.2	273.2	10.0	10.0	-0.6	303.8	307.0	1.0	15.6	2.3	11.0
10.8	30.7	3616.9	650.0	-3.6	-28.0	273.1	10.8	10.8	-0.7	305.9	307.8	0.6	14.3	2.9	11.0
11.6	39.5	3924.5	625.0	-5.8	-28.7	273.5	10.6	10.6	-1.3	306.9	309.1	0.6	18.7	3.5	13.0
12.7	42.1	4244.0	600.0	-8.0	-27.7	273.2	10.1	10.1	-0.5	307.6	309.7	0.6	22.0	4.1	13.0
13.7	45.1	4573.0	575.0	-10.7	-28.2	273.0	10.3	10.3	-0.1	308.6	311.2	0.8	32.5	4.7	13.0
14.7	48.1	4913.5	550.0	-13.1	-26.1	268.4	11.4	11.3	-0.1	309.8	311.4	0.5	22.1	5.4	13.0
15.5	51.0	5266.0	525.0	-15.5	-32.3	270.4	10.9	10.9	-2.5	310.2	311.8	0.5	28.5	6.2	13.0
17.0	54.1	5632.2	500.0	-18.8	-32.6	283.9	10.2	9.9	-2.0	310.6	313.1	0.7	50.3	7.7	13.0
18.2	57.1	6017.1	475.0	-22.0	-29.5	280.4	11.0	10.8	-1.3	312.2	314.6	0.7	63.1	8.9	13.0
19.4	60.4	6406.1	450.0	-24.7	-20.7	275.5	12.3	12.3	1.3	313.3	315.7	0.7	79.6	10.1	13.0
20.7	64.0	6821.5	425.0	-27.9	-30.3	264.9	12.3	14.2	2.2	314.6	316.8	0.7	91.9	12.1	13.0
22.1	67.4	7254.8	400.0	-31.1	-31.9	263.5	19.1	19.0	1.8	316.1	317.0	0.3	50.4	12.0	13.0
23.7	71.0	7709.3	375.0	-34.4	-41.0	265.2	21.5	21.5	0.2	318.5	319.1	0.2	36.8	14.1	13.0
25.1	74.9	8199.8	350.0	-37.2	-46.5	269.2	20.6	20.6	0.1	319.4	319.4	0.9	99.9	17.0	13.0
26.5	79.2	8697.7	325.0	-41.5	99.9	269.4	36.7	36.7	0.3	319.8	319.8	99.9	99.9	20.5	13.0
28.1	83.2	9214.6	300.0	-46.5	99.9	269.5	41.6	41.6	0.3	321.7	321.7	99.9	99.9	24.3	13.0
30.1	87.6	9806.4	275.0	-50.8	99.9	270.1	52.5	52.5	3.1	326.4	326.4	99.9	99.9	32.9	13.0
32.1	92.4	10423.1	250.0	-52.3	99.9	267.7	53.8	53.7	4.6	333.1	333.1	99.9	99.9	41.3	13.0
34.5	97.5	11093.6	225.0	-55.7	99.9	266.1	58.0	47.9	3.2	338.4	338.4	99.9	99.9	49.2	13.0
36.6	103.0	11845.0	200.0	-59.6	99.9	266.5	58.7	52.6	-1.3	354.1	354.1	99.9	99.9	57.1	13.0
39.6	109.3	12681.8	175.0	-58.1	99.9	272.4	38.2	32.1	2.1	370.1	370.1	99.9	99.9	63.1	13.0
43.2	115.8	13652.8	150.0	-58.1	99.9	265.5	26.8	24.7	5.7	392.5	392.5	99.9	99.9	70.2	13.0
47.4	123.7	14806.0	125.0	-56.6	99.9	258.7	24.9	24.3	0.4	417.6	417.6	99.9	99.9	76.8	13.0
52.5	132.0	16225.3	100.0	-57.0	99.9	268.9	20.5	20.5	4.8	442.7	442.7	99.9	99.9	81.8	13.0
58.1	141.5	18030.0	75.0	-62.1	99.9	244.7	11.1	10.1	-3.2	508.8	508.8	99.9	99.9	84.4	13.0
64.2	152.0	20572.6	50.0	-58.0	99.9	219.9	3.5	-1.3	-0.5	636.2	636.2	99.9	99.9	83.4	13.0
81.6	163.0	24955.8	25.0	-51.7	99.9	786.2	1.9	-1.8							

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 645
GREEN BAY, WIS

25 APRIL 1975
515 GMT

TIME MIN	CNTCT	HEIGHT GM	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.9	210.0	991.5	3.3	2.4	80.0	2.1	-2.1	-0.4	277.7	289.5	4.6	94.0	0.0	0.
99.9	99.9	1000.0	999.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	8.4	346.3	975.0	3.0	2.2	85.6	8.5	-8.4	-0.6	278.8	290.6	4.6	94.3	0.1	220.
1.4	10.5	550.9	925.0	2.2	1.4	81.1	9.9	-9.8	-1.5	280.0	291.5	4.5	94.3	0.5	263.
2.2	12.6	771.9	925.0	0.7	0.3	88.0	10.0	-9.2	-3.7	280.6	291.6	4.2	94.6	1.0	260.
3.0	14.9	992.6	900.0	2.0	-2.0	47.5	9.9	-7.3	-6.7	284.0	293.2	3.5	70.4	1.4	252.
3.9	17.0	1220.6	875.0	3.2	-9.8	55.7	5.5	-4.6	-3.1	287.4	293.2	2.1	37.6	1.8	246.
4.7	19.3	1456.1	850.0	3.9	-9.3	55.9	2.7	-2.7	-0.2	290.5	296.8	2.2	37.4	2.0	247.
5.7	21.5	1658.2	825.0	2.8	-9.2	56.5	0.4	-0.4	0.0	291.8	298.4	2.3	40.8	2.0	246.
6.7	23.9	1946.6	800.0	1.3	-7.6	155.0	1.2	-0.5	1.1	292.8	300.4	2.7	51.4	2.1	249.
7.7	26.2	2201.5	775.0	0.5	-25.4	257.8	0.6	0.6	0.1	294.4	296.4	0.6	12.6	2.1	250.
8.6	28.7	2468.7	750.0	0.5	-49.6	280.4	3.3	3.3	-0.6	297.2	297.3	0.1	1.0	1.9	249.
9.5	31.2	2735.9	725.0	-0.4	-48.9	293.6	4.6	4.2	-1.8	299.0	299.2	0.1	1.2	1.8	244.
10.6	33.9	3015.3	700.0	-2.0	-43.0	298.2	7.2	6.3	-3.4	300.3	300.7	0.1	2.5	1.6	233.
11.7	36.2	3303.2	675.0	-4.4	-12.7	297.3	7.3	6.4	-3.3	301.0	307.3	2.1	52.1	1.4	214.
12.8	39.0	3595.2	650.0	-6.4	-18.3	295.2	7.7	7.0	-3.3	301.8	306.1	1.4	38.2	1.4	196.
14.0	41.6	3904.9	625.0	-8.2	-40.0	293.1	9.6	8.6	-3.7	303.0	303.9	0.2	7.5	1.7	175.
15.1	44.3	4220.7	600.0	-10.1	-50.0	278.9	8.7	8.6	-1.3	304.4	304.8	0.1	3.6	2.0	158.
16.4	47.3	4542.0	575.0	-12.6	-35.6	277.9	8.8	8.8	-1.2	305.3	306.4	0.3	13.0	2.3	144.
17.6	50.2	4865.0	550.0	-14.8	-40.2	281.5	11.1	10.9	-2.2	306.5	307.2	0.2	9.3	3.0	136.
19.0	53.1	5235.5	525.0	-16.9	-39.1	276.5	10.8	10.7	-1.3	308.1	309.0	0.2	12.5	3.8	126.
20.3	56.0	5595.3	500.0	-20.0	-31.0	271.8	9.7	9.7	-0.3	308.7	310.6	0.6	36.5	4.4	120.
21.8	58.3	5977.3	475.0	-23.3	-32.9	279.4	12.9	12.7	-2.1	309.2	310.9	0.5	48.6	5.4	116.
23.2	62.7	6371.0	450.0	-26.1	-39.3	276.6	13.9	13.8	-1.6	310.4	311.4	0.3	27.5	6.5	113.
24.6	65.9	6781.8	425.0	-29.0	-44.3	272.1	15.9	15.9	-0.6	311.7	312.4	0.2	21.1	7.7	110.
26.1	69.4	7212.5	400.0	-32.4	-53.4	2 4.0	17.8	17.7	1.9	312.8	313.1	0.1	10.2	9.1	107.
27.6	72.9	7664.2	375.0	-36.0	-54.8	262.0	17.3	17.1	2.4	313.9	314.1	0.1	12.2	10.6	103.
29.1	76.9	8138.3	350.0	-40.0	99.9	257.3	20.2	19.7	4.4	314.7	999.9	99.9	999.9	12.1	100.
30.9	80.6	8641.1	325.0	-44.4	99.9	253.4	23.9	23.0	6.8	315.6	999.9	99.9	999.9	14.3	96.
32.9	84.8	9178.0	300.0	-48.8	99.9	250.9	28.2	26.7	9.2	316.6	999.9	99.9	999.9	17.2	92.
35.1	89.0	9738.3	275.0	-53.0	99.9	251.1	30.2	28.6	9.8	318.4	999.9	99.9	999.9	20.9	88.
37.6	93.8	10348.6	250.0	-57.3	99.9	247.4	31.1	28.7	11.9	320.9	999.9	99.9	999.9	25.3	85.
40.0	98.6	11015.8	225.0	-55.9	99.9	247.5	37.9	35.0	14.5	332.8	999.9	99.9	999.9	30.2	81.
42.7	103.8	11765.4	200.0	-53.5	99.9	246.7	35.7	34.7	8.2	348.0	999.9	99.9	999.9	36.4	80.
45.8	109.5	12623.6	175.0	-55.1	99.9	255.7	27.5	26.7	6.8	359.0	999.9	99.9	999.9	41.7	80.
49.4	115.5	13607.1	150.0	-55.5	99.9	252.7	30.7	29.3	9.1	374.5	999.9	99.9	999.9	47.4	79.
53.6	122.3	14768.5	125.0	-57.1	99.9	258.6	23.8	23.8	0.6	391.6	999.9	99.9	999.9	53.8	79.
58.9	130.3	16178.2	100.0	-54.0	99.9	253.6	19.8	19.3	-4.7	423.5	999.9	99.9	999.9	60.5	80.
65.3	137.8	18013.3	75.0	-56.9	99.9	246.6	10.6	7.5	7.6	453.8	999.9	99.9	999.9	64.8	80.
74.3	146.0	20580.5	50.0	-55.7	99.9	253.7	4.0	3.6	-1.6	512.1	999.9	99.9	999.9	68.9	79.
89.3	154.5	25925.1	25.0	-53.6	99.9	67.2	2.5	-2.3	-0.9	633.5	999.9	99.9	999.9	68.4	79.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 654
MURON. S D25 APRIL 1975
515 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	CEM PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	PH PCT	RANGE KN	AZ DG
0.0	8.8	392.0	966.5	7.2	5.5	360.0	0.0	0.0	0.0	283.9	299.0	5.9	89.0	124	98.0
90.9	99.9	1000.0	999.9	99.9	99.9	99.9	99.9	99.9	99.9	59.9	999.9	99.9	999.9	0.0	0.0
99.9	59.9	59.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9
0.5	10.1	538.5	950.0	8.0	7.4	107.4	8.4	-8.0	2.5	286.2	303.9	6.8	95.5	0.2	218.0
1.2	12.1	754.5	925.0	6.8	6.2	110.7	9.0	-8.4	3.2	287.1	303.9	6.4	95.7	0.5	271.0
1.9	14.2	980.5	900.0	7.4	4.2	109.3	7.5	-7.0	2.5	289.9	305.1	5.7	79.9	0.8	280.0
2.7	16.1	1212.4	875.0	6.3	4.1	91.9	6.9	-6.0	0.2	291.1	306.8	5.9	85.5	1.2	281.0
3.4	18.1	1450.0	850.0	4.7	4.0	58.5	5.8	-4.9	-3.0	291.9	307.9	6.0	94.7	1.4	276.0
4.3	20.5	1653.5	825.0	3.6	1.3	43.9	6.0	-4.2	-4.3	293.1	306.9	5.1	84.7	1.6	267.0
5.1	22.6	1942.7	800.0	2.3	-2.4	24.3	2.9	-1.2	-2.6	294.2	305.3	4.0	71.2	1.8	262.0
6.3	25.0	2190.6	775.0	2.5	-10.8	318.8	3.5	2.3	-2.6	296.8	303.0	2.2	36.5	1.7	259.0
7.8	27.1	2464.5	750.0	1.6	-13.2	319.1	5.1	3.3	-3.8	298.5	304.0	1.8	32.3	1.7	254.0
8.7	29.5	2737.0	725.0	0.4	-20.0	319.0	7.7	5.6	-5.3	300.0	303.3	1.1	19.9	1.5	239.0
9.7	32.0	3017.3	700.0	-1.0	-32.3	309.3	9.1	7.1	-5.8	301.4	302.5	0.4	7.1	1.5	221.0
10.7	34.5	3304.2	675.0	-3.4	-36.4	309.4	10.3	7.9	-6.5	301.9	302.7	0.2	5.6	1.5	176.0
11.7	36.9	3603.5	650.0	-5.1	-39.1	313.9	11.0	6.0	-7.7	303.2	304.4	0.4	9.1	1.9	181.0
12.8	39.6	3910.3	625.0	-7.9	-37.3	321.3	12.1	7.6	-9.5	304.8	305.8	0.3	8.3	2.4	163.0
14.1	42.0	4228.2	600.0	-10.1	-30.0	332.6	13.8	6.4	-12.3	308.2	310.0	0.5	17.7	3.2	163.0
15.3	47.8	4557.6	575.0	-13.0	-40.0	326.2	15.0	8.5	-13.6	308.7	309.7	0.3	11.9	4.2	181.0
16.6	50.5	4858.2	550.0	-16.0	-40.0	326.1	17.7	9.9	-14.7	309.2	309.9	0.2	10.6	5.3	159.0
17.8	53.5	5250.8	525.0	-19.2	-41.0	320.7	19.0	12.0	-14.7	309.6	310.3	0.2	12.4	8.0	134.0
19.1	56.4	5616.0	500.0	-22.6	-43.3	317.1	19.3	13.2	-14.2	310.0	310.6	0.2	13.0	9.4	152.0
20.5	59.8	5955.0	475.0	-26.2	-47.1	316.5	19.4	13.9	-13.6	312.3	310.7	0.1	11.8	11.0	149.0
21.9	63.1	6323.7	450.0	-28.6	-51.3	320.7	20.9	11.5	-17.5	312.3	312.6	0.1	7.1	12.6	149.0
23.4	66.4	6799.8	425.0	-31.7	-57.4	326.3	23.7	13.2	-19.7	313.7	313.9	0.0	5.5	14.7	148.0
25.0	70.0	7231.5	400.0	-35.2	-60.0	328.3	25.6	14.9	-20.9	314.9	315.0	0.0	5.9	16.9	148.0
26.7	73.7	7684.3	375.0	-39.3	-67.7	323.1	27.8	16.7	-22.3	315.7	315.8	0.0	8.1	19.6	147.0
28.6	77.7	8164.1	350.0	-43.7	-69.9	325.7	30.2	17.0	-25.0	316.5	316.9	99.9	999.9	23.0	147.0
30.6	81.8	8644.0	325.0	-47.6	-72.9	321.0	30.0	18.9	-23.3	318.2	319.2	99.9	999.9	26.5	147.0
32.4	86.0	9190.9	300.0	-52.5	-79.9	315.1	27.0	19.1	-19.1	319.2	319.9	99.9	999.9	29.8	146.0
34.7	90.8	9765.1	275.0	-56.3	-87.1	314.0	31.9	22.9	-22.1	323.8	323.9	99.9	999.9	34.3	146.0
37.3	95.9	10379.1	250.0	-58.2	-99.9	308.8	28.2	22.9	-16.5	329.4	329.4	99.9	999.9	38.2	143.0
40.2	101.3	11045.5	225.0	-55.2	-99.9	308.4	23.5	18.4	-14.6	335.3	335.3	99.9	999.9	42.2	141.0
43.0	107.5	11789.1	200.0	-52.9	-99.9	270.1	20.2	20.2	-0.0	337.7	337.7	99.9	999.9	45.4	139.0
46.6	114.0	12641.5	175.0	-50.9	-99.9	273.2	21.1	21.1	-1.2	375.5	375.5	99.9	999.9	48.9	135.0
50.9	121.7	13621.6	150.0	-54.9	-99.9	278.7	19.6	19.4	-3.0	394.0	394.0	99.9	999.9	53.1	131.0
55.9	130.3	14792.3	125.0	-55.8	-99.9	278.7	19.6	19.4	-3.0	394.0	394.0	99.9	999.9	53.1	131.0
59.9	130.3	16122.6	100.0	-57.7	-99.9	999.9	99.9	99.9	99.9	416.3	416.3	99.9	999.9	999.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 655
ST CLOUD, MINN

25 APRIL 1975
515 GMT

190 11. 0

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	7.0	316.0	979.3	6.3	4.8	70.0	9.1	-3.9	-1.4	281.8	296.0	5.5	90.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	7.4	352.3	975.0	6.3	4.7	86.4	5.7	-5.7	-0.4	282.4	296.5	5.5	88.2	0.1	324.
1.0	9.7	565.8	950.0	6.2	2.9	103.9	9.2	-9.0	2.2	284.2	297.1	5.0	78.0	0.4	274.
1.8	11.9	784.2	925.0	5.4	2.6	116.2	8.0	-7.2	3.5	285.4	298.6	5.0	82.4	0.9	282.
2.7	14.3	1008.0	900.0	4.0	2.7	140.7	5.7	-3.6	4.4	286.3	299.9	5.2	90.8	1.2	288.
3.6	16.5	1237.0	875.0	2.8	2.3	146.5	5.3	-2.9	4.5	287.3	301.0	5.2	98.6	1.5	297.
4.4	19.0	1471.3	850.0	1.1	0.6	125.5	4.9	-4.0	2.8	287.9	303.5	4.7	96.3	1.7	299.
5.3	21.3	1711.4	825.0	0.4	0.1	134.8	5.3	-3.8	3.7	289.6	302.1	4.7	97.7	2.0	300.
6.3	23.9	1958.1	800.0	-0.6	-0.9	177.7	3.2	-0.1	3.1	291.1	303.2	4.5	97.8	2.2	303.
7.2	26.2	2211.9	775.0	-1.5	-1.6	265.1	2.7	2.7	0.2	292.8	304.8	4.4	98.7	2.2	307.
8.2	29.0	2472.4	750.0	-2.5	-3.7	269.7	4.6	4.6	0.0	293.3	304.0	3.9	98.4	2.0	310.
9.3	31.7	2740.3	725.0	-4.8	-5.0	265.6	6.1	8.1	0.6	294.7	304.9	3.6	98.2	1.7	319.
10.3	34.4	3015.8	700.0	-6.5	-7.1	261.2	9.5	9.4	1.5	295.6	304.7	3.2	95.9	1.5	337.
11.3	37.0	3290.4	675.0	-8.0	-10.3	256.1	9.3	9.1	1.9	297.0	304.4	2.6	83.1	1.5	0.
12.4	39.9	3551.5	650.0	-10.2	-19.7	262.4	7.9	7.4	1.0	297.6	301.3	1.2	45.6	1.7	19.
13.5	42.6	3832.4	625.0	-11.2	-15.8	263.6	6.5	6.5	0.7	299.9	305.2	1.8	65.5	2.0	33.
14.7	45.6	4206.0	600.0	-12.5	-21.6	278.0	4.4	4.4	-0.6	301.7	305.2	1.1	48.5	2.2	41.
15.9	48.6	4525.9	575.0	-14.5	-24.1	312.1	3.6	2.7	-2.4	303.1	306.1	0.9	43.7	2.3	48.
17.2	51.6	4865.1	550.0	-17.3	-23.5	111.1	3.4	2.6	-2.2	303.7	306.9	1.0	58.5	2.3	55.
18.5	54.9	5212.4	525.0	-19.3	-24.9	267.8	3.9	3.9	0.2	305.3	308.4	1.0	61.0	2.4	60.
19.7	58.0	5573.8	500.0	-21.4	-29.3	267.7	4.6	4.6	0.2	307.0	309.2	0.7	48.5	2.7	62.
21.1	61.4	5956.3	475.0	-24.4	-32.0	270.1	5.2	5.2	-0.0	307.8	309.5	0.5	49.2	3.1	66.
22.5	65.0	6341.7	450.0	-27.7	-35.7	266.0	6.8	6.8	0.5	308.4	309.7	0.4	46.1	3.6	68.
24.0	68.4	6750.1	425.0	-31.2	-36.9	262.4	6.1	6.0	0.8	309.0	310.3	0.4	56.6	4.1	71.
25.5	72.3	7176.4	400.0	-35.1	-39.7	254.3	4.1	4.0	1.1	309.3	310.3	0.3	61.4	4.6	72.
27.1	76.0	7627.1	375.0	-38.9	-43.6	221.4	3.9	2.6	2.9	310.1	310.8	0.2	60.1	5.0	71.
28.7	80.0	8092.4	350.0	-43.0	99.9	191.0	3.1	0.6	3.0	310.8	999.9	99.9	99.9	5.2	68.
30.5	84.2	8586.5	325.0	-47.9	99.9	156.9	5.0	1.5	4.8	310.7	999.9	99.9	99.9	7.4	65.
32.3	88.4	9111.9	300.0	-50.3	99.9	210.2	6.9	3.5	6.0	314.5	999.9	99.9	99.9	6.0	60.
34.3	93.0	9677.2	275.0	-52.4	99.9	246.4	8.0	7.3	3.2	319.3	999.9	99.9	99.9	6.8	60.
36.5	98.0	10289.1	250.0	-53.0	99.9	253.2	12.7	12.7	1.1	327.2	999.9	99.9	99.9	8.0	62.
38.7	103.0	10964.3	225.0	-54.8	99.9	288.3	14.2	14.2	0.4	334.6	999.9	99.9	99.9	9.6	66.
41.5	108.8	11717.3	207.0	-55.0	99.9	278.6	16.3	16.1	-2.4	345.7	999.9	99.9	99.9	12.1	72.
44.5	114.8	12571.4	175.0	-54.6	99.9	264.0	19.3	19.1	2.0	359.8	999.9	99.9	99.9	15.3	75.
48.3	121.3	13555.7	150.0	-55.4	99.9	264.2	22.0	21.9	2.2	374.6	999.9	99.9	99.9	19.4	78.
52.0	128.3	14718.0	125.0	-56.1	99.9	266.1	17.6	17.5	1.2	393.4	999.9	99.9	99.9	24.2	80.
56.8	136.0	16134.5	100.0	-55.9	99.9	272.1	18.4	18.4	-0.7	419.7	999.9	99.9	99.9	29.2	80.
62.4	143.3	17563.4	75.0	-55.6	99.9	258.8	3.5	3.4	0.7	456.4	999.9	99.9	99.9	33.2	92.
71.4	151.3	20540.6	50.0	-55.7	99.9	274.3	3.2	3.2	-0.1	512.3	999.9	99.9	99.9	33.3	82.
85.8	155.7	25003.3	25.0	-52.8	99.9	339.4	4.9	1.7	-4.6	633.3	999.9	99.9	99.9	34.1	86.

ORIGINAL PAGE IS
OF POOR QUALITY

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
0 BY TIME MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 662
RAPID CITY, S D25 APRIL 1975
515 GMT

131 49.0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MX RTO GN/KG	RH PCT	RANGE KM	AZ DG
0.0	14.2	966.0	902.1	4.4	2.3	200.0	1.5	0.5	1.4	286.5	299.7	5.0	86.0	0.0	0
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
9.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	14.4	965.2	875.0	6.4	4.3	999.9	99.9	99.9	99.9	287.2	300.6	5.1	84.0	999.9	99.9
0.8	16.4	1216.5	850.0	5.8	0.3	999.9	99.9	99.9	99.9	291.2	307.1	6.0	86.3	999.9	99.9
1.6	18.4	1454.4	850.0	5.8	0.3	999.9	99.9	99.9	99.9	292.8	305.4	4.6	86.0	999.9	99.9
2.4	20.3	1699.1	825.0	5.6	-1.3	156.9	2.7	-1.1	2.5	295.0	305.5	4.1	60.0	0.7	307
3.2	23.1	1950.2	800.0	4.2	-0.9	184.1	5.5	0.4	5.5	296.2	309.6	4.5	65.8	0.3	317
4.0	25.3	2208.4	775.0	4.0	-4.5	205.4	7.7	3.3	7.0	298.6	308.7	3.6	55.0	1.1	312
4.9	27.7	2475.1	750.0	4.5	-12.6	250.4	11.2	10.6	3.6	301.7	307.5	2.0	28.2	1.2	353
5.6	30.1	2731.2	725.0	4.3	-18.4	253.2	12.9	12.3	3.7	304.4	308.2	1.2	17.3	1.5	22
6.9	32.6	3075.5	700.0	2.0	-23.7	240.8	11.3	9.8	5.5	304.8	307.4	0.6	12.7	2.1	14
7.9	35.3	3327.8	675.0	0.2	-25.1	244.5	11.5	10.3	4.9	305.9	308.3	0.7	12.8	2.7	42
8.9	37.7	3629.1	650.0	-1.8	-26.5	247.6	11.8	10.9	4.5	307.0	309.2	0.7	13.0	3.4	47
9.8	40.1	3939.5	625.0	-4.6	-28.6	250.5	11.4	10.7	3.9	307.2	309.1	0.6	13.3	4.2	50
10.9	42.9	4250.9	600.0	-7.5	-30.7	252.5	11.4	10.9	3.4	307.4	309.0	0.5	13.5	4.9	54
11.7	45.7	4565.3	575.0	-10.6	-33.0	252.2	11.3	10.8	3.5	307.6	309.9	0.4	13.8	5.2	56
12.8	48.6	4878.0	550.0	-13.9	-35.4	257.4	11.1	10.8	2.4	307.6	309.8	0.3	14.1	5.3	58
13.9	51.4	5275.6	525.0	-16.7	-37.6	260.8	10.4	10.3	1.7	308.3	309.3	0.3	14.4	6.6	60
15.2	54.4	5644.1	500.0	-19.4	-39.6	261.2	11.8	11.7	1.8	309.4	310.2	0.2	14.6	7.4	63
16.6	57.2	6023.8	475.0	-21.6	-41.3	257.6	14.4	14.1	3.1	311.2	312.0	0.2	14.8	8.4	63
17.8	60.3	6420.3	450.0	-24.3	-43.4	254.3	13.0	12.5	3.5	312.6	313.2	0.2	15.1	9.4	64
19.2	63.6	6833.7	425.0	-28.0	-46.3	253.1	14.4	13.8	4.2	313.0	313.5	0.1	15.4	10.6	67
20.7	66.9	7265.1	400.0	-31.1	-41.4	252.9	14.5	13.9	4.3	314.6	315.4	0.2	15.4	11.8	67
22.2	70.3	7726.7	375.0	-34.0	-37.9	259.3	15.6	15.3	3.0	316.5	317.8	0.4	15.4	13.2	68
23.9	73.9	8190.4	350.0	-38.5	-42.3	263.3	18.2	18.0	2.1	316.2	317.7	0.3	15.4	14.9	70
24.7	77.7	8708.3	325.0	-42.7	99.9	265.1	18.3	18.2	1.5	317.8	317.8	99.9	99.9	16.3	71
27.4	81.5	9239.7	300.0	-47.1	99.9	271.8	20.7	20.6	-0.7	319.0	319.0	99.9	99.9	18.7	73
29.4	85.7	9809.1	275.0	-52.2	99.9	271.2	22.2	22.1	-0.5	319.6	319.6	99.9	99.9	21.0	75
31.0	90.2	10418.5	250.0	-57.3	99.9	269.0	26.4	26.4	0.5	320.9	320.9	99.9	99.9	23.2	77
33.0	95.0	11081.7	225.0	-61.9	99.9	271.3	35.9	35.8	-1.2	326.2	326.2	99.9	99.9	26.8	79
35.4	100.0	11813.9	200.0	-61.7	99.9	287.7	33.9	33.0	-8.0	335.1	335.1	99.9	99.9	32.1	82
37.3	105.3	12635.4	175.0	-66.0	99.9	282.3	23.5	20.0	-4.4	341.0	341.0	99.9	99.9	34.6	84
40.1	111.3	13592.9	150.0	-69.3	99.9	259.6	20.3	19.9	3.7	368.0	368.0	99.9	99.9	38.0	88
43.5	116.0	14741.7	125.0	-57.8	99.9	260.3	18.4	18.2	2.9	390.4	390.4	99.9	99.9	42.4	88
47.4	125.8	16144.9	100.0	-58.8	99.9	258.2	11.8	11.6	2.4	414.3	414.3	99.9	99.9	45.9	88
53.4	134.7	17968.4	75.0	-55.5	99.9	268.7	6.4	6.4	0.1	456.7	456.7	99.9	99.9	50.2	93
61.8	143.5	20521.2	50.0	-55.3	99.9	99.9	99.9	99.9	99.9	513.1	513.1	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER25 APRIL 1975
525 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEV PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.2	180.0	993.5	22.2	19.0	100.0	6.2	1.1	6.1	297.8	334.7	14.1	82.0	0.0	0.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	7.9	343.0	975.0	19.8	18.0	197.1	15.8	4.6	15.1	296.9	332.3	13.5	89.4	0.5	18.
1.7	10.1	567.2	950.0	18.4	17.5	211.6	19.5	10.2	16.6	257.7	332.8	13.4	94.0	1.5	23.
2.5	12.1	756.3	925.0	17.8	16.3	213.4	21.4	13.3	16.7	292.2	331.0	12.7	91.0	2.6	28.
3.5	14.4	1031.2	900.0	16.7	14.7	227.6	16.4	12.1	11.1	300.3	331.9	11.8	88.2	3.5	32.
4.3	16.5	1271.4	875.0	15.2	12.6	232.2	12.9	12.9	10.0	301.0	327.5	10.6	84.3	4.3	36.
5.3	18.9	1515.8	850.0	13.3	11.1	235.0	14.1	11.5	8.1	301.4	328.1	9.8	86.6	5.1	39.
6.3	21.3	1767.8	825.0	11.2	9.9	235.2	14.5	11.9	8.3	301.7	327.2	9.4	91.7	6.0	41.
7.4	23.5	2024.5	800.0	8.8	7.6	239.3	11.8	10.0	6.2	301.6	324.3	8.3	92.3	6.8	43.
8.4	25.9	2237.1	775.0	7.2	6.7	237.5	14.3	10.4	6.6	302.6	324.5	8.0	96.9	7.5	44.
9.5	28.4	2556.8	750.0	6.3	1.2	213.8	14.5	11.7	8.5	304.2	320.4	5.8	72.8	8.3	46.
10.3	30.9	2936.1	725.0	6.4	-16.2	212.5	15.6	12.4	9.5	308.8	313.6	1.5	16.1	9.1	46.
11.3	33.5	3125.2	700.0	7.1	-22.3	231.6	16.3	11.2	8.9	310.5	313.5	0.9	10.3	10.0	47.
12.3	36.1	3422.6	675.0	4.6	-25.8	231.4	14.2	11.1	6.9	310.9	313.2	0.7	8.8	10.9	47.
13.5	38.9	3723.4	650.0	2.2	-27.4	234.2	17.4	14.1	10.2	311.9	313.6	0.6	8.9	11.9	47.
14.6	41.5	4033.5	625.0	-0.2	-25.0	241.0	21.0	18.4	10.2	312.3	314.9	0.8	13.3	13.3	48.
16.0	44.4	4388.7	600.0	-2.4	-23.9	251.5	21.7	20.6	6.9	313.4	316.4	0.9	17.2	15.1	51.
17.5	47.4	4704.5	575.0	-5.6	-23.5	257.3	21.6	21.1	4.8	313.5	316.7	1.6	22.7	16.8	53.
18.6	50.4	5031.0	550.0	-8.9	-22.4	262.0	21.9	21.7	3.0	313.6	317.3	1.2	32.7	18.3	56.
20.0	53.5	5488.8	525.0	-12.5	-20.3	266.1	21.8	21.6	0.7	313.6	318.2	1.4	51.6	19.6	58.
21.1	56.5	5780.0	500.0	-14.4	-43.1	269.1	23.7	23.5	2.4	315.5	316.3	0.2	9.2	21.0	60.
22.3	59.3	6166.9	475.0	-16.9	-37.6	264.6	24.8	24.7	2.3	317.0	317.2	0.0	1.5	22.5	62.
23.6	63.3	6570.3	450.0	-19.7	-38.0	264.5	23.5	23.4	2.3	318.4	318.5	0.0	1.8	24.3	64.
25.1	66.7	6992.4	425.0	-22.5	-36.7	263.7	22.7	22.6	2.5	320.0	320.1	0.0	2.1	26.3	65.
26.9	70.4	7434.5	400.0	-25.7	-35.8	262.6	21.3	21.1	2.8	321.5	321.6	0.0	2.4	28.5	67.
28.9	74.2	7899.2	375.0	-28.8	-31.0	266.4	25.8	25.6	1.6	323.4	323.6	0.0	2.8	31.2	68.
30.3	78.3	8389.2	350.0	-32.7	-27.7	270.5	25.6	25.6	-0.2	325.6	324.7	0.0	3.2	33.7	69.
32.1	82.4	8906.7	325.0	-37.0	-64.9	273.2	25.4	26.4	-1.5	325.6	325.7	0.0	3.7	35.9	71.
33.8	86.7	9454.4	300.0	-41.9	-99.9	271.7	25.5	25.5	-0.8	326.3	325.9	99.9	99.9	38.4	73.
35.6	91.6	10036.7	275.0	-47.2	-99.9	276.9	26.9	26.7	-3.2	328.9	328.9	99.9	99.9	41.3	74.
37.0	96.4	10631.9	250.0	-51.2	-99.9	284.5	29.4	28.4	-7.4	329.9	329.9	99.9	99.9	44.6	76.
40.3	101.8	11337.9	225.0	-57.1	-99.9	293.5	30.2	27.7	-12.0	331.0	329.9	99.9	99.9	48.5	79.
42.7	107.8	12072.8	200.0	-62.8	-99.9	291.6	23.2	21.8	-8.6	333.3	329.9	99.9	99.9	51.7	81.
45.3	114.0	12888.1	175.0	-68.7	-99.9	299.0	33.2	30.8	-12.5	335.9	329.9	99.9	99.9	54.7	84.
47.9	121.0	13813.6	150.0	-88.4	-99.9	267.3	29.1	29.1	1.4	352.3	329.9	99.9	99.9	59.2	85.
51.5	129.0	14921.5	125.0	-64.4	-99.9	263.4	23.2	23.2	2.7	378.3	329.9	99.9	99.9	64.8	85.
55.1	137.0	16274.5	100.0	-65.9	-99.9	299.9	99.9	99.9	99.9	408.4	329.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 1
 0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTER
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

Intentionally Left Blank

Sounding Data**25 April 1975****1200 GMT**

ORIGINAL PAGE IS

STATION NO. 208
CHARLESTON, SC

25 APRIL 1975
1115 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

157 11. 1

TIME MIN	CNCT	HEIGHT GPM	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SLC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.4	13.0	1017.6	19.6	16.3	230.0	4.2	3.2	2.7	292.8	322.7	11.5	81.0	0.0	0.
0.6	5.7	163.8	1000.0	19.2	16.0	230.7	2.9	2.3	1.7	293.9	323.8	11.5	81.5	0.6	50.
1.5	7.9	381.6	975.0	18.9	14.5	241.8	14.2	12.5	6.7	293.6	323.8	10.7	75.8	0.9	53.
2.3	10.1	605.1	950.0	18.4	14.0	249.4	13.4	12.5	4.7	292.3	325.6	10.7	75.9	1.7	54.
3.3	12.2	833.6	925.0	17.1	13.1	255.3	10.2	9.7	3.1	290.2	325.7	10.3	77.3	2.3	63.
4.1	14.5	1067.3	900.0	15.6	10.6	251.2	11.0	10.4	3.5	290.8	322.9	9.0	72.1	2.9	64.
5.1	16.6	1306.1	875.0	13.6	10.5	253.1	11.4	10.9	3.3	290.1	323.3	9.1	81.5	3.5	66.
6.0	18.3	1553.1	850.0	12.0	9.2	250.5	11.9	11.6	2.8	290.9	323.3	8.7	83.0	4.2	67.
7.0	21.2	1800.2	835.0	10.5	8.4	256.3	9.4	9.4	0.6	300.8	323.8	8.4	87.1	4.7	69.
7.9	23.6	2056.1	800.0	8.5	7.0	273.7	6.0	7.9	-0.5	302.2	316.5	7.9	90.2	5.2	71.
9.0	25.8	2318.3	775.0	7.2	0.3	274.6	6.0	6.0	-0.5	302.2	316.5	5.1	61.7	5.6	73.
10.0	28.4	2587.1	750.0	7.7	-0.2	268.6	4.8	4.8	0.4	305.5	320.0	5.1	57.7	5.9	74.
11.2	31.0	2867.8	725.0	6.0	-4.8	261.3	4.7	4.7	0.7	308.5	317.4	3.7	46.0	6.2	74.
12.3	33.5	3154.9	700.0	5.1	-11.7	263.3	7.9	7.9	0.2	309.4	315.2	2.2	28.5	6.6	75.
13.3	35.9	3451.0	675.0	3.9	-18.4	275.2	10.1	10.1	-0.9	310.1	314.3	1.3	17.8	7.2	76.
14.4	37.6	3756.2	650.0	1.3	-18.0	288.4	11.6	11.3	-2.9	310.6	315.1	1.4	22.1	7.8	78.
15.4	41.1	4070.3	625.0	-1.0	-23.5	295.6	13.3	12.0	-5.8	311.4	318.4	0.9	16.1	8.5	81.
16.6	43.9	4395.2	600.0	-2.0	-28.3	308.9	13.4	11.0	-7.7	313.8	315.9	0.6	11.3	9.2	84.
17.6	46.8	4731.2	575.0	-5.3	-26.7	308.4	13.4	10.9	-8.6	313.8	316.3	0.7	16.6	10.0	84.
18.0	45.5	5077.9	550.0	-8.5	-30.6	308.4	11.1	9.1	-6.3	318.0	315.8	0.5	14.8	10.7	92.
20.4	52.6	5437.0	525.0	-10.8	-41.4	275.3	9.7	9.6	-0.9	317.8	318.8	0.2	9.2	12.4	92.
21.9	55.6	5810.9	500.0	-12.5	-38.5	258.8	11.1	10.9	2.2	317.8	318.8	0.3	9.2	12.4	92.
23.2	58.7	6200.2	475.0	-15.6	-38.0	263.5	10.4	10.3	1.2	318.7	319.7	0.3	12.5	13.2	92.
25.5	62.0	6655.4	450.0	-18.4	-42.9	268.9	11.3	11.3	0.2	320.1	320.8	0.2	9.4	14.0	91.
26.0	65.3	7020.1	425.0	-21.9	-45.4	269.3	11.2	11.2	0.1	320.9	321.4	0.2	10.1	14.4	91.
27.9	68.7	7472.3	400.0	-25.4	-47.8	272.8	15.1	15.0	-0.7	321.9	322.4	0.1	10.1	14.4	91.
29.8	72.1	7936.9	375.0	-28.4	-50.7	280.1	15.2	15.0	-2.7	322.6	323.0	0.1	10.5	18.2	92.
31.6	76.3	8428.0	350.0	-33.1	-53.4	288.6	15.4	14.6	-4.9	328.0	328.3	0.1	10.9	14.9	93.
33.4	80.0	8942.2	325.0	-37.4	-56.6	295.6	15.4	14.8	-7.1	325.0	325.2	0.1	11.3	21.5	94.
35.5	83.8	9491.3	300.0	-40.8	-59.9	302.6	17.3	14.6	-9.3	327.8	999.9	99.9	99.9	23.6	94.
37.8	88.2	10076.7	275.0	-46.0	-59.9	308.0	19.6	16.2	-10.9	328.6	999.9	99.9	99.9	25.9	94.
40.2	92.9	10704.1	250.0	-50.8	-59.9	308.2	18.0	12.6	-9.9	330.6	999.9	99.9	99.9	28.1	101.
42.7	97.4	11384.2	225.0	-54.9	-59.9	338.9	15.0	6.8	-14.5	338.5	999.9	99.9	99.9	24.8	104.
45.1	102.4	12126.6	200.0	-61.1	-59.9	328.6	22.3	11.6	-19.0	338.0	999.9	99.9	99.9	31.8	126.
48.4	108.0	12987.9	175.0	-64.3	-59.9	311.6	15.6	12.4	-11.1	343.8	999.9	99.9	99.9	35.3	112.
51.7	114.3	13903.9	150.0	-59.9	-59.9	290.3	18.9	17.8	-6.6	367.0	999.9	99.9	99.9	37.1	112.
56.3	121.0	15037.9	125.0	-62.8	-59.9	278.1	22.2	22.0	-3.1	381.3	999.9	99.9	99.9	44.5	111.
61.2	128.7	16357.9	100.0	-68.5	-59.9	270.5	18.0	18.0	-0.2	398.4	999.9	99.9	99.9	50.6	110.
67.5	137.0	18116.5	75.0	-67.8	-59.9	274.7	9.7	9.7	-0.8	430.8	999.9	99.9	99.9	55.0	108.
70.6	148.7	20592.7	50.0	-61.9	-59.9	87.8	2.6	-2.6	-0.3	457.8	999.9	99.9	99.9	50.6	104.
91.2	155.0	25320.4	25.0	-50.2	-59.9	335.3	5.1	2.1	-4.6	640.3	999.9	99.9	99.9	55.6	111.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 211
TAMPA, FLA

25 APRIL 1976
1115 GMT

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V CCNP M/SEC	POT T DEG K	E POT T DEG K	NA RTO GM/KG	RM PCT	RANGE KM	AZ DEG
0.0	4.4	5.0	1018.4	20.0	17.8	140.0	2.6	-1.7	2.0	293.3	326.1	12.7	87.0	0.0	0.
0.7	5.8	166.0	1000.0	20.2	16.9	140.0	8.6	-2.8	8.1	295.0	326.8	12.2	81.6	0.2	326.
1.5	7.8	385.2	975.0	20.1	16.6	180.4	6.0	0.1	8.0	297.0	329.3	12.3	80.3	0.7	342.
2.6	10.0	605.5	950.0	19.7	13.5	195.9	5.0	1.4	4.8	298.6	326.2	10.4	67.5	1.0	354.
3.6	11.9	639.4	925.0	18.8	12.0	207.3	4.6	2.1	4.0	299.8	325.6	9.6	64.8	1.2	358.
4.7	14.2	1074.3	900.0	16.9	11.9	204.0	4.6	1.9	4.2	300.2	326.6	9.8	72.4	1.6	3.
5.6	16.1	1319.2	875.0	15.3	10.9	185.8	2.5	0.3	2.5	301.0	326.6	9.4	70.9	1.7	6.
6.6	18.4	1559.8	850.0	13.5	10.3	237.3	1.7	1.4	0.9	301.5	327.9	9.7	84.4	1.8	7.
7.7	20.5	1811.6	823.0	13.1	8.9	256.0	1.7	1.7	0.4	303.4	323.3	7.2	82.3	1.9	10.
8.6	22.8	2068.9	800.0	12.4	-9.4	51.6	0.4	-0.3	-0.2	304.7	311.8	2.4	21.4	1.9	11.
9.7	25.2	2335.5	775.0	12.1	-8.3	102.3	3.8	-3.8	0.8	307.2	315.1	2.7	23.4	1.9	6.
10.7	27.4	2605.6	750.0	11.0	-4.3	108.4	5.6	-5.4	1.5	309.0	320.0	3.7	33.9	2.0	356.
11.8	30.0	2891.5	725.0	9.4	-6.1	97.0	6.2	-6.1	0.7	310.2	320.2	3.4	33.0	2.1	348.
12.9	32.5	3182.0	700.0	7.9	-7.1	80.4	7.4	-7.3	-1.2	311.6	321.3	3.2	33.9	2.2	377.
14.1	35.2	3481.2	675.0	6.4	-9.9	58.4	6.9	-5.8	-3.6	313.1	321.3	2.7	21.4	2.4	310.
15.5	37.6	3789.2	650.0	3.9	-17.2	44.4	5.2	-3.6	-3.7	313.6	318.8	1.7	21.4	2.4	310.
16.7	40.3	4100.7	625.0	1.6	-11.7	42.3	4.2	-2.8	-3.1	314.6	322.4	2.5	36.8	2.4	333.
17.9	42.9	4433.8	600.0	-1.2	-11.5	57.9	4.1	-3.5	-2.2	315.0	323.2	2.6	45.4	2.5	295.
19.2	45.8	4772.3	575.0	-2.5	-15.9	29.0	4.3	-2.1	-3.8	317.3	323.4	1.9	34.9	2.6	290.
20.6	48.8	5123.4	550.0	-5.2	-18.7	348.5	4.3	0.9	-4.2	318.2	324.7	2.0	43.3	2.6	282.
22.0	51.6	5487.0	525.0	-8.2	-17.4	324.5	4.8	2.8	-3.9	319.8	324.7	1.9	47.3	2.4	273.
23.5	54.6	5863.7	500.0	-11.4	-19.0	310.9	5.7	4.3	-3.7	319.3	324.7	1.7	53.2	2.1	266.
25.0	57.6	6255.3	475.0	-13.7	-26.5	304.2	7.5	6.2	-4.2	321.1	324.8	0.9	32.9	1.7	251.
26.4	60.9	6649.2	450.0	-16.5	-30.8	99.9	99.9	99.9	99.9	322.5	324.8	0.7	27.9	99.9	99.9.
28.4	64.4	7091.5	425.0	-20.0	-32.3	99.9	99.9	99.9	99.9	323.3	325.4	0.6	32.2	99.9	99.9.
30.2	67.7	7537.8	400.0	-23.7	-33.1	298.9	15.5	13.6	-7.5	324.2	326.2	0.6	41.2	2.7	142.
32.0	71.3	8006.6	375.0	-26.2	-44.4	302.7	20.3	17.1	-11.0	326.9	327.6	0.2	16.2	4.6	133.
33.8	75.2	8502.6	350.0	-29.6	-41.0	72.4	21.4	18.0	-11.5	328.8	329.8	0.3	31.8	6.9	130.
35.9	79.3	9026.8	325.0	-34.0	-44.7	75.4	19.2	15.6	-11.1	329.8	330.6	0.2	33.7	9.4	128.
38.0	83.4	9581.7	300.0	-38.9	-46.2	305.0	18.2	14.9	-10.4	330.5	331.2	0.2	45.5	11.7	127.
40.2	87.8	10173.2	275.0	-43.3	99.9	314.9	22.6	16.1	-14.1	332.6	999.9	99.9	99.9	14.3	124.
42.7	92.6	10809.6	250.0	-48.1	99.9	309.6	26.9	20.7	-17.1	334.5	999.9	99.9	99.9	18.1	129.
45.5	97.6	11495.0	225.0	-53.6	99.9	309.7	29.4	22.6	-18.8	336.3	999.9	99.9	99.9	22.8	129.
48.4	103.0	12245.8	200.0	-60.3	99.9	307.8	27.5	21.7	-16.8	337.3	999.9	99.9	99.9	27.8	129.
51.5	109.3	13044.3	175.0	-64.3	99.9	306.9	29.8	23.8	-17.9	343.9	999.9	99.9	99.9	33.7	129.
55.1	115.6	14014.9	150.0	-60.1	99.9	254.1	24.0	21.5	-10.5	346.5	999.9	99.9	99.9	38.3	127.
58.4	123.3	15145.5	125.0	-64.4	99.9	256.0	20.5	18.4	-9.0	378.4	999.9	99.9	99.9	44.1	125.
64.3	131.7	16491.0	100.0	-70.0	99.9	255.6	15.1	15.1	0.1	392.5	999.9	99.9	99.9	48.6	122.
70.3	141.0	18188.5	75.0	-71.9	99.9	250.8	7.3	6.8	-2.4	422.3	999.9	99.9	99.9	52.2	122.
78.2	150.7	20645.3	50.0	-61.6	99.9	42.3	8.2	-5.5	-6.1	498.8	999.9	99.9	99.9	54.6	123.
91.1	161.3	25056.1	25.0	-50.1	99.9	20.3	1.8	-0.6	-1.7	641.2	999.9	99.9	99.9	53.5	125.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 9 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 213
WAYCROSS, GA25 APRIL 1975
1115 GMT

TIME MIN	CATCT	WEIGHT G/M	PRES MB	TEMP DG C	DEV PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	3.5	44.0	1013.6	16.1	15.6	200.0	1.5	0.5	1.4	285.6	318.0	11.1	97.0	0.0	0
0.3	4.6	160.0	1000.0	18.4	16.3	207.1	12.8	5.8	11.4	293.1	323.6	11.8	87.8	0.3	20
1.1	6.4	378.5	975.0	19.9	15.2	204.8	6.9	3.7	4.0	296.7	326.4	11.3	76.6	0.7	23
1.9	2.4	602.6	950.0	19.7	10.3	211.8	5.4	2.6	4.6	298.3	326.8	8.3	54.5	1.2	24
2.4	10.4	832.1	925.0	18.3	10.8	212.7	5.9	3.2	5.0	299.2	323.1	8.9	61.7	1.2	26
3.4	12.4	1066.3	900.0	16.3	9.2	233.2	6.7	5.4	4.0	299.4	321.6	8.2	62.7	1.5	28
4.2	14.5	1305.7	875.0	14.9	7.5	249.0	9.5	8.8	3.4	300.2	320.7	7.5	61.3	1.8	30
5.1	16.5	1550.7	850.0	13.4	4.9	253.5	11.6	11.3	3.3	301.1	319.0	6.5	56.8	2.3	44
5.8	18.8	1831.4	825.0	13.3	-41.8	261.0	10.4	10.3	1.6	302.6	303.0	0.1	1.0	2.8	56
6.7	20.8	2355.5	800.0	11.6	1.1	268.6	7.1	7.1	0.2	304.2	319.1	5.2	42.7	3.1	55
7.5	23.1	2324.6	775.0	10.9	-1.3	251.7	5.6	5.3	1.7	306.1	319.1	4.5	42.8	3.4	58
8.4	25.4	2597.7	750.0	9.8	-10.0	244.3	6.2	5.5	2.7	307.6	314.9	2.4	23.8	3.7	59
9.4	27.6	2878.6	725.0	9.3	-16.1	248.7	7.2	6.7	2.6	309.8	314.9	1.6	16.1	4.1	59
10.4	30.1	3168.1	700.0	7.2	-19.9	250.2	6.9	6.4	2.3	310.6	314.2	1.1	12.4	4.5	59
11.4	32.6	3466.0	675.0	5.4	-23.2	275.0	6.8	6.5	-0.6	311.8	314.8	0.9	11.2	4.9	61
12.5	35.2	3772.7	650.0	2.4	-15.6	294.3	6.3	5.8	-2.6	311.9	317.3	1.7	25.1	5.2	65
13.6	37.7	4084.3	625.0	0.4	-40.4	274.4	4.8	4.8	-0.4	313.0	314.3	0.4	6.3	5.5	68
14.5	40.3	4414.2	600.0	-1.8	-51.1	262.9	4.4	4.4	0.6	314.0	314.2	0.1	1.0	5.7	68
15.6	42.9	4750.7	575.0	-4.4	-52.7	281.1	6.7	8.5	-1.3	314.8	315.0	0.0	1.0	6.0	69
16.8	45.7	5058.5	550.0	-7.8	-39.7	286.4	9.0	8.6	-2.5	314.8	315.6	0.2	5.7	6.4	72
17.8	48.7	5458.0	525.0	-11.1	-32.7	282.4	11.1	10.9	-2.4	315.1	316.7	0.5	14.8	7.0	75
19.0	51.5	5831.5	500.0	-12.8	-26.4	285.6	14.5	14.0	-3.9	317.5	320.5	0.9	30.9	7.5	78
20.2	54.6	6220.6	475.0	-15.9	-29.7	287.1	14.2	13.6	-4.2	318.4	321.8	1.0	45.2	8.4	82
21.6	57.6	6625.6	450.0	-19.6	-20.8	284.1	12.9	12.5	-3.1	318.7	323.9	1.6	90.2	9.4	84
23.1	61.0	7047.3	425.0	-22.4	-55.8	283.0	12.4	12.1	-2.8	320.2	320.4	0.0	3.0	10.9	88
24.5	64.5	7485.8	400.0	-25.7	-34.6	286.5	14.7	14.1	-4.2	321.6	323.4	0.5	42.9	12.3	88
26.2	68.0	7953.8	375.0	-29.2	-68.6	298.1	12.5	11.0	-5.9	322.5	322.6	0.0	1.0	13.3	90
27.7	71.5	8443.1	350.0	-32.7	-71.0	293.1	14.8	13.6	-5.8	324.5	324.6	0.0	1.0	14.3	92
29.4	75.6	8941.1	325.0	-36.5	-73.5	288.6	16.9	16.0	-5.4	326.2	326.2	0.0	1.0	15.9	94
31.2	79.5	9516.8	300.0	-40.9	99.9	281.9	19.4	19.0	-4.0	327.7	327.7	99.9	99.9	17.8	95
33.1	84.0	10094.0	275.0	-45.2	99.9	287.5	20.9	20.0	-6.3	329.8	329.9	99.9	99.9	20.0	96
35.1	88.6	10726.3	250.0	-50.2	99.9	300.7	20.1	17.3	-10.3	331.5	331.5	99.9	99.9	22.6	97
37.3	93.6	11467.3	225.0	-54.8	99.9	313.3	16.7	12.1	-11.4	334.6	334.6	99.9	99.9	24.7	101
39.8	99.0	12151.5	200.0	-59.8	99.9	302.9	21.0	17.6	-11.4	338.1	338.1	99.9	99.9	27.2	104
42.6	105.0	12974.6	175.0	-64.5	99.9	287.4	15.0	14.3	-4.5	343.4	343.4	99.9	99.9	30.0	105
45.7	111.7	13923.6	150.0	-69.9	99.9	281.4	15.0	14.3	-7.2	346.9	346.9	99.9	99.9	34.3	105
49.3	119.0	15056.9	125.0	-62.0	99.9	276.8	23.8	23.6	-2.8	362.7	362.7	99.9	99.9	39.7	106
53.7	128.0	16420.0	100.0	-67.4	99.9	280.6	16.5	16.2	-3.0	397.5	397.5	99.9	99.9	45.2	106
59.3	136.7	18136.1	75.0	-70.5	99.9	293.1	14.1	13.0	-8.6	425.1	425.1	99.9	99.9	49.2	106
66.8	150.5	20594.0	50.0	-61.5	99.9	293.1	5.2	-0.4	-8.1	468.5	468.5	99.9	99.9	51.3	106
78.3	183.0	25007.4	25.0	-50.9	99.9	132.1	5.1	2.3	-4.5	638.5	638.5	99.9	99.9	51.5	107

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 220
TALAMICOLA, FLA

2F APRIL 1975
1110 GMT

TIME MIN	CATCT	WEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	11.0	1017.5	18.6	18.6	180.0	2.1	0.0	5.1	292.1	326.4	13.4	100.0	0.0	0.
0.6	6.1	161.0	1000.0	19.2	18.6	192.6	4.2	1.3	6.4	294.1	329.4	13.7	96.5	0.1	10.
1.4	8.4	374.3	975.0	19.5	18.1	195.8	6.6	1.8	6.4	295.7	316.6	7.0	48.0	0.5	11.
2.2	10.8	602.8	950.0	20.0	-28.1	223.3	4.5	3.1	3.3	297.6	301.0	1.2	7.7	0.7	17.
3.0	12.1	631.8	925.0	20.0	-28.5	232.7	4.9	3.9	3.0	299.8	301.8	0.6	4.0	0.9	26.
3.9	13.4	1066.6	900.0	18.3	-15.2	221.6	5.6	3.7	4.2	300.5	304.5	1.3	8.8	1.1	30.
4.6	17.8	1306.4	875.0	16.7	-24.2	215.1	6.8	3.7	5.3	301.2	303.6	0.7	5.5	1.4	31.
5.4	20.3	1852.1	850.0	15.4	-24.7	224.5	7.2	5.1	5.2	302.4	304.7	0.8	5.9	1.7	33.
6.1	22.6	1804.2	825.0	14.6	-41.0	234.9	6.5	5.3	3.7	304.0	304.4	0.1	1.0	2.1	16.
7.3	25.2	2033.2	800.0	12.7	-26.6	248.7	4.1	3.7	1.7	305.2	316.7	3.9	34.3	2.4	39.
8.3	27.5	2329.1	775.0	11.7	-59.9	266.6	4.6	4.2	1.8	306.8	316.2	3.2	28.5	2.6	42.
9.2	30.3	2603.3	750.0	12.4	-39.7	230.3	4.3	3.3	2.6	310.1	311.3	0.4	3.0	2.9	44.
10.3	33.0	2864.3	725.0	10.9	-12.9	212.1	5.3	2.8	4.5	311.6	317.7	2.0	17.4	3.2	43.
11.2	35.7	3177.6	700.0	9.2	-16.4	222.7	4.9	3.3	3.6	312.9	317.7	1.8	14.7	3.5	42.
12.3	38.4	3477.9	675.0	7.3	-21.7	253.5	4.4	4.2	1.2	313.9	317.2	1.0	10.6	3.7	43.
13.3	41.1	3786.4	650.0	4.6	-17.4	264.3	3.6	3.5	0.3	314.3	319.1	1.8	18.4	3.9	46.
14.4	44.1	4104.0	625.0	1.3	-14.0	294.3	2.1	1.9	-0.8	314.2	320.7	2.1	31.0	4.1	48.
15.6	47.1	4430.9	600.0	-1.5	-13.1	333.2	2.3	1.0	-2.0	314.6	321.8	2.3	40.6	4.0	50.
16.9	50.2	4768.4	575.0	-4.3	-13.2	298.8	4.0	3.5	-1.9	315.2	322.7	2.4	50.0	4.1	52.
18.0	53.1	5117.4	550.0	-6.5	-13.9	299.8	6.3	5.8	-3.1	316.6	324.0	2.4	53.7	4.2	56.
19.1	56.1	5475.3	525.0	-9.4	-16.4	298.0	8.6	7.6	-4.1	317.4	323.8	2.0	56.4	4.5	63.
20.4	59.5	5844.4	500.0	-12.6	-19.9	296.6	9.3	8.3	-4.2	317.8	324.9	1.6	54.4	4.9	69.
21.7	63.0	6243.5	475.0	-16.2	-22.4	295.2	9.0	8.1	-3.6	318.0	324.4	1.3	56.5	5.4	75.
23.1	66.2	6648.6	450.0	-18.4	-27.9	292.9	5.7	9.0	-3.6	320.1	321.2	0.3	16.0	6.0	79.
24.5	69.9	7072.3	425.0	-21.9	-35.7	287.4	12.2	11.6	-3.6	321.0	324.4	0.4	27.1	6.9	83.
26.0	73.3	7515.4	400.0	-25.7	-33.2	286.3	14.4	13.9	-4.0	321.6	323.6	0.6	49.2	8.0	86.
27.6	77.2	7990.5	375.0	-28.2	-31.8	300.9	19.6	16.8	-10.1	324.2	326.7	0.7	71.4	9.5	91.
29.3	81.0	8472.7	350.0	-31.2	-33.0	301.7	22.5	19.1	-11.6	326.7	329.0	0.7	83.8	11.3	97.
31.2	85.1	8994.1	325.0	-35.2	-36.7	305.8	21.3	17.2	-12.4	328.1	328.9	0.5	85.6	13.6	101.
33.3	89.4	9546.5	300.0	-40.0	-39.9	317.1	20.1	13.7	-14.7	328.9	328.9	99.9	99.9	16.0	106.
35.4	94.0	10134.5	275.0	-44.5	-39.9	340.7	12.6	4.2	-11.9	330.8	328.9	99.9	99.9	17.2	110.
37.9	98.6	10766.3	250.0	-49.4	-39.9	316.5	25.2	17.4	-18.3	332.7	328.9	99.9	99.9	20.1	115.
40.4	103.6	11447.6	225.0	-55.1	-39.9	313.1	24.5	17.9	-16.7	334.0	328.9	99.9	99.9	23.8	118.
42.8	108.8	12190.1	200.0	-60.4	-39.9	48.7	6.2	-4.7	-14.1	337.1	328.9	99.9	99.9	26.2	120.
45.1	114.8	13014.0	175.0	-63.9	-39.9	316.2	18.6	12.5	-14.0	344.4	328.9	99.9	99.9	27.6	123.
48.3	121.7	13561.7	150.0	-68.6	-39.9	304.8	16.9	13.9	-9.6	345.7	328.9	99.9	99.9	31.0	123.
50.3	126.3	15091.4	125.0	-63.8	-39.9	289.1	15.7	14.9	-2.8	379.4	328.9	99.9	99.9	34.6	123.
52.2	136.5	16446.8	100.0	-68.8	-39.9	285.0	10.7	10.4	-2.8	394.7	328.9	99.9	99.9	38.4	122.
54.2	145.0	18151.9	75.0	-65.3	-39.9	266.7	7.7	7.4	-2.2	427.7	328.9	99.9	99.9	41.5	121.
56.2	155.0	20116.9	50.0	-63.9	-39.9	28.1	3.7	-1.7	-3.3	493.4	328.9	99.9	99.9	44.0	122.
58.8	160.3	25033.5	25.0	-50.3	-39.9	341.9	5.1	1.6	-4.9	640.5	328.9	99.9	99.9	46.5	124.

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 226
CENTERVILLE, ALA25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.3	147.0	1000.5	20.0	19.2	200.0	4.2	1.4	3.9	295.0	331.6	14.2	95.0	0.3	0
0.0	6.3	144.3	1000.0	19.9	19.1	204.0	4.8	2.0	4.4	295.0	331.4	14.1	94.9	0.0	3
0.9	6.7	362.6	975.0	18.3	17.2	225.2	14.2	10.1	10.0	295.3	328.6	12.8	93.6	0.5	42
1.7	11.2	585.6	950.0	17.4	16.2	236.5	16.6	13.8	9.1	295.5	325.8	12.3	92.6	1.3	46
2.7	13.5	813.9	925.0	16.1	14.6	238.5	17.6	15.0	9.2	297.3	327.5	11.4	90.8	2.2	52
3.6	15.8	1046.9	900.0	14.6	13.0	242.0	15.8	14.0	7.4	298.0	325.9	10.5	89.8	3.1	54
4.5	18.4	1295.0	875.0	12.8	10.3	241.8	15.5	13.7	7.3	298.3	322.7	9.1	85.1	3.9	56
5.5	20.8	1529.2	850.0	13.6	4.6	250.8	16.3	15.4	5.4	301.2	318.8	6.3	59.1	4.9	51
6.3	23.3	1780.4	825.0	12.9	-1.4	261.6	16.3	16.1	2.4	302.8	314.9	4.2	37.1	5.7	61
7.2	25.9	2036.2	800.0	11.5	-1.3	267.6	15.5	15.5	0.7	304.0	316.5	4.4	41.0	6.5	64
8.3	28.6	2302.7	775.0	9.5	-0.7	264.0	15.6	15.5	1.6	304.6	314.1	4.7	48.9	7.3	67
9.2	31.3	2574.1	750.0	8.0	-8.6	261.8	17.5	17.3	2.5	305.6	313.5	2.7	29.6	8.2	68
10.2	34.1	2853.3	725.0	7.5	-19.7	267.2	18.7	18.6	0.9	307.9	311.4	1.1	12.4	9.3	70
11.3	36.8	3141.5	700.0	6.1	-24.1	268.7	19.4	19.4	0.4	309.4	311.9	0.8	9.3	10.5	72
12.5	39.7	3437.9	675.0	3.7	-16.0	260.8	20.5	20.2	2.3	309.9	315.1	1.7	22.5	11.8	74
13.9	42.4	3742.2	650.0	1.5	-12.6	250.7	21.0	19.8	6.9	310.9	317.8	2.2	34.1	13.7	74
15.1	45.4	4057.2	625.0	-1.7	-12.3	244.4	18.6	16.8	2.0	310.2	316.3	2.4	45.1	15.2	73
16.3	48.2	4380.6	600.0	-4.6	-11.8	242.1	17.5	15.5	8.4	311.1	318.9	2.6	57.1	16.4	73
17.5	51.5	4713.8	575.0	-7.9	-13.1	244.5	19.4	17.5	8.4	311.0	318.4	2.4	66.2	17.7	72
18.9	54.8	5037.6	550.0	-11.0	-12.8	241.1	19.9	17.5	9.6	311.3	319.2	2.6	86.7	19.3	71
20.4	57.5	5413.9	525.0	-12.9	-15.1	238.0	23.2	19.7	12.3	313.2	320.2	2.3	83.6	21.1	70
21.9	61.3	5785.4	500.0	-14.7	-17.8	245.2	24.9	22.6	10.4	315.3	321.2	1.9	77.0	23.2	69
23.3	64.7	6172.0	475.0	-17.2	-23.1	246.4	20.7	19.0	6.3	316.7	320.8	1.2	59.9	25.2	67
24.7	68.1	6595.4	450.0	-20.1	-26.7	244.0	18.5	16.7	6.1	318.0	321.2	1.0	58.2	26.7	66
26.1	71.4	6996.6	425.0	-23.5	-28.6	246.7	24.3	22.8	2.5	319.0	321.8	0.8	62.3	28.6	65
27.8	75.3	7437.6	400.0	-26.2	-32.7	244.5	26.5	26.4	2.5	320.9	323.0	0.6	54.1	31.0	64
29.7	79.3	7901.3	375.0	-29.4	-34.1	248.3	25.1	25.1	0.8	322.6	324.6	0.6	53.4	34.3	71
31.7	83.2	8390.7	350.0	-32.9	-39.7	266.9	29.6	29.7	1.6	324.4	325.6	0.3	49.9	37.3	72
33.9	87.3	8907.6	325.0	-37.1	-43.7	276.6	21.8	21.7	-2.5	325.5	326.3	0.2	49.7	40.5	74
36.1	91.8	9456.9	300.0	-40.0	99.9	280.7	28.1	27.6	-5.2	328.9	329.9	99.9	99.9	43.9	75
38.2	96.4	10045.1	275.0	-44.6	99.9	285.9	21.4	20.6	-5.9	330.6	330.9	99.9	99.9	46.1	77
40.5	101.2	10675.7	250.0	-50.0	99.9	288.5	14.4	13.7	-4.6	331.8	331.8	99.9	99.9	48.5	76
43.1	106.5	11337.0	225.0	-54.8	99.9	287.0	10.6	10.1	-3.1	334.6	334.6	99.9	99.9	50.4	76
45.8	112.0	12059.3	200.0	-60.8	99.9	270.7	16.6	16.6	-0.2	336.4	336.4	99.9	99.9	53.0	80
49.0	118.0	12916.4	175.0	-66.3	99.9	279.5	24.9	24.5	-4.1	340.6	340.6	99.9	99.9	57.3	81
52.3	124.7	13855.5	150.0	-64.4	99.9	282.6	27.1	26.4	-5.9	359.2	359.2	99.9	99.9	62.8	83
56.7	131.8	14975.3	125.0	-63.2	99.9	273.5	31.4	31.4	-1.9	380.5	380.5	99.9	99.9	70.1	85
61.4	139.3	16342.7	100.0	-66.2	99.9	295.7	15.1	13.6	-6.6	399.5	399.5	99.9	99.9	77.8	86
67.7	147.3	18070.5	75.0	-69.2	99.9	272.7	5.7	5.7	-0.3	427.9	427.9	99.9	99.9	81.6	87
74.2	156.0	20511.3	50.0	-73.0	99.9	250.4	1.0	1.0	0.2	495.0	495.0	99.9	99.9	83.6	88
90.0	165.5	24932.6	25.0	-82.1	99.9	53.9	7.4	-6.0	-4.4	635.0	635.0	99.9	99.9	82.9	90

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 232
BOOTHVILLE, LA
25 APRIL 1975
1115 GMT

TIME MIN	CATCT	HEIGHT GFW	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.3	5.0	100.0	1016.0	22.7	22.0	170.0	3.1	-0.5	2.1	266.7	339.9	16.7	96.0	0.0	0.
0.4	6.2	140.1	1000.0	22.9	21.8	181.7	9.9	0.3	9.9	298.3	341.9	16.7	93.7	0.3	354.
1.2	8.5	301.2	975.0	21.3	20.1	184.8	9.1	0.8	9.1	298.6	339.0	15.4	93.1	0.7	359.
2.1	10.7	506.5	950.0	19.7	18.5	189.9	9.8	1.7	9.7	299.1	336.7	14.3	93.1	1.1	3.
3.0	12.9	816.8	925.0	19.5	13.8	195.4	10.5	2.8	10.2	300.7	329.7	10.8	69.6	1.7	6.
3.9	15.3	1032.8	900.0	18.8	8.7	193.1	12.4	2.8	12.1	301.9	323.6	7.9	51.9	2.3	8.
4.7	17.5	1294.4	875.0	18.2	7.0	194.9	13.2	3.4	12.7	303.7	324.3	7.4	49.3	3.0	9.
5.7	20.3	1542.2	850.0	16.2	10.1	200.2	12.4	4.3	11.6	304.3	329.6	9.2	67.1	3.7	11.
6.7	22.3	1795.9	825.0	14.5	5.5	200.4	12.3	4.3	11.5	304.9	324.6	7.1	55.6	4.5	13.
7.7	24.8	2055.4	800.0	13.3	1.4	214.1	11.3	6.3	9.3	306.0	321.3	5.3	44.4	5.1	14.
8.8	27.2	2322.0	775.0	12.4	-9.0	226.7	11.0	8.3	7.5	307.4	314.9	2.5	21.5	5.9	18.
9.6	29.5	2596.1	750.0	10.9	-13.2	228.9	10.6	8.0	7.0	308.7	316.4	1.8	18.9	6.3	20.
10.7	32.5	2877.7	725.0	9.7	-13.6	215.8	10.4	6.1	8.4	310.3	316.1	1.9	18.2	6.9	23.
11.8	35.2	3168.5	700.0	8.9	-1.3	204.9	10.8	4.6	9.8	312.9	327.7	5.0	49.1	7.5	23.
12.8	37.6	3468.2	675.0	6.2	-6.3	199.8	10.6	3.6	9.9	313.1	324.0	3.6	41.2	8.3	23.
13.9	40.5	3777.0	650.0	5.0	-19.0	187.2	10.7	1.3	10.6	314.8	319.1	1.3	18.9	8.9	22.
15.1	43.2	4095.6	625.0	3.0	-17.6	151.9	11.2	2.3	11.0	316.0	320.9	1.5	20.4	9.6	21.
16.2	46.1	4424.4	601.0	0.2	-12.8	202.4	10.9	4.1	10.1	316.6	324.1	2.4	36.7	10.3	21.
17.3	49.1	4764.4	574.0	-1.9	-16.0	231.3	9.6	7.5	6.0	318.0	324.1	1.9	33.0	11.1	27.
18.6	52.0	5116.1	550.0	-4.7	-20.5	269.1	9.2	9.2	0.1	318.6	323.0	1.4	27.6	11.6	24.
19.9	55.2	5486.0	525.0	-8.2	-20.0	284.4	7.8	7.5	-1.9	318.7	323.8	1.9	37.8	11.7	28.
21.3	58.1	5856.7	500.0	-11.4	-20.0	274.7	7.3	7.3	-0.6	319.3	324.4	1.6	49.1	11.9	30.
22.8	61.6	6277.1	475.0	-14.4	-26.5	279.9	9.2	9.1	-1.6	320.2	323.3	0.9	34.9	12.2	33.
24.2	65.0	6655.5	450.0	-16.9	-30.6	268.1	11.5	11.5	0.4	322.3	325.2	0.7	29.0	12.7	37.
25.9	68.4	7082.1	425.0	-20.1	-32.7	271.4	14.4	14.4	-0.3	323.2	325.2	0.6	31.8	13.5	41.
27.3	71.7	7530.1	400.0	-22.2	-30.2	276.4	19.4	19.3	-2.5	326.1	328.8	0.8	47.9	14.4	46.
28.9	75.5	8001.2	375.0	-26.0	-28.1	275.9	23.9	23.9	-2.1	327.2	330.6	1.0	82.8	15.8	52.
30.5	79.5	8497.3	350.0	-29.7	-31.7	275.1	23.9	23.8	-2.1	328.7	331.4	0.8	42.9	17.6	57.
32.4	83.4	9021.5	325.0	-33.0	-43.0	281.5	23.3	22.9	-4.6	331.1	332.1	0.3	36.6	19.7	62.
34.4	87.5	9580.4	300.0	-36.7	-50.7	283.7	27.7	26.9	-6.6	333.5	334.0	0.1	21.7	22.2	67.
36.7	92.2	10176.3	275.0	-41.9	-59.9	288.5	27.2	25.8	-8.6	334.5	999.9	99.9	99.9	24.9	74.
38.7	96.8	10814.5	250.0	-47.3	99.9	291.9	33.3	30.9	-12.5	335.8	999.9	99.9	99.9	28.1	77.
41.1	101.8	11502.5	225.0	-52.5	99.9	295.3	34.8	31.5	-14.9	338.1	999.9	99.9	99.9	32.1	82.
43.7	107.5	12252.8	200.0	-59.0	99.9	291.8	36.4	33.0	-13.5	339.4	999.9	99.9	99.9	36.8	87.
46.5	112.3	13077.2	175.0	-65.6	99.9	292.3	36.0	33.3	-13.7	341.6	999.9	99.9	99.9	42.4	90.
49.8	120.0	14006.1	150.0	-65.8	99.9	279.5	34.7	34.7	-2.1	356.7	999.9	99.9	99.9	48.6	93.
53.7	127.0	15119.7	125.0	-64.1	99.9	279.2	25.9	25.6	-4.1	375.0	999.9	99.9	99.9	58.3	94.
58.4	135.3	16488.0	100.0	-65.0	99.9	284.1	15.6	15.2	-3.8	394.5	999.9	99.9	99.9	62.1	94.
64.1	143.0	16170.6	75.0	-72.2	99.9	267.6	10.8	10.8	0.5	421.5	999.9	99.9	99.9	66.3	94.
71.9	151.7	20631.0	50.0	-62.2	99.9	3.4	11.0	-0.7	-11.0	497.0	999.9	99.9	99.9	68.6	95.
83.8	160.3	25027.3	25.0	-52.5	99.9	28.6	4.1	-2.0	-3.6	634.2	999.9	99.9	99.9	69.0	95.

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
°° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 235
JACKSON, MISS25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	165 19.0	0
0.0	4.3	100.0	1004.7	21.7	19.4	180.0	2.6	0.0	2.6	296.4	333.7	14.3	87.0	0.3	0.3	0
0.1	4.8	140.8	1000.0	21.2	19.4	222.6	6.4	4.3	4.7	256.3	333.8	14.4	89.6	0.1	0.1	9
1.0	6.0	365.9	975.0	20.8	19.9	228.7	9.5	7.1	6.3	237.9	337.9	15.2	94.4	0.4	0.4	35
1.7	5.0	585.2	950.0	19.7	18.7	233.1	12.3	9.8	7.4	299.1	337.3	14.5	94.0	0.6	0.6	44
2.4	11.1	816.7	925.0	18.6	17.4	234.0	14.8	12.0	8.7	300.2	336.5	13.7	93.1	1.4	1.4	49
3.2	13.4	1052.2	900.0	17.2	16.0	233.7	15.0	12.1	8.9	300.9	335.3	12.9	93.1	2.1	2.1	50
3.9	15.6	1262.7	875.0	16.3	6.9	231.2	15.4	13.5	7.4	301.7	321.8	7.3	55.0	2.4	2.4	51
4.7	18.0	1535.4	850.0	15.9	8.9	250.7	13.4	12.6	4.4	304.0	327.4	8.5	63.1	3.4	3.4	54
5.5	20.4	1752.9	825.0	14.4	7.4	250.6	13.7	12.9	4.5	306.9	326.8	7.9	62.6	4.1	4.1	57
6.4	22.8	2022.9	800.0	14.0	3.7	253.4	15.3	16.7	4.4	306.9	326.8	6.3	50.0	4.8	4.8	60
7.4	25.3	2320.1	775.0	12.4	0.2	251.0	17.0	16.0	5.5	307.6	324.3	5.0	43.2	5.7	5.7	62
8.6	27.9	2594.1	750.0	10.5	-3.2	249.6	17.4	16.3	6.0	308.5	320.4	4.0	38.0	7.0	7.0	63
9.7	30.7	2875.4	725.0	9.0	-8.8	259.3	16.4	16.1	3.1	309.7	317.9	2.7	27.3	8.1	8.1	64
10.6	33.3	3165.4	700.0	7.7	-11.5	250.6	15.9	15.8	1.5	311.3	318.5	2.3	24.7	9.0	9.0	67
11.7	36.0	3463.5	675.0	5.6	-11.5	250.6	15.1	14.3	5.0	312.2	319.5	2.4	27.9	9.9	9.9	64
12.5	39.3	3771.1	650.0	3.5	-12.3	240.2	15.2	13.2	7.6	313.2	320.3	2.3	30.1	10.7	10.7	64
13.6	41.8	4046.0	625.0	0.6	-13.4	234.1	16.0	13.0	9.4	313.4	320.1	2.2	33.9	11.6	11.6	67
14.7	44.9	4414.2	600.0	-2.0	-12.8	234.1	15.6	12.7	9.1	314.0	321.4	2.4	43.5	12.7	12.7	65
15.9	48.0	4751.2	575.0	-4.3	-12.4	240.8	17.7	15.5	8.7	315.2	323.1	2.6	53.0	13.8	13.8	65
17.2	51.1	5059.7	550.0	-7.7	-12.5	244.0	20.0	18.0	8.8	315.2	323.4	2.7	68.3	15.3	15.3	65
18.4	54.4	5450.7	525.0	-10.9	-13.2	241.6	19.6	17.3	9.3	315.6	323.7	2.6	82.8	16.9	16.9	65
19.7	57.7	5832.9	500.0	-13.9	-15.3	241.1	19.8	17.3	9.3	316.4	323.7	2.3	82.7	18.3	18.3	64
20.9	61.3	6220.8	475.0	-16.7	-16.9	245.1	22.2	20.1	9.3	317.5	324.3	2.1	97.9	19.8	19.8	64
22.2	65.1	6624.3	450.0	-18.2	-27.9	254.6	22.5	21.7	6.0	320.4	324.2	0.9	42.3	21.6	21.6	62
23.6	68.8	7050.2	425.0	-21.7	-31.4	254.3	22.9	22.0	4.2	321.1	323.3	0.6	40.8	23.5	23.5	65
25.2	72.7	7453.9	400.0	-25.2	-28.6	254.5	25.6	24.7	6.8	322.3	325.4	0.9	72.8	25.5	25.5	60
26.7	76.8	7960.7	375.0	-27.9	-31.5	257.6	27.0	26.4	5.8	324.7	327.2	0.7	71.0	28.2	28.2	67
28.3	81.0	8451.7	350.0	-32.4	-36.0	264.9	24.5	24.4	2.2	325.0	326.8	0.5	70.0	30.5	30.5	64
30.3	85.5	8971.6	325.0	-35.3	-48.2	265.6	28.4	28.4	0.2	327.9	328.5	0.2	26.3	33.2	33.2	70
32.4	90.2	9524.6	300.0	-39.0	99.9	277.0	27.8	27.6	-3.4	330.5	994.9	99.9	99.9	36.7	36.7	72
34.6	95.2	10115.6	275.0	-43.6	99.9	274.6	25.8	25.7	-2.1	332.0	994.9	99.9	99.9	40.2	40.2	74
36.9	100.3	10745.0	250.0	-49.1	99.9	280.6	32.4	31.9	-5.7	333.1	994.9	99.9	99.9	43.6	43.6	76
39.4	106.0	11432.2	225.0	-54.6	99.9	289.1	28.0	26.5	-9.2	334.6	994.9	99.9	99.9	47.4	47.4	74
41.9	111.5	12175.9	200.0	-60.6	99.9	291.7	29.3	27.2	-10.8	336.9	994.9	99.9	99.9	51.7	51.7	81
44.4	117.7	12993.3	175.0	-66.6	99.9	282.4	37.9	37.0	-8.1	340.0	994.9	99.9	99.9	56.3	56.3	83
47.9	124.8	13934.6	150.0	-61.0	99.9	268.9	30.2	30.2	0.6	365.0	994.9	99.9	99.9	63.3	63.3	85
52.2	132.0	15065.1	125.0	-63.0	99.9	257.0	21.7	19.4	-9.9	380.9	994.9	99.9	99.9	70.2	70.2	87
57.0	139.7	16413.2	100.0	-6.2	99.9	275.8	13.7	13.7	-1.4	399.9	994.9	99.9	99.9	77.9	77.9	88
62.6	147.3	18161.3	75.0	-66.2	99.9	303.0	3.7	3.1	-20.2	434.3	994.9	99.9	99.9	82.6	82.6	84
71.4	156.3	23650.9	50.0	-60.4	99.9	351.1	1.8	0.3	-1.8	501.2	994.9	99.9	99.9	83.7	83.7	84
84.4	165.5	25056.0	25.0	-49.9	99.9	6.3	7.6	-0.8	-7.6	641.5	994.9	99.9	99.9	82.9	82.9	91

* BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 240
LAKE CHARLES, LA

25 APRIL 1975
1115 GMT

149 49 0

TIME MIN	CHTCT	WEIGHT GFM	PRES MB	TEMP DG C	GEN PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	4.0	5.0	1013.7	22.2	21.7	150.0	5.2	-2.6	4.5	296.4	338.8	16.4	97.0	0.0	0
0.3	4.9	123.9	1000.2	22.0	21.2	176.2	10.0	-0.7	10.0	297.3	339.2	16.1	95.3	0.2	340
1.1	6.8	344.2	975.0	20.4	19.2	181.1	11.2	0.2	11.2	297.6	339.6	14.5	92.9	0.7	353
2.1	8.9	568.8	950.0	18.8	17.4	192.4	9.4	2.4	9.1	298.0	339.1	13.3	91.9	1.3	366
2.4	10.9	758.7	925.0	19.1	15.6	201.2	6.3	2.3	5.8	300.5	333.0	12.2	80.2	1.6	4
3.7	13.0	1034.2	900.0	18.1	9.5	200.2	3.7	1.3	3.5	301.2	324.0	8.3	57.3	1.8	6
4.7	15.2	1275.5	875.0	17.0	7.8	214.2	6.8	3.8	5.6	302.5	323.5	7.6	54.7	2.1	9
5.6	17.3	1522.0	850.0	15.7	-1.8	208.0	9.7	4.5	8.5	303.1	315.0	4.1	31.6	2.5	11
6.5	19.6	1775.0	825.0	14.5	3.5	202.6	10.3	4.0	9.5	303.7	321.6	6.0	47.5	3.1	15
7.5	21.8	2034.4	800.0	12.8	2.9	205.7	11.8	5.8	10.2	305.6	322.3	5.9	51.0	3.7	17
8.5	24.2	2300.4	775.0	11.7	-6.9	211.0	13.8	7.1	11.8	308.8	315.6	2.9	26.5	4.5	19
9.5	26.4	2573.9	750.0	10.6	-23.6	217.9	14.5	9.9	11.4	308.3	312.7	1.4	13.4	5.3	21
10.7	28.9	2855.3	725.0	9.8	-43.9	226.8	14.7	10.7	10.1	310.3	310.6	0.1	1.0	6.3	23
11.7	31.5	3146.0	700.0	9.5	-44.1	237.9	14.5	12.3	7.7	313.0	313.4	0.1	1.0	7.2	25
12.8	34.1	3446.3	675.0	7.7	-43.3	255.0	12.1	11.7	3.1	314.3	314.8	0.2	1.5	7.3	27
13.9	36.5	3756.2	650.0	6.1	-15.3	266.1	10.3	10.2	0.7	316.1	321.9	1.8	20.3	8.3	30
15.1	39.2	4076.0	625.0	3.7	-11.6	267.7	10.5	10.5	0.4	317.0	324.9	2.5	31.7	8.8	32
16.3	41.3	4406.6	600.0	1.8	-8.7	270.2	11.7	11.7	-0.0	318.6	328.8	3.3	45.5	9.4	34
17.7	44.7	4746.1	575.0	-1.7	-8.9	270.9	11.6	11.8	-0.2	318.4	328.9	3.4	57.8	10.0	36
18.9	47.6	5099.7	550.0	-5.2	-12.5	264.8	12.9	12.8	1.2	318.2	326.6	2.7	56.4	10.9	38
20.3	50.5	5463.2	525.0	-8.3	-17.5	268.7	13.1	13.1	0.3	318.7	324.6	1.8	47.2	11.6	40
21.6	53.6	5839.7	500.0	-11.4	-23.3	277.9	14.5	14.3	-2.0	319.3	323.1	1.2	36.6	12.5	42
22.9	56.6	6231.0	475.0	-14.1	-27.3	271.7	16.2	16.2	-0.5	320.5	321.3	0.3	9.3	13.4	44
24.2	59.9	6640.2	450.0	-15.6	-39.8	262.9	14.3	15.2	2.0	323.6	323.7	0.0	1.7	14.6	46
25.8	63.4	7068.4	425.0	-18.8	-61.9	266.7	16.7	15.6	1.0	324.8	324.8	0.0	1.7	16.1	48
27.5	66.7	7517.8	400.0	-21.3	-63.5	267.4	19.3	19.2	0.9	325.2	327.3	0.0	1.0	17.4	50
29.3	70.4	7990.9	375.0	-24.7	-50.7	263.4	23.2	23.1	2.7	325.9	329.5	0.2	12.0	20.0	52
31.2	74.2	8484.3	350.0	-28.5	-68.1	265.7	22.1	22.1	1.7	330.3	330.4	0.0	1.0	22.4	54
33.1	78.3	9017.0	325.0	-32.2	-70.6	273.8	24.0	23.9	-1.6	332.3	332.3	0.0	1.0	24.9	56
35.0	82.3	9576.9	300.0	-36.7	-70.6	286.6	25.5	24.4	-7.3	333.6	333.6	0.0	1.9	27.5	58
37.2	86.6	10173.0	275.0	-41.7	-58.9	285.9	27.9	26.8	-7.6	334.9	334.9	99.9	99.9	30.4	60
39.6	91.4	10811.4	250.0	-47.1	-99.9	285.2	34.0	32.8	-8.9	336.0	336.0	99.9	99.9	34.4	62
42.4	96.4	11499.8	225.0	-52.7	-99.9	288.1	32.3	30.7	-10.0	337.7	337.7	99.9	99.9	39.2	64
45.1	101.8	12245.9	200.0	-58.5	-99.9	284.9	33.2	32.1	-8.5	340.1	340.1	99.9	99.9	44.4	66
48.0	106.0	13076.9	175.0	-65.7	-99.9	286.5	35.2	33.7	-10.0	341.5	341.5	99.9	99.9	50.0	68
51.3	114.7	14007.3	150.0	-65.7	-99.9	281.2	29.8	29.8	-5.8	355.1	355.1	99.9	99.9	56.6	70
55.2	122.0	15112.1	125.0	-65.9	-99.9	276.4	29.5	29.3	-3.3	375.6	375.6	99.9	99.9	63.5	72
60.1	131.0	16433.7	100.0	-66.7	-99.9	280.2	20.8	20.5	-3.7	398.8	398.8	99.9	99.9	70.6	74
65.7	140.5	18195.1	75.0	-65.2	-99.9	311.4	9.3	7.0	-6.1	430.2	430.2	99.9	99.9	78.0	76
74.0	151.5	20880.2	50.0	-60.7	-99.9	99.9	99.9	99.9	99.9	500.6	500.6	99.9	99.9	99.9	78
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

° BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 248
SHREVEPORT, LA28 APRIL 1975
1115 GMT

TIME MIN	CNCT	HEIGHT GPM	PRES MB	TEMP CG-C	DEW PT CG-C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/HC	RH PCT	RANGE KM	AZ DG
0.0	4.2	79.0	1004.1	22.2	19.4	170.0	3.6	-0.6	3.5	296.9	334.2	14.3	84.0	0.0	0
0.1	4.5	114.8	1000.0	22.2	19.7	180.7	6.2	0.1	6.2	297.4	335.7	14.7	85.6	0.1	354
0.6	6.3	335.0	975.0	21.7	20.4	150.3	10.7	1.9	10.6	297.1	340.3	15.7	92.5	0.4	354
1.4	8.3	561.6	950.0	20.3	19.1	203.5	12.2	4.8	11.1	296.8	338.9	14.8	92.7	0.9	5
2.2	10.3	792.4	925.0	19.1	17.9	215.4	15.0	6.7	12.2	300.8	338.3	14.1	92.6	1.5	16
3.0	12.3	1029.2	900.0	17.5	16.3	222.2	15.6	10.4	11.5	301.3	336.3	13.1	92.5	2.2	23
3.8	14.4	1265.6	875.0	17.7	13.1	239.8	17.1	14.8	8.6	303.6	333.3	10.9	74.8	2.3	30
4.6	16.3	1518.0	850.0	17.6	4.4	254.0	17.4	16.7	4.8	303.6	323.1	6.2	41.0	3.6	30
5.5	18.5	1772.6	825.0	15.9	4.3	253.7	17.1	16.4	4.8	306.3	324.4	6.4	46.4	4.3	45
6.3	20.7	2033.4	800.0	13.5	8.7	255.5	14.4	15.0	3.6	306.7	331.4	8.9	72.9	5.0	50
7.2	22.9	2300.2	775.0	11.2	9.3	260.1	11.2	11.0	1.9	307.2	334.8	10.0	91.4	5.6	53
8.0	25.2	2574.2	750.0	9.8	6.9	270.1	8.3	8.3	-0.0	308.3	332.0	8.4	82.3	6.1	55
9.0	27.5	2856.0	725.0	8.4	5.7	270.9	7.5	7.0	-2.7	309.8	332.5	8.0	83.1	6.3	58
9.6	29.9	3145.5	700.0	6.2	4.1	291.4	9.0	8.4	-3.3	310.3	331.4	7.4	86.4	6.4	61
10.7	32.4	3443.6	675.0	4.7	0.7	275.9	9.5	9.4	-1.0	311.7	329.2	6.0	75.3	6.4	64
11.6	35.0	3750.6	650.0	2.3	-1.2	222.9	12.0	11.9	1.5	312.3	328.2	5.4	77.7	7.4	65
12.4	37.3	4066.5	625.0	-0.3	-4.2	256.2	14.7	14.4	2.8	312.6	326.2	4.6	76.5	8.1	67
13.6	40.1	4392.3	600.0	-0.2	-29.5	251.3	17.0	16.1	5.5	315.9	317.7	0.5	8.7	9.2	68
14.7	42.6	4731.7	575.0	-3.4	-31.2	251.9	18.1	17.2	5.6	316.0	317.7	0.5	9.6	10.3	69
15.4	45.4	5081.7	550.0	-5.4	-34.4	256.3	18.5	17.9	4.4	317.7	315.5	0.2	17.4	11.5	70
16.9	48.4	5444.5	525.0	-8.4	-40.4	261.4	19.5	19.3	2.9	318.3	319.1	0.2	5.5	12.9	71
18.1	51.1	5820.9	500.0	-11.2	-44.3	262.0	20.3	20.1	2.4	319.3	319.9	0.1	4.5	14.2	71
19.3	54.3	6213.0	475.0	-13.6	-43.2	266.8	20.0	20.0	1.1	321.3	322.0	0.2	6.0	15.6	72
20.5	57.3	6621.9	450.0	-15.6	-48.3	270.1	20.3	20.3	-0.0	323.3	323.7	0.1	4.2	17.1	73
22.0	60.6	7050.6	425.0	-18.6	-48.2	271.6	20.2	20.2	-0.6	324.8	325.3	0.1	5.4	18.3	75
23.0	64.1	7498.8	400.0	-22.6	-50.5	271.3	24.4	24.2	-0.5	325.6	325.9	0.1	5.8	20.4	77
25.0	67.4	7968.8	375.0	-26.3	-52.8	276.7	23.5	23.4	-2.8	326.7	327.0	0.1	6.2	22.6	78
26.6	71.0	8464.6	350.0	-29.3	-54.6	280.1	25.3	24.9	-4.4	329.2	329.5	0.1	6.5	24.9	80
28.2	75.0	8990.0	325.0	-33.2	-57.2	282.0	26.1	25.5	-5.4	330.8	331.0	0.0	6.9	27.2	82
30.0	79.2	9547.1	300.0	-37.9	-60.2	283.5	28.0	27.2	-6.5	332.1	332.2	0.0	7.4	29.3	84
31.8	83.4	10141.5	275.0	-42.2	-64.9	284.4	30.5	29.6	-7.6	334.2	334.9	0.0	99.9	33.0	86
33.7	87.8	10779.3	250.0	-47.5	-69.9	289.6	33.8	31.9	-11.3	335.5	335.9	0.0	99.9	36.4	88
36.0	92.6	11465.8	225.0	-53.3	-74.9	289.0	37.4	35.3	-12.2	336.9	336.9	0.0	99.9	41.1	90
38.4	98.2	12214.2	200.0	-59.3	-79.9	285.9	39.4	38.1	-10.8	338.8	338.8	0.0	99.9	46.3	91
41.0	103.8	13037.3	175.0	-65.3	-84.9	283.7	41.8	40.6	-9.9	340.2	340.2	0.0	99.9	52.5	93
44.4	110.3	13963.6	150.0	-66.0	-89.9	276.8	45.6	44.4	-4.2	350.5	350.5	0.0	99.9	59.8	95
48.1	117.3	15077.9	125.0	-62.9	-94.9	274.2	36.3	36.2	-2.6	381.2	381.2	0.0	99.9	67.4	96
53.2	124.0	16442.0	100.0	-66.8	-99.3	275.1	25.9	25.8	-2.3	398.7	398.7	0.0	99.9	74.4	95
59.1	136.0	18187.2	75.0	-65.5	-99.9	320.5	9.0	5.7	-8.9	427.1	427.1	0.0	99.9	79.3	96
67.1	140.5	20669.6	50.0	-59.7	-99.9	335.3	3.9	1.4	-3.1	502.9	502.9	0.0	99.9	81.4	97
79.3	158.5	25065.4	25.0	-52.1	-99.9	33.7	3.8	-2.1	-3.2	635.0	635.0	0.0	99.9	82.0	100

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION, PAGE IS

STATION NO. 255
VICTORIA, TER25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	0.2	33.0	1007.4	23.9	21.6	170.0	5.2	-0.9	5.1	298.8	341.4	16.4	87.0	0.0	0.
0.2	4.8	57.8	1000.0	23.4	21.6	999.9	99.9	99.9	99.9	298.8	342.0	16.5	89.5	999.9	999.
0.9	8.6	319.5	975.0	22.1	21.1	999.9	99.9	99.9	99.9	299.6	342.7	16.4	94.3	999.9	999.
1.6	2.9	545.7	950.0	20.8	19.7	999.9	99.9	99.9	99.9	300.4	341.2	15.5	93.8	999.9	999.
2.4	10.8	776.8	925.0	19.3	18.1	190.4	13.3	2.4	13.0	301.0	338.9	14.3	92.4	1.6	355.
3.2	13.0	1013.5	900.0	21.3	7.1	194.4	17.7	4.4	17.2	304.4	324.2	7.1	39.9	2.3	2.
3.9	15.2	1237.2	875.0	19.9	7.7	198.2	17.6	4.3	17.1	305.5	326.7	7.6	45.1	3.1	5.
4.9	17.4	1506.2	850.0	17.4	8.5	189.9	16.2	2.8	15.9	305.5	328.4	8.2	55.8	4.0	7.
5.7	19.9	1763.5	825.0	15.6	5.1	190.2	14.5	2.6	14.3	306.0	325.0	6.7	49.6	4.8	7.
6.7	22.3	2021.2	800.0	15.3	-15.3	207.7	12.1	5.6	10.8	307.6	312.2	1.5	10.7	5.6	9.
7.6	24.4	2290.7	775.0	16.8	-39.6	220.3	8.2	5.3	6.3	311.9	312.5	0.2	1.0	6.1	11.
8.6	26.8	2559.0	750.0	16.5	-39.5	241.6	6.6	5.8	3.1	314.5	315.1	0.2	1.0	6.4	13.
9.5	29.3	2855.7	725.0	14.4	-30.2	275.9	4.9	4.9	-0.5	315.3	316.9	0.5	3.3	6.4	14.
10.5	32.3	3149.4	700.0	11.5	-17.8	308.0	4.2	3.3	-2.6	315.3	314.7	1.3	11.1	6.5	14.
11.6	34.7	3455.3	675.0	9.1	-	286.7	4.0	3.9	-1.2	316.2	326.1	3.2	30.2	6.4	20.
12.6	37.2	3763.8	650.0	7.5	-22.0	267.0	5.9	5.9	0.3	317.5	320.9	1.0	10.5	6.6	22.
13.7	40.1	4085.0	625.0	4.8	-21.9	278.3	8.9	8.8	-1.3	318.0	321.5	1.1	12.3	6.7	26.
14.8	42.8	4418.1	600.0	2.3	-23.2	275.3	10.8	10.8	-1.0	318.9	322.1	1.0	13.1	6.9	32.
15.9	45.8	4755.0	575.0	-0.4	-27.0	269.4	11.3	11.3	0.1	319.5	322.0	0.7	11.2	7.3	37.
17.1	49.9	5110.9	550.0	-3.8	-28.5	270.4	12.0	12.0	-0.1	319.6	321.8	0.7	12.5	7.9	42.
18.4	51.3	5476.0	525.0	-7.0	-26.7	267.7	15.2	15.1	0.6	320.1	322.8	0.8	18.9	8.6	46.
19.7	55.0	5854.2	500.0	-9.9	-29.8	255.3	19.3	19.2	1.6	321.0	323.2	0.6	17.7	9.6	52.
21.0	58.0	6248.7	475.0	-11.7	-25.0	255.8	20.1	20.1	1.5	323.5	326.9	1.0	30.3	11.0	54.
22.5	61.4	6601.8	450.0	-13.6	-30.6	275.2	18.8	18.6	-3.0	326.1	328.4	0.7	22.4	12.4	61.
24.0	65.0	7093.2	425.0	-17.3	-23.2	274.8	21.0	20.9	-1.8	326.9	331.6	1.4	60.0	13.9	65.
25.5	69.6	7555.7	400.0	-20.3	-27.4	276.1	19.4	19.3	-2.1	328.7	332.2	1.0	52.5	15.4	67.
27.2	72.2	8050.2	375.0	-24.2	-28.2	275.6	22.3	22.2	-2.2	329.6	333.1	1.0	69.1	17.3	71.
28.7	76.3	8520.2	350.0	-27.7	-34.7	276.0	22.3	22.2	-2.3	331.3	333.4	0.6	51.2	19.4	74.
30.4	80.4	9049.6	325.0	-31.2	-41.4	276.5	21.5	21.4	-2.4	331.7	334.6	0.3	35.4	21.4	77.
32.3	84.3	9610.7	300.0	-36.5	-46.2	274.4	22.7	22.6	-1.7	333.9	334.6	0.2	35.3	23.7	79.
34.4	89.4	10207.1	275.0	-41.9	96.9	276.6	22.8	22.7	-2.6	334.6	339.9	99.9	999.9	26.4	80.
36.5	94.5	10845.1	250.0	-47.5	99.9	279.1	24.6	24.3	-3.9	335.4	399.9	99.9	999.9	29.3	82.
38.6	99.6	11531.8	225.0	-53.8	99.9	279.3	23.4	23.1	-3.8	336.0	399.9	99.9	999.9	32.4	84.
41.3	105.3	12277.1	200.0	-59.9	99.9	278.9	28.5	28.3	-2.9	338.0	399.9	99.9	999.9	36.1	85.
44.0	111.3	13101.1	175.0	-65.0	99.9	286.9	27.5	26.3	-8.0	342.7	399.9	99.9	999.9	40.9	87.
47.3	118.3	14031.9	150.0	-66.9	99.9	283.7	27.8	27.0	-6.6	344.8	399.9	99.9	999.9	46.2	89.
50.8	126.0	15130.7	125.0	-68.9	99.9	271.8	31.4	31.4	-1.0	370.2	399.9	99.9	999.9	51.5	90.
55.6	135.0	16446.3	100.0	-70.1	99.9	269.0	15.9	15.9	0.3	392.4	399.9	99.9	999.9	57.8	90.
61.4	143.7	17186.7	75.0	-70.8	99.9	277.6	10.1	9.0	-1.3	426.4	399.9	99.9	999.9	62.4	90.
68.4	154.0	20544.0	50.0	-61.8	99.9	288.8	1.6	1.5	-0.5	497.8	399.9	99.9	999.9	63.5	91.
81.0	164.7	25073.6	25.0	-51.9	99.9	999.9	99.9	99.9	99.9	635.9	399.9	99.9	999.9	999.9	999.

* BY SPEED ALANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 260
STEPHENVILLE, TEX
25 APRIL 1975
1115 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	CIN DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/SEC	RH PC7	RANGE KM	AZ DG
0.0	9.3	399.0	903.8	18.0	15.6	180.0	5.2	0.0	5.2	255.8	326.4	11.7	86.0	0.0	0
99.9	99.9	59.9	1000.0	99.9	99.9	59.9	99.9	99.9	59.9	59.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	59.9	975.0	99.9	99.9	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	10.5	523.7	950.0	19.6	18.1	207.6	6.3	6.3	12.1	299.0	335.6	13.9	90.5	0.2	15
1.6	12.9	754.7	925.0	22.0	12.9	218.2	16.2	10.0	12.7	303.8	331.8	10.3	90.5	0.2	15
2.4	15.3	593.7	900.0	22.7	12.6	227.5	11.4	6.4	7.7	306.3	334.6	10.3	52.8	1.8	35
3.4	17.9	1238.6	875.0	21.3	10.3	250.3	7.2	6.8	2.4	307.2	332.4	9.1	49.4	2.3	40
6.3	22.3	1489.6	850.0	20.8	-1.1	266.1	4.0	4.0	0.3	308.6	322.0	4.6	25.4	2.5	44
5.1	22.9	1746.5	825.0	19.3	-9.0	273.2	1.7	1.7	-0.1	309.3	317.5	2.4	13.9	2.6	46
6.1	25.4	2139.4	800.0	16.7	-7.2	282.0	0.0	0.0	0.0	309.3	317.7	2.8	18.7	2.6	47
7.0	28.9	2278.0	775.0	14.2	-9.7	284.1	1.6	1.1	1.1	309.4	316.6	2.4	18.1	2.6	47
7.9	30.9	2533.2	750.0	11.9	-17.8	282.4	2.7	2.7	0.4	309.6	313.6	1.3	10.8	2.8	48
8.4	31.6	2835.2	725.0	9.2	-18.4	273.9	3.6	3.6	-0.2	309.7	313.6	1.2	12.3	2.9	50
9.7	36.1	3124.2	700.0	7.1	-23.3	283.2	6.5	6.3	-1.5	310.4	313.1	0.8	9.3	3.1	53
10.7	39.0	3422.1	675.0	6.1	-27.3	275.9	9.7	9.6	-1.7	312.5	314.5	0.6	6.9	3.4	60
11.7	41.8	3729.6	650.0	3.4	-25.8	268.0	10.3	10.3	0.4	312.6	315.2	0.7	9.0	3.7	45
12.7	44.9	4045.6	625.0	0.5	-25.6	249.0	11.0	10.3	3.9	313.0	315.5	0.8	11.9	4.5	07
13.6	47.9	4371.5	600.0	-1.9	-25.7	237.6	12.4	10.5	6.7	314.0	316.5	0.8	14.1	5.3	66
14.9	51.9	4708.4	575.0	-3.5	-48.6	235.6	9.8	8.1	5.6	315.9	316.3	0.1	2.1	6.1	65
16.0	56.0	5058.5	550.0	-5.4	-53.3	254.4	7.8	7.5	2.1	317.6	317.8	0.0	1.0	6.6	64
17.1	57.1	5421.4	525.0	-8.1	-55.0	242.1	8.5	8.4	1.2	318.7	318.9	0.0	1.0	7.2	66
18.3	60.6	5799.0	500.0	-10.1	-58.3	263.8	10.1	10.0	1.1	320.7	320.9	0.0	1.0	7.8	77
19.6	65.3	6132.0	475.0	-12.9	-60.3	269.4	14.1	14.1	0.2	321.9	322.0	0.0	1.0	8.6	69
20.9	67.7	6501.4	450.0	-16.4	-62.5	266.9	16.7	16.7	0.9	323.6	323.7	0.0	1.0	10.7	73
22.2	71.3	7028.4	425.0	-19.7	-62.5	266.9	16.7	16.7	0.9	323.6	323.7	0.0	1.0	12.4	74
23.6	75.2	7474.7	400.0	-23.7	-63.0	266.9	19.9	19.9	1.1	324.1	324.1	0.0	1.0	14.6	77
25.6	79.3	7943.2	375.0	-28.8	-63.4	274.3	20.5	20.5	-0.8	326.1	326.2	0.0	1.3	16.6	79
27.5	83.3	8437.1	350.0	-30.7	-65.9	271.1	20.8	20.8	-0.4	327.2	327.3	0.0	1.7	18.9	80
29.7	87.6	8958.7	325.0	-34.8	-67.2	268.3	24.6	24.6	0.7	328.6	328.6	0.0	2.1	19.9	80
32.1	92.2	9513.5	300.0	-38.7	-68.6	274.5	27.6	27.6	-2.2	330.8	331.2	0.1	21.1	23.5	82
34.1	96.9	10164.9	275.0	-43.7	-69.9	274.7	31.5	31.5	-0.9	331.9	331.9	99.9	99.9	27.2	84
36.8	101.8	10737.7	250.0	-49.2	-69.9	274.3	36.9	36.8	-2.7	332.9	332.9	99.9	99.9	32.4	85
39.9	107.3	11420.2	225.0	-54.7	-69.9	281.6	32.6	31.9	-6.6	334.7	334.7	99.9	99.9	38.3	87
43.1	112.6	12162.1	200.0	-61.1	-69.9	278.2	35.7	35.5	-3.3	336.0	336.0	99.9	99.9	45.5	89
46.3	119.3	12976.5	175.0	-67.7	-69.9	278.2	38.3	37.8	-6.2	338.2	338.2	99.9	99.9	52.0	90
50.9	126.0	13910.3	150.0	-65.9	-69.9	274.0	25.7	25.6	-0.9	336.6	336.6	99.9	99.9	60.4	91
55.8	133.3	15023.3	125.0	-65.7	-69.9	265.0	26.1	26.0	-2.3	336.0	336.0	99.9	99.9	68.8	90
62.1	141.2	16378.0	100.0	-66.1	-69.9	281.6	19.2	18.8	-3.9	400.0	400.0	99.9	99.9	78.1	90
69.7	148.7	18116.3	75.0	-63.2	-69.9	89.0	5.8	5.8	-0.6	440.4	440.4	99.9	99.9	86.0	91
80.8	157.3	20626.4	50.0	-58.6	-69.9	278.0	7.7	7.7	-0.5	505.6	505.6	99.9	99.9	85.2	91
99.9	99.9	99.9	25.0	-59.9	-69.9	99.9	99.9	99.9	59.9	99.9	99.9	99.9	99.9	99.9	99.9

° BY SOLED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
° BY TEF MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 261
DEL RIO, TEX25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	8.9	314.0	972.0	21.7	18.9	100.0	4.6	-4.5	0.8	299.2	336.9	14.3	84.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	10.3	512.8	950.0	20.9	17.3	126.6	12.0	-9.6	7.2	300.2	335.3	13.2	79.7	0.4	243.
1.6	13.3	743.9	925.0	20.0	14.8	150.9	11.1	-5.4	9.7	301.4	332.4	11.6	71.9	1.0	307.
2.5	15.7	980.6	900.0	19.6	14.1	172.9	10.0	-1.2	9.9	303.2	333.9	11.3	70.5	1.4	321.
3.3	18.1	1224.6	875.0	21.9	13.1	171.0	7.1	-1.0	7.0	308.0	338.3	10.9	57.6	1.9	325.
4.2	20.5	1476.3	850.0	20.8	9.4	167.4	7.4	-1.6	7.2	309.2	334.0	8.8	48.0	2.2	332.
5.2	23.1	1734.2	825.0	20.3	2.7	153.9	6.1	-3.5	7.2	310.8	327.2	5.7	31.2	2.6	338.
6.1	25.6	1999.2	800.0	19.3	-0.1	136.8	5.7	-3.9	4.3	312.4	326.4	4.7	27.0	3.0	333.
7.1	28.2	2271.2	775.0	18.2	-1.9	156.3	4.2	-1.6	3.9	313.9	327.1	4.4	26.2	3.3	332.
8.0	31.0	2550.8	750.0	16.3	-2.3	202.4	4.9	1.9	4.5	314.8	327.7	4.3	27.6	3.5	316.
9.2	33.9	2838.0	725.0	14.2	-9.5	220.5	5.0	3.9	4.5	315.3	323.3	2.6	18.5	3.7	316.
10.1	36.4	3132.6	700.0	12.1	-16.7	238.8	5.9	5.0	3.1	316.1	320.9	1.5	11.7	3.9	344.
11.1	39.3	3435.7	675.0	10.0	-20.2	253.3	7.1	8.3	1.3	317.0	320.7	1.1	10.0	3.9	350.
12.2	42.1	3747.3	650.0	7.2	-21.2	264.7	8.3	9.0	0.8	317.2	320.6	1.0	12.4	3.9	6.
13.1	45.1	4057.6	625.0	4.0	-22.1	266.0	9.0	10.6	0.6	317.1	320.6	1.0	15.3	4.1	15.
14.5	48.3	4357.3	600.0	0.9	-22.5	265.2	10.6	10.6	0.9	317.3	320.7	1.0	19.6	4.6	26.
15.7	51.1	4737.8	575.0	-1.1	-21.3	256.7	15.0	14.6	3.5	318.2	322.8	1.2	19.6	4.6	26.
16.9	54.3	5090.4	550.0	-4.1	-19.7	253.3	17.0	16.5	4.3	319.4	324.2	1.5	28.4	5.4	36.
18.2	57.4	5455.3	525.0	-7.2	-17.0	253.6	17.8	17.1	5.0	320.4	326.2	1.9	45.4	6.5	43.
19.5	60.3	5833.1	500.0	-10.5	-20.7	259.3	15.6	15.4	2.9	320.4	325.2	1.5	42.7	7.7	44.
20.9	63.3	6225.8	475.0	-13.8	-22.0	249.5	14.4	13.5	5.0	321.2	325.6	1.4	49.4	8.4	52.
22.3	67.7	6635.3	450.0	-16.1	-21.0	252.0	14.0	13.3	4.3	323.2	328.4	1.6	65.9	9.9	54.
23.8	71.1	7061.7	425.0	-18.5	-26.1	262.4	15.4	15.3	2.0	325.3	324.9	1.1	52.2	11.1	56.
25.3	75.3	7513.4	400.0	-21.5	-24.9	266.0	19.4	19.4	1.4	327.1	331.4	1.3	73.6	12.5	61.
26.6	78.3	7965.5	375.0	-25.4	-30.1	262.9	20.7	20.6	2.6	328.0	330.9	0.8	64.6	14.2	63.
28.3	82.8	8483.1	350.0	-28.7	-35.4	266.1	20.8	20.7	1.4	330.0	331.9	0.5	52.5	16.1	66.
30.1	87.0	9009.1	325.0	-33.1	-40.2	265.9	22.2	22.2	0.0	331.0	332.3	0.3	42.8	18.2	69.
31.6	91.4	9566.4	300.0	-38.0	-42.8	268.2	23.7	23.4	3.2	331.2	332.9	0.3	59.9	20.3	71.
33.8	96.3	10155.1	275.0	-42.8	99.9	266.9	24.5	24.5	1.3	333.3	339.9	99.9	99.9	23.2	72.
35.9	105.7	10795.1	250.0	-48.2	59.9	266.3	27.7	27.6	0.3	334.4	339.9	99.9	99.9	26.4	74.
38.1	105.7	11480.0	225.0	-54.1	99.9	271.8	27.7	27.7	-0.9	335.7	339.9	99.9	99.9	30.3	76.
40.6	111.3	12225.7	200.0	-59.8	99.9	271.8	33.4	33.4	0.2	336.1	339.9	99.9	99.9	34.1	78.
43.1	117.0	13047.4	175.0	-66.4	99.9	279.4	34.0	33.5	-5.6	340.3	339.9	99.9	99.9	39.2	80.
46.3	124.0	13908.5	150.0	-69.5	99.9	274.1	34.3	32.2	-2.3	350.3	339.9	99.9	99.9	45.2	82.
50.1	131.3	15065.6	125.0	-67.1	99.9	267.0	25.8	25.4	1.4	371.4	339.9	99.9	99.9	51.6	83.
54.9	138.0	16124.4	100.0	-70.2	99.9	261.8	18.3	18.1	2.6	372.1	339.9	99.9	99.9	56.9	84.
60.4	147.0	18101.5	75.0	-70.4	99.9	290.5	7.7	7.2	-2.7	425.3	339.9	99.9	99.9	61.6	86.
63.5	150.5	20377.7	50.0	-60.5	99.9	2.2	7.6	-0.3	-7.6	501.1	339.9	99.9	99.9	62.4	86.
80.5	166.5	24582.2	25.0	-53.2	99.9	15.4	8.2	-1.6	-6.0	632.1	339.9	99.9	99.9	62.6	87.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

ORIGINAL PAGE IS

STATION NO. 265
MIDLAND, TEX25 APRIL 1975
1115 GMT

TIME MIN	CNCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	CIR CG	SPEED K/SEC	U COMP M/SEC	V COMP M/SEC	POT T DJ K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.2	12.0	873.0	911.3	12.8	7.3	330.0	1.0	0.5	-0.9	254.6	313.5	7.1	69.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	12.9	979.6	900.0	19.7	15.4	999.0	99.9	99.9	99.9	303.5	337.3	12.5	76.2	999.9	99.9
1.4	15.2	1224.1	875.0	20.8	13.9	999.9	99.9	99.9	99.9	307.0	338.7	11.5	64.6	999.9	99.9
2.3	17.3	1475.4	850.0	21.2	6.7	182.0	11.4	1.2	11.3	309.3	330.0	7.3	39.0	1.4	10.
3.2	16.0	1723.1	825.0	19.6	3.4	182.0	6.3	0.3	2.3	310.2	327.4	6.0	34.3	1.4	9.
4.2	21.7	1996.9	800.0	17.9	-6.7	172.2	5.2	-0.3	5.2	310.6	319.4	2.9	18.1	2.4	7.
5.2	24.2	2262.9	775.0	15.7	-7.5	152.9	3.9	1.1	3.9	311.1	319.6	2.9	18.1	2.4	7.
6.2	26.4	2547.7	750.0	13.3	-9.6	225.7	5.2	3.9	3.9	311.4	319.6	2.9	18.1	2.4	7.
7.2	28.9	2927.6	725.0	11.5	-12.5	255.4	8.7	8.4	2.2	311.4	319.6	2.9	18.1	2.4	7.
8.3	31.4	3119.4	700.0	9.2	-13.8	272.0	10.5	10.5	-0.4	312.9	318.7	1.9	18.1	3.3	2.0
9.4	34.3	3415.0	675.0	6.7	-14.3	272.1	12.1	12.1	-0.4	313.4	319.2	1.9	18.1	3.3	2.0
10.5	36.5	3727.6	650.0	4.6	-16.3	272.1	14.2	14.2	1.0	314.4	317.6	1.6	20.2	4.1	4.0
11.7	39.2	4045.7	625.0	2.4	-18.3	256.3	16.4	16.0	3.3	315.3	320.0	1.4	19.9	5.2	5.1
12.4	41.6	4373.6	600.0	-0.4	-21.2	256.6	17.3	16.5	5.2	315.8	319.6	1.2	18.9	6.1	5.7
13.2	44.7	4712.6	575.0	-2.3	-24.6	250.2	18.0	15.0	5.4	317.4	320.6	1.1	18.2	7.5	5.0
14.2	47.5	5065.2	550.0	-3.3	-28.3	250.0	19.3	13.0	2.8	320.2	322.5	0.7	18.3	8.5	6.1
15.2	50.4	5431.0	525.0	-6.1	-30.8	246.6	11.7	11.6	1.1	321.1	323.0	0.6	18.0	9.4	6.1
16.5	53.4	5810.4	500.0	-9.4	-33.2	250.8	12.0	11.6	2.7	321.6	323.2	0.5	18.3	10.3	6.1
17.9	56.3	6204.5	475.0	-12.7	-35.5	255.4	13.5	12.9	4.1	322.3	323.7	0.4	18.6	11.4	6.0
19.3	59.4	6614.7	450.0	-15.7	-37.8	251.7	14.7	1.0	4.6	323.4	324.6	0.3	18.0	12.7	6.1
20.8	62.9	7042.8	425.0	-19.1	-39.7	250.1	17.3	16.2	5.9	324.7	325.5	0.3	18.1	14.2	6.1
24.3	66.1	7491.1	400.0	-22.5	-41.6	250.2	18.2	17.2	6.2	325.1	326.7	0.2	18.6	16.1	6.1
25.9	69.7	7961.2	375.0	-26.5	-43.7	250.3	18.2	17.5	4.9	327.8	328.6	0.2	18.6	18.0	6.1
27.7	73.2	8455.7	350.0	-30.3	-45.7	254.5	22.0	21.2	5.9	329.9	331.5	0.5	18.7	20.5	6.1
29.6	77.2	8979.8	325.0	-33.9	-47.5	260.2	24.4	22.1	3.8	332.1	332.3	0.5	18.7	22.5	6.1
31.5	81.0	9535.0	300.0	-38.5	-41.5	257.5	24.0	24.0	5.3	331.1	332.3	0.4	18.7	25.3	7.1
33.5	85.3	10126.7	275.0	-43.6	-45.9	256.4	28.1	27.7	4.9	332.1	332.3	0.4	18.7	28.5	7.1
35.7	89.8	10760.0	250.0	-49.1	-49.9	263.1	32.5	32.3	3.1	333.1	333.1	0.3	18.7	31.7	7.1
38.1	94.6	11442.4	225.0	-54.7	-54.7	267.4	33.9	33.9	1.5	334.6	334.6	0.3	18.7	35.2	7.1
40.8	99.5	12125.8	200.0	-61.1	-61.1	272.7	40.5	40.4	-1.0	336.0	336.0	0.3	18.7	38.7	7.1
44.0	105.3	13004.2	175.0	-66.1	-66.1	272.3	43.1	43.1	-1.7	340.9	340.9	0.3	18.7	42.2	7.1
47.5	111.3	13934.9	150.0	-67.5	-67.5	263.0	31.6	31.4	3.5	353.9	353.9	0.3	18.7	45.7	7.1
51.9	118.3	15039.7	125.0	-65.2	-65.2	258.8	23.3	22.8	4.5	377.0	377.0	0.3	18.7	49.2	7.1
57.0	126.0	16355.9	100.0	-65.2	-65.2	276.9	23.2	23.0	-2.0	401.7	401.7	0.3	18.7	52.7	7.1
63.4	135.3	18134.8	75.0	-67.5	-67.5	261.4	14.4	14.3	2.1	431.5	431.5	0.3	18.7	56.2	7.1
72.4	144.7	20624.8	50.0	-50.3	-50.3	268.8	3.5	-1.6	-3.1	505.8	505.8	0.3	18.7	60.7	7.1
86.9	155.5	25031.0	25.0	-51.7	-51.7	702.2	7.1	-6.7	-2.4	635.6	635.6	0.3	18.7	65.2	7.1

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 304
MATTERS. NC

25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GEN	PRES MB	TEMP DG C	DRW PT DG C	DIR DG	S-ED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GN/KG	RH PCT	RANGE KM	AZ DG
0.0	4.5	4.0	1010.6	19.6	17.4	240.0	7.2	6.2	3.6	293.0	325.0	12.4	87.0	0.0	0.
0.5	5.9	146.4	1000.0	19.6	17.3	270.3	18.4	18.4	-0.1	294.6	327.3	12.6	85.8	0.9	25.
1.3	7.9	368.9	975.0	19.0	14.0	240.4	24.2	21.1	12.0	295.7	324.5	10.9	76.6	1.6	49.
2.1	10.1	588.1	950.0	17.9	12.5	237.9	23.4	19.8	12.4	296.6	322.2	9.6	70.5	2.8	52.
2.8	12.1	816.1	925.0	17.4	13.5	231.3	22.9	21.6	7.3	298.5	326.3	10.6	77.9	3.8	55.
3.6	14.3	1050.2	900.0	15.9	12.7	233.9	20.9	20.8	2.2	299.3	327.1	10.4	81.4	4.7	60.
4.3	16.4	1290.1	875.0	14.1	12.9	273.9	18.0	18.0	-0.3	299.9	329.7	10.8	82.5	5.5	64.
5.1	18.6	1544.8	850.0	12.6	11.4	274.4	16.4	16.4	-1.3	300.6	327.8	10.1	92.0	6.2	66.
5.9	20.8	1783.5	825.0	11.2	10.0	276.6	12.2	12.1	-1.4	301.7	327.2	9.4	92.0	6.9	72.
6.8	23.2	2042.5	800.0	9.6	7.9	266.2	12.9	12.0	0.8	302.6	325.7	8.4	85.0	7.5	72.
7.6	25.5	2306.0	775.0	7.8	6.3	262.4	11.9	11.8	1.6	303.2	324.7	7.8	90.0	8.1	75.
8.5	27.8	2575.9	750.0	5.6	4.5	265.0	11.7	11.6	1.0	303.6	323.3	7.1	92.4	8.6	74.
9.3	30.3	2822.8	725.0	3.7	2.5	267.4	13.3	13.2	0.6	304.3	322.2	6.4	92.3	9.3	74.
10.2	32.9	3137.6	700.0	2.4	0.8	269.2	14.3	14.3	0.2	305.9	322.4	5.8	88.9	10.0	75.
11.0	35.3	3431.3	675.0	0.9	-3.4	265.4	14.1	14.1	0.9	307.2	320.1	4.4	73.4	10.7	76.
12.0	37.8	3734.1	650.0	-0.5	-8.7	263.2	14.2	14.1	1.7	308.8	318.7	3.1	58.1	11.5	77.
12.9	40.5	4047.2	625.0	-1.8	-14.5	263.9	16.0	16.0	0.0	310.6	316.7	2.0	37.3	12.3	77.
13.9	43.1	4370.7	600.0	-3.1	-18.3	273.1	19.1	19.1	-1.0	312.7	317.4	1.5	29.7	13.4	74.
15.1	46.0	4706.3	575.0	-5.7	-13.9	265.9	19.2	19.1	1.4	313.6	320.7	2.3	25.3	13.6	80.
16.2	48.9	5053.7	550.0	-6.9	-10.1	268.7	15.0	15.0	0.3	315.9	317.9	0.6	14.3	15.9	80.
17.4	51.2	5414.1	525.0	-8.1	-8.5	260.8	10.3	9.6	-3.7	318.6	314.0	0.1	2.2	16.7	81.
18.6	54.6	5792.6	500.0	-11.0	-43.3	257.7	13.4	11.9	-6.2	319.6	320.2	0.2	4.9	17.3	93.
19.7	57.0	6183.8	475.0	-14.5	-43.9	304.7	14.1	11.6	-8.0	320.0	320.6	0.2	6.3	18.1	64.
21.0	61.0	6590.6	450.0	-17.9	-41.2	303.3	15.5	12.9	-8.5	320.7	321.5	0.2	10.9	19.0	87.
22.3	64.4	7015.6	425.0	-20.7	-43.7	258.4	12.7	11.2	-6.0	322.4	323.1	0.2	10.5	18.5	89.
23.7	67.7	7450.8	400.0	-24.0	-46.6	292.3	9.8	9.1	-3.7	323.8	324.3	0.1	10.2	20.4	90.
25.1	71.1	7828.3	375.0	-27.8	-53.3	298.1	8.1	7.2	-3.8	324.7	325.0	0.1	8.9	21.4	91.
26.5	74.9	8205.0	350.0	-31.9	-54.1	298.1	9.0	8.3	-3.5	325.6	325.9	0.1	16.7	23.1	91.
28.1	78.9	8635.8	325.0	-36.2	-52.5	286.7	12.8	12.2	-3.7	326.7	327.1	0.1	49.4	24.5	93.
29.8	82.7	9089.7	300.0	-39.9	-59.9	292.8	18.8	17.3	-7.3	329.0	997.9	99.9	99.9	26.6	91.
31.6	87.0	10077.5	275.0	-45.2	99.9	293.3	17.1	15.7	-6.8	324.8	997.9	99.9	99.9	28.3	94.
33.4	91.6	10766.6	250.0	-50.7	99.9	293.5	14.9	13.4	-6.4	330.7	999.9	99.9	99.9	30.0	97.
35.5	96.4	11383.4	225.0	-56.7	99.9	302.5	20.4	17.2	-11.0	331.7	999.9	99.9	99.9	30.0	97.
37.6	101.6	12120.0	200.0	-61.5	99.9	308.9	99.9	99.9	99.9	335.8	999.9	99.9	99.9	30.0	97.
39.0	107.5	12939.1	175.0	-66.8	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	30.0	97.
40.9	113.5	13800.0	150.0	-72.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	30.0	97.
42.9	119.5	14685.0	125.0	-77.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	30.0	97.
44.9	125.5	15595.0	100.0	-82.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	30.0	97.
46.9	131.5	16530.0	75.0	-87.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	30.0	97.
48.9	137.5	17495.0	50.0	-92.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	30.0	97.
50.9	143.5	18490.0	25.0	-97.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	99.9	30.0	97.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 311
ATHENS, GA

25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	WX RTO CM/KG	RH PCT	RANGE KM	AZ DG
0.0	7.0	245.0	988.2	17.6	17.6	210.0	3.2	1.6	2.8	293.5	326.9	13.0	100.0	0.0	0.
99.9	99.9	45.9	1005.0	97.9	97.9	99.9	99.9	99.9	49.9	49.9	97.9	99.9	99.9	99.9	99.9
0.4	8.2	361.5	975.0	17.6	17.4	248.2	11.7	10.8	4.3	294.6	328.2	13.0	98.9	0.3	48.
1.2	10.4	584.3	950.0	17.1	16.9	256.3	12.8	12.4	3.3	294.6	329.8	12.9	98.5	0.7	62.
2.1	12.6	812.2	925.0	15.6	15.3	261.0	15.4	15.2	2.4	296.9	329.3	11.9	97.9	1.7	72.
3.2	15.0	1044.7	900.0	13.5	13.4	260.0	16.1	15.9	2.0	296.8	329.4	10.4	95.6	2.5	76.
4.0	17.1	1282.7	875.0	13.2	13.0	256.7	17.7	17.2	4.1	298.7	322.5	8.9	81.1	3.4	76.
4.9	19.6	1527.5	850.0	13.3	9.8	257.2	14.3	13.9	3.2	301.2	323.7	9.0	79.3	4.2	76.
5.9	21.9	1778.8	825.0	12.0	9.7	254.3	13.3	12.9	3.6	302.3	323.0	7.5	70.1	4.1	77.
7.0	24.4	2036.2	800.0	10.2	6.2	237.5	13.2	11.1	7.1	303.0	323.7	7.5	76.5	5.4	75.
9.0	26.7	2300.2	775.0	8.7	4.2	228.2	12.7	9.5	6.5	304.0	322.8	6.7	73.5	6.6	74.
9.9	29.3	2570.6	750.0	6.1	2.0	220.2	13.2	10.1	6.5	304.0	323.7	5.9	75.2	7.3	70.
10.1	32.3	2848.2	725.0	5.2	-1.9	240.5	15.0	13.1	7.4	305.7	319.1	4.3	55.8	9.2	74.
11.2	34.7	3134.6	700.0	4.5	-14.3	252.5	18.3	17.4	5.5	307.7	313.2	1.8	24.0	9.2	74.
12.3	37.2	3430.2	675.0	3.8	-21.0	256.6	19.4	18.9	4.5	310.1	311.5	1.1	14.2	10.5	69.
13.3	40.1	3736.3	650.0	2.8	-17.1	255.6	19.6	19.0	4.9	312.3	317.1	1.5	21.5	11.0	70.
14.5	42.7	4032.4	625.0	0.3	-15.2	255.4	19.0	18.4	4.8	313.0	318.8	1.9	10.3	13.0	70.
15.0	45.6	4378.0	600.0	-2.6	-14.3	259.1	17.3	17.0	3.3	313.3	317.9	2.1	47.3	14.3	71.
16.9	48.0	4713.8	575.0	-5.5	-15.2	261.7	19.5	19.3	2.8	313.8	320.2	2.0	46.2	15.6	72.
19.2	51.5	5061.0	550.0	-8.4	-14.1	260.2	21.3	21.0	3.6	314.4	320.6	2.0	53.2	17.3	73.
19.6	54.3	5415.7	525.0	-11.9	-21.2	256.3	21.4	20.8	5.1	314.2	318.5	1.3	46.1	19.0	73.
21.1	57.8	5790.9	500.0	-15.3	-20.4	258.0	21.1	20.6	4.4	314.5	316.7	0.7	28.7	20.9	73.
22.5	61.0	6176.3	475.0	-18.1	-34.5	264.5	22.2	22.1	2.1	315.5	317.0	0.4	22.1	22.8	74.
24.0	64.4	6580.2	450.0	-18.9	-41.9	261.7	21.0	20.7	3.0	314.4	319.5	0.0	1.0	24.6	75.
25.4	67.6	7003.9	425.0	-21.2	-43.4	262.6	19.6	19.5	2.2	321.7	321.8	0.0	1.0	24.4	75.
27.0	70.3	7448.2	400.0	-24.6	-45.6	267.9	21.4	21.4	0.1	323.0	323.1	0.0	1.0	24.3	76.
28.7	74.7	7915.1	375.0	-27.8	-47.7	271.1	22.1	22.1	-0.4	324.7	324.9	0.0	1.0	33.3	77.
30.3	78.0	8406.5	350.0	-32.2	-43.4	275.3	26.1	26.0	-2.4	325.3	325.4	0.0	2.8	34.6	78.
32.1	82.4	8925.0	325.0	-36.5	-46.5	277.3	24.2	24.0	-3.1	326.3	327.0	0.2	35.2	35.2	79.
34.0	86.4	9474.5	300.0	-40.9	-49.9	283.1	27.3	26.6	-0.2	327.7	327.7	99.9	99.9	37.4	81.
35.9	91.0	10060.5	275.0	-45.5	-50.9	291.2	19.6	18.5	-7.2	329.3	329.3	99.9	99.9	41.3	81.
39.1	95.6	10689.1	250.0	-50.8	-50.9	291.0	17.8	16.8	-0.4	330.3	329.9	99.9	99.9	42.8	82.
40.4	100.5	11367.8	225.0	-55.8	-50.9	310.9	14.6	11.0	-4.5	332.9	329.9	99.9	99.9	44.7	82.
43.2	105.8	12106.9	200.0	-61.8	-50.9	307.5	23.1	17.5	-13.4	335.0	329.9	99.9	99.9	47.0	83.
46.0	111.9	12922.8	175.0	-66.7	-50.9	289.0	23.7	22.4	-7.7	334.9	329.9	99.9	99.9	49.7	83.
49.3	118.0	13959.1	150.0	-62.7	-50.9	276.0	36.2	36.0	-3.9	332.1	329.9	99.9	99.9	53.8	82.
53.4	125.3	14992.3	125.0	-60.3	-50.9	270.8	22.3	22.3	-6.3	335.6	329.9	99.9	99.9	61.1	82.
56.0	132.3	16366.6	100.0	-65.9	-50.9	253.9	20.0	19.2	5.6	400.4	329.9	99.9	99.9	68.6	82.
63.9	141.7	18108.2	75.0	-66.1	-50.9	261.5	6.8	6.5	1.0	434.5	329.9	99.9	99.9	72.8	81.
71.8	151.0	20592.6	50.0	-63.2	-50.9	341.3	3.9	0.8	-2.3	444.5	329.9	99.9	99.9	74.5	81.
84.6	161.5	24995.6	25.0	-52.1	-50.9	374.0	2.8	-2.3	-3.0	459.1	329.9	99.9	99.9	74.3	83.

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

• BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

• BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 317
GREENSBORO, NC

25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T DEG K	E POT T DEG K	MX RTO CM/KG	PM PCT	RANGE K4	AZ DEG
0.0	7.4	275.0	982.5	17.8	17.3	200.0	3.6	1.7	3.4	290.1	327.3	12.8	97.0	0.0	0
00.9	90.9	90.9	1000.0	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9
0.3	2.3	300.8	975.0	17.4	16.1	230.4	10.5	4.1	6.7	260.2	325.2	11.9	91.9	0.0	37
1.3	10.5	500.4	950.0	16.8	15.6	240.2	12.6	11.5	9.1	250.9	327.0	11.9	92.7	0.0	49
2.1	12.4	702.2	925.0	16.2	13.0	250.3	14.8	14.3	3.8	300.3	325.9	10.7	70.2	1.4	42
3.0	15.1	1027.7	900.0	17.7	11.5	250.0	12.4	12.0	3.3	301.0	326.8	9.5	66.8	2.2	46
3.9	17.5	1260.4	875.0	16.0	10.2	251.7	12.2	11.6	3.9	301.7	326.1	9.0	68.2	2.4	54
4.9	20.1	1514.4	850.0	14.1	8.3	250.7	10.3	9.7	2.3	302.0	324.3	8.1	68.2	3.5	64
5.9	22.4	1760.0	825.0	12.0	7.8	257.7	11.0	10.7	2.3	302.3	324.6	8.1	75.6	4.1	74
6.9	25.0	2023.1	800.0	9.9	4.9	263.9	12.3	12.2	1.3	302.6	321.8	6.8	71.1	4.8	74
8.0	27.4	2281.8	775.0	8.5	1.6	275.6	11.3	11.3	-1.1	303.7	319.4	5.5	61.5	5.5	74
9.0	30.1	2557.6	750.0	7.1	-0.1	271.1	10.5	10.5	-0.2	304.9	319.4	5.1	60.3	6.2	74
10.2	32.9	2833.8	725.0	5.3	-0.6	262.4	11.4	11.3	1.5	305.0	323.5	5.1	65.8	6.8	74
11.2	35.5	3122.0	700.0	3.2	0.2	242.5	12.8	12.8	0.6	305.8	323.7	5.4	80.6	7.6	74
12.2	38.2	3410.1	675.0	1.2	-1.8	273.7	13.4	13.4	-0.7	307.7	322.0	5.0	80.1	8.5	74
13.3	41.0	3719.2	650.0	-0.6	-2.3	267.3	13.3	13.3	0.6	308.9	323.4	5.0	88.3	9.4	74
14.4	43.9	4032.1	625.0	-2.8	-4.8	260.9	13.6	13.6	1.2	309.7	322.3	4.3	86.2	10.2	74
15.7	47.0	4350.9	600.0	-4.4	-28.5	257.4	19.6	19.1	4.3	311.1	313.1	0.6	13.1	11.4	74
17.1	50.3	4682.8	575.0	-6.2	-29.1	261.5	22.9	22.7	3.4	312.8	314.8	0.6	14.3	13.3	74
18.5	53.0	5034.8	550.0	-8.0	-29.1	260.2	24.5	24.4	1.8	313.4	315.7	0.7	19.4	14.3	74
19.7	56.1	5393.6	525.0	-11.4	-29.4	260.0	27.0	27.0	0.5	315.8	319.4	1.4	47.5	17.4	74
21.1	59.1	5765.9	500.0	-14.1	-14.9	260.5	21.8	21.8	0.6	316.0	321.5	1.7	64.8	17.4	74
22.6	62.7	6153.4	475.0	-16.0	-15.1	258.1	19.4	19.0	4.0	318.1	318.5	0.1	4.0	21.2	74
24.1	66.0	6558.7	450.0	-18.7	-61.8	250.2	22.0	21.1	6.0	319.7	319.0	0.0	1.0	27.7	74
25.7	69.6	6922.0	425.0	-22.1	-64.0	250.7	21.8	21.2	5.0	320.6	320.6	0.0	1.0	25.1	74
27.2	72.9	7424.4	400.0	-26.0	-59.9	255.6	21.7	21.1	9.4	321.2	321.3	0.0	2.8	27.1	74
29.0	76.7	7888.5	375.0	-29.5	-60.4	253.9	24.6	24.2	4.3	322.5	322.6	0.0	3.2	27.6	74
30.7	80.6	8377.1	350.0	-33.2	-39.0	260.3	24.7	24.7	0.3	323.9	323.2	0.4	56.4	32.1	74
32.5	84.6	8940.5	325.0	-36.7	-39.0	261.0	25.1	24.6	-4.8	325.0	327.5	0.4	79.3	34.7	74
34.6	88.8	9443.3	300.0	-41.5	55.4	262.5	21.8	21.3	-4.7	326.9	329.9	99.4	99.9	37.7	74
36.6	93.4	10027.0	275.0	-46.8	99.9	263.4	21.7	21.0	-4.5	327.4	329.9	99.9	99.9	40.0	74
38.8	98.0	10650.7	250.0	-51.9	99.9	263.4	19.6	19.6	0.2	328.9	329.9	99.9	99.9	47.7	74
41.2	103.0	11324.7	225.0	-57.5	90.9	263.5	19.9	19.9	1.5	330.4	329.9	99.9	99.9	45.6	74
43.8	108.5	12355.2	200.0	-63.8	99.9	258.3	16.5	15.7	5.0	333.3	329.9	99.9	99.9	48.4	74
46.6	114.5	12885.6	175.0	-63.8	99.9	260.5	9.7	9.7	-4.3	336.3	329.9	99.9	99.9	50.5	74
50.2	120.8	13828.3	150.0	-63.3	99.9	260.5	18.9	18.8	-3.6	340.3	329.9	99.9	99.9	53.3	74
54.1	124.0	14951.5	125.0	-62.7	99.9	273.8	22.3	22.3	-1.3	341.8	329.9	99.9	99.9	57.8	74
59.9	136.0	16334.3	100.0	-63.8	99.9	258.9	14.7	14.2	3.8	400.8	329.9	99.9	99.9	62.9	74
64.9	144.3	18082.2	75.0	-64.9	99.9	282.5	7.4	7.4	-1.7	434.8	329.9	99.9	99.9	66.0	74
73.1	152.3	20507.0	50.0	-66.9	99.9	320.2	2.2	1.1	-1.9	500.7	329.9	99.9	99.9	67.1	74
90.9	9.9	90.9	25.0	-69.9	99.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9	90.9

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 5 AND 30 DEG

° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

° BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

NASHVILLE, TENN

STATION NO. 327
NASHVILLE, TENN25 APRIL 1975
1116 GMT

TIME MIN	CHCT	HEIGHT GPM	PRES MR	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	POT Y DG K	MA RTD GM/KG	RM PCT	RANGE KM	AZ DG
00.0	5.3	180.0	920.9	16.0	14.7	190.0	2.1	0.4	2.1	291.3	318.9	10.7	92.0	0.0	0
00.3	6.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
00.6	6.3	318.1	975.0	16.0	14.9	99.9	99.9	99.9	99.9	292.7	321.3	11.1	93.6	99.9	99.9
00.9	6.3	93.0	950.0	14.9	13.9	99.9	99.9	99.9	99.9	49.3	321.3	10.6	94.0	99.9	99.9
01.2	10.3	71.5	925.0	14.4	12.3	99.9	99.9	99.9	99.9	295.3	321.3	7.9	94.0	99.9	99.9
01.5	12.1	57.0	900.0	14.1	11.1	99.9	99.9	99.9	99.9	297.2	321.3	9.3	94.0	99.9	99.9
01.8	14.1	123.6	875.0	12.5	7.4	265.8	10.0	19.4	10.0	297.9	321.3	8.5	94.0	99.9	99.9
02.1	15.0	147.7	850.0	10.7	8.2	240.6	20.3	19.4	10.0	298.4	321.3	8.1	94.0	99.9	99.9
02.4	16.2	126.4	825.0	9.5	6.6	243.3	24.8	24.1	10.0	299.7	321.3	7.5	94.0	99.9	99.9
02.7	20.3	156.0	800.0	8.6	4.9	277.2	32.1	31.9	10.0	301.3	321.3	6.8	94.0	99.9	99.9
03.0	22.4	224.4	775.0	8.0	4.1	274.0	31.9	31.9	10.0	301.3	321.3	6.6	94.0	99.9	99.9
03.3	24.7	251.2	750.0	6.3	3.0	267.9	27.9	27.8	10.0	304.3	321.3	6.7	94.0	99.9	99.9
03.6	26.9	279.2	725.0	4.3	3.4	257.4	26.8	26.2	10.0	305.1	321.3	6.7	94.0	99.9	99.9
03.9	29.2	327.2	700.0	3.0	2.2	248.1	28.7	26.0	10.0	306.0	321.3	6.4	94.0	99.9	99.9
04.2	31.7	372.7	675.0	1.4	0.6	243.9	31.8	28.6	10.0	306.0	321.3	6.0	94.0	99.9	99.9
04.5	34.2	397.2	650.0	0.4	-1.1	241.4	32.6	28.6	10.0	306.0	321.3	5.4	94.0	99.9	99.9
04.8	36.7	390.0	625.0	-1.6	-2.3	238.5	33.3	28.5	10.0	311.3	321.3	5.2	94.0	99.9	99.9
05.1	39.3	431.5	600.0	-1.0	-4.4	237.7	34.6	29.1	10.0	312.0	321.3	4.6	94.0	99.9	99.9
05.4	41.9	459.0	575.0	-1.1	-5.0	237.3	33.7	28.3	10.0	312.0	321.3	4.3	94.0	99.9	99.9
05.7	44.9	489.0	550.0	-1.4	-5.2	239.7	35.2	30.1	10.0	315.8	321.3	3.8	94.0	99.9	99.9
06.0	47.7	536.5	525.0	-0.6	-10.5	234.4	34.8	30.0	10.0	317.7	321.3	3.3	94.0	99.9	99.9
06.3	50.6	582.0	500.0	-12.8	-14.7	241.3	34.9	30.6	10.0	317.7	321.3	2.3	94.0	99.9	99.9
06.6	53.6	612.7	475.0	-15.9	-22.5	240.3	34.1	29.6	10.0	318.4	321.3	1.3	94.0	99.9	99.9
06.9	56.6	631.2	450.0	-17.5	-21.5	240.6	34.3	31.6	10.0	321.4	321.3	1.5	94.0	99.9	99.9
07.2	59.6	657.0	425.0	-20.3	-24.8	242.5	34.6	31.5	10.0	321.4	321.3	1.5	94.0	99.9	99.9
07.5	62.6	700.0	400.0	-23.8	-28.1	244.0	37.4	33.0	10.0	324.8	321.3	0.9	94.0	99.9	99.9
07.8	65.6	740.0	375.0	-27.9	-33.4	243.8	36.4	32.0	10.0	324.8	321.3	0.6	94.0	99.9	99.9
08.1	68.6	781.0	350.0	-31.4	-36.7	247.6	35.4	32.7	10.0	326.3	321.3	0.5	94.0	99.9	99.9
08.4	71.6	827.0	325.0	-36.0	-41.2	251.4	29.0	27.5	10.0	327.0	321.3	0.3	94.0	99.9	99.9
08.7	74.6	872.0	300.0	-41.3	-46.7	246.6	32.3	29.6	10.0	327.0	321.3	0.3	94.0	99.9	99.9
09.0	77.6	917.0	275.0	-46.7	-51.9	243.4	31.0	27.4	10.0	327.6	321.3	0.3	94.0	99.9	99.9
09.3	80.6	962.0	250.0	-51.9	-56.9	243.7	17.3	16.6	10.0	327.6	321.3	0.3	94.0	99.9	99.9
09.6	83.6	1007.0	225.0	-56.9	-61.9	242.9	30.1	26.8	10.0	327.6	321.3	0.3	94.0	99.9	99.9
09.9	86.6	1052.0	200.0	-61.9	-66.9	242.9	23.5	22.1	10.0	327.6	321.3	0.3	94.0	99.9	99.9
10.2	89.6	1097.0	175.0	-66.9	-71.9	242.8	33.1	32.6	10.0	327.6	321.3	0.3	94.0	99.9	99.9
10.5	92.6	1142.0	150.0	-71.9	-76.9	242.8	25.3	25.1	10.0	327.6	321.3	0.3	94.0	99.9	99.9
10.8	95.6	1187.0	125.0	-76.9	-81.9	242.8	15.2	14.6	10.0	327.6	321.3	0.3	94.0	99.9	99.9
11.1	98.6	1232.0	100.0	-81.9	-86.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
11.4	101.6	1277.0	75.0	-86.9	-91.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
11.7	104.6	1322.0	50.0	-91.9	-96.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
12.0	107.6	1367.0	25.0	-96.9	-101.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
12.3	110.6	1412.0	0.0	-101.9	-106.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
12.6	113.6	1457.0	0.0	-106.9	-111.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
12.9	116.6	1502.0	0.0	-111.9	-116.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
13.2	119.6	1547.0	0.0	-116.9	-121.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
13.5	122.6	1592.0	0.0	-121.9	-126.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
13.8	125.6	1637.0	0.0	-126.9	-131.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
14.1	128.6	1682.0	0.0	-131.9	-136.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
14.4	131.6	1727.0	0.0	-136.9	-141.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
14.7	134.6	1772.0	0.0	-141.9	-146.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
15.0	137.6	1817.0	0.0	-146.9	-151.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
15.3	140.6	1862.0	0.0	-151.9	-156.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
15.6	143.6	1907.0	0.0	-156.9	-161.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
15.9	146.6	1952.0	0.0	-161.9	-166.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
16.2	149.6	1997.0	0.0	-166.9	-171.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
16.5	152.6	2042.0	0.0	-171.9	-176.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
16.8	155.6	2087.0	0.0	-176.9	-181.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
17.1	158.6	2132.0	0.0	-181.9	-186.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
17.4	161.6	2177.0	0.0	-186.9	-191.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
17.7	164.6	2222.0	0.0	-191.9	-196.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
18.0	167.6	2267.0	0.0	-196.9	-201.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
18.3	170.6	2312.0	0.0	-201.9	-206.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
18.6	173.6	2357.0	0.0	-206.9	-211.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
18.9	176.6	2402.0	0.0	-211.9	-216.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
19.2	179.6	2447.0	0.0	-216.9	-221.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
19.5	182.6	2492.0	0.0	-221.9	-226.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
19.8	185.6	2537.0	0.0	-226.9	-231.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
20.1	188.6	2582.0	0.0	-231.9	-236.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
20.4	191.6	2627.0	0.0	-236.9	-241.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
20.7	194.6	2672.0	0.0	-241.9	-246.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
21.0	197.6	2717.0	0.0	-246.9	-251.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
21.3	200.6	2762.0	0.0	-251.9	-256.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
21.6	203.6	2807.0	0.0	-256.9	-261.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
21.9	206.6	2852.0	0.0	-261.9	-266.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
22.2	209.6	2897.0	0.0	-266.9	-271.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
22.5	212.6	2942.0	0.0	-271.9	-276.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
22.8	215.6	2987.0	0.0	-276.9	-281.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
23.1	218.6	3032.0	0.0	-281.9	-286.9	242.8	4.1	1.5	10.0	327.6	321.3	0.3	94.0	99.9	99.9
23.4	221.6	3077.0	0.0	-286.9	-291.										

STATION NO. 340
LITTLE ROCK, ARK

25 APRIL 1975
1115 GMT

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U CUMP M/SEC	V CUMP M/SEC	POT Y DEG K	E POT Y DEG K	RTG CM/KG	RM PCT	RANGE KM	AZ DEG
0.7	5.7	79.0	1003.7	16.7	14.0	420.0	1.6	1.0	1.2	290.9	316.9	10.1	84.0	0.0	0.
0.1	6.1	110.6	1000.0	16.2	14.0	212.2	7.6	4.1	6.4	290.7	316.9	10.1	87.0	0.2	37.
0.9	6.3	327.6	975.0	19.0	11.1	216.0	9.5	5.2	6.7	295.4	316.9	10.1	87.0	0.2	37.
1.6	10.5	551.7	950.0	19.7	12.1	236.8	9.8	8.0	5.7	258.4	323.6	9.4	60.5	0.9	41.
2.6	12.6	781.4	925.0	19.5	10.5	254.4	10.4	10.4	2.9	300.4	324.0	8.7	56.3	1.1	51.
3.3	15.0	1017.1	900.0	18.2	12.2	272.5	12.7	12.6	-0.5	301.6	324.7	10.0	68.1	1.4	60.
4.2	17.2	1256.4	875.0	16.5	13.3	273.7	15.6	19.5	-1.6	302.4	323.3	11.1	70.8	2.4	70.
5.0	19.6	1505.4	850.0	15.1	11.2	271.7	15.7	14.7	-0.5	303.3	330.4	9.9	77.8	3.2	77.
5.5	21.9	1758.4	825.0	14.5	6.5	266.4	11.4	11.4	6.7	305.0	325.6	7.4	58.6	3.4	75.
6.4	24.4	2018.0	800.0	12.8	-11.6	269.3	12.0	12.0	0.1	305.4	317.9	4.3	37.1	4.4	86.
7.4	26.7	2283.8	775.0	12.1	-20.0	278.8	13.5	13.3	-2.1	306.9	310.1	1.0	8.9	5.2	82.
8.9	29.3	2556.9	750.0	9.4	-13.4	283.5	13.7	13.3	-3.2	307.1	312.6	1.8	18.4	6.0	85.
9.7	32.0	2816.5	725.0	7.1	-19.5	287.0	13.3	12.7	-3.9	307.4	311.9	1.5	16.7	6.8	87.
11.0	34.8	3123.3	700.0	4.2	-18.6	288.2	13.9	13.3	-3.9	307.3	311.9	1.5	16.7	7.7	90.
12.1	37.3	3418.0	675.0	2.1	-18.7	286.3	15.9	15.2	-4.4	308.2	312.3	1.3	10.9	8.6	91.
13.1	40.1	3721.2	650.0	0.1	-23.9	285.6	17.7	16.7	-5.9	309.1	311.9	0.9	14.4	9.6	93.
14.2	42.8	4034.0	625.0	-2.1	-19.9	283.7	19.5	19.0	-4.6	310.2	314.3	1.3	24.5	10.8	95.
15.4	45.5	4356.9	600.0	-4.9	-8.5	280.6	19.6	19.3	-3.6	310.6	320.9	3.4	76.3	12.7	96.
16.7	48.9	4690.8	575.0	-6.8	-10.9	281.3	22.5	21.7	-5.9	312.2	317.7	1.8	44.4	13.7	96.
18.2	51.9	5037.0	550.0	-7.6	-33.9	279.8	24.2	23.9	-4.1	311.1	319.5	0.4	10.3	15.4	97.
19.5	55.0	5397.9	525.0	-9.4	-35.9	280.1	23.1	22.7	-4.0	311.0	319.2	0.0	1.0	17.4	97.
20.8	58.3	5772.9	500.0	-12.3	-57.7	285.2	23.7	22.8	-6.6	318.0	318.1	0.0	1.0	19.5	98.
22.0	61.4	6162.4	475.0	-15.4	-59.7	289.1	25.6	24.2	-8.4	318.9	314.9	0.0	1.0	21.3	98.
23.3	65.3	6568.9	450.0	-17.7	-61.2	282.6	27.1	26.4	-6.3	320.9	321.0	0.0	1.0	23.4	100.
24.6	68.3	6994.3	425.0	-20.6	-63.1	272.9	30.9	30.9	-1.6	322.5	321.5	0.0	1.0	25.9	100.
26.2	72.0	7439.0	400.0	-24.8	-63.4	267.6	34.4	34.4	1.2	322.7	322.7	0.0	1.4	28.6	98.
27.6	76.0	7904.2	375.0	-29.6	-39.2	268.4	31.9	31.9	0.9	324.4	323.6	0.3	38.2	31.0	96.
29.2	80.0	8395.3	350.0	-31.6	-39.2	273.3	31.2	33.0	-3.1	325.8	327.6	0.5	64.7	34.2	97.
31.2	84.2	8915.9	325.0	-35.6	-39.0	271.3	35.6	35.6	-0.8	327.5	325.0	0.4	70.9	36.2	97.
33.0	88.4	9467.2	300.0	-40.1	49.9	267.7	37.3	37.0	4.7	328.8	325.0	0.4	99.9	42.0	96.
34.5	92.2	10055.3	275.0	-45.0	99.9	257.7	37.3	36.4	8.0	330.0	327.9	99.9	99.9	45.3	96.
36.2	98.0	10685.1	250.0	-50.1	99.9	251.6	31.4	29.8	9.9	331.6	327.9	99.9	99.9	48.5	93.
38.0	103.2	11366.4	225.0	-56.6	99.9	253.4	35.9	33.5	10.0	331.8	327.9	99.9	99.9	51.9	92.
40.3	109.0	12107.1	200.0	-63.1	99.9	262.7	38.6	34.3	4.4	332.8	327.9	99.9	99.9	56.7	90.
43.2	115.0	12910.4	175.0	-69.0	99.9	277.7	39.7	39.3	-5.3	336.2	327.9	99.9	99.9	63.3	91.
47.4	122.0	13847.2	150.0	-78.9	99.9	284.9	37.1	35.9	-9.6	338.5	327.9	99.9	99.9	74.0	92.
51.9	129.3	14995.5	125.0	-80.2	99.9	278.8	26.6	26.3	-4.0	339.9	327.9	99.9	99.9	82.2	93.
56.9	137.2	16362.6	100.0	-67.0	99.9	273.1	17.5	17.5	-0.9	338.2	327.9	99.9	99.9	86.9	93.
63.6	146.3	18125.6	75.0	-64.6	99.9	268.5	3.3	3.1	0.1	437.4	327.9	99.9	99.9	93.2	94.
72.6	155.3	20598.1	50.0	-60.3	99.9	359.4	7.4	0.5	-7.3	501.5	327.9	99.9	99.9	98.7	94.
86.1	165.3	25011.7	25.0	-52.0	99.9	259.4	3.3	-1.3	-3.0	635.6	327.9	99.9	99.9	99.9	96.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10. DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 369
MONETTE, WJ

24 APRIL 1975
1210 GMT

TIME MIN	CNTCT	HEIGHT GEM	PHES MB	TEMP DG C	DEY PT DG C	CTH DG	SPEED M/SEC	U COMP M/SEC	V CLMP M/SEC	POT T DG K	E PUT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.0	438.0	981.4	16.1	15.0	240.0	2.6	2.3	1.1	254.0	323.3	11.2	93.0	0.0	0.0
0.0	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	9.1	539.7	950.0	15.7	15.4	995.9	99.9	99.9	99.9	246.6	325.2	11.7	98.5	99.9	99.9
1.3	11.2	766.4	925.0	14.8	14.5	995.9	99.9	99.9	99.9	295.9	325.6	11.3	98.7	99.9	99.9
2.1	13.5	968.5	900.0	13.6	13.6	10.0	3.6	-0.6	-3.5	296.3	312.7	6.0	55.3	0.3	12.1
3.0	15.8	1236.8	875.0	15.1	7.2	34.3	3.1	-1.4	-2.6	300.4	320.4	7.3	59.0	0.4	15.1
4.0	19.2	1482.3	850.0	14.4	2.3	33.3	3.5	-1.6	-2.0	302.5	317.5	5.3	42.7	0.5	17.2
4.9	20.7	1734.6	825.0	14.1	-12.6	55.5	3.4	-2.8	-1.9	303.8	309.6	1.5	15.7	0.6	18.7
5.8	23.2	1993.1	800.0	12.8	-29.8	57.4	4.0	-3.4	-2.2	304.6	306.1	0.4	3.5	0.8	19.7
6.8	25.7	2257.9	775.0	10.1	-22.3	31.5	2.7	-1.4	-2.3	304.8	307.4	0.6	8.3	0.5	20.4
7.5	28.3	2425.3	750.0	8.5	-25.9	312.4	3.7	2.7	-2.5	305.5	307.9	0.6	6.8	1.0	20.1
8.5	31.1	2609.1	725.0	6.7	-30.8	292.4	7.9	7.3	-3.0	306.8	309.2	0.4	4.8	1.1	20.8
9.5	34.0	2794.2	700.0	3.9	-27.4	254.1	9.6	9.7	-3.9	306.8	308.7	0.6	8.0	1.4	20.8
10.5	36.7	2988.0	675.0	1.5	-22.3	306.7	9.1	7.3	-5.4	307.3	308.1	0.2	3.4	1.9	20.8
11.5	39.5	3693.5	650.0	-0.1	-50.0	326.0	8.5	4.7	-7.1	308.6	307.1	0.1	1.0	2.1	20.8
12.6	42.5	4003.5	625.0	-1.7	-31.0	327.4	8.2	4.4	-6.9	310.5	310.7	0.1	1.0	2.9	20.8
13.7	45.6	4326.6	600.0	-4.3	-52.6	316.6	10.2	7.0	-7.4	311.1	311.3	0.0	1.0	3.5	20.8
14.8	48.9	4659.9	575.0	-7.2	-54.5	311.2	13.0	9.8	-8.6	311.5	311.6	0.0	1.0	4.3	20.8
16.0	51.8	5005.0	550.0	-9.1	-55.7	999.9	99.9	99.9	99.9	313.2	313.4	0.0	1.0	99.9	99.9
17.6	55.1	5363.8	525.0	-10.9	-56.8	999.9	99.9	99.9	99.9	315.3	315.4	0.0	1.0	99.9	99.9
18.9	58.4	5736.6	500.0	-13.5	-58.5	999.9	99.9	99.9	99.9	316.6	316.7	0.0	1.0	99.9	99.9
20.2	62.0	6124.1	475.0	-16.9	-60.7	999.9	99.9	99.9	99.9	317.0	317.1	0.0	1.0	99.9	99.9
21.6	65.6	6528.0	450.0	-19.5	-62.3	295.4	22.4	20.2	-9.6	318.7	318.7	0.0	1.0	11.7	12.9
23.2	69.5	6950.0	425.0	-23.0	-64.6	295.6	21.7	19.5	-9.4	319.4	319.5	0.0	1.0	13.6	12.9
24.4	73.3	7391.0	400.0	-26.5	-66.9	292.8	23.2	21.4	1.0	320.4	320.5	0.0	1.0	15.7	12.9
26.4	77.5	7853.4	375.0	-30.5	-69.5	999.9	99.9	99.9	99.9	321.1	321.1	0.0	1.0	99.9	99.9
29.9	99.9	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
30.9	99.9	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
31.9	99.9	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
32.9	99.9	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
33.9	99.9	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
34.9	99.9	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
35.9	99.9	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
36.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
37.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
38.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
39.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
40.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
41.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
42.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

AMARILLO, TEX

25 APRIL 1975

1115 GMT

156 20. 0

TIME MIN	CNTCT	WEIGHT GFM	PRES MM	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE AZ KM	DG
0.0	14.0	1095.0	887.0	10.7	8.5	160.0	4.2	-1.4	3.9	294.8	315.8	7.9	86.3	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	15.0	1209.3	875.0	13.7	2.1	99.9	99.9	99.9	99.9	298.7	312.9	5.1	45.2	99.9	99.9
1.1	17.2	1456.6	850.0	18.7	1.8	99.9	99.9	99.9	99.9	304.5	321.4	5.2	32.8	99.9	99.9
2.0	15.5	1713.1	825.0	19.7	-4.7	194.5	8.4	2.1	8.2	305.9	319.7	3.3	18.7	1.3	33.4
2.9	15.7	1576.6	800.0	17.4	-5.5	219.9	8.2	5.2	6.3	310.1	319.6	3.2	20.4	1.6	35.1
3.7	24.2	2246.3	775.0	15.1	-6.3	233.7	7.9	6.3	4.6	310.4	319.7	3.1	22.2	1.9	1.
4.6	25.3	2522.4	750.0	12.6	-8.1	238.9	8.6	7.4	4.4	310.6	319.0	2.8	22.7	2.1	11.
5.6	29.1	2805.4	725.0	10.1	-10.2	243.1	10.3	9.2	4.7	310.8	319.2	2.4	22.9	2.5	21.
6.6	31.7	3055.8	700.0	7.8	-11.7	242.6	11.5	10.2	5.3	311.4	318.3	2.2	23.0	3.0	29.
7.5	34.5	3393.9	675.0	4.6	-13.4	241.4	10.9	9.6	5.2	311.0	317.3	2.0	25.7	3.6	3.
8.6	37.0	3699.8	650.0	3.0	-18.0	234.0	8.7	7.0	5.1	312.5	317.0	1.4	19.6	4.2	30.
9.3	40.0	4016.0	625.0	1.5	-20.0	217.8	8.5	5.2	6.7	314.3	319.3	1.2	18.3	4.9	3.
10.9	42.7	4344.0	600.0	-0.2	-21.3	222.7	10.3	7.0	7.6	315.0	319.8	1.2	18.4	5.4	3.
12.1	45.8	4663.2	575.0	-1.9	-22.6	232.1	11.1	8.0	6.8	317.9	321.4	1.1	18.5	6.2	4.
13.3	49.0	5035.3	550.0	-4.2	-24.5	239.1	10.9	9.3	5.6	319.2	322.4	1.0	18.7	6.9	4.
14.6	52.0	5399.9	525.0	-7.5	-27.1	245.1	10.9	9.9	4.6	319.5	322.1	0.8	19.0	7.7	4.
15.3	55.3	5777.4	500.0	-11.1	-30.0	246.3	11.0	10.1	4.4	319.5	321.7	0.6	19.2	8.5	4.
17.1	58.6	6168.9	475.0	-14.3	-32.5	251.7	11.4	10.9	3.6	320.3	322.1	0.5	19.5	9.3	4.
18.5	62.3	6576.2	450.0	-17.3	-35.0	257.1	11.1	10.8	2.5	321.4	322.9	0.4	19.7	10.2	5.
19.9	65.9	7001.9	425.0	-20.6	-37.2	262.2	13.6	13.5	1.9	322.5	323.8	0.4	20.8	11.1	5.
21.5	69.5	7446.2	400.0	-25.1	-40.9	264.3	14.9	14.9	1.5	322.3	323.2	0.3	21.2	12.2	5.
23.1	73.9	7911.6	375.0	-29.4	-43.9	271.7	16.6	16.0	-0.5	322.6	323.3	0.2	22.9	13.5	6.
24.7	78.2	8400.0	350.0	-33.3	-46.4	263.9	20.6	20.5	2.2	323.7	324.4	0.2	25.1	15.1	6.
26.4	82.5	8916.8	325.0	-36.8	-50.0	264.8	23.8	23.7	2.4	325.9	326.4	0.1	23.5	17.2	6.
28.2	87.2	9466.9	300.0	-40.2	-54.9	265.0	27.5	27.4	2.4	327.9	327.9	99.9	99.9	19.9	6.
30.2	92.3	10055.2	275.0	-44.4	-59.9	264.9	28.7	28.6	2.6	330.4	330.4	99.9	99.9	23.1	7.
32.3	97.6	10685.3	250.0	-50.0	-64.9	266.6	29.7	29.6	1.8	331.7	331.7	99.9	99.9	26.7	7.
34.5	102.3	11365.9	225.0	-55.3	-69.9	268.9	34.9	34.9	0.7	333.7	333.7	99.9	99.9	30.4	7.
36.6	106.8	12107.1	200.0	-61.7	-74.9	264.7	41.3	41.1	3.8	335.1	335.1	99.9	99.9	35.3	7.
38.6	116.0	127.4	175.0	-64.2	-79.9	270.5	35.3	35.3	-0.3	340.7	340.7	99.9	99.9	40.7	7.
41.2	123.7	13.7	150.0	-63.2	-84.9	265.4	29.1	29.0	2.4	361.3	361.3	99.9	99.9	44.4	7.
44.2	131.3	14.7	125.0	-63.2	-89.9	259.0	33.8	33.2	6.5	380.6	380.6	99.9	99.9	50.6	7.
48.2	139.7	15.356.1	100.0	-65.5	-94.9	264.6	18.5	18.4	1.7	401.3	401.3	99.9	99.9	57.3	8.
53.1	148.0	16108.1	75.0	-60.3	-99.9	252.5	20.1	19.2	6.1	440.5	440.5	99.9	99.9	63.4	7.
60.0	157.3	20039.1	50.0	-54.1	-99.9	289.7	6.7	6.3	-2.3	508.3	508.3	99.9	99.9	66.5	7.
72.3	167.0	25083.1	25.0	-50.7	-99.9	332.4	4.0	1.9	-3.5	638.8	638.8	99.9	99.9	68.1	8.

* BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEC MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 402
WALLOPS ISLAND, VA

25 APRIL 1975
1100 GMT

TIME MIN	CNTCT	HEIGHT GDM	PRES MB	TEMP DG C	CLB PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.9	4.0	1012.6	17.8	15.2	999.9	99.9	99.0	99.9	291.4	319.3	10.8	35.0	999.4	934
0.5	5.3	111.6	1000.0	17.3	15.5	999.9	99.9	99.0	99.3	292.0	321.4	11.4	90.2	999.9	997
1.3	7.8	323.0	975.0	16.2	14.6	999.9	99.9	99.0	99.9	292.9	321.0	10.8	90.5	999.9	997
2.4	9.9	545.0	950.0	15.4	12.3	999.9	99.9	99.0	99.9	294.2	320.2	9.9	84.8	999.9	997
3.2	11.9	775.4	925.0	14.5	10.2	999.9	99.9	99.0	99.9	295.3	317.9	8.5	75.4	999.9	997
4.1	14.1	1007.1	900.0	13.4	9.0	999.9	99.9	99.0	99.9	296.4	319.1	8.1	74.8	999.9	997
5.1	16.3	1244.1	875.0	12.0	9.1	999.9	99.9	99.0	99.9	297.3	319.7	8.3	82.7	999.9	997
6.0	18.3	1496.5	850.0	10.1	8.4	999.9	99.9	99.0	99.9	297.8	319.9	8.2	89.4	999.9	997
7.0	20.5	1735.1	825.0	8.7	7.2	999.9	99.9	99.0	99.9	298.8	319.9	7.8	90.3	999.9	997
8.0	22.8	1985.3	800.0	7.1	5.3	999.9	99.9	99.0	99.9	299.6	318.9	7.0	86.3	999.9	997
9.1	25.2	2250.4	775.0	6.2	1.9	999.9	99.9	99.0	99.9	301.2	317.1	5.7	74.0	999.9	997
10.1	27.4	2515.2	750.0	4.7	-0.0	999.9	99.9	99.0	99.9	302.3	316.8	5.1	71.4	999.9	997
11.1	29.3	2795.3	725.0	3.6	-2.5	999.9	99.9	99.0	99.9	303.9	316.5	4.4	64.7	999.9	997
12.2	32.6	3280.1	700.0	3.1	-5.9	999.9	99.9	99.0	99.9	306.3	316.7	3.5	51.8	999.9	997
13.3	35.1	3374.5	675.0	2.3	-12.0	999.9	99.9	99.0	99.9	308.5	315.4	2.3	33.9	999.9	997
14.6	37.7	3676.8	650.0	0.9	-17.7	999.9	99.9	99.0	99.9	310.1	314.7	1.5	23.4	999.9	997
15.9	40.3	3993.4	625.0	-0.1	-24.9	999.9	99.9	99.0	99.9	312.4	315.0	0.8	13.3	999.9	997
17.0	43.3	4318.8	600.0	-1.8	-26.2	999.9	99.9	99.0	99.9	314.1	316.6	0.7	13.4	999.9	997
18.2	45.9	4652.8	575.0	-4.1	-29.9	999.9	99.9	99.0	99.9	315.3	317.2	0.6	11.3	999.9	997
19.5	48.9	5005.1	550.0	-6.0	-31.5	999.9	99.9	99.0	99.9	317.0	318.7	0.5	11.1	999.9	997
20.3	51.9	5367.5	525.0	-8.8	-32.2	999.9	99.9	99.0	99.9	317.5	319.6	0.5	13.0	999.9	997
22.4	55.0	5743.8	500.0	-10.8	-29.0	999.9	99.9	99.0	99.9	320.0	322.3	0.7	20.5	999.9	997
23.7	57.9	6134.6	475.0	-14.2	-31.1	999.9	99.9	99.0	99.9	320.5	322.5	0.6	22.1	999.9	997
25.3	61.3	6542.7	450.0	-18.2	-32.6	999.9	99.9	99.0	99.9	320.3	322.2	0.5	27.0	999.9	997
26.9	64.7	6964.4	425.0	-21.7	-35.4	999.9	99.9	99.0	99.9	321.1	322.6	0.4	27.5	999.9	997
28.4	68.1	7410.0	400.0	-25.5	-38.1	999.9	99.9	99.0	99.9	321.8	323.0	0.4	29.5	999.9	997
30.4	71.7	7874.4	375.0	-29.6	-42.1	999.9	99.9	99.0	99.9	322.4	323.3	0.2	28.3	999.9	997
32.2	75.7	8362.9	350.0	-33.2	-45.8	999.9	99.9	99.0	99.9	323.9	324.5	0.2	26.6	999.9	997
34.3	79.4	8872.9	325.0	-37.0	-51.5	999.9	99.9	99.0	99.9	325.7	326.0	0.1	20.2	999.9	997
36.4	84.0	9428.1	300.0	-41.7	-59.9	999.9	99.9	99.0	99.9	326.6	326.9	99.9	99.9	999.9	997
39.0	88.4	10314.1	275.0	-45.6	-69.9	999.9	99.9	99.0	99.9	329.3	329.9	99.9	99.9	999.9	997
40.7	93.3	10642.5	250.0	-50.2	-79.9	999.9	99.9	99.0	99.9	331.4	329.9	99.9	99.9	999.9	997
43.4	98.1	11321.4	225.0	-54.2	-89.9	999.9	99.9	99.0	99.9	332.4	329.9	99.9	99.9	999.9	997
46.0	103.9	12058.6	200.0	-58.9	-99.9	999.9	99.9	99.0	99.9	336.4	329.9	99.9	99.9	999.9	997
48.9	109.9	12687.0	175.0	-63.1	-99.9	999.9	99.9	99.0	99.9	331.8	329.9	99.9	99.9	999.9	997
52.1	116.0	13613.7	150.0	-63.1	-99.9	999.9	99.9	99.0	99.9	331.8	329.9	99.9	99.9	999.9	997
56.2	123.3	14937.2	125.0	-61.4	-99.9	999.9	99.9	99.0	99.9	333.8	329.9	99.9	99.9	999.9	997
61.1	131.3	16327.7	100.0	-59.7	-99.9	999.9	99.9	99.0	99.9	412.3	329.9	99.9	99.9	999.9	997
67.3	139.0	18104.7	75.0	-54.9	-99.9	999.9	99.9	99.0	99.9	430.9	329.9	99.9	99.9	999.9	997
75.5	147.0	20619.7	50.0	-58.5	-99.9	999.9	99.9	99.0	99.9	505.7	329.9	99.9	99.9	999.9	997
88.2	155.3	25047.8	25.0	-52.2	-99.9	999.9	99.9	99.0	99.9	635.1	329.9	99.9	99.9	999.9	997

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
• BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. ACS
STERLING, VA

25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE NM	AZ DG
0.0	5.8	150.0	1003.3	12.3	11.0	230.0	1.5	1.1	1.0	280.3	308.6	8.7	97.0	6.0	0
0.1	6.0	112.9	1000.0	15.4	15.1	291.3	5.6	5.2	-2.0	290.0	317.8	10.9	98.3	6.1	7.0
1.1	6.4	329.5	975.0	17.7	13.5	256.7	6.8	6.1	-3.1	294.3	320.8	10.1	76.3	6.3	9.0
1.9	10.7	551.6	950.0	16.0	12.4	303.6	7.2	6.0	-4.0	294.7	318.7	9.6	78.9	6.7	11.0
2.3	13.1	777.9	925.0	13.9	11.1	311.8	7.2	5.4	-4.8	294.8	318.7	9.0	83.1	1.1	11.0
3.8	15.4	1009.1	900.0	12.5	10.0	311.9	7.6	5.7	-5.1	295.6	318.6	8.6	84.4	1.4	12.0
4.6	17.7	1245.2	874.0	10.6	9.1	309.1	7.6	5.9	-4.8	295.9	318.1	8.3	89.9	1.6	12.0
5.6	20.3	1497.0	850.0	9.9	7.2	307.2	6.6	5.3	-4.0	297.5	318.0	7.6	83.4	2.3	12.0
6.5	22.7	1734.9	825.0	8.1	5.8	294.5	5.7	5.2	-2.4	298.1	317.2	7.0	85.3	2.7	12.0
7.4	25.3	1949.1	800.0	7.6	4.1	270.9	7.1	7.1	-0.1	300.0	317.8	6.4	78.6	2.4	12.0
8.1	27.8	2250.2	775.0	5.7	1.7	268.1	8.0	8.0	0.5	300.7	316.3	5.6	75.3	3.2	11.0
9.2	30.5	2516.1	750.0	4.0	-0.5	264.6	8.2	8.2	0.8	301.6	315.4	4.9	72.0	3.6	11.0
10.1	33.3	2793.5	725.0	3.6	-0.8	261.4	9.0	8.0	-0.9	303.8	311.9	2.7	40.3	4.0	11.0
11.1	35.3	3077.9	700.0	2.7	-1.9	263.1	8.7	8.5	-2.0	305.6	309.4	1.2	18.0	4.5	11.0
12.1	38.8	3371.0	675.0	1.0	-17.0	273.1	11.4	11.4	-0.6	307.0	311.6	1.5	24.6	5.1	10.0
13.1	41.4	3673.4	650.0	-0.8	-13.1	279.6	14.7	14.6	1.1	308.3	314.9	2.2	39.1	5.9	10.0
14.3	44.4	3985.7	625.0	-2.6	-12.6	265.8	18.9	18.4	1.3	313.3	316.3	0.9	17.9	8.2	9.0
15.4	47.5	4309.9	600.0	-2.6	-23.6	265.8	18.4	18.4	1.3	313.3	316.3	0.9	17.9	8.2	9.0
16.6	50.5	4640.1	575.0	-3.8	-27.9	269.8	19.8	19.8	0.1	314.5	316.7	0.7	18.0	10.5	9.0
17.7	53.6	4990.1	550.0	-7.2	-27.4	265.6	20.9	20.9	1.6	315.6	318.0	0.7	18.0	12.1	9.0
18.8	56.7	5350.6	525.0	-10.4	-27.9	265.6	20.7	20.7	1.5	316.0	319.5	0.7	18.0	13.1	9.0
19.9	60.3	5728.0	500.0	-13.5	-28.7	267.0	21.5	21.5	1.1	316.7	319.0	0.7	18.0	13.5	9.0
21.1	63.4	6116.3	475.0	-16.2	-33.2	262.3	22.4	22.4	2.7	317.9	319.6	0.5	21.3	15.1	9.0
22.4	66.9	6521.4	450.0	-18.8	-30.9	268.4	22.5	22.5	0.6	319.6	321.8	0.6	33.5	16.4	9.0
23.7	70.4	6946.3	425.0	-20.8	-35.1	274.4	21.3	21.2	-1.6	322.4	323.9	0.4	26.1	18.4	9.0
25.1	74.2	7391.4	400.0	-24.1	-35.6	276.5	23.9	23.8	-2.7	323.6	325.2	0.5	33.5	20.2	9.0
26.5	78.2	7850.1	375.0	-28.4	-33.6	276.1	22.9	22.7	-2.4	324.1	326.1	0.6	62.3	22.2	9.0
28.1	82.0	8349.8	350.0	-31.4	-36.2	276.0	30.6	30.6	-3.2	326.4	328.1	0.5	62.3	24.7	9.0
29.7	86.2	8865.4	325.0	-34.1	-40.7	273.1	35.7	35.7	-1.9	326.8	328.0	0.3	62.3	26.0	9.0
31.3	90.6	9419.9	300.0	-40.7	90.3	274.3	35.7	35.6	-2.7	328.0	328.0	0.3	99.9	31.4	9.0
33.2	95.7	10005.8	275.0	-45.9	99.9	277.1	30.2	35.9	-4.5	328.8	328.8	0.3	99.9	35.7	9.0
35.3	100.2	10632.1	250.0	-51.7	99.9	272.9	34.0	34.0	-1.7	329.2	329.2	0.3	99.9	40.3	9.0
37.4	105.3	11305.8	225.0	-57.8	99.9	270.5	30.4	30.4	-0.3	330.0	329.9	0.3	99.9	44.3	9.0
39.7	110.9	12039.1	200.0	-63.3	99.9	268.1	30.7	30.1	-0.8	332.5	329.9	0.3	99.9	48.4	9.0
42.0	116.8	12863.4	175.0	-68.7	99.9	308.4	31.2	29.1	-1.8	336.5	329.9	0.3	99.9	52.6	9.0
44.8	123.7	13800.5	150.0	-62.8	99.9	285.1	12.4	12.4	-3.3	331.9	329.9	0.3	99.9	57.4	9.0
48.3	130.3	14942.3	125.0	-58.8	99.9	269.4	25.6	25.6	0.1	338.5	329.9	0.3	99.9	61.8	9.0
52.7	136.8	16341.0	100.0	-59.1	99.9	276.6	19.4	19.7	-3.0	413.6	329.9	0.3	99.9	67.1	9.0
58.3	147.3	18120.5	75.0	-62.9	99.9	258.9	11.8	11.5	-2.3	441.0	329.9	0.3	99.9	70.4	9.0
66.3	157.3	20657.2	50.0	-57.9	99.9	204.8	4.6	-1.6	-4.3	507.0	329.9	0.3	99.9	72.1	9.0
79.0	168.5	25078.3	25.0	-51.7	99.9	99.9	99.9	99.9	99.9	636.2	329.9	0.3	99.9	99.9	9.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 425
HUNTINGTON, WVA

25 APRIL 1975
1212 GMT

TIME MIN	CATCT	WEIGHT GFM	PRES WB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	8.7	246.0	980.1	17.0	16.0	999.9	99.9	99.9	99.9	293.4	224.2	11.8	94.0	398.4	67.6
0.9	98.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
6.2	6.2	253.4	975.0	14.1	12.9	999.9	99.9	99.9	99.9	290.6	315.7	9.7	92.6	398.4	67.6
0.7	11.2	510.7	950.0	14.3	13.2	999.9	99.9	99.9	99.9	293.1	319.5	10.1	93.1	398.4	67.6
1.7	13.5	715.9	925.0	12.5	11.3	999.9	99.9	99.9	99.9	293.3	317.4	9.2	92.7	398.4	67.6
2.3	15.6	925.0	900.0	10.8	9.3	999.9	99.9	99.9	99.9	293.7	315.5	8.2	90.4	398.4	67.6
3.5	17.9	1200.3	875.0	9.3	7.5	999.9	99.9	99.9	99.9	294.5	314.3	7.4	85.0	398.4	67.6
4.8	20.3	1440.5	850.0	8.1	5.8	999.9	99.9	99.9	99.9	295.6	314.0	6.8	85.3	398.4	67.6
6.4	22.5	1487.3	825.0	7.5	5.1	999.9	99.9	99.9	99.9	297.4	313.6	6.7	84.9	398.4	67.6
7.3	25.3	1943.8	800.0	7.0	4.6	999.9	99.9	99.9	99.9	299.4	312.7	6.7	84.6	398.4	67.6
8.2	27.3	2201.9	775.0	5.7	3.6	999.9	99.9	99.9	99.9	300.8	318.5	6.4	85.9	398.4	67.6
9.2	30.3	2465.9	750.0	4.4	1.9	999.9	99.9	99.9	99.9	302.1	318.4	5.9	83.7	398.4	67.6
10.1	32.6	2745.8	725.0	2.7	0.6	999.9	99.9	99.9	99.9	303.2	318.7	5.5	85.7	398.4	67.6
11.2	35.2	3029.4	700.0	1.2	-0.7	999.9	99.9	99.9	99.9	304.5	319.3	5.2	87.2	398.4	67.6
12.1	37.4	3322.3	675.0	0.6	-0.9	999.9	99.9	99.9	99.9	307.0	322.3	5.3	89.4	398.4	67.6
13.5	40.7	3625.0	650.0	-0.9	-2.4	999.9	99.9	99.9	99.9	308.5	327.3	5.0	89.9	398.4	67.6
14.7	43.3	3937.8	625.0	-2.4	-4.5	999.9	99.9	99.9	99.9	310.3	323.3	4.4	85.4	398.4	67.6
14.1	46.3	4261.3	600.0	-4.1	-7.1	999.9	99.9	99.9	99.9	311.8	323.0	3.8	75.8	398.4	67.6
17.4	49.2	4596.0	575.0	-6.2	-9.8	999.9	99.9	99.9	99.9	313.6	322.7	3.2	75.5	398.4	67.6
19.6	52.1	4943.1	550.0	-7.8	-11.7	999.9	99.9	99.9	99.9	315.2	323.9	2.8	73.2	398.4	67.6
19.3	55.1	5303.9	525.0	-9.9	-14.0	999.9	99.9	99.9	99.9	316.8	324.5	2.3	71.6	398.4	67.6
21.2	58.4	5677.0	500.0	-12.2	-16.4	999.9	99.9	99.9	99.9	318.4	325.1	2.1	70.4	398.4	67.6
22.4	62.0	6065.4	475.0	-14.9	-19.3	999.9	99.9	99.9	99.9	319.7	325.4	1.7	68.4	398.4	67.6
24.0	65.5	6477.2	450.0	-17.4	-21.9	999.9	99.9	99.9	99.9	321.6	326.4	1.5	67.6	398.4	67.6
25.4	69.3	6903.2	425.0	-20.3	-25.0	999.9	99.9	99.9	99.9	323.0	327.4	1.2	66.2	398.4	67.6
26.7	72.6	7343.9	400.0	-23.5	-28.2	999.9	99.9	99.9	99.9	324.4	327.6	0.9	64.6	398.4	67.6
28.2	76.7	7818.4	375.0	-27.3	-32.2	999.9	99.9	99.9	99.9	325.4	327.8	0.7	63.2	398.4	67.6
29.3	80.3	8111.0	350.0	-31.7	-36.6	999.9	99.9	99.9	99.9	326.0	327.6	0.5	61.2	398.4	67.6
31.5	85.3	8435.9	325.0	-35.9	-40.8	999.9	99.9	99.9	99.9	327.2	328.4	0.3	59.8	398.4	67.6
33.2	89.2	8781.7	300.0	-40.6	-45.9	999.9	99.9	99.9	99.9	328.2	328.2	0.2	58.6	398.4	67.6
35.1	94.2	9257.6	275.0	-45.9	-50.9	999.9	99.9	99.9	99.9	328.7	328.7	0.1	57.6	398.4	67.6
36.8	99.3	10594.0	250.0	-51.6	-55.9	999.9	99.9	99.9	99.9	329.4	329.4	0.1	56.6	398.4	67.6
38.7	104.4	11267.9	225.0	-56.1	-60.9	999.9	99.9	99.9	99.9	329.5	329.5	0.1	55.6	398.4	67.6
40.3	110.3	11938.3	200.0	-60.9	-65.9	999.9	99.9	99.9	99.9	330.0	330.0	0.1	54.6	398.4	67.6
43.2	116.4	12811.0	175.0	-65.6	-70.9	999.9	99.9	99.9	99.9	331.6	331.6	0.1	53.6	398.4	67.6
45.5	123.3	13768.7	150.0	-70.2	-75.9	999.9	99.9	99.9	99.9	332.4	332.4	0.1	52.6	398.4	67.6
49.2	130.7	14901.7	125.0	-75.9	-80.9	999.9	99.9	99.9	99.9	333.3	333.3	0.1	51.6	398.4	67.6
52.6	138.3	16302.3	100.0	-80.9	-85.9	999.9	99.9	99.9	99.9	334.3	334.3	0.1	50.6	398.4	67.6
56.4	146.3	18099.0	75.0	-85.9	-90.9	999.9	99.9	99.9	99.9	335.3	335.3	0.1	49.6	398.4	67.6
59.3	154.3	19999.0	50.0	-90.9	-95.9	999.9	99.9	99.9	99.9	336.3	336.3	0.1	48.6	398.4	67.6
60.9	162.3	22000.0	25.0	-95.9	-100.9	999.9	99.9	99.9	99.9	337.3	337.3	0.1	47.6	398.4	67.6

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 429
DAYTON, OHIO

24 APRIL 1975
1115 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

148 12.1

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP CG C	DEW PT CG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	WZ RTG GM/KG	RM PCT	RANGE KM	AZ DG
0.0	7.8	298.0	976.6	11.1	10.2	75.0	4.2	-0.2	-0.4	287.2	307.9	8.0	94.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	129.
0.1	8.3	311.7	975.0	11.2	10.8	174.4	2.6	-0.3	2.6	287.5	309.1	8.4	97.8	0.5	27.
1.0	10.2	529.0	950.0	11.0	10.8	144.4	5.4	-3.1	4.4	289.5	311.9	8.6	98.5	0.5	29.
2.0	12.2	753.1	925.0	12.6	15.4	146.0	7.2	-4.0	6.0	293.4	319.2	9.0	98.8	0.4	32.
3.0	14.5	983.1	900.0	11.0	10.6	154.9	4.4	-1.9	4.0	293.1	317.7	9.0	96.9	1.2	39.
4.0	16.5	1218.2	875.0	9.7	9.3	162.9	4.2	-1.2	4.0	293.0	317.4	8.4	97.0	1.4	31.
5.0	18.3	1459.0	850.0	8.4	8.0	166.9	3.4	-0.8	3.3	293.0	317.3	8.0	97.5	1.6	31.
6.1	20.3	1705.9	825.0	7.4	7.0	190.8	2.5	0.5	2.5	297.4	318.1	7.7	97.2	1.4	32.
6.9	23.1	1959.1	800.0	5.6	5.3	196.8	3.8	1.1	1.6	298.1	317.2	7.0	97.7	1.9	32.
7.9	25.5	2218.9	775.0	4.0	3.7	213.1	4.8	2.0	4.1	299.0	316.7	6.5	97.6	2.0	31.
8.0	27.9	2465.2	750.0	2.8	2.5	218.8	6.3	4.0	4.9	300.4	317.3	6.1	98.0	2.2	30.
9.0	30.3	2758.9	725.0	0.4	0.1	219.0	6.5	4.1	5.0	300.6	315.4	5.3	97.7	2.4	34.
11.2	32.9	3039.9	700.0	-1.3	-1.6	226.5	6.1	4.4	4.2	301.7	315.5	4.9	97.8	2.8	37.
12.4	35.4	3329.3	675.0	-3.5	-0.7	233.9	4.7	3.8	2.8	304.1	312.1	3.4	78.6	3.0	3.
13.4	37.9	3626.5	650.0	-5.6	-1.7	241.0	3.0	2.6	1.4	305.9	309.5	2.2	57.2	3.1	6.
14.4	40.5	3933.9	625.0	-6.8	-1.4	262.2	1.4	1.7	0.2	305.9	310.9	2.0	54.5	3.2	9.
16.2	43.1	4281.5	600.0	-8.4	-1.1	247.8	3.8	3.5	1.4	308.6	313.0	2.1	55.5	3.3	11.
17.7	45.9	4581.8	575.0	-9.0	-1.2	269.5	6.9	6.9	0.5	308.6	313.0	2.5	74.5	3.6	19.
19.1	48.7	4924.7	550.0	-11.4	-1.1	268.3	7.6	7.6	0.2	310.8	318.0	2.3	80.2	3.8	24.
20.4	51.4	5283.7	525.0	-12.9	-1.7	254.7	10.5	10.2	2.0	313.1	319.7	2.1	79.4	4.2	35.
22.0	54.4	5651.5	500.0	-15.2	-1.6	260.7	15.0	14.8	2.4	316.7	320.3	1.8	74.6	5.3	44.
23.5	57.1	6037.4	475.0	-17.5	-2.1	257.8	15.2	14.9	3.2	318.4	321.0	1.4	70.0	6.4	52.
25.1	60.4	6440.8	450.0	-20.3	-2.4	235.0	18.1	14.8	10.4	317.8	321.7	1.2	70.8	7.8	55.
26.7	63.7	6862.3	425.0	-24.8	-2.5	223.3	21.8	15.0	15.9	319.9	323.5	1.1	77.2	9.4	51.
28.4	66.9	7304.8	400.0	-25.1	-2.8	224.6	27.2	18.1	15.4	322.4	325.5	0.9	75.4	12.3	51.
30.1	70.3	7771.1	375.0	-28.4	-3.2	231.8	33.2	28.1	20.5	326.0	328.3	0.7	67.5	15.4	50.
32.1	73.9	8211.2	350.0	-32.9	-3.7	239.2	36.5	31.3	16.7	328.4	325.9	0.4	63.6	19.7	52.
34.1	77.7	8776.7	325.0	-36.9	-4.1	240.9	39.7	34.7	15.1	325.8	326.9	0.3	62.3	24.0	53.
36.2	81.3	9328.0	300.0	-41.2	-4.9	239.3	42.7	36.8	21.4	327.4	329.9	0.9	99.9	29.2	54.
38.7	85.3	9913.3	275.0	-46.1	-5.1	241.2	43.4	38.1	21.0	328.5	329.9	0.9	99.9	35.9	54.
41.4	89.7	10539.1	250.0	-51.6	-5.9	242.4	46.5	41.2	21.5	329.4	329.9	0.9	99.9	43.0	57.
44.0	94.4	11214.2	225.0	-57.3	-6.9	242.5	49.0	43.7	22.6	330.7	329.9	0.9	99.9	51.7	57.
47.0	99.2	11950.2	200.0	-62.5	-6.9	246.9	47.6	43.8	18.6	333.8	329.9	0.9	99.9	58.5	58.
50.3	104.4	12763.7	175.0	-66.9	-6.9	263.6	46.1	45.8	5.1	336.6	329.9	0.9	99.9	66.9	51.
53.9	110.2	13714.7	150.0	-59.4	-6.9	272.0	26.1	28.0	-1.2	367.9	329.9	0.9	99.9	73.5	64.
58.1	116.3	14855.5	125.0	-59.9	-6.9	256.8	24.0	23.3	5.5	386.5	329.9	0.9	99.9	79.5	65.
63.5	123.7	16254.4	100.0	-59.0	-6.9	257.5	15.9	15.6	3.5	413.7	329.9	0.9	99.9	85.7	66.
69.9	131.5	18044.7	75.0	-62.4	-6.9	262.6	8.4	8.3	1.1	442.2	329.9	0.9	99.9	91.2	68.
78.6	140.3	20595.0	50.0	-56.0	-6.9	252.6	4.8	4.6	1.4	511.6	329.9	0.9	99.9	94.6	68.
92.3	149.0	25022.3	25.0	-52.5	-6.9	53.7	3.4	-2.7	-2.0	633.8	329.9	0.9	99.9	93.8	68.

ORIGINAL PAGE IS
OF POOR QUALITY

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 433
SALEM, ILL25 APRIL 1975
1115 GM1

159 14. 0

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	5.5	174.0	990.0	14.4	13.4	10.0	2.1	-0.4	-2.1	299.7	313.0	9.9	94.0	0.0	0.
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	6.6	304.7	97.0	14.8	13.4	343.7	3.2	0.7	-3.1	291.4	317.2	10.0	99.9	0.1	19.8
1.0	8.9	524.6	95.0	13.5	12.2	300.6	2.1	1.8	-1.1	292.2	316.8	9.4	91.5	0.1	15.2
1.6	10.3	740.4	925.0	12.5	11.1	262.7	4.4	4.4	0.6	293.3	317.0	9.0	91.4	0.2	12.3
2.4	12.6	979.4	900.0	11.3	9.9	277.1	4.2	4.2	-0.5	294.3	317.0	8.6	91.2	0.4	10.0
3.3	15.7	1214.8	875.0	10.2	8.8	270.0	4.4	4.4	-0.8	295.5	317.3	8.2	91.1	0.6	13.5
4.1	16.7	1456.1	850.0	9.2	7.8	271.9	6.8	6.4	-0.2	296.8	317.9	7.8	90.6	0.4	10.2
4.9	18.9	1703.9	825.0	8.8	7.4	266.8	10.2	10.2	0.6	294.7	320.2	7.9	90.8	1.2	3.8
5.7	21.0	1556.5	800.0	7.5	5.6	277.0	9.0	8.9	-1.1	300.1	319.8	7.2	87.9	1.8	26.1
6.6	23.6	2220.1	775.0	6.0	3.3	286.1	8.1	7.8	-2.3	301.1	318.5	6.3	82.4	2.2	37.
7.3	25.5	2429.5	750.0	4.1	2.5	287.6	8.4	8.3	-2.5	301.4	318.9	6.1	89.4	2.6	46.
8.3	28.3	2763.7	725.0	2.4	1.1	287.9	8.6	8.2	-2.6	302.8	318.9	5.7	91.3	3.0	10.0
9.2	30.5	3087.0	700.0	0.6	-0.8	291.8	9.4	8.8	-3.5	303.8	318.5	4.4	85.8	4.1	1.3
10.2	32.3	3334.1	675.0	-1.4	-3.4	293.2	10.2	9.4	-4.0	304.7	317.4	3.7	79.2	4.7	12.4
11.2	35.5	3638.5	650.0	-3.3	-6.4	290.0	11.2	10.5	-3.8	305.7	316.4	2.1	50.2	5.4	12.5
12.1	38.1	3947.7	625.0	-5.3	-14.0	295.4	12.4	11.2	-5.3	306.6	312.9	1.5	40.6	6.1	10.7
13.2	40.7	4207.1	600.0	-7.5	-19.6	296.4	13.0	12.1	-6.8	307.6	312.1	0.9	24.2	7.1	13.9
14.2	43.4	4536.6	575.0	-9.0	-27.6	301.3	17.0	14.6	-8.8	308.4	310.9	0.8	1.0	8.3	11.1
15.3	46.4	4838.9	550.0	-11.4	-37.1	305.2	14.1	14.8	-10.4	310.6	310.7	0.7	1.0	9.5	11.3
16.5	49.4	5233.8	525.0	-14.2	-48.4	304.0	17.3	14.3	-9.7	311.3	311.4	0.0	1.0	10.8	11.4
17.9	52.3	5661.9	500.0	-16.9	-60.7	302.5	16.6	14.0	-8.3	312.4	312.4	0.0	1.0	12.1	11.5
19.1	55.4	6044.6	475.0	-20.0	-72.7	297.9	14.2	17.0	-9.0	313.2	313.2	0.0	1.0	14.0	11.5
20.6	58.7	6443.0	450.0	-22.9	-64.5	290.7	21.6	20.2	-7.6	314.4	314.4	0.0	1.0	15.8	11.6
21.9	62.1	6858.9	425.0	-26.5	-66.9	281.9	22.0	21.6	-4.5	315.0	315.0	0.0	1.0	17.7	11.2
23.4	65.7	7294.1	400.0	-29.7	-69.0	273.4	24.5	24.1	-4.6	316.4	316.4	0.0	1.0	19.1	17.7
25.0	69.5	7751.7	375.0	-32.1	-70.9	260.7	24.5	24.1	-4.6	319.0	319.0	0.0	1.0	22.2	17.7
26.5	73.2	8234.1	350.0	-34.8	-72.3	250.9	35.8	33.4	11.7	321.6	321.6	0.0	1.0	25.4	17.0
28.1	77.3	8752.4	325.0	-36.0	-73.2	240.8	41.1	35.7	20.0	326.9	327.0	0.0	1.0	28.4	24.
29.8	81.5	9307.7	300.0	-38.9	-75.9	226.4	41.8	30.2	24.8	329.3	329.3	99.9	99.9	31.4	27.
31.4	85.0	9892.2	275.0	-44.4	-79.3	227.1	46.4	34.0	11.6	330.6	330.6	99.9	99.9	36.4	42.
33.6	91.3	10322.9	250.0	-46.8	-80.9	230.3	47.9	36.9	10.6	332.0	332.0	99.9	99.9	42.7	77.
35.9	97.2	11205.8	225.0	-53.3	-89.9	239.1	50.6	43.4	26.0	337.6	337.6	99.9	99.9	49.5	76.
38.1	101.4	11946.1	200.0	-60.3	-99.9	252.4	50.4	48.1	15.2	337.6	337.6	99.9	99.9	56.2	70.
40.9	108.1	12776.7	175.0	-60.8	-99.9	264.5	26.3	26.2	2.5	349.6	349.6	99.9	99.9	62.3	72.
44.2	115.3	13744.3	150.0	-57.4	-99.9	274.9	29.4	29.3	-2.5	371.2	371.2	99.9	99.9	68.4	74.
47.9	123.3	14933.2	125.0	-58.9	-99.9	282.3	18.4	18.2	2.5	388.3	388.3	99.9	99.9	72.7	74.
52.2	131.5	16591.5	100.0	-54.5	-99.9	255.1	25.6	24.7	6.6	412.7	412.7	99.9	99.9	79.0	81.
58.0	140.5	19095.8	75.0	-58.3	-99.9	267.8	7.4	7.0	-2.3	450.7	450.7	99.9	99.9	82.1	91.
65.5	150.3	20619.5	50.0	-57.2	-99.9	353.7	4.8	0.5	-4.8	508.2	508.2	99.9	99.9	82.2	83.
70.2	160.3	25382.9	25.0	-51.3	-99.9	43.8	2.4	-1.7	-1.7	637.1	637.1	99.9	99.9		

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 451
DODGE CITY, KAN

25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	QW PT CS C	DIR DG	SPED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/RC	HM PCY	RANGE KM	AZ DG
0.0	13.3	791.0	921.1	10.6	9.5	140.0	3.2	-2.1	2.5	291.6	312.9	8.1	93.0	0.7	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9
0.7	15.4	580.0	900.0	13.6	11.4	176.7	10.6	-7.3	7.7	290.8	322.1	9.5	86.6	0.8	32.0
1.6	17.4	1224.4	875.0	14.5	7.1	111.3	9.0	-6.7	5.9	290.8	317.7	7.3	61.3	0.9	32.0
2.3	20.3	1469.4	850.0	14.5	-9.2	136.2	9.5	-3.6	4.2	301.9	316.8	4.8	37.5	1.3	31.0
3.1	22.9	1721.1	825.0	14.7	-10.8	171.0	4.7	-0.7	4.7	308.4	310.6	2.0	16.0	1.5	32.0
3.9	25.3	1941.1	800.0	13.9	-11.8	228.2	6.1	4.6	4.1	308.3	312.2	1.9	15.6	1.6	32.0
4.9	27.9	2247.4	775.0	12.6	-14.9	280.6	10.6	9.2	5.2	307.5	312.3	1.8	13.2	1.7	34.1
5.8	30.6	2521.4	750.0	11.2	-20.4	239.8	14.1	12.2	7.1	308.8	312.0	1.0	9.0	2.0	3.
6.7	33.3	2802.7	725.0	8.8	-22.0	256.8	12.5	12.1	2.9	309.2	312.2	0.9	9.2	2.4	14.
7.7	36.0	3091.7	700.0	6.9	-23.2	258.0	11.3	11.0	2.4	310.2	313.0	0.8	9.4	2.8	31.
8.6	38.4	3388.9	675.0	4.2	-21.8	250.1	10.7	10.0	3.6	310.5	313.6	1.0	12.9	3.3	40.
9.6	41.6	3654.0	650.0	1.2	-22.0	253.3	9.4	8.0	2.4	310.4	313.6	1.0	15.7	3.4	40.
10.6	44.5	4007.8	625.0	-1.7	-20.7	250.5	9.9	6.8	1.4	310.6	314.4	1.2	21.8	4.2	47.
11.6	47.5	4310.7	600.0	-4.9	-19.8	254.5	7.7	7.4	2.1	310.6	314.7	1.3	20.9	4.4	50.
12.7	50.3	4664.1	575.0	-8.3	-38.9	254.4	11.1	10.7	3.0	312.7	314.1	0.4	10.4	5.1	51.
13.9	53.4	5010.7	550.0	-8.0	-59.0	262.9	13.0	12.9	1.6	312.5	314.7	0.0	1.0	5.9	51.
15.0	56.3	5370.7	525.0	-10.0	-59.3	268.4	13.3	13.3	0.3	316.3	316.5	0.0	1.0	6.7	60.
16.2	59.6	5744.4	500.0	-13.4	-58.4	272.7	13.0	13.0	-0.6	316.6	316.7	0.0	1.0	7.5	64.
17.5	63.1	6132.6	475.0	-16.0	-60.1	270.0	14.2	14.2	0.0	316.6	316.7	0.0	1.0	8.5	47.
18.6	66.3	6537.5	450.0	-19.1	-65.1	273.2	13.8	13.8	-0.8	319.2	319.3	0.0	1.0	9.5	70.
20.2	71.0	6955.9	425.0	-22.3	-65.1	268.8	14.7	14.6	0.9	320.4	320.4	0.0	1.0	10.7	72.
21.7	73.5	7402.1	400.0	-26.3	-65.0	271.0	14.7	10.7	-0.4	320.8	320.8	0.0	1.3	12.3	74.
23.2	77.4	7846.6	375.0	-30.5	-52.1	272.6	14.2	14.2	-0.9	321.1	321.4	0.1	4.7	15.9	79.
24.3	81.2	8351.1	350.0	-34.1	-60.9	267.5	14.6	14.6	0.9	322.7	322.9	0.0	5.1	18.2	74.
26.7	85.4	8846.3	325.0	-37.6	-63.0	263.1	24.9	24.7	3.0	324.7	324.8	0.0	99.9	21.0	80.
28.5	89.6	9413.4	300.0	-41.9	99.9	267.3	25.1	25.1	1.2	325.3	325.3	99.9	99.9	24.2	81.
30.6	94.3	9956.1	275.0	-46.9	99.9	270.3	24.4	24.4	-0.1	327.3	327.3	99.9	99.9	26.0	81.
32.8	99.0	10620.1	250.0	-52.2	99.9	268.1	24.5	24.4	0.9	328.4	328.4	99.9	99.9	28.0	81.
35.2	103.8	11295.7	225.0	-56.8	99.9	272.5	31.4	31.4	-1.4	331.5	331.5	99.9	99.9	32.2	81.
37.8	109.5	12013.0	200.0	-62.2	99.9	272.5	30.5	30.4	-1.3	334.3	334.3	99.9	99.9	37.0	85.
40.8	115.4	12474.8	175.0	-66.2	99.9	273.3	25.3	25.3	-1.7	337.5	337.5	99.9	99.9	43.1	81.
44.0	122.0	13789.1	150.0	-61.9	99.9	260.9	31.5	31.0	5.3	363.5	363.5	99.9	99.9	48.7	81.
48.1	129.3	14926.8	125.0	-60.9	99.9	269.6	24.7	24.7	0.2	368.7	368.7	99.9	99.9	56.1	87.
52.7	137.0	16304.2	100.0	-62.8	99.9	257.0	20.6	20.6	0.2	408.3	408.3	99.9	99.9	62.9	87.
58.0	145.3	18086.6	75.0	-57.8	99.9	260.4	15.4	15.2	2.6	451.6	451.6	99.9	99.9	70.6	91.
66.3	155.0	20623.1	50.0	-59.0	99.9	268.7	4.5	4.5	0.1	504.6	504.6	99.9	99.9	72.7	95.
78.2	185.0	25083.4	25.0	-50.0	99.9	343.4	6.8	1.9	-0.5	640.8	640.8	99.9	99.9	73.4	95.

0 BY SPEC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF FOUR QUALITY

ORIGINAL PAGE IS

STATION NO. 456
TOPEKA, KAN25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DEG C	DEW PT DEG C	DIP DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	FOF 7 DG K	E POT 7 DG K	MX RTO CM/KG	AM PCT	RANGE KM	AZ DG
0.0	6.0	268.0	580.9	11.1	11.1	20.0	1.5	-0.5	-1.4	286.9	308.7	6.5	100.0	0.0	0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	6.4	318.3	975.0	11.6	11.6	999.9	99.9	99.9	99.9	288.2	310.9	8.8	98.6	999.9	99.9
3.8	6.3	537.9	950.0	14.4	12.7	999.9	99.9	99.9	99.9	293.1	316.7	9.6	89.6	999.9	99.9
1.5	10.3	764.1	925.0	15.4	9.3	999.9	99.9	99.9	99.9	296.1	317.6	6.0	67.4	999.9	99.9
2.3	12.2	995.3	900.0	15.1	4.6	343.1	2.9	0.8	-2.0	297.9	314.4	6.0	50.4	0.3	152
3.0	14.3	1236.6	875.0	1.1	-0.6	349	4.1	-0.3	-0.1	299.0	310.9	4.2	36.4	0.6	154
3.7	16.1	1476.0	850.0	11.9	-3.9	14.2	4.8	-0.2	-0.6	299.1	309.7	3.4	32.7	0.6	159
4.5	19.2	1727.2	825.0	11.0	-20.7	358.6	3.9	0.1	-3.9	300.3	303.1	0.9	9.0	0.6	175
5.4	20.4	1983.1	800.0	5.8	-19.0	309.1	7.2	5.5	-6.6	301.7	305.0	1.1	11.3	1.3	167
6.3	22.4	2245.3	775.0	7.3	-17.0	310.9	9.6	7.2	-6.2	301.8	305.6	1.3	15.7	1.4	151
7.2	24.7	2514.1	750.0	6.6	-35.1	329.3	10.2	4.7	-7.9	303.7	306.4	0.3	3.7	1.9	151
8.0	26.9	2791.6	725.0	6.0	-46.2	332.3	9.4	4.4	-6.4	306.1	308.4	0.1	1.0	2.6	153
9.7	29.2	3076.2	700.0	5.5	-46.5	315.1	5.0	6.8	-6.8	309.0	309.1	0.1	1.0	3.5	147
10.3	31.6	3373.8	675.0	3.0	-48.1	303.7	10.1	8.4	-7.6	309.4	309.7	0.1	1.3	4.1	143
11.1	34.1	3677.6	650.0	0.4	-47.3	298.7	10.3	9.1	-7.3	309.4	310.1	0.1	1.3	4.7	134
12.1	36.5	3900.4	625.0	-2.2	-49.5	299.0	11.4	9.9	-7.5	310.5	310.7	0.1	1.0	5.5	13
13.2	39.1	4112.4	600.0	-4.6	-53.0	298.5	12.3	10.8	-7.9	310.5	311.1	0.0	1.0	6.3	134
14.3	41.6	4345.8	575.0	-7.7	-54.8	297.5	12.2	10.8	-7.6	311.0	311.7	0.0	1.0	7.1	132
15.6	44.3	4595.5	550.0	-10.5	-55.4	291.9	13.1	12.2	-6.9	311.6	312.8	0.0	1.2	8.1	124
16.9	47.2	5353.7	525.0	-13.0	-51.7	290.6	14.5	13.6	-6.0	312.8	313.2	0.1	3.5	9.1	127
18.3	50.3	5715.1	500.0	-16.5	-50.4	291.8	16.1	15.0	-6.3	314.7	314.8	0.0	1.4	10.5	125
19.3	53.3	6059.7	475.0	-18.8	-59.4	301.1	18.2	15.6	-9.4	314.7	316.2	0.0	1.7	11.9	125
20.5	55.9	6406.6	450.0	-21.5	-59.8	300.3	19.6	16.9	-9.3	317.0	317.0	0.1	4.0	13.6	124
22.2	59.1	6918.3	425.0	-24.9	-54.1	297.1	20.2	17.6	-10.7	318.4	318.1	0.1	6.6	15.8	124
23.6	62.6	7356.7	400.0	-27.0	-53.4	296.6	22.3	19.5	-10.7	319.6	320.1	0.1	10.6	18.1	123
25.3	65.9	7816.8	375.0	-31.5	-52.4	296.8	24.5	21.9	-11.1	319.6	321.3	0.1	11.6	20.5	122
27.0	69.4	8316.4	350.0	-35.3	-54.7	298.7	26.6	24.4	-11.7	321.3	322.5	0.1	11.9	22.7	122
29.7	73.1	8815.3	325.0	-39.1	-57.6	295.1	28.6	24.1	-12.6	322.5	322.5	0.1	99.9	25.6	121
30.4	77.2	9357.4	300.0	-42.2	-59.9	295.1	32.8	29.7	-13.9	324.4	324.4	99.9	99.9	28.2	120
32.4	81.2	9935.3	275.0	-46.9	-59.9	297.5	38.1	37.9	-17.7	327.3	327.3	99.9	99.9	30.6	120
34.8	85.7	10563.2	250.0	-51.4	-59.9	277.1	44.6	39.7	-20.3	330.6	330.6	99.9	99.9	42.7	119
37.3	90.4	11239.8	225.0	-56.3	-59.9	298.4	37.9	33.4	-18.0	332.3	332.3	99.9	99.9	47.2	119
39.6	95.6	11982.4	200.0	-59.8	-59.9	283.4	26.2	25.5	-16.1	338.1	338.1	99.9	99.9	51.2	116
42.2	101.2	12807.1	175.0	-64.6	-59.9	271.2	37.9	37.9	-16.1	343.4	343.4	99.9	99.9	51.2	116
45.7	107.7	13764.2	150.0	-60.3	-59.9	281.3	31.9	31.2	-16.2	346.2	346.2	99.9	99.9	51.2	116
49.9	115.0	14500.5	125.0	-61.1	-59.9	275.9	30.1	29.9	-16.1	348.4	348.4	99.9	99.9	51.2	116
54.6	123.3	16300.4	100.0	-58.9	-59.9	277.3	26.6	26.4	-16.1	343.9	343.9	99.9	99.9	51.2	116
59.6	134.0	18100.4	75.0	-50.9	-59.9	227.3	6.1	4.1	-16.1	445.3	445.3	99.9	99.9	70.6	110
67.3	147.0	22630.7	50.0	-58.1	-59.9	280.0	3.0	3.7	-16.2	506.6	506.6	99.9	99.9	70.6	108
80.7	162.0	25091.9	25.0	-50.1	-59.9	63.6	10.0	-8.9	-16.4	670.6	670.6	99.9	99.9	80.9	111

0.1 SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0.5 TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

0.0 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 486
PORT TOTTEN, N Y

25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRPS MB	TEMP DG C	CLW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T LG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE AZ KM	14. 0
0.0	4.9	8.2	1009.5	14.4	13.0	999.9	99.9	99.9	99.9	284.0	314.0	9.4	91.0	999.9	999.9
0.4	5.6	88.5	1000.0	15.0	13.1	999.9	99.9	99.9	99.9	289.4	314.0	9.5	88.4	999.9	999.9
1.1	7.5	302.8	975.0	13.3	12.4	999.9	99.9	99.9	99.9	289.8	313.9	9.3	93.9	999.9	999.9
1.8	5.6	521.4	950.0	12.0	11.5	999.9	99.9	99.9	99.9	290.6	314.0	9.0	96.7	999.9	999.9
2.7	11.5	744.9	925.0	11.0	9.7	999.9	99.9	99.9	99.9	291.7	313.3	8.2	91.7	999.9	999.9
3.6	13.7	974.2	900.0	11.4	8.5	999.9	99.9	99.9	99.9	294.3	315.0	7.8	82.2	999.9	999.9
4.5	15.8	1210.0	875.0	10.7	7.7	999.9	99.9	99.9	99.9	295.9	316.2	7.6	81.9	999.9	999.9
5.4	17.9	1451.2	850.0	8.9	7.0	999.9	99.9	99.9	99.9	296.5	316.5	7.4	89.0	999.9	999.9
6.3	20.2	1698.2	825.0	7.2	6.2	999.9	99.9	99.9	99.9	297.2	316.8	7.2	93.1	999.9	999.9
7.2	22.3	1951.3	800.0	5.6	4.5	999.9	99.9	99.9	99.9	299.0	316.1	6.7	93.1	999.9	999.9
8.1	24.7	2211.0	775.0	4.5	2.7	999.9	99.9	99.9	99.9	299.4	316.0	6.0	88.4	999.9	999.9
9.2	26.8	2477.8	750.0	3.4	-0.4	999.9	99.9	99.9	99.9	301.7	314.8	5.0	76.4	999.9	999.9
10.2	29.3	2752.3	725.0	1.5	-2.5	999.9	99.9	99.9	99.9	301.7	314.2	4.4	74.8	999.9	999.9
11.2	31.9	3034.4	700.0	-0.2	-4.1	999.9	99.9	99.9	99.9	302.7	314.3	4.1	75.3	999.9	999.9
12.2	34.3	3325.4	675.0	-1.0	-11.0	999.9	99.9	99.9	99.9	304.9	312.2	2.5	46.4	999.9	999.9
13.3	36.7	3625.9	650.0	-2.4	-15.7	999.9	99.9	99.9	99.9	306.4	311.7	1.7	35.2	999.9	999.9
14.3	39.4	3936.2	625.0	-4.4	-21.0	999.9	99.9	99.9	99.9	307.6	311.2	1.1	25.9	999.9	999.9
15.5	41.3	4256.0	600.0	-6.5	-41.9	999.9	99.9	99.9	99.9	308.6	309.2	0.2	4.5	999.9	999.9
16.6	44.8	4586.9	575.0	-9.1	-43.0	999.9	99.9	99.9	99.9	309.3	309.8	0.1	4.4	999.9	999.9
17.9	47.7	4929.3	550.0	-11.5	-44.3	999.9	99.9	99.9	99.9	310.4	311.0	0.1	4.6	999.9	999.9
19.0	50.5	5284.5	525.0	-13.3	-45.1	999.9	99.9	99.9	99.9	312.4	312.8	0.1	4.8	999.9	999.9
20.3	53.5	5554.2	500.0	-15.8	-26.2	999.9	99.9	99.9	99.9	313.8	316.7	0.9	40.6	999.9	999.9
21.5	56.4	5834.0	475.0	-18.2	-36.3	999.9	99.9	99.9	99.9	316.4	317.3	0.5	28.6	999.9	999.9
22.9	59.7	6142.0	450.0	-19.7	-62.4	999.9	99.9	99.9	99.9	316.4	318.5	0.0	1.0	999.9	999.9
24.3	63.0	6465.3	425.0	-21.5	-63.6	999.9	99.9	99.9	99.9	321.3	321.4	0.0	1.0	999.9	999.9
25.9	66.3	6799.4	400.0	-24.8	-65.8	999.9	99.9	99.9	99.9	322.7	322.7	0.0	1.0	999.9	999.9
27.7	70.3	7174.9	375.0	-28.9	-68.5	999.9	99.9	99.9	99.9	323.2	323.2	0.0	1.0	999.9	999.9
29.3	73.5	7564.4	350.0	-33.1	-71.2	999.9	99.9	99.9	99.9	324.0	324.1	0.0	1.0	999.9	999.9
30.4	77.5	7950.5	325.0	-37.6	-74.2	999.9	99.9	99.9	99.9	324.7	324.8	0.0	1.0	999.9	999.9
32.0	81.5	8327.7	300.0	-41.7	99.9	999.9	99.9	99.9	99.9	326.6	999.9	99.9	999.9	999.9	999.9
34.4	85.9	8713.4	275.0	-44.9	99.9	999.9	99.9	99.9	99.9	330.2	999.9	99.9	999.9	999.9	999.9
36.9	90.4	9143.1	250.0	-50.2	99.9	999.9	99.9	99.9	99.9	331.4	999.9	99.9	999.9	999.9	999.9
39.1	95.3	9621.8	225.0	-56.3	99.9	999.9	99.9	99.9	99.9	332.4	999.9	99.9	999.9	999.9	999.9
41.7	100.5	10123.2	200.0	-60.3	99.9	999.9	99.9	99.9	99.9	337.3	999.9	99.9	999.9	999.9	999.9
43.7	106.3	10795.0	175.0	-66.1	99.9	999.9	99.9	99.9	99.9	340.9	999.9	99.9	999.9	999.9	999.9
47.0	112.5	11729.2	150.0	-61.7	99.9	999.9	99.9	99.9	99.9	363.8	999.9	99.9	999.9	999.9	999.9
50.9	120.3	12662.4	125.0	-59.2	99.9	999.9	99.9	99.9	99.9	367.8	999.9	99.9	999.9	999.9	999.9
55.8	128.3	13681.2	100.0	-55.6	99.9	999.9	99.9	99.9	99.9	420.3	999.9	99.9	999.9	999.9	999.9
62.1	136.3	15057.8	75.0	-60.6	99.9	999.9	99.9	99.9	99.9	445.9	999.9	99.9	999.9	999.9	999.9
69.8	140.3	16334.8	50.0	-57.6	99.9	999.9	99.9	99.9	99.9	507.8	999.9	99.9	999.9	999.9	999.9
81.4	160.0	25062.1	25.0	-52.6	99.9	999.9	99.9	99.9	99.9	633.3	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 518
ALDANY, N Y

25 APRIL 1975
1115 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CHCT	HEIGHT GEV	PRLS WB	TEMP DG C	DFW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANSE RM	A7 CG
0.0	5.7	84.0	1002.9	9.0	6.6	350.0	4.2	0.7	-4.1	282.7	299.4	6.1	85.0	6.0	0.0
7.1	5.4	110.1	1070.0	8.7	6.5	338.5	2.4	1.0	-2.2	282.7	299.4	6.1	85.0	6.1	0.1
6.9	7.6	319.3	975.0	7.4	6.3	292.4	1.7	1.6	-0.7	283.4	299.7	6.1	85.0	6.1	0.1
1.7	10.0	532.5	950.0	5.2	4.6	350.0	6.5	0.2	-6.5	283.2	297.7	5.6	95.4	6.5	0.5
2.6	12.4	750.3	925.0	3.7	3.0	322.3	6.4	3.9	-5.1	283.7	297.1	5.2	95.6	6.4	0.5
3.5	14.6	672.5	907.0	2.4	1.8	320.5	6.1	5.2	-6.3	284.6	297.3	4.8	95.6	6.4	0.5
4.5	17.3	1203.4	875.0	2.1	-0.8	323.4	8.6	5.1	-7.0	284.6	297.9	4.3	83.2	6.7	0.7
5.3	19.7	1434.7	850.0	3.0	-14.6	331.4	10.0	4.7	-8.9	289.4	293.6	1.4	26.1	2.2	1.7
6.4	22.2	1677.7	825.0	4.9	-20.1	316.0	6.5	4.5	-4.6	293.9	290.8	0.5	14.2	2.7	1.4
7.1	24.3	1924.1	800.0	4.5	-33.6	308.5	9.4	7.7	-6.1	296.0	286.9	0.3	4.2	3.1	1.4
8.4	27.4	2186.4	775.0	4.6	-47.1	308.7	9.6	7.5	-6.0	298.8	289.0	0.1	1.0	3.7	1.4
9.4	30.2	2452.8	750.0	3.9	-47.5	308.7	9.1	7.1	-5.7	300.6	301.0	0.1	1.0	4.3	1.4
10.5	33.0	2727.2	725.0	2.7	-48.3	298.7	9.0	7.9	-4.3	302.4	302.6	0.1	1.0	4.9	1.4
11.7	35.9	3010.0	700.0	0.9	-37.6	298.1	9.4	8.6	-3.9	303.5	304.2	0.2	3.9	5.5	1.4
12.9	38.4	3300.7	675.0	-1.6	-38.4	289.4	9.2	8.7	-2.7	303.9	304.5	0.2	3.9	6.1	1.4
14.1	41.3	3593.8	650.0	-4.0	-39.9	294.4	9.2	8.4	-3.8	304.5	305.1	0.2	4.1	6.7	1.4
15.4	44.3	3909.1	625.0	-6.2	-32.9	291.8	10.3	9.6	-3.8	305.3	306.6	0.4	9.9	7.4	1.4
16.7	47.4	4225.4	600.0	-6.2	-35.0	283.1	11.1	10.8	-2.6	305.4	306.5	0.3	10.2	8.2	1.4
18.0	50.3	4551.5	575.0	-10.5	-35.8	280.5	12.2	12.0	-2.2	307.7	309.8	0.3	10.3	9.0	1.4
19.5	53.5	4858.1	550.0	-12.0	-36.0	284.8	13.9	13.5	-3.6	309.8	310.8	0.3	10.4	10.1	1.4
20.7	56.6	5249.9	525.0	-14.7	-34.8	278.6	15.0	14.8	-2.5	310.8	311.6	0.2	10.7	11.1	1.4
22.2	60.0	5617.1	500.0	-16.3	-33.3	275.7	16.3	16.3	-1.6	313.7	314.8	0.5	21.2	12.1	1.4
23.5	62.5	6000.7	475.0	-19.6	-32.4	275.7	16.4	16.3	-1.6	313.7	315.5	0.5	31.1	13.7	1.4
25.2	64.9	6359.4	450.0	-23.5	-32.8	265.3	15.9	15.9	0.2	313.7	315.5	0.5	42.1	15.2	1.4
26.3	70.4	6814.9	425.0	-26.9	-36.0	263.1	18.4	16.6	2.3	314.5	315.9	0.4	45.9	16.7	1.4
28.3	74.2	7249.4	400.0	-28.7	-37.6	270.9	21.0	21.0	-0.3	316.3	317.6	0.4	45.9	16.7	1.4
30.4	78.2	7707.9	375.0	-32.6	-50.1	272.2	24.5	24.4	-1.0	318.3	318.7	0.1	16.0	21.4	1.4
32.8	82.0	8192.1	350.0	-34.8	-54.8	263.0	27.7	27.5	3.4	319.1	319.3	0.1	13.3	24.6	1.4
34.7	86.3	8657.7	325.0	-41.0	99.9	267.0	20.1	28.1	1.2	320.2	319.3	99.9	99.9	27.7	1.4
36.7	90.3	9238.4	300.0	-43.9	99.9	280.2	35.9	15.4	-6.4	324.5	99.9	99.9	99.9	31.1	1.4
38.5	94.8	9820.1	275.0	-47.0	99.9	291.5	49.4	45.9	-18.1	328.6	99.9	99.9	99.9	34.7	1.4
40.5	99.7	10447.2	250.0	-51.0	99.9	293.9	65.1	58.5	-28.4	330.2	99.9	99.9	99.9	38.1	1.4
42.7	104.8	11121.1	225.0	-57.1	99.9	295.2	78.9	69.5	-32.7	331.0	99.9	99.9	99.9	42.4	1.4
45.4	110.3	11860.7	200.0	-60.9	99.9	300.5	68.5	59.1	-34.8	336.3	99.9	99.9	99.9	46.3	1.4
48.4	116.0	12694.9	175.0	-62.3	99.9	284.7	38.7	37.5	-9.9	347.1	99.9	99.9	99.9	50.4	1.4
52.0	122.5	13654.2	150.0	-58.1	99.9	277.6	32.2	31.9	-4.2	370.0	99.9	99.9	99.9	54.3	1.4
55.6	130.0	14407.1	125.0	-50.6	99.9	271.2	27.1	27.1	-0.6	372.6	99.9	99.9	99.9	58.3	1.4
60.4	139.0	16236.7	100.0	-54.1	99.9	255.7	15.0	14.5	3.7	423.1	99.9	99.9	99.9	62.3	1.4
66.3	146.5	18064.8	75.0	-41.0	99.9	209.4	9.3	8.1	-4.6	445.1	99.9	99.9	99.9	66.3	1.4
74.2	156.7	20615.5	50.0	-57.0	99.9	203.4	2.1	0.8	1.3	509.2	99.9	99.9	99.9	74.2	1.4
86.5	168.5	25065.9	25.0	-51.9	99.9	99.9	99.9	99.9	99.7	635.8	99.9	99.9	99.9	86.5	1.4

° BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

° BY TEMP MEANS TEMPERATURE ON TIME HAVE BEEN INTERPOLATED

° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 520
PITTSBURG, PA25 APRIL 1975
1130 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MN RTO GN/KG	RH PCT	RANGE KM	AZ F/G
0.0	7.3	356.0	971.0	8.8	8.8	140.7	1.0	-0.6	0.8	285.3	364.1	7.4	100.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	9.4	540.9	950.3	10.3	10.2	99.9	99.9	99.9	99.9	288.7	310.1	8.3	100.0	99.9	99.9
1.4	11.6	764.4	925.0	11.9	11.1	99.9	99.9	99.9	99.9	292.7	316.4	9.1	99.9	99.9	99.9
2.1	14.1	993.7	900.0	10.6	9.7	99.9	99.9	99.9	99.9	293.5	319.7	9.4	99.9	99.9	99.9
2.9	16.4	1228.5	875.0	9.8	9.0	258.8	3.6	3.6	0.7	298.0	317.1	9.3	98.2	0.5	7.0
3.7	19.0	1469.2	850.0	8.6	7.1	260.2	6.7	6.6	1.1	298.2	316.2	7.5	98.0	0.5	7.0
4.5	21.3	1715.9	825.0	7.1	4.5	260.4	8.0	8.0	0.2	298.6	314.1	7.5	98.3	0.5	7.0
5.3	23.0	1968.1	800.0	4.7	4.1	261.7	9.4	9.3	1.4	297.0	313.0	6.4	95.4	1.1	6.0
6.3	26.4	2226.4	775.0	2.3	2.3	267.2	9.4	9.4	0.5	297.1	313.0	5.8	95.4	1.7	6.0
7.0	29.1	2491.2	750.0	1.0	0.7	263.8	9.5	9.4	1.0	298.4	313.3	5.4	97.9	2.2	2.0
7.9	31.9	2763.8	725.0	0.3	-2.4	258.9	8.9	8.7	1.7	300.3	312.8	4.4	82.1	2.6	2.0
8.8	34.8	3043.9	700.0	-0.9	-2.9	260.1	8.2	8.1	1.4	299.4	302.5	1.0	22.4	3.1	7.0
9.9	37.3	3331.8	675.0	-2.7	-28.4	263.5	8.2	8.1	0.9	302.7	304.4	0.5	11.5	3.4	7.0
10.9	40.3	3631.2	650.0	-2.8	-31.9	261.7	8.9	8.8	1.3	305.8	307.1	0.4	8.4	4.1	7.0
11.9	43.0	3940.7	625.0	-4.6	-33.1	254.5	10.2	9.8	2.7	307.2	308.4	0.4	8.6	4.7	7.0
12.9	45.1	4260.6	600.0	-6.8	-27.7	246.4	10.5	9.7	4.2	308.3	312.4	0.7	17.2	5.1	7.0
14.1	47.3	4591.1	575.0	-9.5	-21.3	248.1	11.9	11.1	4.5	309.0	312.8	1.2	37.2	6.1	7.0
15.1	52.1	4933.4	550.0	-11.1	-26.1	255.4	14.5	13.0	3.5	310.9	313.6	0.8	28.0	6.9	7.0
16.2	55.1	5246.8	525.0	-12.5	-33.7	263.0	17.1	17.0	5.1	313.4	314.8	0.4	15.0	8.0	7.0
17.6	58.3	5560.3	500.0	-15.2	-44.8	261.9	16.3	16.2	2.0	314.5	314.0	0.1	4.0	9.1	7.0
18.9	61.7	6040.4	475.0	-17.0	-39.3	251.2	16.0	15.1	5.2	316.9	317.8	0.3	12.6	12.6	7.0
20.3	65.2	6450.0	450.0	-20.3	-32.0	254.1	17.1	16.4	4.7	317.7	317.6	0.3	34.3	11.7	7.0
21.5	68.5	6871.0	425.0	-23.2	-28.9	264.9	20.2	20.2	1.8	319.3	322.1	0.8	54.2	13.3	7.0
23.1	72.1	7312.1	400.0	-26.9	-31.5	265.0	22.4	21.4	2.0	320.1	322.4	0.7	64.3	14.1	7.0
24.6	76.1	7775.2	375.0	-29.8	-34.2	250.2	24.6	23.2	8.3	322.2	324.1	0.6	64.9	17.3	7.0
26.1	80.3	8263.4	350.0	-33.6	-38.8	253.4	28.0	26.6	8.7	323.3	324.7	0.6	64.9	17.3	7.0
27.7	84.2	8778.7	325.0	-37.7	-43.1	253.5	33.5	32.1	9.5	324.6	325.5	0.3	56.7	22.7	7.0
29.4	88.4	9325.7	300.0	-42.0	-49.9	247.4	39.8	37.8	15.0	326.2	326.9	99.9	99.9	26.5	7.0
31.2	93.0	9907.6	275.0	-47.1	-50.9	247.4	44.1	40.4	10.6	327.0	327.0	99.9	99.9	30.9	7.0
33.2	97.6	10531.8	250.0	-52.4	-55.9	252.6	48.4	46.2	14.4	328.3	328.3	99.9	99.9	34.9	7.0
35.4	102.6	11244.4	225.0	-58.2	-62.9	256.8	53.7	52.3	12.2	329.3	329.9	99.9	99.9	42.3	7.0
37.9	108.2	11935.3	200.0	-64.5	-69.9	260.2	55.6	54.7	9.8	330.7	329.9	99.9	99.9	51.5	7.0
40.5	114.0	12747.4	175.0	-65.3	-70.9	268.4	62.0	59.8	-13.5	332.2	329.9	99.9	99.9	58.9	7.0
43.5	120.5	13653.3	150.0	-62.1	-69.9	267.3	42.0	39.8	1.0	332.2	329.9	99.9	99.9	63.1	7.0
47.5	127.7	14626.0	125.0	-59.5	-69.9	274.1	18.2	18.1	-1.3	337.2	329.9	99.9	99.9	64.5	7.0
52.2	134.7	16234.2	100.0	-59.0	-69.9	266.2	19.8	19.8	1.3	337.2	329.9	99.9	99.9	73.7	7.0
58.1	143.7	18023.0	75.0	-62.0	-69.9	254.2	13.0	12.5	3.5	443.0	329.9	99.9	99.9	77.6	7.0
65.7	153.0	20564.3	50.0	-57.7	-69.9	73.5	1.8	-1.7	-0.5	507.5	329.9	99.9	99.9	79.7	7.0
77.0	163.5	24081.3	25.0	-53.3	-69.9	36.0	4.5	-2.7	-3.7	631.7	329.9	99.9	99.9	78.0	7.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 428
BUFFALO, N. Y.

25 APRIL 1975
1112 GMT
ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GEN	PRES MR	TEMP DG C	DEW PT DG C	WIND DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT Y DG K	E POT Y DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.5	218.0	990.2	6.1	3.9	30.0	1.5	-0.7	-1.3	290.7	293.9	5.1	86.0	0.0	0
0.3	6.9	250.9	1000.0	9.9	9.9	99.9	9.9	9.9	9.9	99.9	99.9	9.9	99.9	99.9	99.9
0.6	7.5	345.0	675.0	5.6	3.6	211.4	7.1	2.7	4.4	281.5	274.0	5.1	97.0	0.2	21.0
1.0	8.5	557.2	950.0	4.2	2.0	175.4	1.5	-0.1	1.5	282.0	294.1	4.7	86.0	0.1	21.0
1.8	10.5	773.6	925.0	2.0	1.0	72.7	3.4	-1.3	-1.0	281.9	293.5	4.5	93.0	0.2	21.0
2.5	12.4	594.3	900.0	0.3	-0.1	62.8	1.7	-1.5	-0.8	281.4	293.4	4.2	96.6	0.3	24.0
3.3	14.5	127.1	875.0	0.3	-2.2	6.0	1.6	-0.2	-1.7	281.0	294.5	3.7	64.0	0.4	24.0
4.1	16.5	141.4	850.0	2.5	-10.6	7.7	1.9	-0.3	-1.9	281.0	294.7	3.0	37.4	0.4	24.0
5.0	18.6	145.1	825.0	2.5	-11.5	33.4	0.8	0.3	-0.8	281.4	294.2	1.6	29.4	0.7	21.0
6.7	20.7	194.8	800.0	2.4	-10.1	26.4	2.1	2.1	0.2	293.8	297.2	1.1	20.3	0.4	21.0
7.4	22.2	215.9	775.0	2.5	-22.5	28.7	3.5	1.4	-0.6	294.4	299.1	0.8	13.7	0.4	17.0
8.4	25.2	245.3	750.0	2.7	-22.0	101.4	3.5	1.0	-1.9	297.0	302.3	0.9	14.2	0.5	11.0
9.3	27.5	273.7	725.0	1.4	-22.9	28.9	5.0	4.8	-1.5	301.1	307.7	0.8	14.3	0.4	11.0
10.2	32.3	302.4	700.0	0.4	-23.6	27.3	7.3	7.3	-0.3	303.0	309.6	0.8	14.4	0.4	11.0
11.3	34.9	361.5	675.0	-1.5	-23.0	26.3	7.9	7.6	1.1	305.1	314.5	0.7	14.5	1.2	11.0
12.3	37.2	351.9	625.0	-5.9	-23.6	26.7	10.5	10.5	0.6	305.8	314.4	0.8	21.0	2.1	12.0
13.3	40.3	423.3	600.0	-7.4	-20.8	26.1	11.9	11.9	0.6	307.2	319.4	0.7	19.9	2.1	12.0
14.5	42.5	450.5	575.0	-10.6	-20.7	26.7	12.8	12.8	0.6	307.6	319.4	0.7	25.1	3.7	12.0
15.5	45.4	470.6	550.0	-13.2	-20.2	26.7	14.7	14.6	1.2	307.6	311.4	0.9	35.4	4.5	12.0
16.7	48.4	525.1	525.0	-14.0	-20.4	25.0	14.6	14.1	3.4	309.3	311.9	0.8	34.7	5.7	12.0
17.0	51.3	582.4	500.0	-14.4	-20.5	25.0	11.9	11.2	4.3	310.6	313.5	0.9	49.0	6.5	12.0
19.1	54.3	600.9	475.0	-20.7	-20.3	25.0	15.0	14.3	4.5	312.4	314.8	0.7	46.9	7.3	12.0
20.5	57.3	657.2	450.0	-24.1	-20.3	25.0	16.4	16.2	3.2	312.9	315.2	0.7	54.3	8.4	12.0
21.9	60.7	681.5	425.0	-27.1	-20.1	24.6	18.6	14.5	1.4	314.3	316.3	0.6	61.4	10.3	12.0
23.4	64.2	725.1	400.0	-30.2	-20.1	24.6	20.8	20.7	1.9	315.7	316.8	0.3	37.2	11.3	12.0
25.0	67.7	771.0	375.0	-32.6	-20.1	24.6	25.0	25.0	-0.1	315.4	318.7	0.1	15.4	14.1	12.0
26.0	71.3	819.5	350.0	-34.9	-20.6	27.7	31.1	30.8	-4.2	316.9	319.3	0.1	22.4	14.7	12.0
27.3	74.3	872.6	325.0	-37.3	-20.6	27.7	33.1	42.7	-5.4	322.4	322.7	0.1	19.9	15.9	12.0
28.6	74.5	924.1	300.0	-42.5	99.9	27.0	55.2	55.1	-4.5	325.5	999.9	99.9	99.9	24.3	12.0
31.6	63.8	992.4	275.0	-47.2	99.9	27.0	54.5	54.5	-0.5	325.8	999.9	99.9	99.9	31.4	12.0
33.7	64.4	1045.1	250.0	-51.5	99.9	26.5	64.0	61.9	4.8	325.5	999.9	99.9	99.9	37.3	12.0
35.9	52.5	1113.7	225.0	-55.9	99.9	26.5	47.9	67.6	6.5	332.8	999.9	99.9	99.9	44.0	12.0
38.3	96.0	1187.0	200.0	-60.4	99.9	27.5	65.2	64.7	-8.5	338.8	999.9	99.9	99.9	57.7	12.0
40.7	105.0	1269.0	175.0	-62.4	99.9	28.0	44.9	44.9	-10.0	340.6	999.9	99.9	99.9	65.6	12.0
43.7	111.7	1365.3	150.0	-58.3	99.9	26.5	20.0	20.5	2.1	305.6	999.9	99.9	99.9	70.4	12.0
47.3	119.2	1480.1	125.0	-54.3	99.9	27.0	24.3	24.3	0.0	393.0	999.9	99.9	99.9	74.7	12.0
51.8	127.7	1622.5	100.0	-54.3	99.9	24.1	12.8	11.7	5.2	423.8	999.9	99.9	99.9	81.4	12.0
57.5	137.5	1908.0	75.0	-54.2	99.9	24.5	6.2	5.7	2.6	450.0	999.9	99.9	99.9	84.1	12.0
64.4	148.0	2062.4	50.0	-56.7	99.9	24.2	5.1	-4.5	-2.4	510.0	999.9	99.9	99.9	87.4	12.0
75.0	160.0	2507.7	25.0	-50.6	99.9	65.0	8.7	-7.9	-3.7	639.1	999.9	99.9	99.9	86.1	12.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 532

STATION NO. 532
PEORIA, ILL25 APRIL 1975
1115 GMT

161 20. C

TIME MIN	CNTCT	WEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.3	5.8	250.0	990.2	7.2	3.8	15.0	2.6	-0.7	-2.3	281.8	294.9	5.1	79.0	0.0	3.0
0.9	55.3	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	7.2	327.3	975.0	5.7	4.2	24.7	4.6	-1.9	-4.7	281.6	295.2	5.3	89.7	0.6	23.3
1.1	6.5	539.8	950.0	5.3	4.9	50.2	4.8	-3.7	-3.1	283.3	298.1	5.8	97.5	0.3	21.6
1.8	11.7	755.6	925.0	8.5	8.5	79.4	3.1	-3.1	-0.6	289.0	348.6	7.6	101.1	0.5	23.3
2.6	18.1	946.7	900.0	8.5	8.5	242.5	1.4	1.2	0.6	291.1	311.7	7.8	101.0	0.5	23.3
3.4	16.3	1220.0	875.0	8.1	7.7	261.5	5.6	5.5	0.8	293.2	313.3	7.6	98.2	0.4	23.3
4.4	18.9	1459.5	850.0	8.0	7.6	293.8	13.3	12.1	-5.4	295.2	315.1	5.5	69.1	0.4	15.3
5.2	21.2	1706.0	825.0	7.1	3.7	305.2	13.5	11.0	-7.8	296.9	314.5	6.1	79.0	1.1	12.7
6.0	23.5	1958.9	800.0	5.8	4.0	305.2	9.4	7.7	-5.4	298.1	315.7	6.4	88.6	1.7	13.3
6.9	26.2	2218.5	775.0	4.0	2.6	286.4	8.5	8.2	-2.4	298.9	315.4	6.0	90.1	2.1	12.9
7.7	29.0	2484.5	750.0	2.2	-0.1	276.7	6.7	6.7	-0.8	299.6	313.8	5.1	85.1	2.4	12.4
9.7	31.3	2757.5	725.0	-0.4	-1.4	271.2	5.6	5.6	-0.1	299.6	313.0	4.8	92.7	2.7	11.7
9.6	34.6	3037.6	700.0	-2.1	-8.1	276.2	4.9	4.9	-0.5	302.5	309.1	3.0	63.5	3.7	11.7
10.5	37.3	3326.1	675.0	-3.4	-9.9	277.3	5.4	5.3	-0.7	302.2	310.6	2.7	60.6	3.2	11.7
11.6	40.3	3623.7	650.0	-5.5	-10.9	278.7	4.6	4.5	-0.7	303.1	310.6	2.6	65.6	3.6	11.7
12.5	43.1	3930.4	625.0	-7.9	-10.9	288.9	4.1	3.9	-1.3	303.9	311.8	2.7	78.6	3.4	11.3
13.5	46.3	4247.0	600.0	-9.8	-24.0	285.2	7.6	7.3	-2.0	304.8	308.5	1.2	38.8	4.1	11.3
14.7	49.4	4574.5	575.0	-11.1	-56.9	286.5	15.1	14.6	-2.3	306.9	307.1	0.0	1.0	4.7	11.3
15.9	52.5	4914.0	550.0	-13.6	-58.5	287.0	18.4	17.6	-5.4	307.9	308.0	0.0	1.0	6.1	11.3
17.0	55.8	5255.7	525.0	-16.5	-60.4	283.6	20.2	19.6	-4.7	308.5	308.6	0.0	1.0	7.4	11.3
18.2	59.0	5630.2	500.0	-19.6	-62.4	279.2	21.7	21.4	-3.5	309.1	309.2	0.0	1.0	8.9	16.4
19.6	62.6	6004.7	475.0	-23.1	-64.7	274.9	21.9	21.9	-1.9	309.3	309.4	0.0	1.0	10.7	17.9
20.9	66.0	6402.2	450.0	-26.2	-66.7	276.2	22.6	22.5	-2.4	310.3	310.3	0.0	1.0	12.4	17.9
22.3	69.3	6813.5	425.0	-28.7	-68.3	277.0	26.3	26.2	-3.2	312.2	312.2	0.0	1.0	14.4	16.4
23.7	73.7	7244.9	400.0	-31.7	-70.3	272.9	28.4	28.4	-1.4	313.8	313.8	0.0	1.0	16.7	16.3
25.2	77.8	7634.3	375.0	-34.9	-72.4	273.5	27.8	27.7	-1.7	315.3	315.3	0.0	1.0	18.3	16.3
26.8	81.8	8175.6	350.0	-38.7	-75.0	270.2	46.7	26.7	-0.1	316.4	316.4	0.0	1.0	21.9	17.9
28.7	86.2	8680.2	325.0	-42.8	-79.9	271.2	32.7	12.7	-0.7	317.7	317.7	99.9	99.9	25.1	17.9
30.5	91.0	9217.9	300.0	-44.8	-89.9	266.7	30.4	30.4	1.8	322.4	322.4	99.9	99.9	28.5	17.9
32.4	95.8	9795.2	275.0	-47.9	-99.9	258.2	33.5	32.8	6.9	325.9	325.9	99.9	99.9	32.0	17.9
34.6	100.8	10420.6	250.0	-49.9	-99.9	250.7	37.8	35.7	12.5	331.9	331.9	99.9	99.9	36.2	17.9
36.7	104.5	11104.6	225.0	-53.4	-99.9	244.1	42.9	39.3	17.4	336.7	336.7	99.9	99.9	41.2	17.9
37.4	112.3	11857.9	200.0	-55.4	-99.9	237.2	40.2	39.2	8.9	343.1	343.1	99.9	99.9	47.7	17.9
42.4	118.5	12712.4	175.0	-58.3	-99.9	260.5	34.7	34.2	5.7	360.2	360.2	99.9	99.9	54.6	17.9
45.8	125.3	13689.3	150.0	-57.7	-99.9	280.1	33.2	32.7	-5.8	370.6	370.6	99.9	99.9	61.9	17.9
49.8	133.0	14943.1	125.0	-58.6	-99.9	269.2	22.8	22.8	0.3	388.8	388.8	99.9	99.9	68.2	17.9
55.0	140.3	16250.6	100.0	-56.5	-99.9	254.2	30.4	29.3	8.3	419.6	419.6	99.9	99.9	76.0	17.9
61.0	147.7	18053.9	75.0	-60.5	-99.9	269.4	22.6	22.6	0.2	446.2	446.2	99.9	99.9	84.7	17.9
69.1	155.7	20614.2	50.0	-56.4	-99.9	270.1	1.9	1.9	-0.0	509.4	509.4	99.9	99.9	94.5	17.9
60.6	143.3	25065.8	25.0	-51.5	-99.9	36.0	7.1	-4.2	-5.7	636.9	636.9	99.9	99.9	88.4	17.9

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

RECEIVED 100000

STATION NO. 553
CMAHA, NEB25 APRIL 1975
1115 GMT

TIME MIN	CATCT	HEIGHT GN	PRES MB	TEMP DG C	DEW PT DG C	DIR CG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCY	RANGE KM	AZ DG
0.0	7.3	400.0	944.6	10.6	10.7	170.0	2.1	-0.4	2.1	287.7	304.4	8.0	96.0	0.7	0
0.5	99.3	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0
1.0	99.3	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	0
1.5	8.5	528.7	950.0	14.3	13.3	232.4	7.7	6.1	4.7	293.1	319.7	10.2	93.6	0.2	27
2.0	10.5	754.6	925.0	14.0	11.9	245.9	6.7	4.2	2.8	294.9	320.1	9.6	87.3	0.5	47
2.5	12.4	996.1	900.0	13.0	9.4	253.8	4.5	4.4	1.3	298.0	318.2	8.3	78.8	0.7	56
3.0	14.3	1222.7	875.0	11.8	7.2	264.2	4.1	4.1	0.4	297.0	316.9	7.3	73.3	0.9	60
3.5	16.5	1465.2	850.0	11.0	-0.4	264.8	5.8	5.2	-2.6	298.2	310.5	4.4	45.4	1.1	68
4.0	18.7	1713.6	825.0	9.4	-2.3	303.9	7.6	6.3	-4.3	299.0	310.1	3.9	43.7	1.4	92
4.5	20.3	1967.7	800.0	7.1	-4.3	302.1	8.4	7.1	-4.5	299.1	309.0	3.5	44.0	1.7	11
5.0	22.0	2227.7	775.0	4.8	-7.4	308.3	9.9	7.9	-6.1	299.3	307.5	2.8	40.8	2.2	40
5.5	23.5	2494.4	750.0	3.3	-19.8	316.6	13.2	9.1	-9.6	300.3	303.9	1.2	18.6	2.4	107
6.0	25.4	2769.9	725.0	3.4	-30.3	314.5	15.8	11.3	-11.1	303.2	304.6	0.4	6.4	3.7	115
6.5	27.0	3053.0	700.0	2.9	-31.0	316.9	17.2	11.7	-12.5	305.8	307.1	0.4	6.1	4.8	113
7.0	28.6	3346.5	675.0	0.9	-32.5	320.6	18.8	11.9	-14.5	307.7	307.9	0.4	5.0	5.9	123
7.5	30.1	3648.3	650.0	-1.2	-31.7	318.2	18.8	12.5	-14.5	307.6	309.0	0.4	7.6	7.1	127
8.0	31.5	3956.9	625.0	-3.1	-34.4	316.6	17.0	11.7	-12.3	308.9	310.0	0.3	6.1	8.1	128
8.5	32.9	4291.7	600.0	-5.0	-36.5	310.1	16.4	12.5	-10.6	310.4	311.3	0.3	6.3	9.1	128
9.0	34.2	4614.6	575.0	-7.5	-37.9	299.5	18.2	15.8	-8.9	311.3	312.1	0.2	6.6	10.5	128
9.5	35.7	4954.0	550.0	-9.9	-39.4	294.3	20.1	18.4	-8.3	312.3	313.1	0.2	6.8	11.4	127
10.0	37.4	5315.6	525.0	-13.1	-39.3	294.2	21.8	19.9	-9.0	312.7	313.5	0.2	8.8	13.4	125
10.5	38.6	5645.1	500.0	-16.3	-41.5	293.8	21.6	19.8	-8.7	313.1	313.8	0.2	9.2	15.2	124
11.0	40.2	5991.7	475.0	-20.0	-41.3	295.6	22.1	20.0	-9.6	313.2	313.9	0.2	12.3	16.5	123
11.5	41.9	6366.4	450.0	-23.3	-46.1	292.6	23.8	22.0	-9.1	313.6	314.4	0.1	10.2	18.8	122
12.0	43.6	6744.8	425.0	-26.4	-48.5	292.6	27.0	25.0	-10.4	315.1	315.5	0.1	10.3	21.0	121
12.5	45.7	7116.7	400.0	-30.3	-50.0	297.7	27.5	24.4	-12.9	315.6	315.9	0.1	12.9	23.5	120
13.0	47.2	7472.5	375.0	-33.7	-51.5	300.8	26.7	23.0	-13.7	316.9	317.2	0.1	14.6	26.0	120
13.5	48.6	7852.6	350.0	-37.6	-54.5	301.4	29.4	25.1	-15.3	318.0	318.2	0.1	15.0	28.4	120
14.0	50.3	8263.0	325.0	-41.1	-59.9	301.4	32.0	27.3	-16.7	320.1	320.1	99.9	99.9	32.0	120
14.5	52.0	8743.0	300.0	-45.4	-64.6	297.8	35.0	31.5	-18.6	321.4	321.4	99.9	99.9	35.0	120
15.0	53.7	9299.9	275.0	-49.6	-69.9	292.3	42.9	39.7	-21.9	327.8	327.8	99.9	99.9	40.5	119
15.5	55.4	9874.8	250.0	-54.7	-74.7	294.1	53.7	49.3	-21.9	327.8	327.8	99.9	99.9	46.5	119
16.0	57.7	10456.3	225.0	-59.8	-79.9	296.5	61.1	54.7	-27.3	331.4	331.4	99.9	99.9	54.8	118
16.5	59.6	11171.0	200.0	-65.0	-85.0	296.5	61.1	54.7	-27.3	331.4	331.4	99.9	99.9	63.1	114
17.0	61.1	11909.4	175.0	-69.5	-89.9	295.3	66.5	62.0	-28.8	334.8	334.8	99.9	99.9	69.3	117
17.5	62.7	12734.3	150.0	-73.7	-94.9	273.8	41.8	41.7	-28.8	344.8	344.8	99.9	99.9	76.0	115
18.0	64.3	13711.4	125.0	-77.6	-99.9	281.3	33.5	32.8	-28.8	370.9	370.9	99.9	99.9	82.1	114
18.5	65.9	14852.3	100.0	-81.5	-104.9	282.7	26.3	25.6	-28.8	380.1	380.1	99.9	99.9	88.9	112
19.0	67.6	16060.7	75.0	-85.7	-109.9	273.3	27.3	27.3	-28.8	414.4	414.4	99.9	99.9	94.6	111
19.5	69.3	17300.0	50.0	-89.5	-114.9	169.2	11.6	-2.2	-3.6	518.2	518.2	99.9	99.9	99.7	110
20.0	71.3	18600.0	25.0	-93.2	-119.9	18.8	3.8	-1.2	-5.3	635.6	635.6	99.9	99.9	95.6	112

ORIGINAL PAGE IS
OF POOR QUALITY

BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 562
NORTH PLATTE, NEB

25 APRIL 1975
1135 GMT

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	WEIGHT GFM	PRES MB	TEMP DG C	CEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.4	647.0	913.6	3.3	1.3	110.0	3.2	-3.0	1.1	284.3	286.4	4.6	87.0	0.0	C
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	14.6	970.8	900.0	9.1	4.7	246.7	2.9	2.7	1.2	291.7	307.7	6.0	73.9	0.6	27.0
1.1	16.2	1206.0	875.0	11.7	7.1	182.3	6.3	0.3	6.3	290.9	316.5	7.2	73.2	0.6	31.0
2.1	15.2	1449.0	850.0	12.0	6.1	186.5	10.9	1.6	10.8	290.6	318.7	7.0	67.2	1.0	34.0
2.0	21.5	1699.9	825.0	11.1	0.8	186.9	11.9	1.4	11.8	301.0	315.0	5.0	49.5	1.6	34.0
3.9	23.9	1955.2	800.0	10.0	-6.2	178.2	10.1	-0.3	10.1	302.3	311.0	3.0	31.3	2.2	35.1
4.7	26.1	2218.1	775.0	4.3	-8.1	181.2	9.3	0.2	9.3	303.0	310.9	2.7	30.4	2.7	35.1
5.6	28.3	2489.0	750.0	5.0	-10.9	194.4	7.7	1.9	7.4	305.6	313.3	2.2	23.3	3.1	35.1
6.6	31.4	2768.8	725.0	7.2	-10.5	210.3	9.6	4.9	8.3	307.7	314.6	2.4	27.0	3.0	35.1
7.6	34.1	3056.0	700.0	4.6	-8.7	216.7	10.8	6.8	8.4	308.0	316.5	2.8	27.3	4.0	35.1
8.5	36.5	3351.3	675.0	2.0	-7.3	222.5	11.9	8.1	8.8	308.3	319.1	3.3	50.2	4.6	35.1
9.5	39.3	3654.5	650.0	0.2	-11.0	227.4	10.6	7.8	7.2	309.5	317.2	2.9	42.7	5.2	35.1
10.6	41.9	3967.5	625.0	-2.3	-12.3	229.0	10.2	7.1	7.4	310.1	317.3	2.4	46.1	5.7	35.1
11.7	44.7	4290.4	600.0	-5.0	-15.7	219.6	9.8	6.3	7.6	310.5	316.3	1.9	42.6	6.3	35.1
12.8	47.7	4623.1	575.0	-8.0	-15.9	216.1	9.7	6.0	7.6	310.8	316.7	1.9	42.6	6.3	35.1
14.1	50.6	4962.4	550.0	-11.4	-19.0	216.7	9.2	5.9	7.1	310.7	315.5	1.6	53.2	7.6	35.1
15.2	53.6	5321.6	525.0	-13.4	-23.0	225.4	10.0	7.1	7.0	312.4	313.5	0.3	12.6	8.2	35.1
16.5	56.5	5691.6	500.0	-15.0	-45.5	240.0	13.5	11.7	6.7	315.4	315.1	0.1	5.3	9.0	35.1
17.8	59.9	6077.3	475.0	-16.2	-47.3	247.4	17.2	13.9	6.5	315.4	315.8	0.1	5.7	10.0	35.1
19.0	63.2	6478.0	450.0	-21.1	-49.0	250.1	18.9	17.8	6.4	316.7	317.1	0.1	6.0	11.0	35.1
20.3	66.4	6899.1	425.0	-24.4	-51.0	255.7	18.8	19.2	4.6	317.7	318.0	0.1	6.4	12.2	35.1
21.7	70.1	7336.4	400.0	-28.2	-53.3	253.7	20.2	19.4	5.7	318.3	318.6	0.1	6.8	13.6	35.1
23.1	73.6	7796.0	375.0	-32.0	-55.3	252.5	22.3	21.3	6.7	319.2	319.4	0.1	8.8	15.2	35.1
24.7	77.4	8279.8	350.0	-35.9	-56.6	254.0	24.4	21.4	6.7	320.3	320.9	0.2	36.1	17.1	35.1
26.4	81.3	8790.2	325.0	-40.1	-59.9	257.7	27.1	24.0	5.6	321.3	320.9	99.9	99.9	19.0	35.1
28.4	85.4	9331.1	300.0	-44.4	-62.2	269.4	28.1	27.5	6.0	322.8	322.8	99.9	99.9	22.3	35.1
30.4	89.8	9909.0	275.0	-49.4	-65.2	268.4	31.3	30.7	6.0	323.7	323.7	99.9	99.9	25.7	35.1
32.4	94.5	10527.9	250.0	-53.6	-68.9	263.6	34.9	33.7	3.9	324.4	324.4	99.9	99.9	29.4	35.1
34.8	99.3	11197.2	225.0	-58.0	-72.9	263.1	38.0	37.9	3.2	325.6	325.6	99.9	99.9	34.5	35.1
37.3	104.5	11932.1	200.0	-62.2	-76.9	269.4	38.3	38.3	0.1	334.3	334.3	99.9	99.9	40.0	35.1
39.8	110.2	12751.2	175.0	-65.2	-80.9	268.4	26.2	26.1	1.7	342.4	342.4	99.9	99.9	46.0	35.1
42.8	116.3	13704.0	150.0	-68.4	-84.9	272.1	22.1	22.1	-0.8	372.9	372.9	99.9	99.9	48.0	35.1
46.2	123.3	14949.8	125.0	-70.3	-88.9	266.2	16.1	16.0	1.2	385.8	385.8	99.9	99.9	52.1	35.1
50.6	130.7	16244.1	100.0	-72.9	-92.9	253.3	20.6	19.7	5.7	416.0	416.0	99.9	99.9	57.1	35.1
56.2	138.3	18060.2	75.0	-75.6	-96.9	280.5	9.8	9.6	-1.8	448.1	448.1	99.9	99.9	62.8	35.1
63.9	146.3	20639.5	50.0	-78.3	-100.9	278.4	7.1	7.1	-0.7	510.1	510.1	99.9	99.9	66.4	35.1
74.7	154.3	25126.2	25.0	-81.3	-104.9	306.4	4.5	-2.9	-3.5	637.7	637.7	99.9	99.9	68.1	35.1

ORIGINAL PAGE IS
POOR QUALITY

• BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
• BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
• BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 600
PORTLAND, ME25 APRIL 1975
1116 GMT

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP CG C	DEN PT DG C	DIR DG	SPEED M/SEC	U CNRP M/SEC	V CCNF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE A7 KM	0
0.0	5.6	20.0	1008.2	6.1	5.7	360.0	0.5	0.0	-0.5	279.3	293.8	5.7	97.0	0.2	0
0.2	6.2	66.9	1000.0	5.2	3.8	260.2	7.5	-3.3	-6.9	279.3	293.8	5.1	91.1	0.7	127
0.4	6.5	294.0	975.0	5.5	4.7	20.0	6.9	-2.4	-6.5	281.4	295.5	5.5	98.1	0.2	196
1.5	10.6	567.3	950.0	6.3	5.2	0.0	8.2	-0.0	-8.2	286.4	299.5	5.9	92.4	0.5	133
2.3	12.9	726.0	925.0	5.8	4.3	347.1	7.4	1.6	-7.2	285.9	300.7	5.7	90.4	2.9	145
3.1	15.2	951.2	900.0	6.3	5.5	305.0	3.2	2.7	-1.7	284.9	303.5	6.3	94.5	1.1	178
3.8	17.3	1182.3	875.0	5.8	5.0	284.5	4.3	4.2	-1.1	290.6	307.2	6.3	94.8	1.1	172
4.5	19.4	1419.6	850.0	5.6	2.2	292.4	7.4	7.3	-1.6	292.7	307.0	5.3	79.1	1.3	145
5.3	22.0	1667.9	825.0	5.8	-11.0	249.4	7.2	6.8	-2.4	294.9	300.7	2.0	28.6	1.5	145
6.0	24.5	1915.2	800.0	4.9	-25.4	287.7	10.1	9.6	-3.1	296.4	294.3	0.6	8.8	1.8	145
6.9	26.3	2173.5	774.0	4.1	-28.9	277.3	10.4	10.3	-1.3	298.3	297.7	0.4	6.8	2.1	135
7.7	29.5	2439.1	750.0	2.3	-30.9	265.8	10.2	10.2	0.7	299.1	300.4	0.4	7.0	2.7	125
8.5	32.1	2711.6	725.0	0.6	-30.4	266.7	10.8	10.8	0.6	100.2	301.5	0.4	7.3	3.0	119
9.4	34.3	2952.1	700.0	-1.4	-31.3	273.3	12.5	14.5	-0.7	301.0	302.3	0.4	8.1	3.4	114
10.4	37.3	3241.1	675.0	-2.4	-33.7	260.1	14.1	13.9	-2.5	303.0	304.1	0.3	6.8	4.4	111
11.2	40.1	3574.8	650.0	-3.6	-34.5	263.0	14.9	14.5	-2.4	306.7	306.0	0.3	6.9	5.1	110
12.3	42.8	3885.0	625.0	-5.0	-32.6	279.6	15.5	15.2	-2.4	306.7	309.0	0.4	9.4	5.0	105
13.3	45.7	4209.1	600.0	-7.4	-33.5	269.0	15.4	15.4	0.3	307.5	309.4	0.4	10.3	6.4	107
14.3	48.5	4537.7	575.0	-10.0	-35.3	261.4	15.5	15.3	2.3	308.3	309.4	0.3	10.4	7.4	104
15.4	51.5	4878.6	550.0	-12.6	-37.1	267.2	16.0	16.0	0.8	309.1	310.1	0.3	10.7	8.4	102
16.4	54.7	5231.9	525.0	-15.3	-39.0	272.1	16.1	16.1	-0.6	310.1	310.9	0.2	11.0	9.9	106
17.0	57.7	5554.0	500.0	-17.2	-37.7	274.8	16.6	16.6	-1.4	312.1	313.1	0.3	14.9	11.2	95
19.1	61.0	5981.2	475.0	-20.4	-38.6	279.6	16.9	16.6	-2.8	312.8	317.7	0.3	17.7	12.4	95
20.4	64.3	6375.9	450.0	-22.4	-43.3	278.9	16.6	16.4	-2.5	315.1	317.7	0.2	12.7	13.7	94
21.8	67.6	6757.2	425.0	-25.8	-45.9	280.5	18.1	17.8	-3.3	315.9	316.5	0.1	13.0	15.2	95
23.4	71.0	7233.5	400.0	-29.1	-40.4	272.2	17.5	17.5	-0.7	317.1	318.1	0.3	32.3	16.9	95
25.1	74.8	7690.4	375.0	-33.3	-39.0	249.5	14.1	19.1	0.2	317.4	318.6	0.3	56.0	18.4	95
26.7	78.6	8173.0	350.0	-36.1	-46.5	270.1	21.9	21.9	-0.1	320.0	320.6	0.2	33.2	20.4	95
28.5	82.3	8661.4	325.0	-40.2	55.9	271.7	22.0	22.0	-0.4	321.2	320.9	95.9	95.9	23.0	97
30.7	86.5	9224.6	300.0	-44.3	99.9	271.1	26.7	26.7	-0.5	322.9	322.9	98.9	98.9	26.1	95
32.9	91.0	9801.0	275.0	-49.4	99.9	265.7	26.4	26.4	2.0	323.7	323.7	98.9	98.9	28.4	95
35.3	95.7	10419.2	250.0	-54.9	99.9	260.6	27.6	27.2	4.5	324.5	324.5	99.9	99.9	33.4	95
38.0	100.7	11049.0	225.0	-56.0	99.9	265.6	32.0	31.9	2.5	325.7	325.7	99.9	99.9	37.9	93
41.0	106.0	11635.1	200.0	-57.9	99.9	275.1	30.6	34.5	-3.5	341.1	341.1	99.9	99.9	44.7	95
44.3	111.9	12674.5	175.0	-57.7	99.9	274.0	35.7	35.6	-2.5	354.2	354.2	99.9	99.9	52.7	93
48.3	118.3	13647.1	150.0	-57.4	99.9	273.6	27.7	27.6	-1.7	371.4	371.4	99.9	99.9	59.2	93
52.7	125.5	14768.4	125.0	-57.2	99.9	281.7	21.0	20.6	-4.2	391.4	391.4	99.9	99.9	68.1	93
58.4	133.3	16221.9	100.0	-54.1	99.9	284.0	22.3	21.7	-5.4	423.2	423.2	99.9	99.9	73.8	95
65.1	141.7	18061.0	75.0	-56.0	99.9	278.4	10.5	10.4	-1.5	455.5	455.5	99.9	99.9	81.1	95
73.5	150.7	20631.8	50.0	-56.6	99.9	99.9	99.9	99.9	52.5	510.3	510.3	99.9	99.9	99.9	99.9
99.0	55.6	55.9	25.0	59.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

° FT SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 ° BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ° BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 637
FLINT, MICH25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MR RTD GM/KG	RM PCT	RANGE AZ
0.7	5.7	236.0	987.1	5.6	2.8	80.0	2.6	-2.0	-0.5	280.4	292.6	4.7	83.0	0.0 0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9 3 37.0
0.4	6.7	337.0	975.0	5.0	2.2	76.3	4.6	-4.4	-1.1	280.7	292.6	4.6	82.5	0.1 2.7
1.2	8.9	548.6	950.0	2.7	1.7	66.3	6.2	-6.1	-0.4	291.6	293.4	4.6	86.9	0.3 2.0
2.0	10.9	765.0	925.0	2.3	0.9	88.7	6.8	-6.8	-0.1	282.2	293.7	4.4	96.9	0.5 2.4
2.9	13.0	985.7	900.0	0.6	-0.1	89.3	6.2	-6.2	-0.1	282.6	293.7	4.2	95.4	0.5 2.0
3.8	15.2	1211.5	875.0	-0.6	-1.3	82.1	3.9	-3.6	-0.5	283.7	294.2	4.0	95.1	1.3 2.7
4.7	17.4	1445.0	850.0	1.8	-4.1	43.4	2.9	-2.0	-0.8	288.5	297.6	3.4	65.8	1.6 2.1
5.6	19.7	1695.7	825.0	1.8	-13.4	302.1	1.5	1.3	-0.8	297.7	295.5	1.6	31.3	1.5 2.1
6.6	21.9	1934.7	800.0	3.0	-10.1	282.6	5.1	5.0	-1.1	294.7	301.1	2.2	37.7	1.2 2.0
7.5	24.3	2191.5	775.0	3.3	-47.9	284.0	4.9	4.8	-1.2	297.4	297.6	0.1	1.0	1.0 2.1
8.5	26.5	2457.1	750.0	2.9	-48.1	288.4	6.8	6.5	-2.2	299.7	300.0	0.1	1.0	0.8 2.1
9.5	29.3	2730.2	725.0	1.2	-49.2	282.0	9.0	8.8	-1.9	300.8	301.0	0.1	1.0	0.5 1.7
10.5	31.5	3011.7	700.0	-0.3	-27.9	271.5	9.6	9.6	-0.2	302.2	304.2	0.6	12.4	0.4 1.6
11.5	34.2	3321.1	675.0	-2.9	-21.5	270.2	8.0	8.0	-0.0	302.5	305.7	1.0	22.1	1.2 1.4
12.5	36.6	3598.9	650.0	-4.8	-32.4	268.4	6.9	6.9	0.2	303.6	305.0	0.4	10.8	1.5 1.5
13.7	39.3	3906.3	625.0	-6.5	-36.9	261.6	7.8	7.7	1.1	305.0	305.8	0.3	6.8	2.3 1.7
14.8	41.9	4223.8	600.0	-8.5	-32.7	255.8	7.5	7.3	1.8	306.3	307.6	0.4	12.0	2.4 1.2
15.9	44.8	4541.9	575.0	-11.5	-32.5	262.6	7.6	7.6	1.0	306.5	307.9	0.4	15.6	2.7 1.0
17.1	47.9	4891.0	550.0	-14.2	-24.9	253.6	9.0	8.6	2.5	307.3	310.3	0.9	40.0	3.5 1.0
18.4	50.6	5242.4	525.0	-16.6	-28.0	231.4	11.0	8.6	6.8	308.5	310.9	0.7	36.2	4.1 1.1
19.7	53.6	5607.4	500.0	-19.4	-20.6	229.4	12.8	9.7	8.3	309.5	312.3	0.9	52.9	4.9 1.2
20.9	56.4	5986.3	475.0	-22.6	-27.3	238.1	13.7	11.6	7.2	310.0	312.8	0.8	65.5	5.8 1.2
22.2	59.9	6381.6	450.0	-24.7	-27.9	245.8	13.9	13.0	4.8	312.2	315.0	0.8	74.6	6.8 1.0
23.6	63.3	6794.6	425.0	-28.5	-38.2	256.1	14.0	13.6	3.4	312.4	313.6	0.3	38.7	8.7 1.5
25.1	66.7	7226.4	400.0	-31.5	-36.6	255.2	16.3	15.7	4.1	314.0	315.4	0.4	60.0	7.3 1.5
26.5	70.3	7681.0	375.0	-34.0	-43.2	259.6	19.9	19.6	3.6	316.5	317.3	0.2	38.8	10.8 1.5
27.9	74.0	8162.2	350.0	-35.9	-44.3	258.5	31.0	30.4	6.2	320.3	321.0	0.2	41.1	13.9 1.5
29.5	78.0	8674.3	325.0	-38.5	-44.7	249.6	43.3	40.6	15.1	323.6	324.3	0.2	51.3	16.3 1.5
31.1	82.0	9220.5	300.0	-41.5	99.9	241.3	52.4	46.0	25.2	326.8	329.9	99.9	99.9	21.1 1.5
33.2	86.3	9836.4	275.0	-45.2	99.9	243.1	56.6	50.5	25.6	329.8	330.9	99.9	99.9	25.0 1.5
35.4	91.2	10436.2	250.0	-50.0	99.9	243.7	59.4	52.7	27.0	331.7	332.8	99.9	99.9	35.5 1.5
37.6	96.0	11115.7	225.0	-55.9	99.9	246.9	63.7	58.6	25.0	332.8	333.9	99.9	99.9	43.6 1.5
40.1	101.3	11855.7	200.0	-61.2	99.9	252.4	67.5	64.3	20.4	335.9	336.9	99.9	99.9	53.0 1.5
42.5	107.3	12676.7	175.0	-63.5	99.9	266.2	42.0	41.9	2.8	345.2	346.9	99.9	99.9	60.5 1.5
46.1	114.0	13666.1	150.0	-58.4	99.9	273.5	28.5	28.5	-1.8	372.9	373.9	99.9	99.9	67.7 1.5
49.7	121.3	14799.1	125.0	-57.0	99.9	259.6	23.3	22.9	4.2	391.8	392.9	99.9	99.9	71.8 1.5
54.7	129.7	16228.7	100.0	-53.4	99.9	249.0	11.9	11.1	4.3	424.6	425.3	99.9	99.9	77.4 1.5
60.4	139.0	18062.6	75.0	-58.5	99.9	262.4	10.8	10.8	1.4	450.3	450.9	99.9	99.9	83.4 1.5
67.7	149.3	20631.3	50.0	-55.2	99.9	126.9	4.2	-3.3	2.5	513.4	513.4	99.9	99.9	85.1 1.5
82.4	160.0	25074.2	25.0	-52.0	99.9	44.6	1.4	-1.0	-1.0	635.1	635.9	99.9	99.9	88.1 1.5

ORIGINAL PAGE IS
OF POOR QUALITY* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO: 645
GREEN RAY, WIS

25 APRIL 1975
1115 GMT

154 17.0

TIME MIN	CNTCT	HEIGHT GFW	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	" COMP M/SEC	V CCMP M/SEC	POT T DEG K	E POT T DEG K	MX RTO CM/KG	RM PCT	RANGE KM	AZ DEG
0.0	6.	210.0	991.2	4.4	2.9	40.0	3.6	2.3	-2.8	278.9	281.1	4.8	90.0	0.0	9.
0.5	99.	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.0	99.	344.2	975.0	3.7	1.5	99.9	99.9	99.9	99.9	278.4	280.7	4.4	85.2	99.9	99.9
1.2	10.4	556.9	925.0	2.0	0.2	99.9	99.9	99.9	99.9	279.7	290.3	4.1	87.8	99.9	99.9
2.0	12.5	769.5	925.0	-0.2	-0.5	75.5	7.6	-7.3	-1.9	279.7	290.0	4.0	98.2	0.9	25.5
2.7	14.9	586.5	900.0	-0.6	-3.5	45.6	7.4	-8.2	-3.7	281.3	289.9	3.3	80.7	1.1	25.0
3.5	17.0	1216.1	875.0	3.4	-12.9	59.5	9.0	-6.4	-3.7	267.5	292.1	1.6	29.0	1.5	25.0
4.3	19.4	1450.8	850.0	2.7	-12.4	19.5	4.1	-1.4	-3.9	289.2	296.3	1.8	32.1	1.8	24.7
5.2	21.6	1692.1	825.0	1.9	-8.4	35.8	4.9	0.4	-4.9	291.0	297.9	2.5	46.0	1.9	24.1
6.1	24.2	1932.7	800.0	0.4	-8.6	33.6	3.9	1.9	-3.4	291.9	298.9	2.5	50.7	2.0	23.3
7.0	26.5	2198.1	775.0	-0.2	-17.4	29.5	5.1	4.7	-1.4	293.8	298.3	1.6	32.9	1.9	22.8
7.9	28.1	2455.4	750.0	-0.2	-39.7	29.7	9.0	8.2	-3.6	296.4	296.9	0.2	3.2	1.8	21.6
8.9	31.7	2727.3	725.0	-1.2	-27.2	29.2	9.5	8.7	-3.6	298.2	300.0	0.6	12.5	1.8	19.6
9.8	34.4	3003.6	700.0	-3.9	-12.6	29.9	7.5	6.9	-2.9	298.5	308.6	2.1	50.9	1.9	18.2
10.8	36.3	3241.9	675.0	-5.6	-8.7	28.3	7.3	6.9	-2.3	299.8	308.3	2.9	78.9	2.0	17.2
11.4	39.7	3597.7	650.0	-7.2	-8.8	27.8	8.9	8.7	-1.5	301.2	310.0	3.0	88.2	2.3	15.0
12.0	42.3	3892.4	625.0	-9.5	-10.7	27.7	9.0	8.9	-1.4	301.9	309.9	2.7	90.4	2.6	14.8
13.0	45.2	4207.0	600.0	-11.5	-12.8	27.3	8.9	8.9	-1.0	303.1	310.1	2.4	90.3	3.0	14.1
14.0	48.1	4532.1	575.0	-13.4	-15.0	27.8	9.8	9.7	-1.0	304.5	310.7	2.1	87.8	3.4	13.3
15.1	50.9	4869.1	550.0	-15.9	-17.5	24.8	9.6	9.6	1.0	305.4	310.7	1.7	87.3	4.0	12.7
16.1	54.3	5219.3	525.0	-18.3	-20.5	26.5	10.0	9.9	1.0	306.5	310.9	1.4	83.1	4.4	12.1
17.2	58.3	5581.3	500.0	-20.5	-23.4	27.2	9.8	9.8	-0.2	308.2	311.9	1.2	77.2	5.1	11.7
18.5	60.3	5959.6	475.0	-23.7	-27.1	26.2	11.4	11.4	0.4	308.7	311.5	1.9	73.2	5.4	11.3
19.7	63.3	6351.5	450.0	-26.9	-31.6	26.3	11.6	11.6	1.0	309.5	311.4	0.6	64.2	6.5	11.0
20.9	66.6	6760.9	425.0	-30.4	-34.1	25.6	11.8	11.6	2.1	310.1	311.7	0.5	69.7	7.4	10.7
22.2	70.1	7184.4	400.0	-34.5	-38.6	25.8	12.5	12.3	2.2	310.2	311.3	0.3	65.5	8.3	10.3
23.6	73.7	7636.3	375.0	-38.0	-44.2	25.0	15.4	14.9	3.7	311.2	311.8	0.2	41.2	9.4	10.0
25.1	77.5	8108.2	350.0	-41.4	-49.9	25.0	14.6	14.2	3.5	312.9	309.9	99.9	99.9	10.6	9.7
26.7	81.2	8607.7	325.0	-44.5	-54.9	24.8	14.8	14.6	2.1	313.3	309.9	99.9	99.9	12.1	9.4
28.4	85.3	9134.5	300.0	-48.3	-59.9	27.8	16.3	15.2	-1.7	317.3	309.9	99.9	99.9	13.8	9.4
30.1	89.5	9707.7	275.0	-52.2	-64.9	24.5	20.3	18.9	7.3	319.6	309.9	99.9	99.9	15.5	9.3
31.4	94.2	10324.6	250.0	-56.2	-69.9	24.2	24.2	24.8	13.1	320.0	309.9	99.9	99.9	18.3	8.4
33.0	99.0	11003.3	225.0	-59.7	-74.9	25.1	36.9	34.7	12.5	334.7	309.9	99.9	99.9	22.0	8.4
34.4	104.0	11755.1	200.0	-64.3	-79.9	28.7	48.6	28.1	5.6	343.6	309.9	99.9	99.9	27.9	8.2
36.0	109.9	12604.1	175.0	-68.2	-84.9	26.9	30.1	29.8	4.3	357.2	309.9	99.9	99.9	31.3	8.1
37.9	115.6	13586.9	150.0	-72.0	-89.9	26.7	24.8	24.0	-6.3	376.1	309.9	99.9	99.9	34.8	8.3
39.0	122.5	14754.0	125.0	-75.9	-94.9	27.2	19.3	19.3	-0.1	395.7	309.9	99.9	99.9	43.5	8.5
40.6	130.3	16180.3	100.0	-80.0	-99.9	25.7	13.5	12.8	4.5	419.5	309.9	99.9	99.9	48.2	8.5
42.1	138.0	18025.1	75.0	-83.5	-99.9	27.5	16.1	15.9	-2.1	460.9	309.9	99.9	99.9	54.0	8.6
43.8	146.5	20615.8	50.0	-86.8	-99.9	27.5	4.3	-3.3	-2.7	515.4	309.9	99.9	99.9	54.9	8.6
45.5	155.7	25087.7	25.0	-92.0	-99.9	79.7	3.1	-3.1	-0.6	635.5	309.9	99.9	99.9	53.7	8.7

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 654

MURON, S D

25 APRIL 1975

1115 GMT

TIME MIN	CNTCT	WEIGHT GEN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX MTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	9.1	392.0	967.2	7.2	5.5	86.0	4.2	-4.1	-0.7	283.2	299.0	5.9	89.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	99.9	59.9	975.0	69.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
1.2	13.0	535.8	950.0	6.5	6.0	76.4	6.6	-6.4	-1.6	284.6	300.6	6.2	97.0	0.3	287.
1.9	15.3	756.6	925.0	6.0	5.6	90.8	4.0	-4.0	0.1	286.3	302.3	6.2	96.9	0.5	275.
2.6	17.6	987.5	900.0	5.4	4.9	90.0	3.3	-3.3	-0.0	287.8	303.7	6.1	96.8	0.6	277.
3.3	20.1	1450.0	850.0	3.9	-2.8	105.9	4.6	-4.5	0.0	289.5	302.7	5.0	79.7	0.7	274.
4.1	22.4	1653.4	825.9	5.2	-3.1	137.5	3.7	-2.2	1.6	290.7	300.7	3.7	82.0	1.0	275.
4.9	25.7	1944.5	800.0	4.8	-3.0	299.1	0.7	0.6	-0.3	296.5	303.5	3.2	47.8	1.1	280.
5.7	27.4	2203.4	775.0	5.0	-23.1	312.7	2.9	2.9	-0.3	299.3	302.4	1.8	26.1	1.2	283.
6.6	30.1	2470.2	750.0	3.9	-30.0	297.6	5.4	4.8	-2.6	299.3	302.3	1.0	14.8	1.1	279.
7.5	32.9	2745.1	725.0	3.2	-37.0	293.9	6.5	6.0	-2.6	303.0	303.8	0.2	6.3	0.8	271.
8.4	35.3	3028.4	700.0	1.5	-49.0	293.9	8.4	7.7	-3.4	304.1	304.3	0.1	3.6	0.6	259.
9.5	38.2	3320.3	675.0	0.5	-49.6	297.3	11.5	10.3	-5.3	306.2	306.4	0.1	1.0	0.3	215.
10.4	40.9	3621.7	650.0	-1.7	-51.0	258.6	13.3	12.0	-5.7	307.1	307.3	0.1	1.0	0.6	146.
11.4	43.8	3932.1	625.0	-4.3	-52.6	290.9	12.9	12.0	-4.6	307.5	307.7	0.0	1.0	1.3	131.
12.4	46.4	4251.9	600.0	-7.1	-54.4	280.0	12.7	12.1	-3.9	307.9	308.0	0.0	1.0	2.1	124.
13.6	49.9	4582.1	575.0	-9.7	-56.1	287.7	11.6	11.0	-3.5	308.6	308.7	0.0	1.0	2.9	120.
14.8	52.9	4923.7	550.0	-11.9	-57.4	280.4	9.6	9.0	-3.3	309.9	310.0	0.0	1.0	3.7	117.
16.0	55.3	5277.9	525.0	-14.5	-59.1	29.9	8.3	7.7	-3.1	310.9	311.0	0.0	1.0	4.5	116.
17.1	59.1	5645.0	500.0	-17.4	-61.2	287.6	9.0	8.6	-2.7	311.3	311.4	0.0	1.0	5.1	115.
18.4	62.4	6026.3	475.0	-20.7	-63.1	283.3	9.7	9.5	-2.1	312.3	312.3	0.0	1.0	5.7	115.
19.7	65.7	6424.0	450.0	-23.4	-64.9	280.3	12.5	12.3	-2.2	313.7	313.8	0.0	1.0	6.4	114.
21.2	69.1	6836.3	425.0	-26.4	-67.3	281.1	15.9	15.6	-3.1	315.1	315.2	0.0	1.0	7.2	112.
22.6	72.6	7274.3	400.0	-30.3	-72.5	278.2	15.1	15.0	-3.1	315.6	315.9	0.1	1.0	8.4	111.
24.0	76.3	7730.4	375.0	-33.6	-75.2	275.9	16.6	16.6	-1.7	317.0	317.3	0.1	1.0	9.7	109.
25.7	80.1	8210.4	350.0	-37.7	-78.7	273.6	18.3	18.2	-1.8	317.9	318.4	0.1	1.0	11.1	107.
27.3	84.2	8717.6	325.0	-41.6	-81.9	275.2	22.9	22.8	-2.1	319.4	319.9	0.1	1.0	12.8	106.
29.3	88.3	9255.7	300.0	-46.2	-85.9	276.2	25.5	25.3	-2.7	320.2	320.9	0.1	1.0	14.7	105.
31.4	92.0	9627.7	275.0	-51.2	-89.9	275.5	27.9	27.4	-2.6	321.1	321.9	0.1	1.0	17.6	103.
33.7	97.6	10441.9	250.0	-55.5	-93.9	276.8	30.1	29.8	-3.5	323.5	323.5	0.1	1.0	20.9	102.
36.0	102.5	11107.9	225.0	-58.2	-97.9	281.5	36.1	35.4	-7.2	329.4	329.9	0.1	1.0	25.0	101.
38.6	108.0	11844.1	200.0	-61.7	-99.9	280.1	38.0	36.6	-8.7	335.0	335.9	0.1	1.0	29.7	100.
41.5	113.8	12671.1	175.0	-61.7	-99.9	269.1	33.7	33.7	1.1	346.0	346.0	0.1	1.0	35.0	102.
44.3	120.0	13636.4	150.0	-59.2	-99.9	279.6	32.6	32.3	-3.8	368.1	368.1	0.1	1.0	40.4	101.
48.6	126.8	14783.2	125.0	-58.3	-99.9	273.1	18.7	18.7	-1.0	389.4	389.9	0.1	1.0	44.9	101.
53.8	134.3	16190.4	100.0	-57.2	-99.9	272.1	17.2	17.1	-0.6	417.3	417.3	0.1	1.0	50.3	100.
60.3	142.0	18021.6	75.0	-51.7	-99.9	278.9	8.7	8.5	-1.3	444.6	444.6	0.1	1.0	55.9	99.
68.6	150.0	20425.6	50.0	-54.7	-99.9	40.0	3.8	-2.4	-2.9	514.6	514.6	0.1	1.0	61.3	99.
80.6	158.3	25110.6	25.0	-51.2	-99.9	25.0	1.2	-0.6	-1.1	638.0	638.0	0.1	1.0	61.4	99.
														62.6	101.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
 OF POOR QUALITY

STATION NO. 655
ST CLOUD, MINN25 APRIL 1975
1115 GMT

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG F	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	6.5	316.0	980.0	5.9	4.1	60.0	4.2	-3.6	-2.1	281.3	294.8	5.2	88.0	0.0	0.0
99.9	99.9	99.9	1000.0	55.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	7.0	357.9	975.0	5.6	4.0	67.8	12.1	-11.2	-4.6	281.4	294.8	5.2	89.4	0.2	263.0
1.0	6.3	570.7	950.0	5.6	2.5	74.0	7.3	-7.0	-2.0	283.5	296.1	8	80.4	0.5	214.0
1.9	11.5	789.3	925.0	6.2	2.4	76.4	2.7	-2.7	-0.6	286.2	299.2	4.9	76.7	0.7	257.0
2.7	13.8	1013.7	900.0	5.0	2.4	43.7	2.4	-1.7	-1.9	287.3	300.7	5.1	83.0	0.9	254.0
3.6	15.9	1243.1	875.0	3.1	2.1	20.2	1.7	-0.6	-1.6	287.6	301.1	5.1	93.0	0.9	253.0
4.6	19.4	1477.9	850.0	1.6	1.4	321.9	1.0	0.6	-0.8	288.5	301.7	5.0	98.4	0.9	245.0
5.4	20.9	1719.6	825.0	1.0	0.5	15.3	2.4	-0.6	-2.3	290.3	303.2	4.8	96.5	0.9	242.0
6.2	23.2	1965.6	800.0	-0.9	-1.0	5.4	3.5	-0.6	-3.4	290.8	303.9	4.5	99.1	1.1	215.0
7.3	25.6	2218.8	775.0	-2.3	-2.5	7.4	1.8	-0.2	-1.7	291.5	303.1	4.1	98.7	1.2	210.0
7.9	28.1	2478.9	750.0	-3.3	-4.3	304.8	1.3	1.1	-0.7	293.5	303.7	3.7	92.5	1.2	224.0
9.0	30.8	2746.7	725.0	-4.3	-7.2	300.1	3.6	3.1	-1.8	295.1	303.7	3.1	80.2	1.1	222.0
10.1	33.6	3023.1	700.0	-5.0	-9.6	312.7	4.9	3.6	-3.3	297.3	304.9	2.6	70.0	1.1	207.0
11.1	36.1	3308.6	675.0	-6.2	-11.2	346.2	4.6	1.1	-4.5	299.0	306.0	2.4	67.4	1.3	14.0
12.2	38.9	3587.6	650.0	-6.6	-21.7	354.8	5.8	0.5	-5.8	301.6	306.9	1.1	29.8	1.6	192.0
13.3	41.6	3935.6	625.0	-7.5	-20.2	345.4	8.1	2.0	-7.8	304.0	307.8	1.2	35.2	2.0	197.0
14.5	44.5	4226.1	600.0	-5.8	-23.9	340.2	9.6	3.2	-9.0	304.5	307.8	0.9	30.7	2.6	141.0
15.6	47.6	4533.1	575.0	-11.9	-39.3	338.4	11.5	4.2	-10.7	306.0	308.8	0.2	8.8	3.3	176.0
16.9	50.5	4891.9	550.0	-14.5	-41.0	333.1	13.7	6.2	-12.3	306.8	307.5	0.2	8.4	4.2	172.0
18.0	53.5	5242.0	525.0	-17.7	-41.2	331.1	13.0	6.3	-11.3	307.1	307.8	0.2	10.7	5.1	144.0
19.3	56.7	5665.7	500.0	-19.9	-62.6	340.1	12.8	4.3	-12.0	308.7	308.8	0.0	1.0	6.0	146.0
20.6	60.0	5983.8	475.0	-23.1	-64.7	350.9	14.6	2.3	-14.4	309.3	309.3	0.0	1.0	7.1	166.0
21.9	63.1	6377.6	450.0	-25.9	-67.5	347.2	17.6	3.9	-17.2	310.7	310.7	0.0	1.0	8.4	167.0
23.4	66.9	6788.4	425.0	-29.6	-68.9	340.4	17.6	5.9	-16.6	311.0	311.0	0.0	1.0	10.0	146.0
25.0	70.5	7217.6	400.0	-33.3	-71.3	336.4	19.8	7.9	-18.1	311.7	311.7	0.0	1.0	11.4	145.0
26.8	74.2	7667.7	375.0	-36.5	-73.4	332.9	20.6	9.4	-16.3	313.2	313.3	0.0	1.0	13.9	143.0
28.7	78.2	8141.4	350.0	-40.5	-99.9	327.3	21.1	11.5	-17.7	314.1	999.9	99.9	999.9	16.1	161.0
30.5	82.2	8642.2	325.0	-44.6	99.9	322.7	20.4	12.4	-16.2	315.3	999.9	99.9	999.9	18.3	139.0
32.4	86.3	9172.8	300.0	-49.2	99.9	324.1	24.7	14.5	-20.7	316.1	999.9	99.9	999.9	21.0	137.0
34.4	90.6	9737.5	275.0	-53.7	99.9	320.3	25.3	16.2	-19.5	317.5	999.9	99.9	999.9	23.8	136.0
36.6	95.7	10343.0	250.0	-58.6	99.9	284.7	26.7	19.5	-13.2	319.0	999.9	99.9	999.9	27.2	153.0
39.0	100.7	11002.1	225.0	-60.3	99.9	298.2	31.2	27.4	-14.8	326.2	999.9	99.9	999.9	30.7	149.0
41.7	106.3	11742.5	200.0	-58.6	99.9	294.3	21.2	19.3	-8.7	340.0	999.9	99.9	999.9	34.9	146.0
44.7	112.0	12580.3	175.0	-59.0	99.9	284.7	28.0	27.1	-7.1	352.6	999.9	99.9	999.9	38.5	142.0
48.3	118.5	13557.9	150.0	-55.2	99.9	279.4	19.2	18.9	-3.2	375.0	999.9	99.9	999.9	43.3	137.0
52.0	125.8	14709.6	125.0	-56.7	99.9	269.1	19.3	18.2	-6.3	348.7	999.9	99.9	999.9	47.0	134.0
57.0	134.0	16122.6	100.0	-56.1	99.9	283.2	14.5	14.1	-3.3	419.4	999.9	99.9	999.9	51.8	112.0
63.6	142.7	17548.3	75.0	-54.1	99.9	245.1	5.1	4.8	-2.2	456.5	999.9	99.9	999.9	53.8	129.0
72.7	153.0	20551.2	50.0	-53.8	99.9	42.4	5.8	-3.1	-4.3	516.7	999.9	99.9	999.9	55.5	129.0
86.2	164.5	25025.1	25.0	-52.8	99.9	14.7	4.6	-1.1	-4.3	632.9	999.9	99.9	999.9	56.9	132.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 662
RAPID CITY, S D

25 APRIL 1975
1115 GMT

TIME	CNTCT	WEIGHT	PRES	TEMP	DEW PT	DIR	SPEED	U COMP	V COMP	POT T	E POT T	MX RTD	RH	RANGF	AZ
MIN		GFM	MB	DEG C	DEG C	DEG	M/SEC	M/SEC	M/SEC	DEG K	DEG K	CM/KG	PCT	FM	DG
0.0	15.0	966.0	899.8	4.4	4.0	140.0	7.2	-4.6	5.2	286.8	301.6	5.7	97.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	17.1	1194.0	875.0	4.4	4.3	183.5	9.7	3.6	9.7	289.2	304.9	6.0	99.2	0.4	3.7.
1.7	15.5	1430.5	850.0	5.0	-2.9	156.9	15.3	-5.0	14.1	291.8	301.8	3.6	99.2	1.1	3.3.
2.5	21.7	1675.7	825.0	7.5	-3.1	166.0	17.4	-4.2	14.9	297.0	307.4	3.7	99.2	1.9	3.1.
3.3	24.1	1929.1	800.0	7.5	-10.2	174.1	17.6	-1.6	17.5	299.5	305.9	2.2	99.2	2.6	3.4.
4.4	26.4	2190.1	775.0	7.1	-12.2	183.2	19.4	1.1	19.4	301.7	307.6	2.0	99.2	3.9	3.4.
5.4	29.0	2456.2	750.0	6.2	-11.2	189.1	20.0	3.2	19.7	303.6	310.0	2.2	99.2	5.1	3.5.
6.6	31.7	2736.2	725.0	4.5	-14.5	195.2	18.5	4.9	17.8	304.6	309.6	1.7	99.2	6.4	3.7.
7.7	34.3	3020.9	700.0	2.2	-14.2	196.9	17.2	5.0	16.5	305.2	310.7	1.8	99.2	7.4	3.8.
8.5	36.9	3313.5	675.0	0.7	-13.0	203.1	15.5	6.1	14.2	306.7	313.0	2.1	99.2	8.3	4.
9.5	39.7	3614.9	650.0	-2.2	-12.8	217.9	12.9	7.9	10.2	306.7	313.0	2.2	99.2	9.3	4.
10.6	42.3	392.3	625.0	-4.7	-13.8	231.0	10.4	8.1	8.5	307.3	313.7	2.1	99.2	9.6	8.
11.9	45.3	4244.5	600.0	-8.0	-14.8	225.4	9.6	6.3	6.8	307.9	313.2	2.0	99.2	10.2	19.
13.2	48.3	4571.5	575.0	-11.2	-16.8	217.1	9.5	5.7	7.6	307.2	312.5	1.8	99.2	10.8	12.
14.5	51.3	4912.8	550.0	-14.4	-19.6	217.9	10.2	6.3	8.1	307.2	311.8	1.5	99.2	11.5	14.
15.7	54.4	5264.4	525.0	-15.8	-42.2	216.4	14.5	8.6	11.7	309.4	313.0	0.2	99.2	12.3	15.
16.8	57.4	5636.2	500.0	-18.7	-44.1	217.4	15.5	9.5	12.2	310.2	310.8	0.1	99.2	13.2	17.
18.1	60.5	6010.3	475.0	-21.1	-45.7	222.9	18.4	12.5	13.5	311.9	312.3	0.1	99.2	14.5	19.
19.3	64.3	6406.4	450.0	-22.6	-46.4	229.5	19.6	14.9	12.7	314.7	315.2	0.1	99.2	15.6	21.
20.6	67.7	6824.9	425.0	-26.1	-41.9	234.2	19.1	15.5	11.1	315.5	316.3	0.2	99.2	17.0	24.
22.0	71.2	7260.3	400.0	-29.4	-48.8	236.1	21.4	17.8	12.0	316.7	317.1	0.1	99.2	19.5	27.
23.6	75.0	7717.1	375.0	-33.1	-51.6	241.9	23.0	20.3	10.9	317.8	318.1	0.1	99.2	20.3	30.
25.1	79.2	8158.1	350.0	-37.2	-54.7	242.6	25.5	22.6	11.7	318.5	318.6	0.1	99.2	22.3	33.
27.0	83.2	8705.7	325.0	-41.6	99.9	243.4	26.5	23.7	11.9	319.4	999.9	99.9	99.9	24.8	36.
29.0	87.4	9243.0	300.0	-46.6	99.9	245.2	30.4	27.6	12.7	319.6	999.9	99.9	99.9	28.0	40.
31.1	92.2	9814.4	275.0	-51.5	99.9	242.9	31.6	28.1	14.4	320.7	999.9	99.9	99.9	31.4	43.
33.7	96.5	10427.3	250.0	-55.3	99.9	242.4	37.2	32.9	17.2	323.9	999.9	99.9	99.9	36.7	45.
36.2	102.0	11055.6	225.0	-57.6	99.9	257.7	45.2	44.1	9.6	330.3	999.9	99.9	99.9	42.8	49.
38.4	107.5	11831.4	200.0	-62.1	99.9	244.5	35.8	35.7	3.4	334.4	999.9	99.9	99.9	47.3	53.
40.8	113.5	12653.0	175.0	-63.4	99.9	234.2	28.7	23.3	16.8	345.4	999.9	99.9	99.9	51.3	54.
44.1	120.3	13617.7	150.0	-58.5	99.9	249.2	27.3	25.5	6.7	349.3	999.9	99.9	99.9	57.2	55.
47.9	127.5	14763.8	125.0	-59.5	99.9	260.4	20.6	20.3	3.8	387.3	999.9	99.9	99.9	61.3	57.
52.7	135.7	16162.0	100.0	-56.9	99.9	256.9	21.1	20.6	4.8	417.8	999.9	99.9	99.9	66.8	58.
58.7	143.7	17983.2	75.0	-54.8	99.9	257.6	9.6	9.4	2.1	458.1	999.9	99.9	99.9	70.9	61.
67.0	152.3	20593.7	50.0	-54.9	99.9	333.7	2.3	0.2	-2.2	514.2	999.9	99.9	99.9	72.0	62.
78.8	161.3	25053.0	25.0	-52.2	99.9	319.4	3.0	1.9	-2.3	645.0	999.9	99.9	99.9	72.8	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

STATION NO. 11001
MARSHALL SPALE FLIGHT CENTER

25 APRIL 1975
1123 GMT

TIME MIN	CNTCT	WEIGHT GEM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT Y DG K	E POT Y DG K	MX RTD CM/KG	RM PCT	RANGE KM	A7 DG
0.0	6.3	100.0	994.0	21.4	18.2	200.0	5.7	1.9	5.4	296.9	331.9	13.4	82.0	0.0	0.
0.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	7.8	347.3	975.0	19.6	17.7	212.4	15.9	8.5	13.4	296.7	331.2	13.2	88.5	0.3	2.3
1.4	9.9	571.3	950.0	18.0	17.1	222.3	21.0	14.3	15.3	297.2	331.4	13.0	93.9	1.3	3.5
2.2	11.8	800.1	925.0	16.6	15.9	231.5	23.5	18.4	14.6	297.0	330.4	12.3	95.3	2.3	4.0
3.0	13.9	1035.6	900.0	15.0	14.2	237.6	25.3	21.3	13.6	298.4	328.7	11.4	95.0	3.4	4.5
3.8	15.9	1272.4	875.0	13.9	13.1	241.8	25.5	22.5	12.0	299.7	329.8	10.9	94.9	4.6	4.6
4.7	17.1	1516.9	850.0	12.1	10.9	247.4	27.7	25.6	10.6	300.1	326.5	9.8	92.6	6.1	5.3
5.4	20.2	1766.5	825.0	10.8	5.6	252.9	23.9	22.8	7.0	300.9	320.0	6.9	70.1	7.4	5.6
6.4	22.4	2023.3	800.0	10.1	5.0	259.0	27.5	27.0	5.2	302.2	321.9	6.9	70.8	8.6	5.6
7.7	24.7	2247.0	775.0	8.1	5.0	255.2	26.6	25.7	6.8	303.5	324.7	7.6	86.8	10.4	6.2
8.6	26.8	2557.5	750.0	6.0	5.0	255.3	26.5	25.6	6.7	304.1	324.5	7.4	93.3	11.9	6.5
9.4	29.2	2836.5	725.0	3.7	2.7	258.5	17.2	26.4	6.4	304.3	322.4	6.4	93.2	13.3	6.5
10.4	31.7	3115.4	700.0	2.1	0.9	253.9	30.1	28.9	6.3	305.6	322.3	5.9	91.5	15.2	6.7
11.8	34.7	3412.5	675.0	-0.1	-1.1	251.4	30.5	28.9	9.7	306.2	321.2	5.2	92.7	17.3	6.7
13.1	36.6	3714.1	650.0	-2.1	-3.1	250.0	35.6	33.5	12.2	307.2	320.7	4.7	92.9	19.9	5.4
14.4	39.2	4024.5	625.0	-4.7	-17.0	244.8	34.5	31.2	14.7	307.3	312.2	1.6	37.5	22.7	6.4
15.6	41.7	4345.8	600.0	-4.8	-17.7	238.9	32.1	27.5	16.6	310.7	315.7	1.6	35.5	25.2	6.7
16.9	44.4	4676.2	575.0	-7.5	-35.6	235.4	30.4	25.0	17.3	311.2	312.3	0.3	8.6	27.5	6.1
18.1	47.3	5022.9	550.0	-10.7	-21.8	234.5	30.5	24.8	17.7	311.5	315.4	1.2	40.0	29.7	6.5
19.2	50.2	5372.5	525.0	-12.3	-19.1	237.1	34.7	29.1	16.8	313.7	318.8	1.6	56.9	31.6	6.5
20.3	53.1	5750.4	500.0	-15.3	-21.4	235.7	36.2	27.9	20.4	314.5	319.0	1.4	54.4	34.2	6.4
21.7	56.0	6136.8	475.0	-16.9	-23.4	237.9	33.3	28.2	17.7	317.2	321.2	1.2	56.5	37.0	6.3
23.6	59.3	6540.8	450.0	-19.5	-24.4	247.2	17.0	34.1	14.4	318.8	322.6	1.2	65.1	40.9	6.4
25.2	62.5	6964.1	425.0	-21.2	-38.9	244.7	29.8	24.8	7.9	321.7	322.9	0.3	14.1	44.7	6.4
26.7	66.3	7408.4	400.0	-24.4	-34.5	255.6	42.4	41.1	10.5	323.0	324.7	0.5	39.0	46.5	6.5
27.8	69.7	7875.2	375.0	-26.0	-34.9	263.9	37.1	36.9	4.0	324.5	326.3	0.5	51.7	50.1	6.1
29.1	73.3	8307.6	350.0	-31.3	-38.0	270.3	37.9	37.9	-0.2	326.5	327.9	0.4	51.2	52.1	6.7
30.6	77.3	8984.3	325.0	-35.7	-42.4	277.0	32.5	32.2	-4.5	327.4	328.4	0.3	49.8	54.7	6.4
32.4	81.4	9435.2	300.0	-40.4	-49.9	276.6	31.3	31.1	-3.6	328.4	329.9	99.9	99.9	56.4	7.0
34.3	85.3	10026.7	275.0	-45.1	-59.9	273.3	22.7	22.6	-1.3	330.0	330.9	99.9	99.9	60.9	7.1
36.6	90.6	10656.3	250.0	-50.2	-69.9	271.4	14.3	14.3	-0.3	331.5	331.5	99.9	99.9	63.1	7.2
39.9	95.7	11335.2	225.0	-56.1	-69.9	264.3	21.2	21.1	2.1	332.6	332.6	99.9	99.9	65.0	7.2
41.2	101.0	12072.4	200.0	-62.7	-69.9	272.2	22.7	22.7	-0.9	333.5	333.5	99.9	99.9	69.4	7.3
43.9	107.5	12822.4	175.0	-65.0	-69.9	276.6	14.2	14.2	7.4	336.1	336.1	99.9	99.9	73.1	7.4
46.8	114.3	13809.9	150.0	-65.2	-69.9	301.5	16.7	16.7	-6.7	337.7	337.7	99.9	99.9	76.5	7.5
50.2	122.7	14934.7	125.0	-63.8	-69.9	266.8	24.2	23.2	-7.0	379.5	379.5	99.9	99.9	82.9	7.7
54.4	130.7	16308.0	100.0	-63.3	-69.9	285.0	14.5	14.0	-3.7	405.5	405.5	99.9	99.9	86.4	7.8
59.9	140.3	18045.9	75.0	-66.4	-69.9	258.7	2.7	2.7	0.5	433.7	433.7	99.9	99.9	89.7	7.9
67.2	151.0	20515.8	50.0	-63.4	-69.9	253.7	28.6	27.4	8.0	494.1	494.1	99.9	99.9	91.3	7.2
78.1	167.0	24895.3	25.0	-52.7	-69.9	63.0	17.5	-15.6	-7.9	673.1	673.1	99.9	99.9	89.1	6.0

0 BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

0 BY TEMP MEANS TEMPERATURE CR TIME HAVE BEEN INTERPOLATED

00 BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

ORIGINAL PAGE IS
OF POOR QUALITY

APPENDIX

Wind Data for Wallops Island, Virginia
and Fort Totten, New York

These data were computed by the
National Weather Service using a
scheme different from that used in
the AVE reduction process.

Wallops Island, Virginia
April 24, 1975 at 1415 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
1.00	16.0	235	50.00	29.3	287
2.00	17.8	234	51.00	35.3	287
3.00	18.1	235	52.00	32.0	277
4.00	20.9	246	53.00	30.3	285
5.00	18.7	257	54.00	29.9	293
6.00	14.6	266	55.00	25.8	295
7.00	12.5	273	56.00	23.8	291
8.00	12.1	263	57.00	22.9	291
9.00	12.7	253	58.00	22.2	291
10.00	13.0	252	59.00	19.2	295
11.00	13.7	257	60.00	13.9	319
12.00	14.6	265	61.00	13.1	3
13.00	17.3	270	62.00	16.7	291
14.00	19.2	271	63.00	18.8	302
15.00	19.7	272	64.00	11.3	312
16.00	17.0	271	65.00	11.1	314
17.00	19.3	269	66.00	11.6	326
18.00	18.9	269	67.00	5.0	346
19.00	15.4	268	68.00	5.8	357
20.00	14.5	270	69.00	6.8	333
21.00	16.5	277	70.00	2.2	336
22.00	14.5	280	71.00	5.4	351
23.00	13.2	285	72.00	5.9	1
24.00	13.9	289	73.00	3.4	342
25.00	12.0	289	74.00	3.7	352
26.00	12.8	285	75.00	2.8	68
27.00	14.1	283	76.00	4.1	328
28.00	12.7	290	77.00	3.2	35
29.00	20.9	282	78.00	2.3	327
30.00	26.2	282	79.00	5.2	29
31.00	22.7	290	80.00	3.9	64
32.00	20.0	297	81.00	3.9	90
33.00	22.9	291	82.00	3.7	122
34.00	24.5	290	83.00	3.6	59
35.00	26.4	293	84.00	2.2	59
36.00	28.6	296	85.00	5.6	337
37.00	30.2	299	86.00	4.9	99
38.00	31.4	303	87.00	1.1	90
39.00	33.6	309	88.00	3.4	92
40.00	35.7	311	89.00	1.7	161
41.00	35.4	310	90.00	3.9	208
42.00	32.2	310	91.00	4.6	286
43.00	29.7	317	92.00	1.5	322
44.00	25.3	324	93.00	2.3	357
45.00	20.4	326	94.00	5.6	359
46.00	19.3	301	95.00	4.7	10
47.00	16.9	304	96.00	3.0	52
48.00	21.8	296	97.00	2.1	105
49.00	27.1	293			

Wallops Island, Virginia
April 24, 1975 at 1715 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
1.00	17.7	232	42.00	26.9	279
2.00	17.5	237	43.00	32.5	286
3.00	18.1	249	44.00	38.7	276
4.00	16.8	248	45.00	41.6	278
5.00	15.6	250	46.00	36.4	292
6.00	16.1	247	47.00	23.5	306
7.00	15.7	245	48.00	16.6	304
8.00	15.1	241	49.00	17.9	293
9.00	16.7	250	50.00	18.6	285
10.00	19.5	258	51.00	18.8	287
11.00	20.3	259	52.00	15.2	298
12.00	22.7	262	53.00	13.9	300
13.00	23.6	265	54.00	15.3	308
14.00	24.9	271	55.00	7.5	315
15.00	26.6	277	56.00	6.9	314
16.00	25.6	284	57.00	6.1	344
17.00	19.7	285	58.00	1.6	11
18.00	16.9	278	59.00	3.2	303
19.00	15.7	275	60.00	1.9	288
20.00	14.0	275	61.00	5.5	351
21.00	15.1	280	62.00	4.1	10
22.00	16.5	280	63.00	3.1	328
23.00	19.6	275	64.00	3.3	349
24.00	17.3	277	65.00	1.6	11
25.00	18.7	278	66.00	3.4	25
26.00	18.9	285	67.00	2.1	251
27.00	18.1	288	68.00	0.4	22
28.00	18.9	290	69.00	1.3	82
29.00	20.3	296	70.00	1.4	72
30.00	20.3	302	71.00	0.8	289
31.00	22.9	311	72.00	2.1	111
32.00	28.0	312	73.00	1.5	321
33.00	29.5	313	74.00	4.7	338
34.00	30.6	314	75.00	5.4	45
35.00	33.7	312	76.00	0.8	158
36.00	32.8	315	77.00	1.3	45
37.00	23.5	319	78.00	1.0	127
38.00	15.0	313	79.00	3.0	319
39.00	13.5	282	80.00	4.7	335
40.00	21.8	279	81.00	1.9	324
41.00	24.4	286	82.00	2.7	325

Wallops Island, Virginia
April 24, 1975 at 2055 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
1.00	16.5	218	52.00	28.7	286
2.00	18.1	214	53.00	26.2	290
3.00	19.0	217	54.00	30.5	287
4.00	19.2	225	55.00	30.1	282
5.00	23.4	226	56.00	33.1	286
6.00	23.2	232	57.00	29.9	291
7.00	24.3	246	58.00	25.8	284
8.00	22.4	252	59.00	24.0	279
9.00	20.3	248	60.00	26.3	299
10.00	19.8	244	61.00	11.1	295
11.00	19.5	247	62.00	13.8	288
12.00	19.3	249	63.00	14.0	297
13.00	18.7	252	64.00	11.4	322
14.00	17.7	255	65.00	8.5	341
15.00	19.8	268	66.00	9.4	332
16.00	21.8	274	67.00	6.4	329
17.00	22.7	277	68.00	5.2	345
18.00	26.6	276	69.00	4.2	312
19.00	26.0	275	70.00	3.2	316
20.00	27.2	279	71.00	6.9	303
21.00	26.5	282	72.00	6.3	303
22.00	27.3	278	73.00	3.6	12
23.00	27.5	277	74.00	2.7	14
24.00	23.8	271	75.00	1.7	312
25.00	24.2	276	76.00	3.1	332
26.00	23.6	275	77.00	1.8	329
27.00	22.1	270	78.00	3.1	345
28.00	22.8	264	79.00	5.6	31
29.00	22.0	263	80.00	3.4	8
30.00	21.3	259	81.00	2.7	17
31.00	21.1	253	82.00	3.7	90
32.00	21.2	253	83.00	2.8	290
33.00	20.8	258	84.00	3.0	309
34.00	19.1	256	85.00	6.4	322
35.00	18.6	263	86.00	2.9	329
36.00	18.3	265	87.00	1.9	10
37.00	17.0	267	88.00	6.2	353
38.00	19.0	277	89.00	5.4	60
39.00	23.1	287	90.00	1.0	189
40.00	24.4	293	91.00	2.9	12
41.00	24.6	296	92.00	3.2	304
42.00	24.4	298	93.00	7.1	326
43.00	26.0	298	94.00	6.3	339
44.00	28.4	296	95.00	8.3	354
45.00	29.5	297	96.00	4.3	84
46.00	32.6	298	97.00	5.7	331
47.00	30.4	300	98.00	0.6	140
48.00	21.1	303	99.00	5.3	319
49.00	17.6	288	100.00	2.6	247
50.00	21.1	283	101.00	7.3	276
51.00	27.2	281	102.00	2.1	268

Wallops Island, Virginia
April 25, 1975 at 0515 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
1.00	18.4	243	49.00	24.0	270
2.00	17.1	246	50.00	18.8	274
3.00	16.3	256	51.00	23.5	276
4.00	19.7	250	52.00	21.6	284
5.00	24.2	252	53.00	28.1	287
6.00	24.6	262	54.00	27.6	292
7.00	22.0	271	55.00	21.9	294
8.00	21.9	277	56.00	16.1	282
9.00	20.3	273	57.00	19.0	272
10.00	18.6	267	58.00	19.6	276
11.00	18.3	267	59.00	21.1	286
12.00	18.2	271	60.00	14.4	280
13.00	17.5	273	61.00	10.6	272
14.00	17.8	271	62.00	10.6	241
15.00	17.1	271	63.00	9.8	237
16.00	17.7	273	64.00	5.2	242
17.00	17.5	271	65.00	1.9	216
18.00	17.6	264	66.00	5.6	237
19.00	17.5	265	67.00	7.2	278
20.00	16.2	272	68.00	4.3	279
21.00	15.8	264	69.00	7.6	311
22.00	16.3	266	70.00	6.3	332
23.00	19.7	269	71.00	4.9	24
24.00	21.1	272	72.00	3.1	57
25.00	22.1	280	73.00	2.1	287
26.00	22.8	286	74.00	5.3	304
27.00	23.8	286	75.00	4.3	336
28.00	22.7	284	76.00	2.6	13
29.00	23.3	277	77.00	3.7	23
30.00	24.6	270	78.00	4.4	42
31.00	23.9	262	79.00	3.3	82
32.00	25.2	259	80.00	4.6	54
33.00	26.9	258	81.00	3.7	81
34.00	27.4	258	82.00	2.0	101
35.00	26.4	257	83.00	4.8	100
36.00	25.6	256	84.00	4.3	87
37.00	25.4	256	85.00	4.2	88
38.00	24.2	255	86.00	3.8	94
39.00	26.3	253	87.00	3.9	68
40.00	27.2	255	88.00	2.7	78
41.00	26.8	251	89.00	3.9	113
42.00	26.4	256	90.00	2.2	22
43.00	26.3	263	91.00	6.1	24
44.00	26.4	265	92.00	5.0	56
45.00	25.3	262	93.00	4.4	69
46.00	24.0	273	94.00	3.9	102
47.00	28.5	282	95.00	2.7	97
48.00	27.2	279	96.00	0.2	90

Wallops Island, Virginia
April 25, 1975 at 0515 GMT (Continued)

Time (min)	Wind Speed (mps)	Wind Direction (deg)
97.00	3.6	304
98.00	3.4	316
99.00	4.5	305
100.00	3.5	326
101.00	4.8	341
102.00	6.0	332
103.00	7.3	345
104.00	10.1	20
105.00	6.7	68
106.00	0.8	164
107.00	2.9	269
108.00	7.1	301

Wallops Island

Ft. Totten, N. Y.
April 23, 1975 at 2315 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	10.8	206	42.00	44.4	308
.50	11.1	145	43.00	35.5	311
.75	20.7	149	44.00	32.2	318
1.00	7.4	142	45.00	28.7	298
1.25	3.0	83	46.00	36.1	308
1.50	8.7	159	47.00	34.3	307
1.75	7.8	188	48.00	28.3	303
2.00	9.0	183	49.00	30.9	301
2.25	9.4	178	50.00	34.7	308
2.50	10.5	171	51.00	28.3	310
2.75	9.7	189	52.00	26.5	310
3.00	8.3	192	53.00	27.3	307
4.00	7.5	253	54.00	29.7	312
5.00	20.5	314	55.00	28.4	320
6.00	30.6	198	56.00	21.3	316
7.00	23.1	228	57.00	22.0	331
8.00	11.5	262	58.00	19.7	328
9.00	13.1	273	59.00	16.5	328
10.00	13.1	282	60.00	12.6	311
11.00	12.8	287	61.00	10.1	297
12.00	12.4	291	62.00	8.0	312
13.00	13.6	296	63.00	17.0	325
14.00	17.4	290	64.00	3.5	187
15.00	18.2	290	65.00	13.9	328
16.00	17.3	289	66.00	3.5	150
17.00	17.9	293	67.00	5.4	315
18.00	15.8	295	68.00	6.5	301
19.00	18.3	288	69.00	4.8	287
20.00	18.5	282	70.00	5.5	325
21.00	18.2	287	71.00	3.9	105
22.00	19.0	284	72.00	7.8	327
23.00	22.0	280	73.00	.5	314
24.00	22.6	277	74.00	4.8	315
25.00	23.5	276	75.00	11.0	328
26.00	24.5	277	76.00	6.6	3
27.00	27.5	290	77.00	33.4	126
28.00	31.9	295	78.00	2.9	3
29.00	33.3	297	79.00	5.0	352
30.00	33.4	300	80.00	1.3	78
31.00	33.4	303	81.00	16.6	320
32.00	30.2	300	82.00	1.7	311
33.00	34.7	301	83.00	5.4	102
34.00	35.6	304	84.00	11.0	336
35.00	37.4	307	85.00	4.6	267
36.00	40.6	306	86.00	5.8	343
37.00	43.5	303	87.00	15.4	145
38.00	42.9	302	88.00	15.6	330
39.00	46.7	306	89.00	8.7	317
40.00	46.8	306	90.00	11.9	316
41.00	46.8	307	91.00	11.5	323

Ft. Totten, N. Y.
April 23, 1975 at 2315 GMT (Continued)

Time (min)	Wind Speed (mps)	Wind Direction (deg)
92.00	26.5	162
93.00	14.8	252
94.00	32.6	194
95.00	23.7	165
96.00	33.4	126
97.00	26.5	162

RECEIVED, PLAIN IS

Ft. Totten, N. Y.
April 24, 1975 at 0515 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	4.0	87	32.00	45.9	179
.50	8.8	117	33.00	55.5	174
.75	10.8	126	34.00	55.3	178
1.00	8.2	121	35.00	50.9	180
1.25	9.5	126	36.00	60.6	176
1.50	9.8	151	37.00	58.3	179
1.75	8.9	163	38.00	74.3	176
2.00	11.1	176	39.00	76.7	171
2.25	13.5	184	40.00	49.1	186
2.50	15.3	186	41.00	44.5	180
2.75	13.4	192	42.00	34.5	184
3.00	15.6	199	43.00	15.1	200
4.00	17.6	203	44.00	27.8	180
5.00	18.4	214	45.00	57.6	171
6.00	17.9	225	46.00	51.1	175
7.00	19.1	228	47.00	22.4	191
8.00	18.7	232	48.00	13.9	201
9.00	19.3	228	49.00	43.3	172
10.00	19.7	221	50.00	62.2	161
11.00	20.1	218	51.00	57.6	159
12.00	20.1	214	52.00	54.3	164
13.00	19.4	228	53.00	52.7	166
14.00	20.7	225	54.00	33.0	175
15.00	21.5	222			
16.00	23.5	232			
17.00	23.8	230			
18.00	24.6	241			
19.00	26.8	245			
20.00	26.0	245			
21.00	28.2	277			
22.00	19.0	249			
23.00	25.3	286			
24.00	17.7	244			
25.00	20.9	224			
26.00	24.1	265			
27.00	41.3	295			
28.00	21.5	222			
29.00	51.7	169			
30.00	47.7	174			
31.00	46.9	175			

Ft. Totten, N. Y.
April 24, 1975 at 1115 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	6.7	169	41.00	41.4	315
.50	7.6	238	42.00	31.1	311
.75	9.2	245	43.00	25.9	302
1.00	11.8	249	44.00	27.2	294
1.25	14.4	252	45.00	27.2	285
1.50	16.9	259	46.00	34.0	284
1.75	17.6	262	47.00	36.3	290
2.00	17.7	267	48.00	32.9	296
2.25	17.6	267	49.00	26.5	292
2.50	17.8	272	50.00	29.2	293
2.75	19.1	274	51.00	25.8	303
3.00	19.8	278	52.00	17.7	285
4.00	18.8	272	53.00	22.7	286
5.00	18.9	275	54.00	21.0	283
6.00	16.9	277	55.00	25.1	287
7.00	17.9	274	56.00	23.3	288
8.00	21.0	272	57.00	21.1	293
9.00	21.3	269	58.00	14.9	307
10.00	18.1	273	59.00	8.1	297
11.00	15.6	275	60.00	12.3	298
12.00	14.4	275	61.00	10.7	309
13.00	14.9	279	62.00	12.1	325
14.00	14.9	287	63.00	6.1	353
15.00	15.7	284	64.00	5.2	326
16.00	16.9	282	65.00	4.2	309
17.00	15.6	273	66.00	6.8	307
18.00	18.1	274	67.00	6.8	316
19.00	19.1	286	68.00	1.7	358
20.00	21.5	289	69.00	1.8	30
21.00	23.0	283	70.00	3.5	333
22.00	23.8	279	71.00	4.2	332
23.00	22.4	276	72.00	5.0	360
24.00	21.8	278	73.00	2.8	43
25.00	21.0	280	74.00	2.1	70
26.00	22.4	294	75.00	7.7	339
27.00	25.5	285	76.00	4.8	71
28.00	31.2	285	77.00	4.6	75
29.00	31.5	285	78.00	3.0	89
30.00	30.6	284	79.00	2.2	111
31.00	30.9	285	80.00	4.5	338
32.00	31.2	283	81.00	2.8	69
33.00	32.9	285	82.00	4.4	316
34.00	34.9	290	83.00	1.8	74
35.00	37.5	296	84.00	1.7	41
36.00	39.5	294	85.00	3.6	24
37.00	44.1	298	86.00	4.2	359
38.00	48.3	302	87.00	5.8	337
39.00	51.5	307	88.00	4.4	316
40.00	54.1	312	89.00	7.9	304

Ft. Totten, N. Y.
April 24, 1975 at 1415 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	4.4	237	42.00	37.4	305
.50	4.5	222	43.00	26.0	282
.75	5.7	212	44.00	25.6	269
1.00	9.8	223	45.00	24.2	254
1.25	9.5	231	46.00	24.5	252
1.50	10.4	237	47.00	27.8	267
1.75	11.2	245	48.00	34.7	286
2.00	13.8	248	49.00	36.1	292
2.25	14.7	257	50.00	33.2	291
2.50	14.7	253	51.00	31.4	290
2.75	14.6	247	52.00	29.5	299
3.00	13.2	249	53.00	23.9	299
4.00	15.0	261	54.00	21.1	284
5.00	15.8	272	55.00	24.1	285
6.00	16.1	282	56.00	23.1	295
7.00	17.8	278	57.00	21.5	309
8.00	18.9	272	58.00	23.0	291
9.00	18.2	268	59.00	18.0	293
10.00	18.6	265	60.00	10.5	304
11.00	18.3	268	61.00	7.9	327
12.00	17.0	259	62.00	12.1	302
13.00	17.0	255	63.00	5.9	306
14.00	16.7	251	64.00	5.7	296
15.00	17.1	243	65.00	4.7	277
16.00	17.0	247	66.00	6.1	275
17.00	18.0	257	67.00	7.7	287
18.00	19.9	260	68.00	7.8	329
19.00	19.5	260	69.00	6.7	16
20.00	22.9	262	70.00	3.1	355
21.00	25.5	261	71.00	.5	99
22.00	25.6	260	72.00	3.1	354
23.00	26.2	263	73.00	4.8	25
24.00	26.9	267	74.00	5.1	29
25.00	27.8	266	75.00	2.2	291
26.00	30.1	266	76.00	2.4	32
27.00	32.1	268	77.00	2.1	63
28.00	32.9	272	78.00	3.4	57
29.00	33.1	275	79.00	6.6	117
30.00	33.5	278	80.00	7.9	161
31.00	35.8	281	81.00	22.0	1
32.00	37.4	282	82.00	45.1	351
33.00	38.5	284	83.00	3.6	25
34.00	40.3	287	84.00	2.9	50
35.00	40.8	293	85.00	1.6	52
36.00	41.5	299	86.00	2.0	24
37.00	42.5	301	87.00	3.3	58
38.00	45.5	303	88.00	3.1	102
39.00	48.2	305	89.00	20.6	66
40.00	49.5	307	90.00	7.9	63
41.00	48.1	311	91.00	.9	222

Ft. Totten, N. Y.
April 24, 1975 at 1415 GMT (Continued)

Time (min)	Wind Speed (mps)	Wind Direction (deg)
92.00	3.3	304
93.00	5.5	341
94.00	5.0	5
95.00	1.7	210
96.00	.1	78

Ft. Totten, N. Y.
April 24, 1975 at 1715 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	5.7	212	33.00	39.1	301
.50	7.8	210	34.00	42.4	299
.75	8.2	222	35.00	46.9	298
1.00	10.1	223	36.00	47.6	298
1.25	11.9	221	37.00	50.0	297
1.50	13.4	223	38.00	53.4	297
1.75	13.5	233	39.00	50.0	295
2.00	13.5	238	40.00	48.5	297
2.25	15.6	225	41.00	42.1	304
2.50	15.1	237	42.00	37.8	308
2.75	16.8	231	43.00	33.5	299
3.00	17.9	235	44.00	27.7	284
4.00	17.1	235	45.00	20.7	271
5.00	15.9	241	46.00	24.1	268
6.00	15.5	245	47.00	32.1	273
7.00	19.3	248	48.00	39.6	286
8.00	21.0	245	49.00	39.7	282
9.00	22.1	244	50.00	33.2	303
10.00	23.5	248	51.00	22.9	307
11.00	24.2	253	52.00	21.4	302
12.00	23.8	257	53.00	22.5	284
13.00	23.7	267	54.00	26.1	293
14.00	26.1	271	55.00	22.5	294
15.00	27.5	268	56.00	22.1	291
16.00	29.2	266	57.00	18.6	296
17.00	29.7	266	58.00	10.4	302
18.00	30.1	267	59.00	6.8	316
19.00	30.6	264	60.00	9.7	310
20.00	30.6	265	61.00	9.5	301
21.00	29.6	264	62.00	8.5	301
22.00	30.0	265	63.00	5.3	297
23.00	29.2	264	64.00	7.7	314
24.00	28.3	267	65.00	3.7	11
25.00	29.0	274	66.00	1.9	109
26.00	29.6	274	67.00	1.7	265
27.00	28.4	279	68.00	1.6	318
28.00	29.0	286	69.00	1.4	20
29.00	30.4	291	70.00	4.1	314
30.00	32.1	291	71.00	9.6	299
31.00	32.5	297			
32.00	34.7	300			

Ft. Totten, N. Y.
April 24, 1975 at 2015 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	6.5	166	42.00	45.3	288
.50	7.4	217	43.00	41.3	295
.75	10.5	212	44.00	37.8	300
1.00	11.8	225	45.00	31.2	301
1.25	12.8	234	46.00	28.5	288
1.50	13.8	222	47.00	27.8	286
1.75	14.8	229	48.00	24.9	279
2.00	16.3	230	49.00	27.5	275
2.25	17.1	233	50.00	31.4	281
2.50	18.9	234	51.00	33.8	284
2.75	19.2	234	52.00	34.3	293
3.00	20.4	232	53.00	34.3	300
4.00	18.7	240	54.00	25.3	306
5.00	19.2	244	55.00	19.7	303
6.00	19.8	254	56.00	20	295
7.00	20.1	264	57.00	22.5	294
8.00	20.2	264	58.00	20.1	288
9.00	19.9	266	59.00	22.8	295
10.00	21.4	268	60.00	22.9	303
11.00	22.6	272	61.00	16.4	306
12.00	24.1	273	62.00	12.3	310
13.00	24.8	273	63.00	11.2	313
14.00	26.0	267	64.00	10.3	313
15.00	26.3	264	65.00	6.5	336
16.00	28.4	266	66.00	3.8	313
17.00	30.8	266	67.00	5.6	330
18.00	29.2	265	68.00	5.7	3
19.00	26.8	267	69.00	2.0	104
20.00	27.9	271	70.00	3.0	314
21.00	28.7	268	71.00	2.6	330
22.00	28.8	271	72.00	2.0	82
23.00	28.0	267	73.00	1.9	180
24.00	27.2	265	74.00	3.6	339
25.00	27.9	266	75.00	2.1	12
26.00	27.5	274	76.00	.7	38
27.00	26.2	278	77.00	3.0	6
28.00	26.3	281	78.00	1.8	358
29.00	27.4	283	79.00	2.1	313
30.00	27.5	283	80.00	3.3	21
31.00	29.3	287	81.00	5.1	32
32.00	35.4	289	82.00	5.6	31
33.00	38.4	282	83.00	3.9	62
34.00	39.7	279	84.00	2.0	37
35.00	40.2	279	85.00	1.3	15
36.00	40.0	283	86.00	2.2	55
37.00	39.0	284	87.00	2.7	166
38.00	38.9	285	88.00	4.2	271
39.00	39.8	287	89.00	2.3	289
40.00	40.9	285	90.00	1.9	322
41.00	37.7	286	91.00	3.2	32
			92.00	3.9	336

Ft. Totten, N. Y.
April 24, 1975 at 2359 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	74.3	295	41.00	33.6	279
.50	44.7	250	42.00	35.2	279
.75	42.1	254	43.00	30.3	284
1.00	43.0	251	44.00	32.8	284
1.25	41.3	248	45.00	35.1	284
1.50	41.2	253	46.00	30.9	282
1.75	44.2	250	47.00	31.2	281
2.00	43.2	249	48.00	30.8	276
2.25	44.0	246	49.00	29.7	269
2.50	42.2	248	50.00	28.9	278
2.75	40.1	252	51.00	28.6	277
3.00	47.3	247	52.00	29.4	277
4.00	45.3	247	53.00	26.8	282
5.00	52.5	246	54.00	22.7	295
6.00	54.9	244	55.00	22.2	300
7.00	50.4	242	56.00	19.7	311
8.00	47.2	240	57.00	19.5	322
9.00	39.5	242	58.00	17.9	347
10.00	41.3	245	59.00	11.9	353
11.00	47.7	250	60.00	9.8	314
12.00	43.3	255	61.00	9.5	335
13.00	33.4	257	62.00	10.8	7
14.00	32.0	256	63.00	5.1	355
15.00	29.7	254	64.00	4.8	259
16.00	27.5	256	65.00	4.9	308
17.00	20.8	263	66.00	5.0	273
18.00	17.8	263	67.00	7.9	309
19.00	20.1	271	68.00	7.8	237
20.00	18.7	278	69.00	25.2	245
21.00	18.2	281	70.00	24.6	251
22.00	25.0	269	71.00	19.2	250
23.00	27.5	267	72.00	17.4	245
24.00	28.2	274	73.00	18.0	254
25.00	35.1	272	74.00	17.8	250
26.00	37.7	272	75.00	24.8	253
27.00	35.4	280	76.00	26.9	254
28.00	40.0	284	77.00	22.1	255
29.00	35.8	281	78.00	14.0	243
30.00	37.3	284	79.00	16.0	253
31.00	38.3	286	80.00	11.1	254
32.00	40.0	284	81.00	6.3	269
33.00	42.6	276	82.00	3.7	291
34.00	46.0	274	83.00	3.5	213
35.00	45.0	266	84.00	7.3	243
36.00	43.6	265	85.00	12.1	258
37.00	35.4	262	86.00	9.4	260
38.00	33.0	274	87.00	8.6	267
39.00	33.9	276	88.00	3.4	267
40.00	34.0	285			

Ft. Totten, N. Y.
April 25, 1975 at 0515 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	12.6	231	42.00	41.5	255
.50	6.7	271	43.00	42.6	255
.75	6.9	284	44.00	41.4	257
1.00	6.4	260	45.00	40.1	259
1.25	7.1	284	46.00	40.4	261
1.50	6.3	272	47.00	41.4	266
1.75	7.9	277	48.00	38.7	268
2.00	6.9	285	49.00	37.9	275
2.25	7.7	290	50.00	36.5	278
2.50	6.1	293	51.00	28.7	279
2.75	5.2	307	52.00	24.0	269
3.00	4.5	295	53.00	27.7	271
4.00	4.1	295	54.00	27.5	283
5.00	4.4	294	55.00	21.0	283
6.00	4.9	293	56.00	23.0	284
7.00	5.6	307	57.00	26.5	289
8.00	7.4	310	58.00	19.7	287
9.00	8.4	309	59.00	19.4	280
10.00	9.3	286	60.00	18.8	281
11.00	15.0	278	61.00	18.0	275
12.00	16.3	264	62.00	18.8	272
13.00	17.7	260	63.00	21.1	271
14.00	18.9	255	64.00	20.8	284
15.00	19.0	253	65.00	18.4	284
16.00	19.6	252	66.00	15.8	291
17.00	19.9	246	67.00	14.5	302
18.00	20.2	255	68.00	13.4	305
19.00	20.0	262	69.00	12.3	299
20.00	19.4	260	70.00	14.3	299
21.00	18.3	261	71.00	13.1	292
22.00	17.9	263	72.00	11.1	280
23.00	19.4	267	73.00	6.4	311
24.00	20.5	261	74.00	3.9	291
25.00	22.4	255	75.00	9.4	280
26.00	23.6	248	76.00	10.0	292
27.00	26.0	244	77.00	7.9	311
28.00	26.7	244	78.00	2.9	269
29.00	26.7	244	79.00	5.8	238
30.00	26.1	246	80.00	7.6	274
31.00	26.2	247	81.00	7.0	301
32.00	26.6	249	82.00	1.4	306
33.00	27.4	249	83.00	1.8	305
34.00	29.7	249	84.00	3.4	3
35.00	31.1	248	85.00	4.0	66
36.00	32.7	248	86.00	4.0	22
37.00	33.7	223	87.00	4.8	63
38.00	35.9	223	88.00	2.9	106
39.00	44.4	269	89.00	1.9	72
40.00	46.4	271	90.00	5.1	51
41.00	41.3	256	91.00	6.4	62

Ft. Totten, N. Y.
April 25, 1975 at 0515 GMT (Continued)

Time (min)	Wind Speed (mps)	Wind Direction (deg)
92.00	6.8	85
93.00	4.2	108
94.00	4.3	80
95.00	6.0	93
96.00	5.1	121
97.00	2.9	129
98.00	2.0	145
99.00	.3	3
100.00	1.0	309
101.00	.7	359
102.00	3.2	39
103.00	5.2	59
104.00	4.5	75
105.00	4.0	48
106.00	4.1	2

Ft. Rotten, N. Y.
April 25, 1975 at 1115 GMT

Time (min)	Wind Speed (mps)	Wind Direction (deg)	Time (min)	Wind Speed (mps)	Wind Direction (deg)
.25	11.4	12	41.00	59.3	295
.50	7.7	352	42.00	57.2	303
.75	8.1	355	43.00	48.6	306
1.00	8.0	358	44.00	43.2	304
1.25	7.5	6	45.00	40.7	295
1.50	7.5	6	46.00	31.4	284
1.75	6.3	11	47.00	24.9	265
2.00	7.4	5	48.00	25.5	268
2.25	6.2	8	49.00	22.1	275
2.50	7.4	344	50.00	21.7	283
2.75	6.2	345	51.00	18.2	283
3.00	3.8	17	52.00	19.3	276
4.00	3.7	355	53.00	16.4	262
5.00	4.3	342	54.00	15.0	265
6.00	4.5	326	55.00	14.4	267
7.00	5.1	309	56.00	19.2	267
8.00	6.3	289	57.00	15.1	258
9.00	5.7	282	58.00	15.6	259
10.00	7.2	293	59.00	15.3	256
11.00	6.6	287	60.00	12.4	253
12.00	7.0	276	61.00	9.0	238
13.00	8.5	275	62.00	8.6	249
14.00	10.1	283	63.00	7.5	275
15.00	10.4	284	64.00	6.0	277
16.00	10.1	288	65.00	5.0	294
17.00	9.8	296	66.00	5.0	5
18.00	10.4	298	67.00	5.6	57
19.00	11.4	293	68.00	1.4	255
20.00	12.5	287	69.00	2.2	0
21.00	16.0	290	70.00	3.7	108
22.00	20.2	289	71.00	2.8	255
23.00	24.7	288	72.00	.3	0
24.00	31.7	290	73.00	4.8	107
25.00	33.1	293	74.00	4.3	101
26.00	35.0	296	75.00	3.9	49
27.00	36.8	297	76.00	4.3	81
28.00	36.6	295	77.00	2.3	79
29.00	38.6	293	78.00	2.6	103
30.00	40.3	291	79.00	1.4	175
31.00	44.3	292	80.00	4.1	11
32.00	45.5	294	81.00	5.1	37
33.00	49.5	294	82.00	6.0	54
34.00	52.6	296	83.00	6.7	57
35.00	55.1	296	84.00	5.0	86
36.00	56.5	296	85.00	4.7	84
37.00	57.6	293	86.00	5.5	87
38.00	58.1	291	87.00	4.6	88
39.00	58.6	288	88.00	6.5	94
40.00	58.7	288	89.00	4.0	81

Ft. Totten, N. Y.
April 25, 1975 at 1115 GMT (Continued)

Time (min)	Wind Speed (mps)	Wind Direction (deg)
90.00	3.8	68
91.00	3.3	46
92.00	4.0	23
93.00	5.8	23
94.00	3.9	53
95.00	7.2	50
96.00	3.7	38
97.00	4.7	79
98.00	4.1	58
99.00	1.5	64
100.00	.9	64

APPROVAL


DATA FOR NASA'S AVE IV EXPERIMENT:
25-MB SOUNDING DATA AND SYNOPTIC CHARTS

By


Nancy F. Fucik and Robert E. Turner

The information in this report has been reviewed for security classification. Review of any information concerning Department of Defense or Atomic Energy Commission programs has been made by the MSFC Security Classification Officer. This report, in its entirety, has been determined to be unclassified.

This document has also been reviewed and approved for technical accuracy.

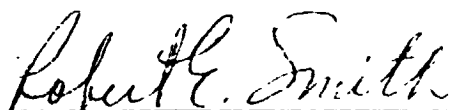

Robert E. Smith
Chief, Orbital & Space Environment Branch

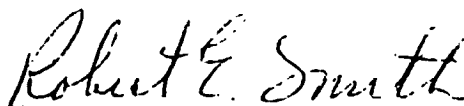for 
William W. Vaughan
Chief, Aerospace Environment Division

for 
Charles A. Lundquist
Director, Space Sciences Laboratory